

# Slimflux 2020



**DURA**  
LAMP  
by **TARGETTI**


Slimflux  
panel Led  
60x60  
**UGR**




BACKLIGHT

PLAFONATO

BACKLIGHT

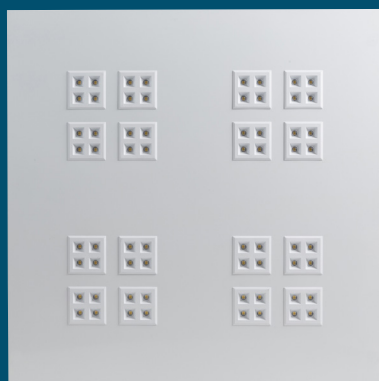

# Slimflux panel Led 60x60 - UGR

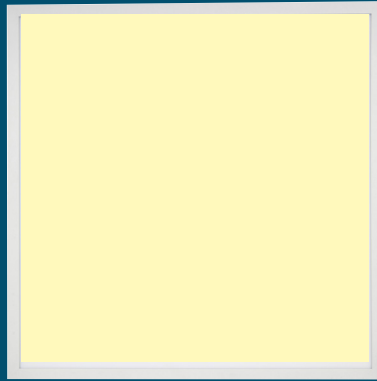

**SIDELIGHT**  
Indirect lighting from both sides of the frame

**BACKLIGHT**  
Direct lighting from a front diffuser

<sup>(3)</sup> Accessories legend

- 1 KTLP-SPU
- 2 LP-SSK
- 3 KTLPW1-MS
- 4 FASTCON-30
- 5 LPLAFO60
- 7 LPLAFO603
- 9 LPLAFO604
- 12 KTLPQ4-SM
- 13 KTLPQ4-SP
- 14 KTLPQ4-MS

220-240V 50/60Hz	IP20 VI IP43 VO		-25° +35°C	PF 0,9			Risk Group 0	
---------------------	--------------------	--	---------------	--------	--	--	-----------------	--

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	UGR	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
												Standby lighting			
LP6060B1UGR-840	40	4000		*	80	19			35000h	G3	No		1/2/3/4/5/9	2	93
LP6060NB3-UGR	40	3400			80	19			25000h	G3	No		1/2/3/4/5/7/9	1	86
LP6060NB4-UGR	40	3600		*	80	19			25000h	G3	No		1/2/3/4/5/7/9	1	87
LP6060B1UGR-8CCT	40	4500 <sup>(1)</sup>		*	80	16			50000h	G5 H24	No		1/2/3/4/5/9	2	94
LP6060P1UGR-840	40	4000		*	80	19			35000h	G3	No		1/2/3/4	2	92
LP6060B1UGR-9CCT	40	4000 <sup>(1)</sup>		*	90	19			50000h	G5 H24	No		1/2/3/4/5/9	2	94
LP6060B2UGR-8CCT	47	5500 <sup>(1)</sup>		*	80	19			50000h	G5 H24	No		1/2/3/4/5/9	2	94
PV6060UGR-940	38	3750			90	16			50000h	G5 H24	No		2/4/5/9	5	99
LP6060UGR-840C*	31	3440		*	80	19			50000h	G5 H24	No		1/3/4/5/7/9	1	-
LP6060UGR-830A	31/37*	3440/4010		*	80	19			50000h	G5 H24	No		1/3/4/5/7/9	1	90
LP6060UGR-840A	31/37*	3730/4350		*	80	19			50000h	G5 H24	No		1/3/4/5/7/9	1	90
LP6060UGR-930A	31/37*	2890/3370		*	90	19			50000h	G5 H24	No		1/3/4/5/7/9	1	90
LP6060UGR-940A	31/37*	3140/3660		*	90	19			50000h	G5 H24	No		1/3/4/5/7/9	1	90
LP6060UGR-830D	24/37*	2760/4010		*	80	19			50000h	G5 H24	DALI 2		1/3/4/5/7/9	1	91
LP6060UGR-840D	24/37*	2990/4350		*	80	19			50000h	G5 H24	DALI 2		1/3/4/5/7/9	1	91
LP6060NWQ4	35	4500			80	13			50000h	G5 H24	No		2/4/12/13/14	4	97
LP6060UGR-930D	24/37*	2320/3370		*	90	19			50000h	G5 H24	DALI 2		1/3/4/5/7/9	1	91
LP6060UGR-940D	24/37*	2520/3660		*	90	19			50000h	G5 H24	DALI 2		1/3/4/5/7/9	1	91
PV6060UGR-940D	38	3750			90	16			50000h	G5 H24	No		4/5/7/9	5	99

\* Multi-current driver. Available version 62x62 with driver multi-current and DALI multi-current.




<sup>(1)</sup> the lumen data indicated refers to the 4000K colour temperature.

• Only upon order with MOQ.


DIMMABILITY: SLIMFLUX panels can be used with multi-current dimming power supply, order codes DELT40D-M, DELT40D-M or DELT65D-M.

STANDBY LIGHTING: SLIMFLUX panels can be used with standby emergency kit, order code KTEMR03.

Slimflux  
panel Led  
30x120  
60x120  
**UGR**

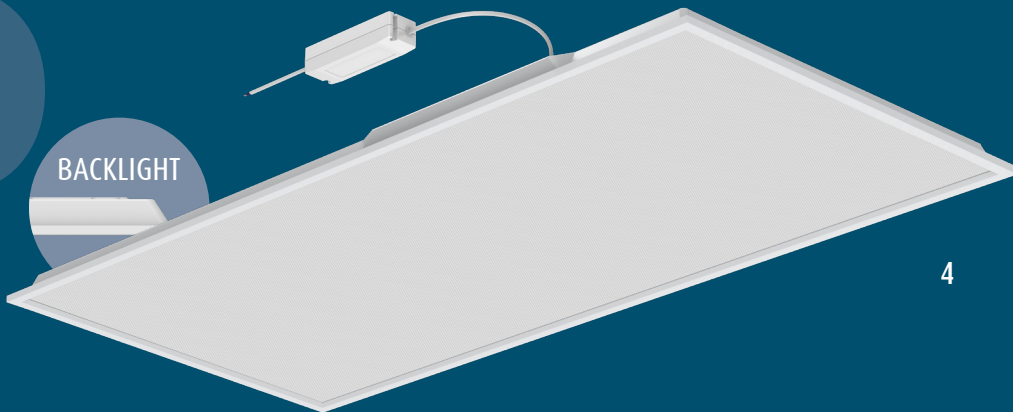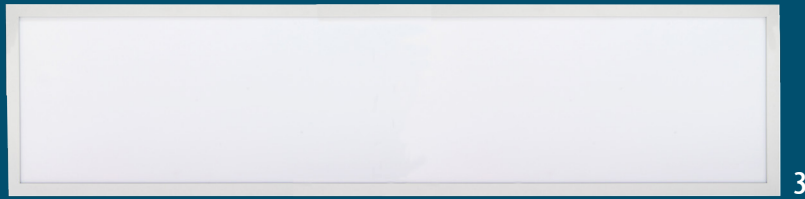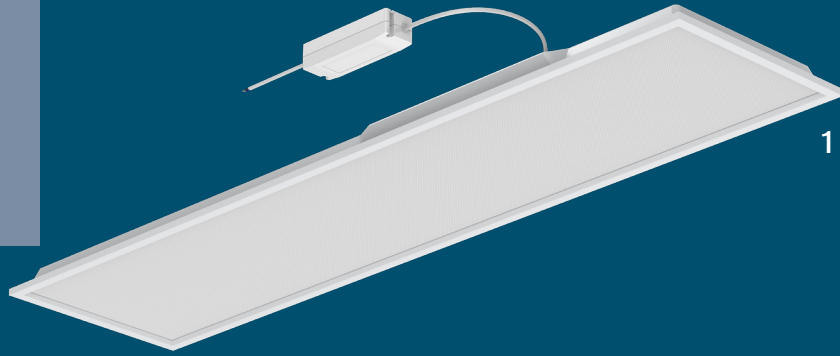

BACKLIGHT

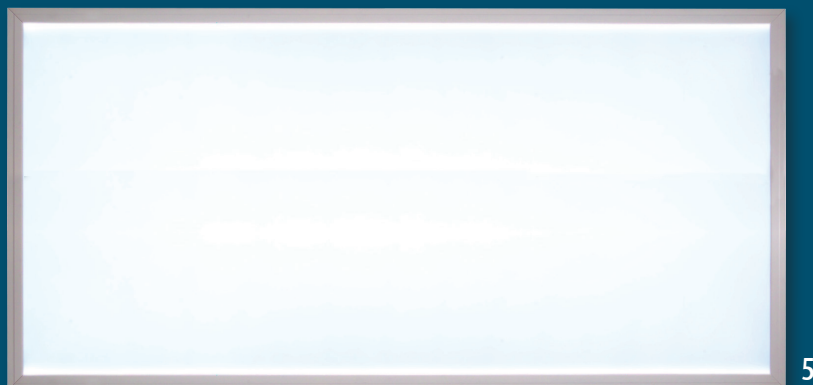

## Slimflux panel Led 30x120 - UGR

220-240V 50/60Hz	IP20 VI IP43 VO		-25° +35°C	PF 0,9		A++ A+ A	Risk Group 0
---------------------	--------------------	--	---------------	--------	--	----------------	-----------------

3000K/4000K/6000K

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	UGR	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
											Standby lighting				
LP30120B1UGR-9CCT	40	4000 <sup>(1)</sup>		*	90	19	■		50000h	G5 H24	No		2/3/4/6/10	1	94
PV30120UGR-940	38	4100		*	90	16			50000h	G5 H24	No		2/4/6/8/10	2	99
LP30120UGR-840A	31/37*	3360/3920		*	80	19		●	50000h	G5 H24	No	<b>D</b> <b>R</b>	2/3/4/6/8/10	3	90
LP30120UGR-940A	31/37*	2830/3300		*	90	19		●	50000h	G5 H24	No	<b>D</b> <b>R</b>	2/3/4/6/8/10	3	90
LP30120UGR-840D	24/37*	2690/3920		*	80	19		●	50000h	G5 H24	DALI 2	<b>R</b>	2/3/4/6/8/10	3	91
LP30120UGR-940D	24/37*	2700/3300		*	90	19		●	50000h	G5 H24	DALI 2	<b>R</b>	2/3/4/6/8/10	3	91
PV30120UGR-940D	38	4100			90	16			50000h	G5 H24	DALI 2		2/4/6/8/10	2	99

## Slimflux panel Led 60x120 - UGR

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	UGR	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
											Standby lighting				
LP60120B1UGR-9CCT	50	5200 <sup>(1)</sup>		*	90		■		50000h	G5 H24	No		2/3/4/11	4	94
LP60120UGR-940C	60	6500		*	90			●	50000h	G5 H24	No	<b>D</b> <b>R</b>	2/3/4/11	5	-

\* Only upon order with MOQ.

<sup>(1)</sup> the lumen and power data indicated refers to the 4000K colour temperature.




**D** DIMMABILITY: SLIMFLUX panels can be used with multi-current dimming power supply, order codes DELT40D-M, DELT40D-M o DELT65D-M.

**R** STANDBY LIGHTING: SLIMFLUX panels can be used with standby emergency kit, order code KTEMR03.

### <sup>(3)</sup> Accessories legend

- 2 LP-SSK
- 3 KTLPW1-MS
- 4 FASTCON-30
- 6 LPLAFO120
- 8 LPLAFO1203
- 10 LPLAFO301204
- 11 LPLAFO601204

Slimflux  
panel Led  
60x60  
30x120  
60x120

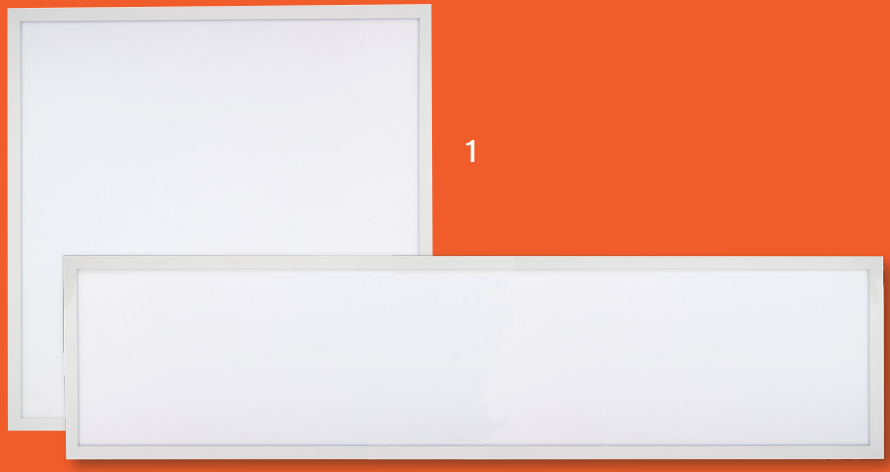

## Slimflux panel Led 60x60

220-240V 50/60Hz	IP20 VI IP43 VO		-25° +35°C	PF 0,9			Risk Group 0
---------------------	--------------------	---	---------------	--------	---	---	-----------------

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
										No	Standby lighting			
LP6060B2-840	40	3200	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	4	93
LP6060B1-830	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	4	93
LP6060B1-840	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	4	93
LP6060B1-860	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	4	93
LP6060CWB3	40	3600	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	86
LP6060NWB3	40	3600	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	86
LP6060WWB3	40	3400	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	86
LP6060CWB4	40	3600	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	87
LP6060NWB4	40	4000	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	87
LP6060WWB4	40	4000	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/5/9	1	87
LP6060P1-840	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4	3	92
LP6060P2-860	60	6000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4	3	92
PV6060NW	38	3900	●		80			25000h	G3	No	<b>D</b> <b>R</b>	2/4/5/9	5	99
LP6060NEX <span style="border: 1px solid red; border-radius: 50%; padding: 2px;">IP65</span>	36	3300	●	*	80			50000h	G5 H24	No		1/2/3/4/5/9	1	88

## Slimflux panel Led 30x120

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
										No	Standby lighting			
LP30120B1-840	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/6/10	7	93
LP30120P1-840	40	4000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4	6	92
LP30120NWB3	40	3400	●		80		●	25000h	G3	No	<b>D</b> <b>R</b>	1/2/3/4/6/8/10	2	86
PV30120NW	33	4300	●		80	■		25000h	G3	No	<b>D</b> <b>R</b>	2/4/6/8/10	9	99

## Slimflux panel Led 60x120

ITEM	WATT	Lumen	Colour temperature	Flicker Free	Ra	BACK LIGHT	SIDE LIGHT	Lifespan	Warranty	Dimmability		Accessories <sup>(3)</sup>	Ph.	Pag.
										No	Standby lighting			
LP60120B1-840	50	5000	●	*	80		●	35000h	G3	No	<b>D</b> <b>R</b>	2/3/4/11	10	93
LP60120P1-840	60	6000	●	*	80	■		35000h	G3	No	<b>D</b> <b>R</b>	2/3/4	8	92

### <sup>(3)</sup> Accessories legend

- 1 KTLP-SPU
- 2 LP-SSK
- 3 KTLPW1-MS
- 4 FASTCON-30
- 5 LPLAFO60
- 6 LPLAFO120
- 7 LPLAFO603
- 8 LPLAFO1203
- 9 LPLAFO604
- 10 LPLAFO301204
- 11 LPLAFO601204

**D** DIMMABILITY: SLIMFLUX panels can be used with multi-current dimming power supply, order codes DELT40D-M, DELT40D-M o DELT65D-M.

**R** STANDBY LIGHTING: SLIMFLUX panels can be used with standby emergency kit, order code KTEMRO3.

**DURA**  
LAMP

DURALAMP SPA Single member company  
Registered office Via Pratese, 164 - 50145 Firenze  
Tel. 055 894 881 - Fax 055 8953 032 / 055 8952 780  
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -  
C.F. and VAT number 03312240488  
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00  
i.v. - Subject to the management and coordination of 3F FILIPPI S.P.A.

**3F Filippi | TARGETTI**

A complete list of the Duralamp distribution and  
project network is available at:

[www.duralamp.it](http://www.duralamp.it)

**SLIMFLUX 2020**  
Pricelist validity starting the 1st of May 2020

REV 1

© Copyright 2020 - Duralamp SpA

All data and pictured provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Duralamp SpA reserves the right to modify its products in any moment, for technical or commercial reasons.

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.

**3F Filippi****DURA**  
LAMP[duralamp.it](http://duralamp.it)