


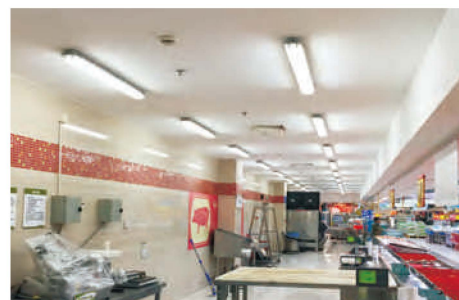



# MLX WP OSCAR 600 LED POR-ÉS PÁRAMENTES SOROLHATÓ LÁMPATEST 24W 2880LM 3000K 120° IP65 600MM OSRAM 3 ÉV

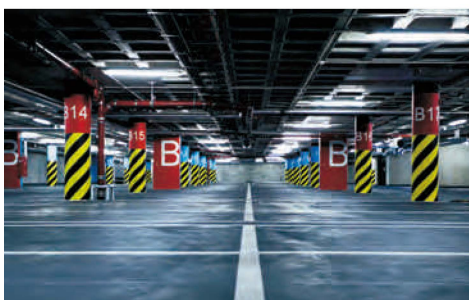

- PC ház
- PC diffúzor
- Gyors telepítés klipszek nélkül
- LG 2835 LED
- OSRAM LED meghajtó
- 120 lm/W
- UV-állóság
- Gyorsrögzítő konzolok mellékelve

|                                                  |                                                                             |
|--------------------------------------------------|-----------------------------------------------------------------------------|
| <b>Felhasználási mód:</b> mennyezeti/oldalfali   | <b>Felhasználási terület:</b> beltér                                        |
| <b>Bemeneti feszültség :</b> 200-240V AC         | <b>Frekvencia :</b> 50-60Hz                                                 |
| <b>Gyártó:</b> MLX                               | <b>Garancia:</b> 3 év                                                       |
| <b>LED típusa:</b> LG 2835                       | <b>Extrák:</b> OSRAM driver                                                 |
| <b>Érintésvédelem:</b> I. érintésvédelmi osztály | <b>Szín:</b> fehér                                                          |
| <b>Sugárzási szög:</b> 120°                      | <b>Ház színe:</b> fehér                                                     |
| <b>Színvisszaadási fokozat CRI:</b> CRI>80       | <b>Ház anyaga:</b> PC                                                       |
| <b>Fényforrás:</b> LED                           | <b>Lámpatest fajtája:</b> Por- és páramentes lámpatest                      |
| <b>Búra/fedél színe:</b> opál fehér              | <b>Búra anyaga:</b> PC                                                      |
| <b>Ütésállóság:</b> IK07                         | <b>Védettség:</b> IP65                                                      |
| <b>Színhőmérséklet:</b> 3000K                    | <b>Névleges környezeti hőmérséklet IEC 62722-2-1 szerint:</b> -25°C - +35°C |
| <b>Névleges üzemidő:</b> 50 000 h                | <b>Várható szállítási idő:</b> Rendeléstől számított 5-10 munkanap          |
| <b>Fényforrást tartalmaz?:</b> Igen              | <b>UV-védelem:</b> Igen                                                     |
| <b>Fényforrással:</b> Igen                       | <b>Sorolható:</b> Igen                                                      |
| <b>Fényáram :</b> 2880                           | <b>Csomagolás szélesség :</b> 77                                            |
| <b>Csomagolás hosszúság :</b> 630                | <b>Csomagolás magasság :</b> 77                                             |
| <b>Csomagolási egység :</b> 12                   | <b>Fényhasznosítás :</b> 120                                                |
| <b>Teljesítmény :</b> 24.00                      | <b>Szélesség :</b> 70.00                                                    |
| <b>Hosszúság :</b> 600.00                        | <b>Magasság :</b> 68.00                                                     |
| <b>Súly :</b> 0.60                               | <b>Bruttó súly kg :</b> 0.70                                                |

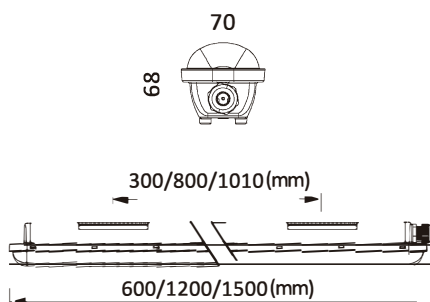




**B**


① Drill  $\varnothing 6\text{mm}$  holes according to below drawing.

| Model         | Power | Fixing Hole Centre |
|---------------|-------|--------------------|
| SR05-15W-630  | 15W   | 300mm              |
| SR05-24W-630  | 24W   |                    |
| SR05-20W-1230 | 20W   | 800mm              |
| SR05-36W-1230 | 36W   |                    |
| SR05-30W-1530 | 30W   | 1010mm             |
| SR05-50W-1530 | 50W   |                    |

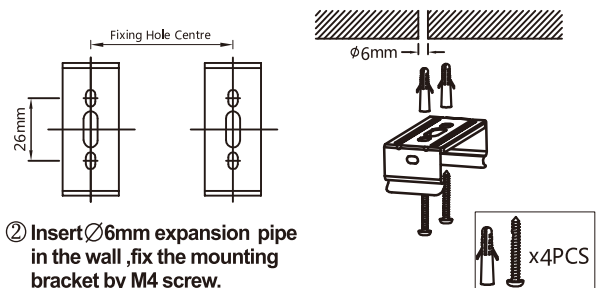


**C**

Loosen the nut of the cable gland, put the cable through the cable gland.

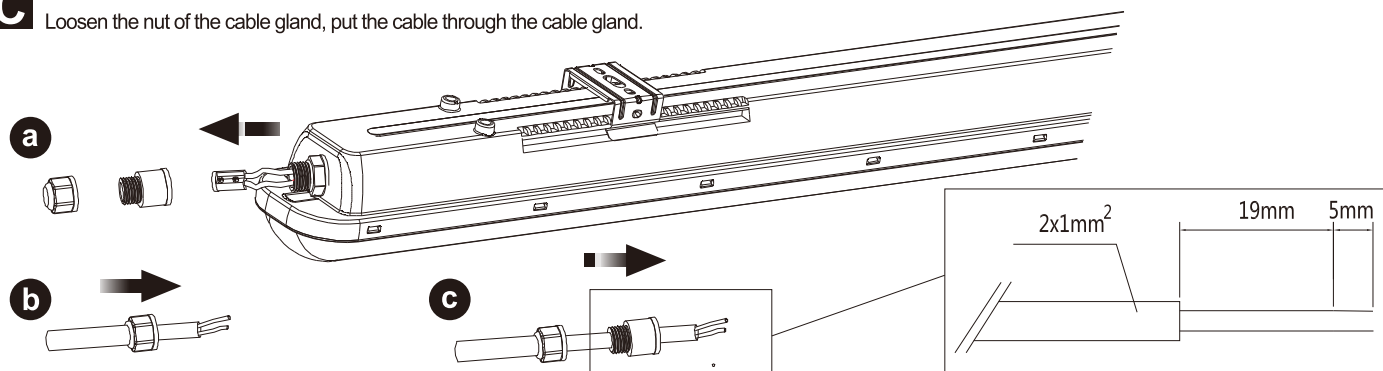


**D**

Connect the cable on the terminal block as below shown and tighten the cable gland

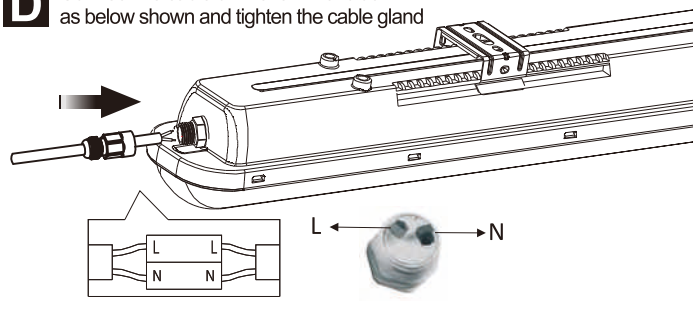


**E**

Tighten the connector under instruction in turn

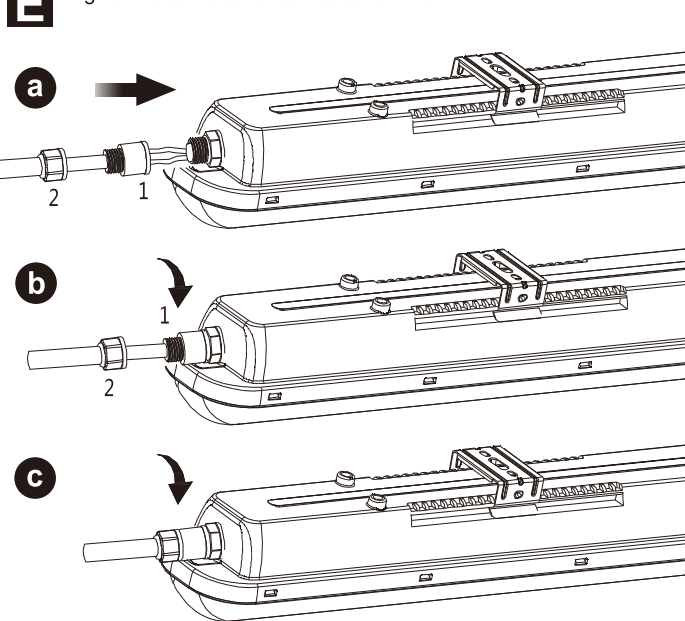


**F**

Close the diffuser

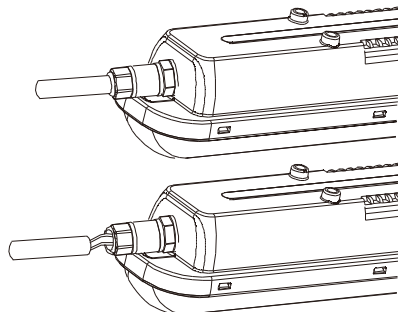


**F**

Fix the lamp on the wall

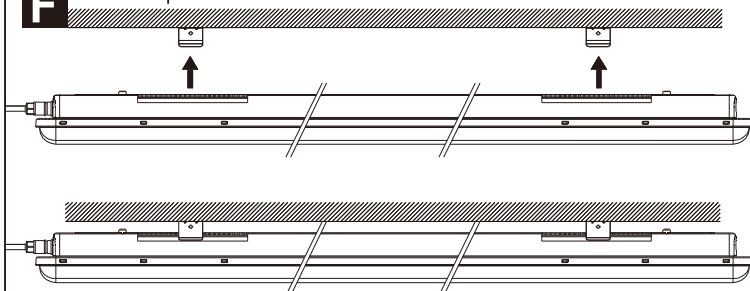

**G**

Turn on the power.



Safety Notice:

1. Electrical installation should be done by registered electrician only
2. Disconnect the luminaire from supply and wait until luminaire is cooled down, before replacement of the driver
3. Never touch the lamp while luminaire is switched on
4. In any case of malfunction disconnect luminaire from supply immediately, don't try to repair the luminaire yourself, repair should only be done by official service agent.

Contact person: Mr Jason  
MOB: 86-13728765409  
TEL: 86-796-86780036

Skype: sxfreborn  
Email: sharplumi@gmail.com  
WEB: <http://www.tsongledlighting.com>