T20

The Collection

TARGETTI

TARGETTI

index

Chapter		Page
01	**Us Targetti**	**8**
02	**Indoor Collection**	
	Recessed	**80**
	Projectors	**220**
	Systems	**330**
	Ceiling and suspensions	**434**
	Wall mounted luminaires	**516**
03	**Outdoor Collection**	
	Inground recessed	**542**
	Projectors	**628**
	Wall recessed luminaires	**706**
	Surface luminaires	**726**
	Bollards	**760**
04	**Control sytem**	**780**
05	**Tecnical data**	**802**

Indoor

Recessed

Linear recessed

82 **LOGICO**

Recessed

94 **THREESIXTY**

106 **CCTLED** Smart-Tech-Feel

117 **CCTLED** Deep

118 **CCTLED** Wall Washer

124 **CCTLED** Mini

124 **CCTLED** Mini WW

126 **CCTLED** Micro

128 **CCT Flash**

132 **CCTLED Arch.** Fix

138 **CCTLED Arch.** Adj

141 **CCTLED Arch.** HP Adj

151 **CCTLED Arch.** Mini fix

152 **CCTLED Arch.** Mini adj

158 **CCTLED Arch.** Micro

160 **OZ** Stand alone



176 **STORE**

192 **ZENO** Small

196 **CLOUD**

208 **COZY**

210 **BEBOP**

212 **QUICKLED**

214 **POLKA**

218 **OTTO** Semi Recessed

219 **OTTO** Recessed

Projectors

Track projectors

222 **ZENO**

236 **LABEL 230V**

242 **STORE**

254 **LEDÒ**

266 **RAY**

278 **EUROSTANDARD** Plus

Surface projectors

284 **JEDI** Compact

292 **ZENO**

296 **VOLTA**

302 **CORO**

324 **OTTO** Base

328 **OTTO** Multi - Optic

Systems

Systems 48V

332
OZ

358
FORTYEIGHT

Systems 230V

376
LOGICO

Ceiling and Suspensions luminaires

Linear Ceiling and Suspensions luminaires

436
ISO

442
OMEGA

448
LOGICO

456
CARTESIO



460
DIVA

464
SLIM

Ceiling and Suspensions luminaires

468
MINIMINIMA

470
OZ Sand alone

476
THREESIXTY

488
PANTHEON

494
CCTLED
Pendant

496
CCTLED
Tube

506
BEBOP

508
GLOBO

510
WASABI

512
DECANTER

514
MONETA

Wall mounted luminaires



518
FLOOD

520
HALL



522
SLIM

524
MINIMINIMA

526
MONETA

528
BRAQUE

530
BOTTONE

532
OSIRIDE

538
PROFESSIONAL

Outdoor

Inground recessed

Linear inground recessed



544
JEDI

556
JEDI Compact



570
MERCURE

Inground recessed



578
KEPLERO

593
KEPLERO MINI

602
TITANO

604
JUPITER

614
SATURN



620
LED.Y

Projectors

Linear projectors

630
JEDI

642
JEDI Compact

Projectors

656
DART

674
PYROS

688
JUPITER pro

699
JUPITER



702
LED.Y

Wall recessed

708
ZEDGE PRO

719
ZEDGE Line

719
ZEDGE Line Opal

722
ZEDGE

Surface luminaires

730
MR SMITH

737
MRS SMITH

740
FEBO EVO

728
Q-BO

746
STILO

758
HOCKEY

Bollards

762
MR. BO

768
CHIODINO

772
STILO

776
ZEDGE Bollard

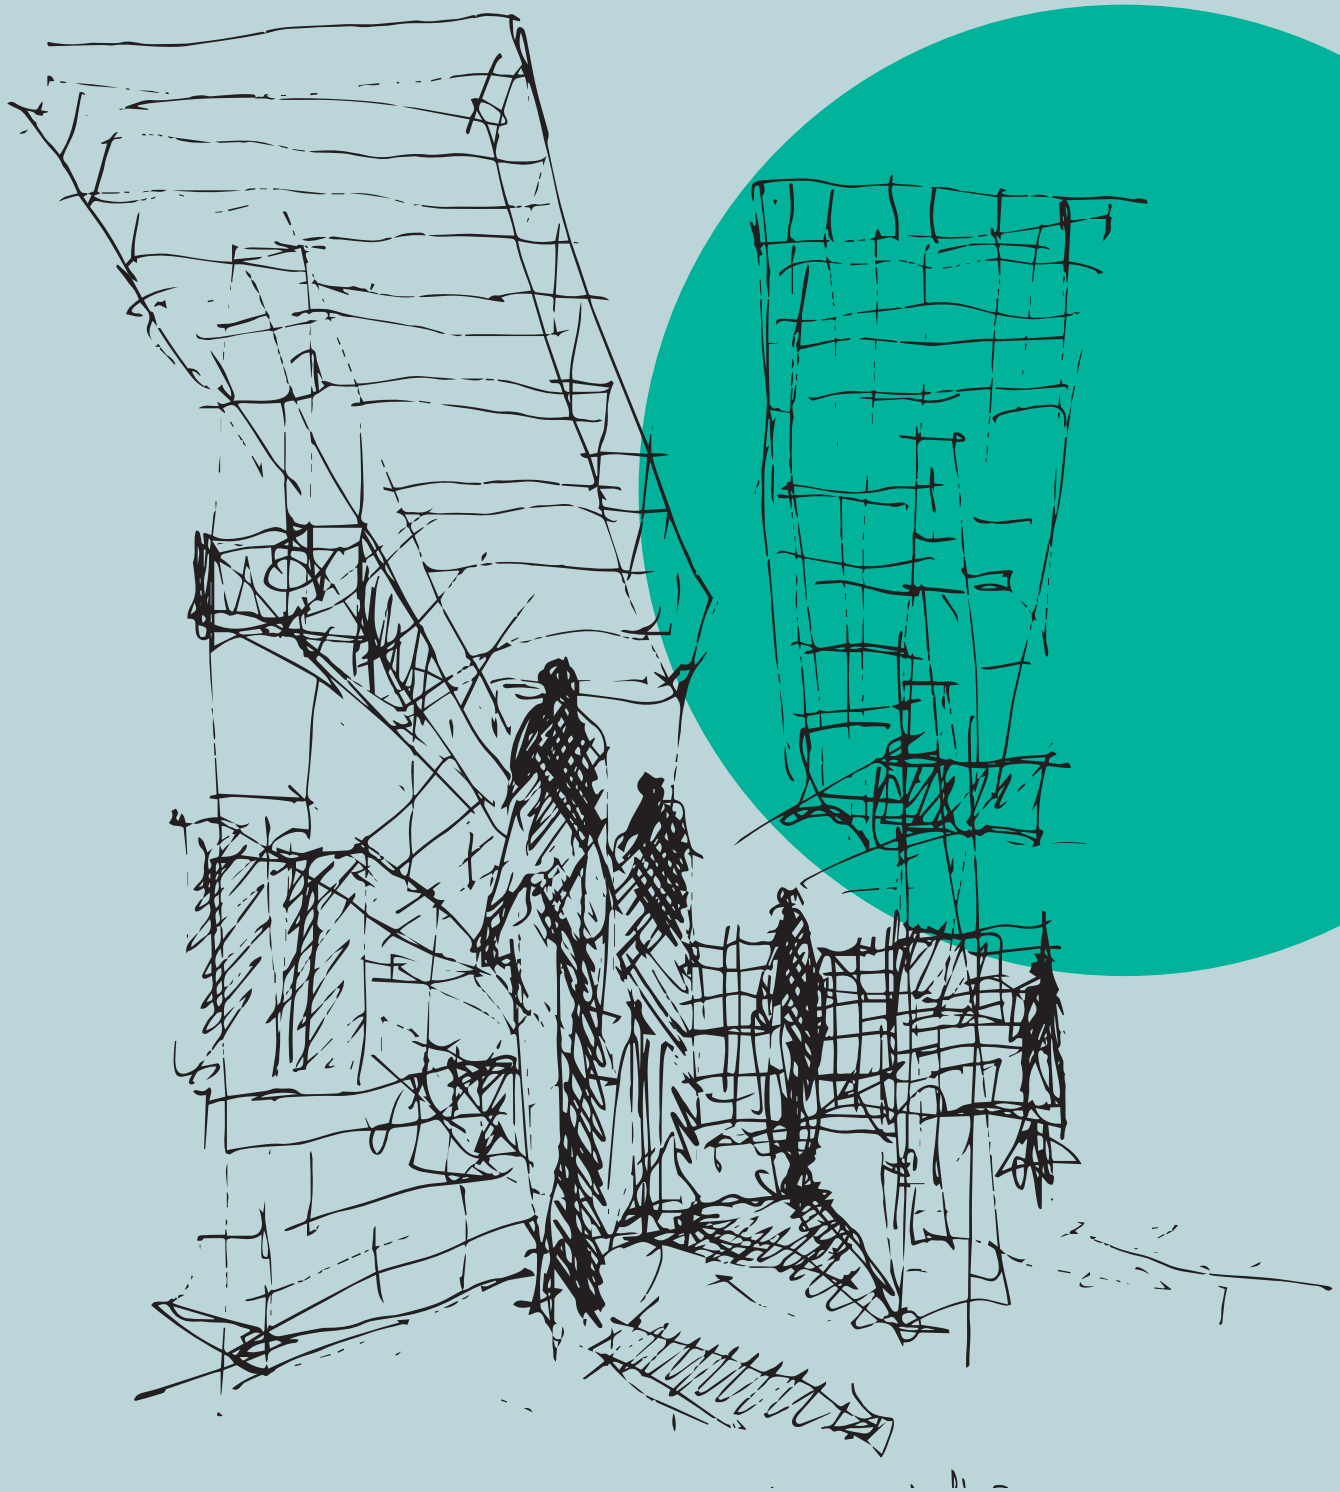

The Group

3F Filippi and Targetti, two companies that have shaped the history of lighting in Italy are now a cohesive Group acting as sole partner for lighting professionals and designers looking for quality solutions.

With extensive experience and the combination of their respective expertise in technical and architectural lighting the two brands together provide a complete portfolio of products that proudly bring Made in Italy to more than 50 countries worldwide.

Today the 3F Filippi-Targetti Group can meet and satisfy any kind of design and project requirements. Our partners can choose from a huge selection of products and solutions; from high-tech and functional products from the 3F Filippi catalogue to indoor and outdoor architectural lighting fixtures designed by Targetti, right up to a wide range of LED lamps and fixtures from the Duralamp brand.

We are Targetti

A workshop to light the world

We started in 1928. Since then we at Targetti have never stopped designing and creating indoor and outdoor architectural light fixtures.

For almost a century our products, which are synonymous with innovation, research and attention to detail, have been lighting the most prestigious architectural and artistic works, creating extraordinary atmospheres and evoking real emotions.

Our appearance and identity today are the result of the experience and professionalism we have gained over time, which we want to share with our partners and put at the service of the quality of the environment we live in through our passion for light

DESIGN

Targetti Headquarters Florence
New Hub TH01 - 2018.

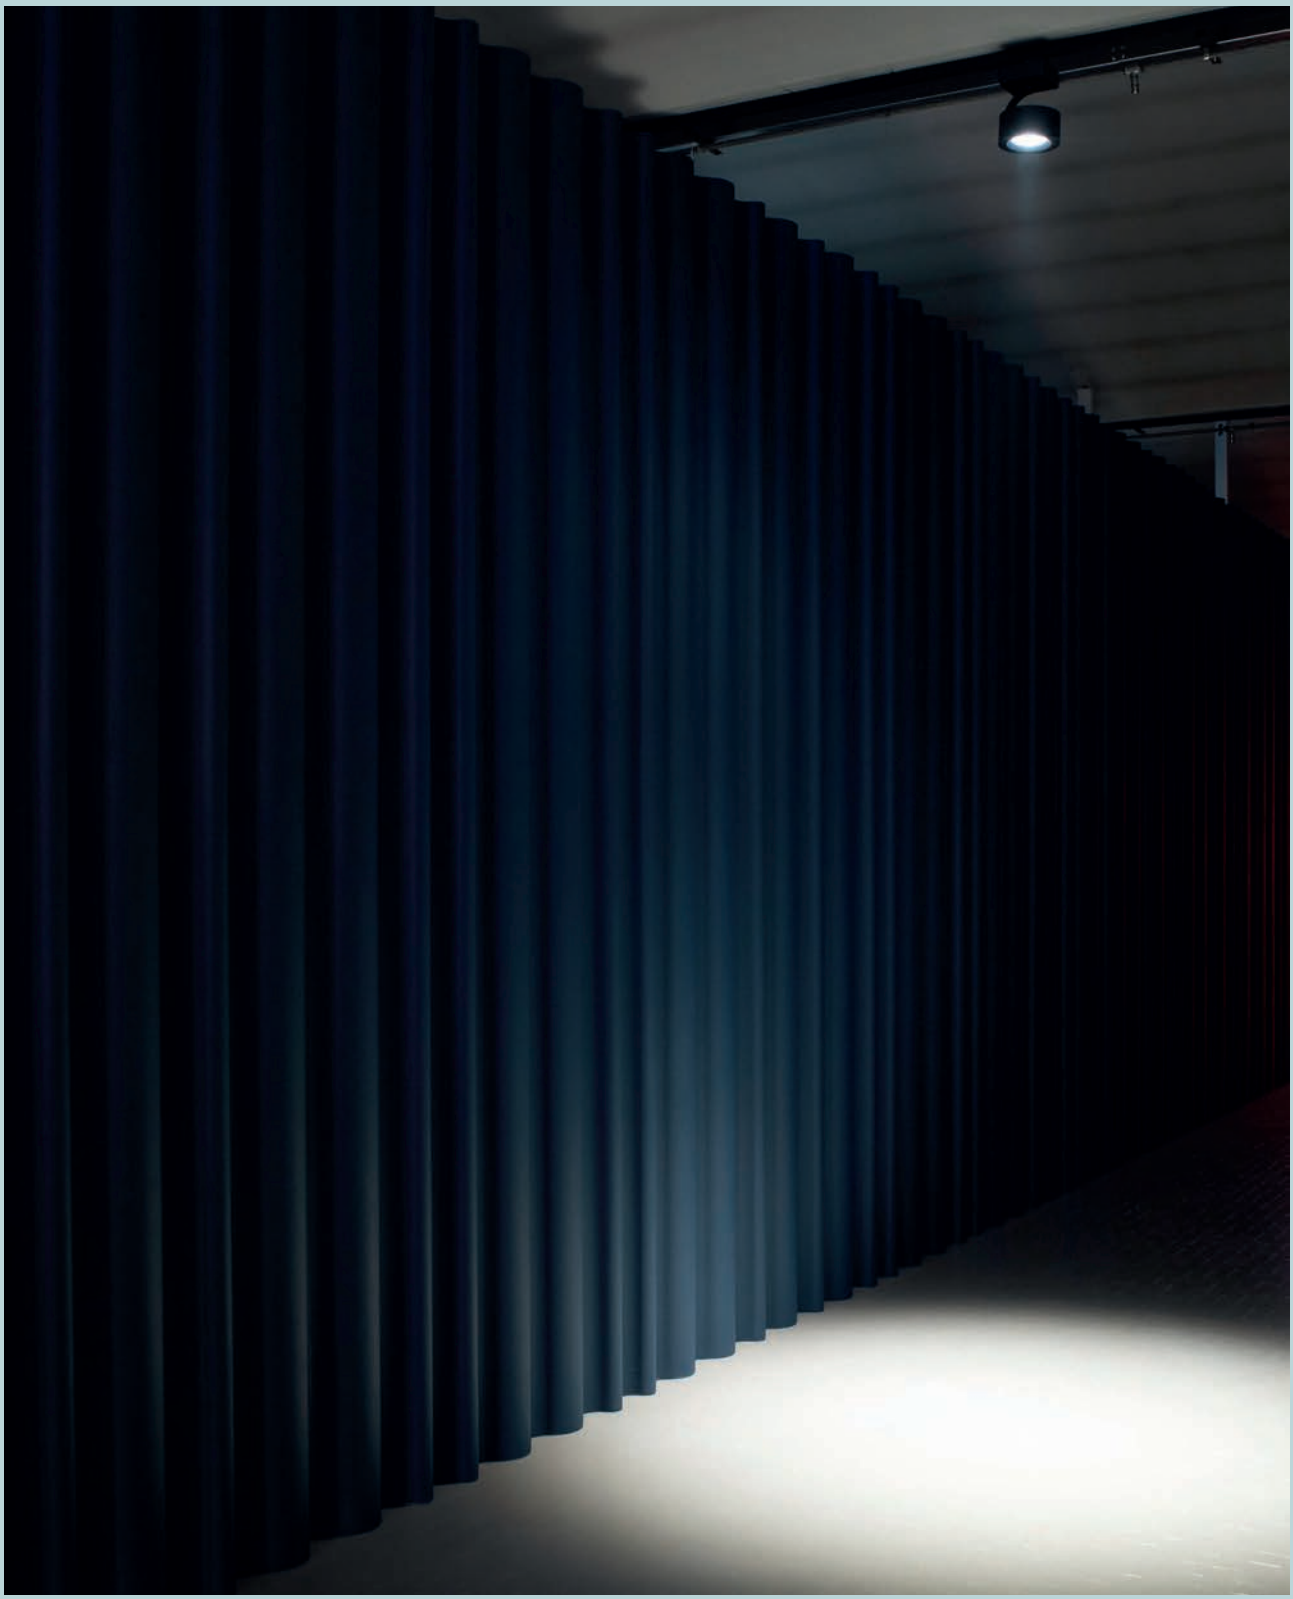

Our ideas

Our essential vocabulary with the words we cannot do without

↘ Light

Light is our raw material, an essential tool and the focus of the work we do. An impalpable and magic element that designs shapes and animates spaces. To us its language is technical refinement, scientific precision as well as a feeling, an atmosphere and the possibility to dress a space up with emotions.

Intuition

Intuition as our main purpose, as an awareness that makes it possible to glimpse a direction for the future, as a spark of genius that continues to make us pioneers in defining new standards.

At left Infinitree - Lighting installation designed for Targetti by DPA Lighting UK Darc awards London, UK - 2018.
On this page Together Lighting installation designed for Targetti by DPA Lighting UK Darc Awards London, UK – 2019

↘ Dialogue

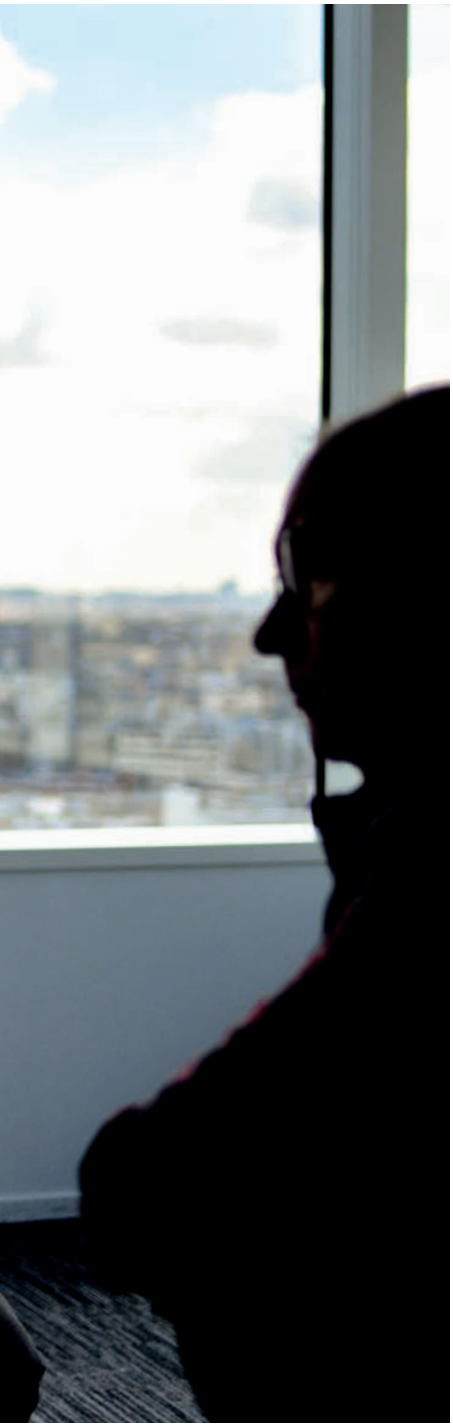

Listening, welcoming stimulus, sharing knowledge and experience. Dialogue is a mind that is open to outside influences, continual exchanges of ideas with partners, multidisciplinary attention and a heart that is always ready to take on new challenges.

Photographer : Romainv

↘ Innovation

Three infinite concepts we are very fond of: progressing, evolving and changing. In a word innovation. The courage to lead the way with the passion and the amazed and curious perspective of someone who knows they still have a long way to go.

2019 WINNER LIGHTING DESIGN AWARDS

↘ Design

Every single one of our products has always epitomised the essence of who we are: essential and discrete shapes and excellent performance in recognisable designs that are within everyone’s reach. Beauty, functionality and simplicity.

Worldwide

Global presence and local networks: our partners can reach us easily. The solutions we provide are versatile and can meet the needs of designers from all corners of the world.

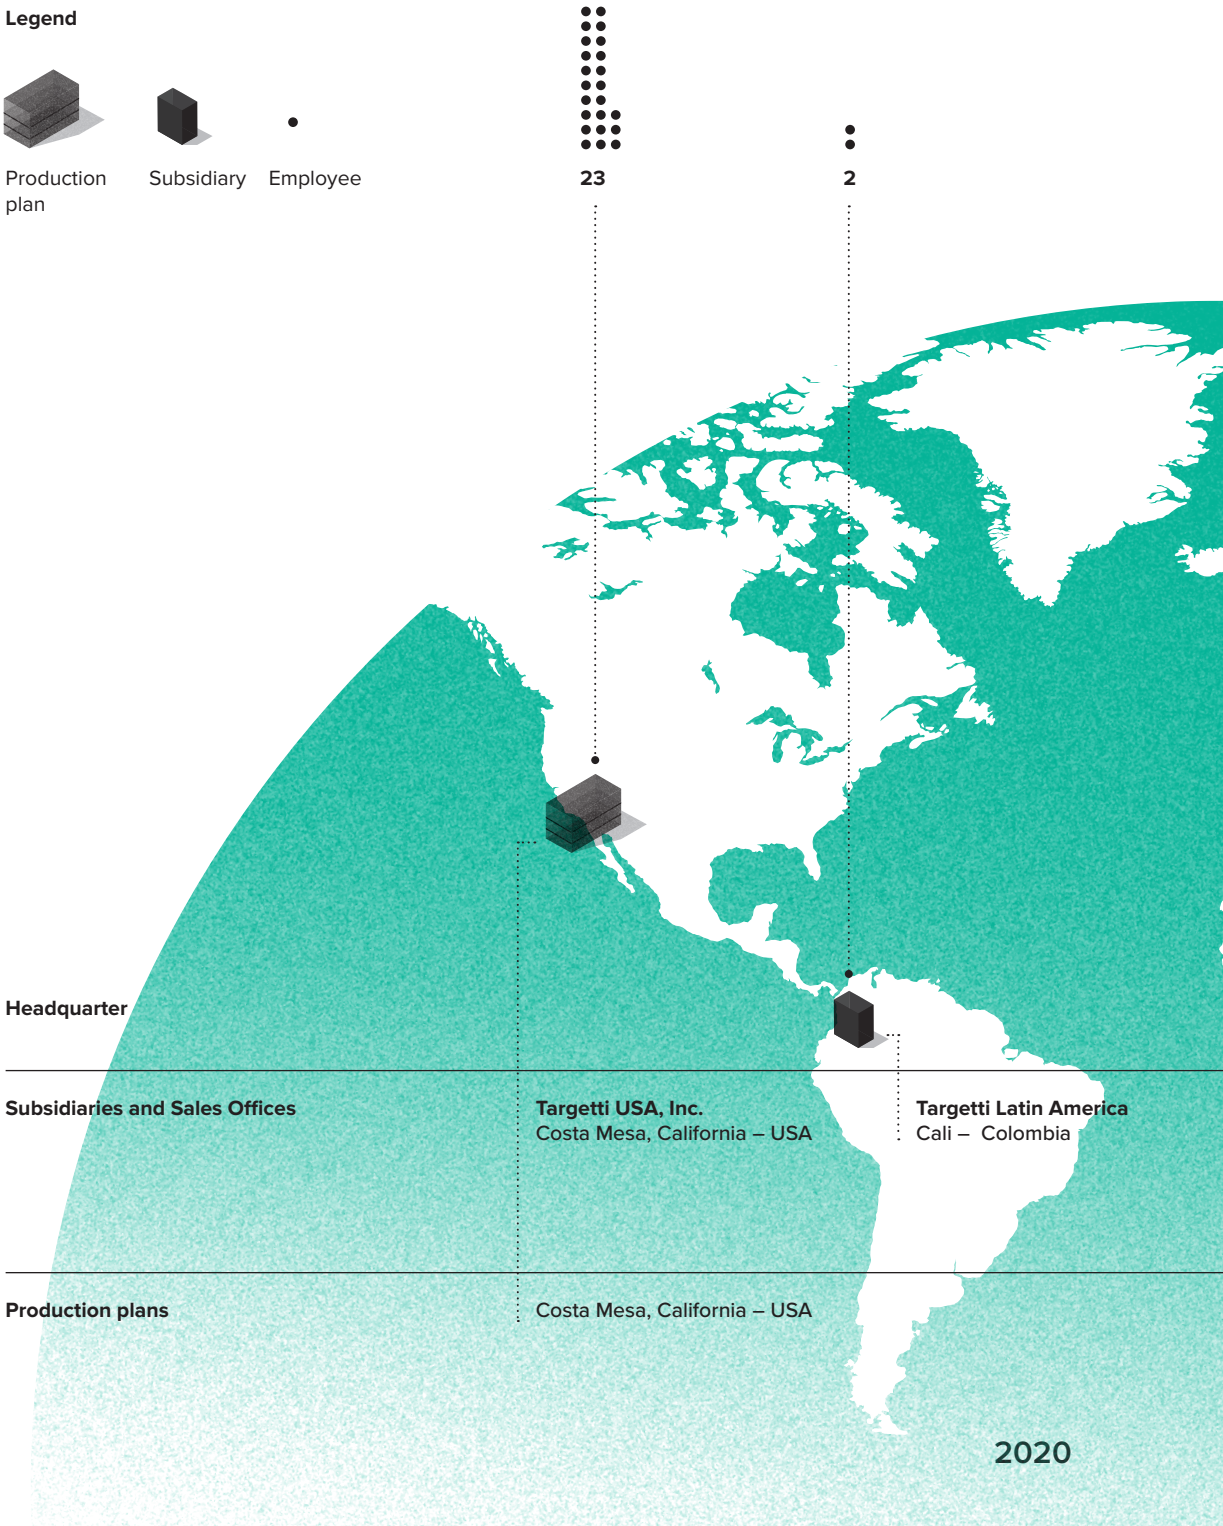

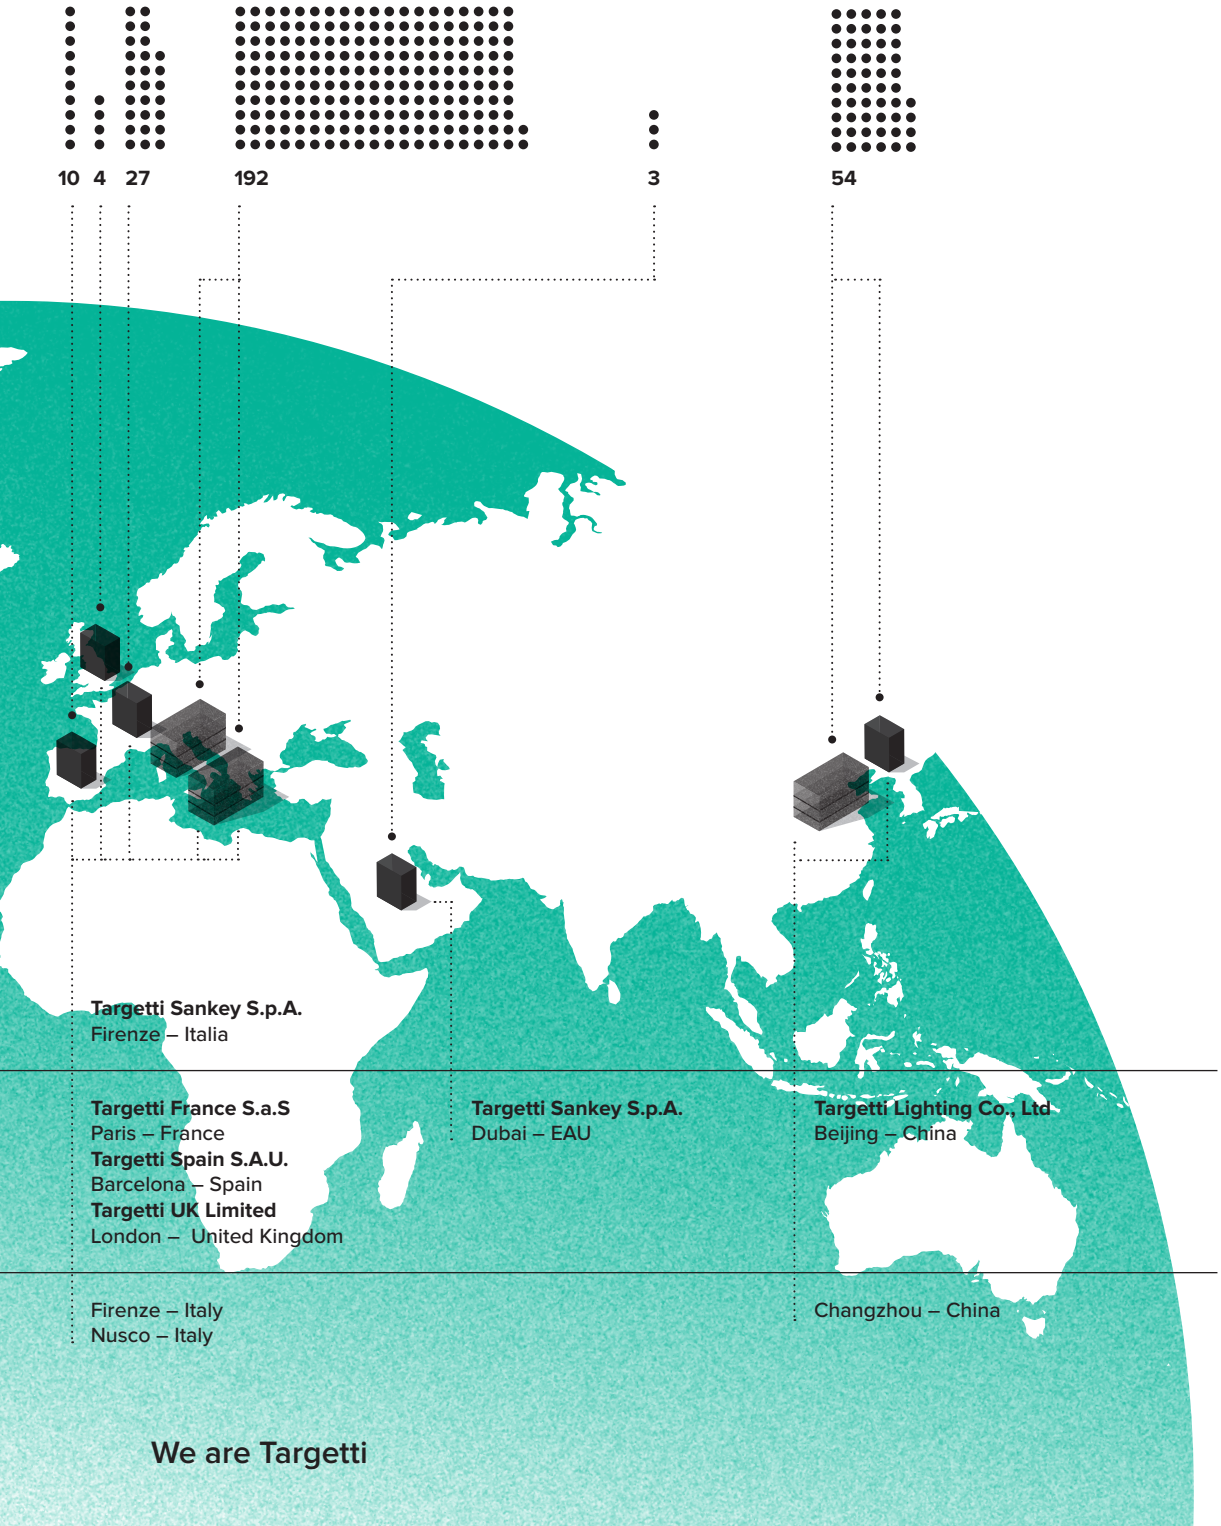
10
4
27
192
3
54
Targetti Sankey S.p.A.
Firenze – Italia
Targetti France S.a.S
Paris – France
Targetti Spain S.A.U.
Barcelona – Spain
Targetti UK Limited
London – United Kingdom
Targetti Sankey S.p.A.
Dubai – EAU
Targetti Lighting Co., Ltd
Beijing – China
Firenze – Italy
Nusco – Italy
Changzhou – China

We love research

The flash of inspiration appears only after travelling a long way

We are constantly on the lookout for new ideas.

Research is a fundamental part of the work we do and an indispensable part of our DNA: new technology, extraordinary ways of applying existing ones, more efficient lamps and new shapes and forms for optical systems. We do all of this because we want to share the ideas and original insights we produce every day in our products. Our projects are based on continuous dialogue with professionals in the industry and specialised partners that start out as pure visions which are then shared, processed and adapted until they are turned into concrete results. This is the way we create tools that are capable of shining a better light on the market.

Always innovating

Pushing the limits of imagination and technology forward

Innovating is a watchword for us.

Innovating is a watchword for us. It means surprising and impressing our partners but above all supplying them with out of the ordinary tools that provide original ideas in the design phase. If our products are innovative it is because they are the result of careful and tireless study.

We study the application of the latest technology available, the potential of new lamps and we collaborate with companies that are pioneers in design and lighting control. Once in the hands of lighting designers these solutions can create new and fascinating projects.

At left Photographer: Guilherme Stecanella

ZENO equipped with NSP
indirect optic - Launch 2017.

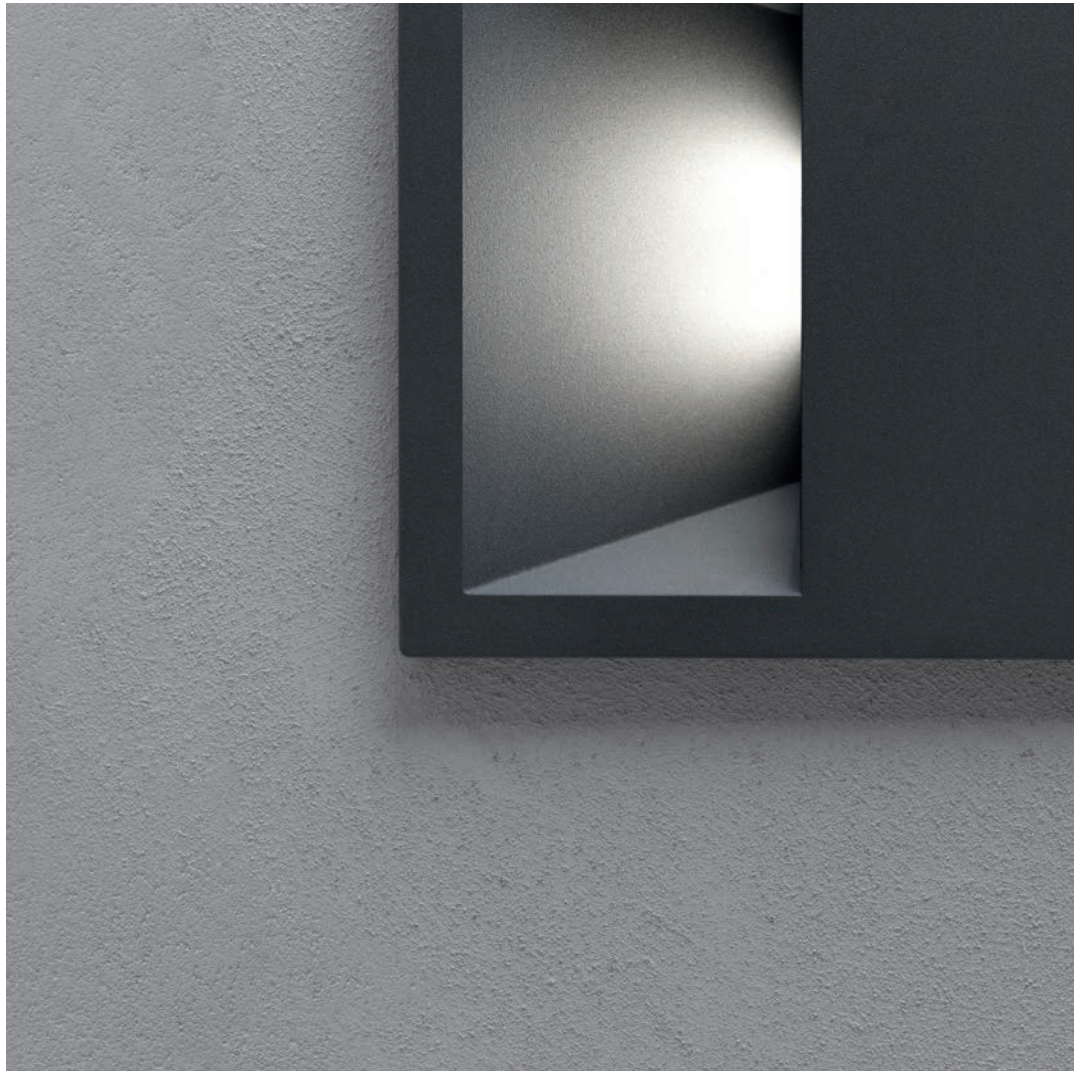

ZEDGE PRO designed in collaboration
with Gensler - Lauch 2018.

We want to experiment

Emotions and the irresistible charm of inventing

We are always ready to venture into unchartered territory.

To find impressive solutions without ever giving up takes intuition, courage, enthusiasm and a dash of madness. For us experimenting new technology is thrilling as well as looking for the links between LED and digitalisation that make even the most technical and complex fixtures simpler.

Results are never a foregone conclusion, sometimes we reach a dead end, but often we are presented with exciting, unexpected scenarios.

At left Cantina Briziarelli - Bevagna Perugia , Italy
Architect: studio miidesign
Photographer: Antonino Ciddio 2018.

DBS

The Dynamic Beam Shaper (DBS) range started this way, from the desire to give designers a sophisticated yet simple to use tool. A technology that makes it possible to vary the beam opening of fixtures via digital input without any mechanical system.

With DBS we navigated uncharted waters, the combination of LED lamps, miniature reflectors and lenses fitted with liquid crystal molecules that can be activated using an electric field thus creating a light diffusion process.

Today DBS technology is available on five different product ranges,

Zeno

CCTLED
Architectural

Coro

Cloud

Ledò

soon it will also be available for other products such as:

CCTLED
Architectural Mini

Cloud
Mini

Coro
Small

Zeno
Small

Label 6

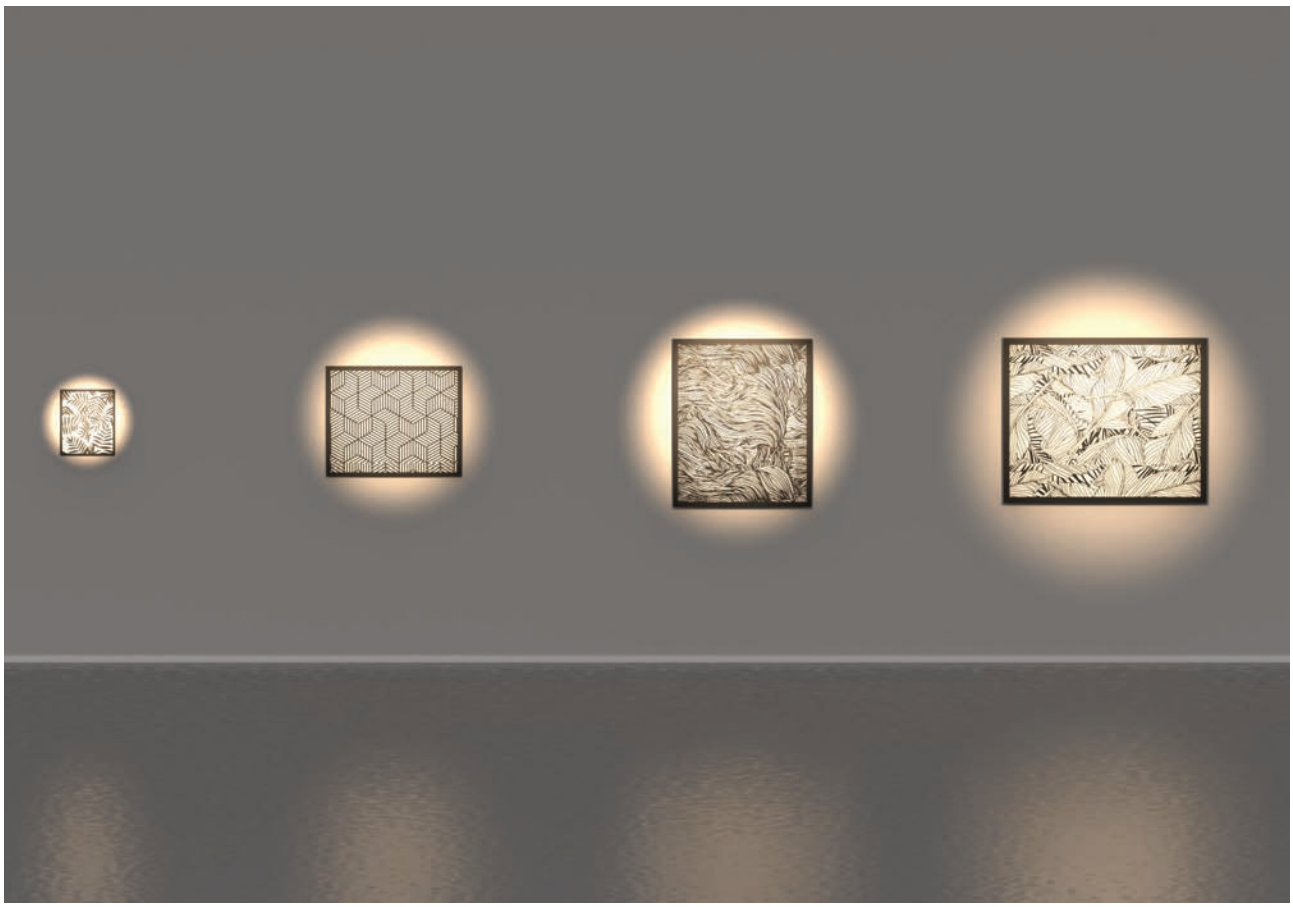

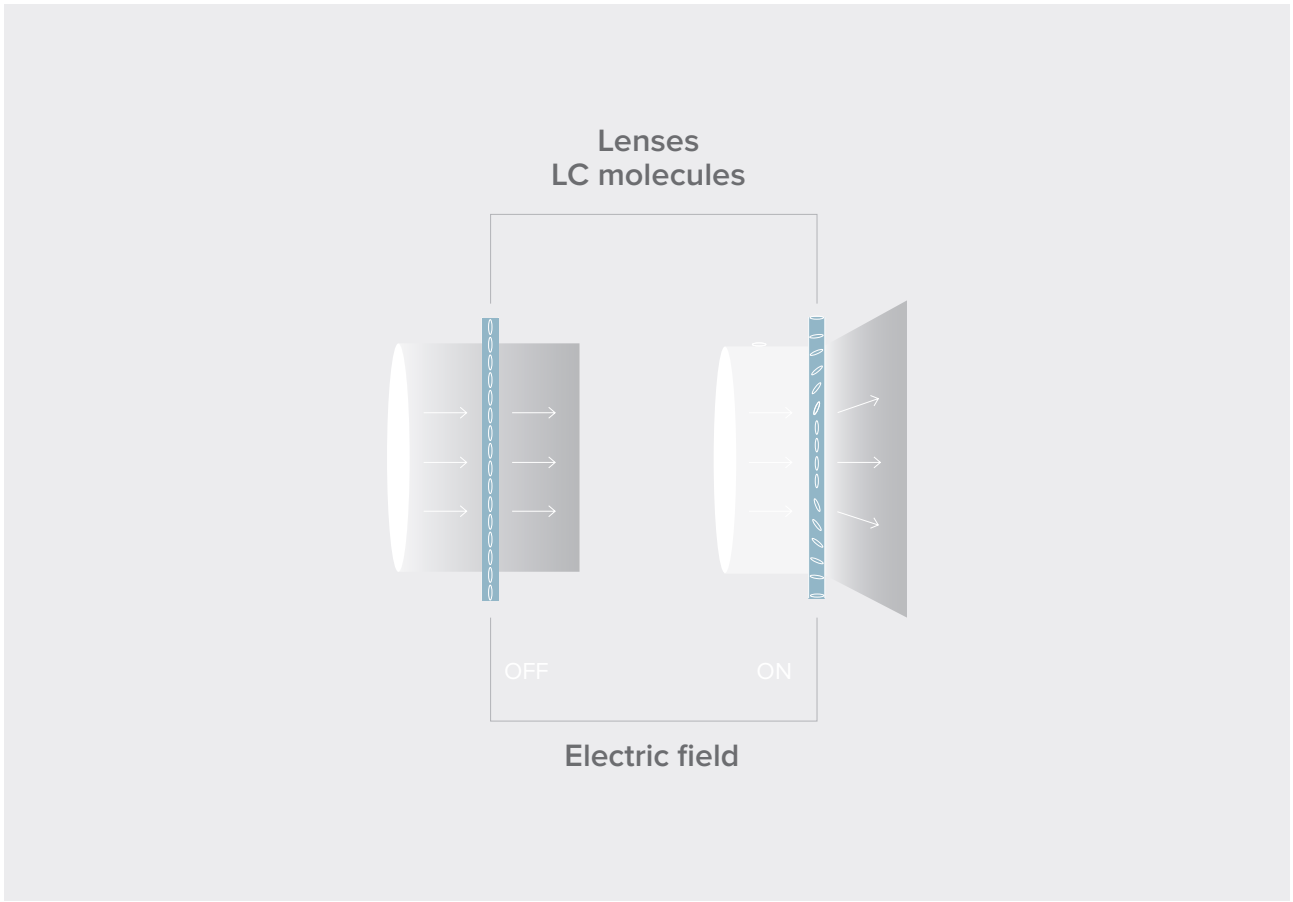
Lenses
LC molecules
OFF
ON
Electric field

TARGETTI

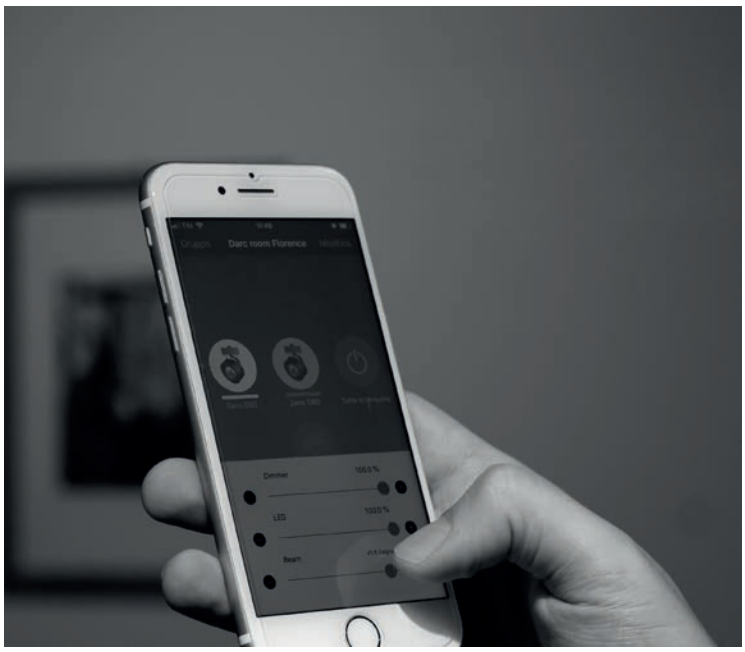

DBS

Control

We worked on a Joint Venture on this adventure to push the boundaries of light with Lens Vector, a leading American company in lens design.

DBS is controlled using an IoT system. Using a Casambi application available for IOS and Android it is possible to dim the source, set the desired beam opening and create dynamic scenes. The same fixture controlled by any smartphone opens up endless possibilities.

TONES

Searching for the best light

The TONES project started with the touch of madness we are famous from taking on the challenge to artificially create the best light for a variety of combinations and colours. A research project more than normal daily work that lasted almost a year, shared with a team of architects from the company Gensler, one of the largest architectural firms in the world. Together we analysed different combinations of materials and colours that are used in modern architecture and created the most suitable spectrum of light for each of them to enhance each composition, both as a whole as well as every single component. The team of architects evaluated the colour rendering of individual materials, the harmony and synchronicity between the various colours, the perception of different textures and contrast enhancement, in order to strengthen the expressive message as a whole. This was possible combining a series of LED that, as a whole, produce different tones of light, all with extremely rich emission spectrums to emphasize the different colours.

Seven different tones of light

Created digitally at first and then concretely reproduced to express various spectrums that have been specifically combined and shaped to enhance different combinations of materials and colours.
A completely new, highly specialised light that has never been seen before.

The TONES range is ideal for domestic, retail, hotel and entertainment lighting, spaces where there is an interior design project that takes into account colours and materials aimed at creating a style and an atmosphere and to elicit particular emotions.

At right Project 107
Architect: The Ply Architecture
Photographer: Andrey Egorov

We design with you

Unique tools and a desire to work together

We love every lighting project, we like being one of gears that drives the planning machine to enhance architecture to the full.

We work with our partners, we share the journey through the different project phases, we support them and we design custom made fixtures with them.

Our technicians study ad hoc solutions that adapt to space, design, optics, colours and size. Solutions that can become an integral part of the environment and meet ever-changing lighting needs.

Cattedrale di Santa Maria Assunta Volterra, Pisa

Lighting designer: **Massimo Iarussi**

For the Cattedrale Santa Maria Assunta in Volterra the lighting designer Massimo Iarussi, in collaboration with the Targetti R&D, designed decorative suspensions with a technological core.

The suspensions, made of alabaster, are a tribute that the lighting designer wanted to pay to the city, the European capital for processing this precious mineral, adding to the Cathedral a new element which is expression of artistic and artisan work from the third millennium. The diffused light provided by the lanterns contribute to the general lighting in the church while the fixtures inside them light the ceiling providing scenographic zenithal accent lighting on the floor.

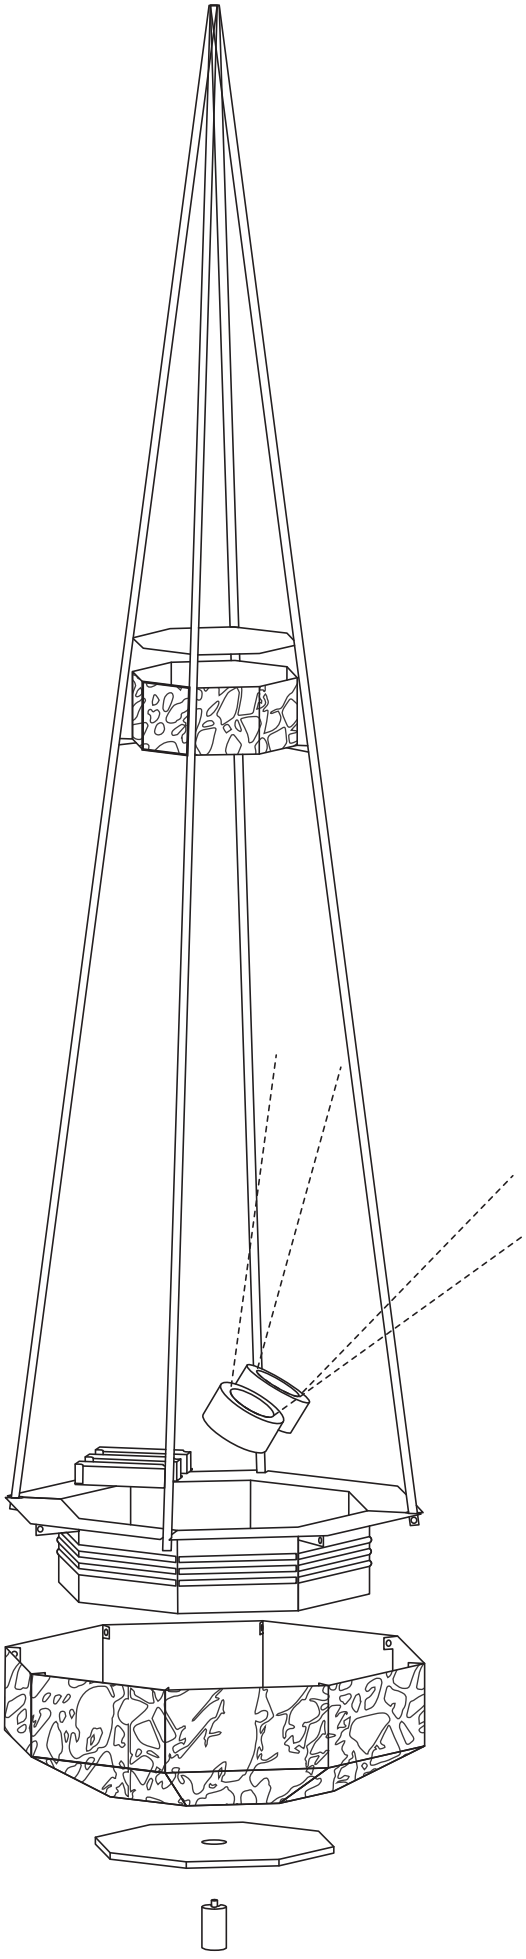

Targetti R&D department at Targetti created a kind of metal tray to house the fixtures for different lighting scenes. The lanterns play a triple role of contributing to the general lighting in the church, lighting the coffered ceiling and providing a more scenographic zenith light for the floor. A kind of ring made of LED strips surrounds the metal tray to provide a backlight for the alabaster suspension fixtures. Inside they are equipped with custom-made projectors inspired by the Zeno range, fitted with a special adjustable bracket to light the coffered ceiling. Finally, in the lower part of the lanterns there are small recessed projectors derived from the Label 48V range which are fixed to the metal trays using rods which zenithally light the floor.

We design light

A taste for distinguishing nuances

For us designing light is irresistible! We've been doing it for decades and it's our strength.

We put all our genius, passion and imagination into it. Creating surprising geometries, looking for new materials and getting light and space to interact together in increasingly original ways is something we never get tired of. Optical systems are the heart of a light fixture and we put our heart into designing them.

In the face of every shape, every new effect we discover, design and optimise we are always surprised just like the first time: it is the excitement to have found a solution using our imagination and the strength to make impossible dreams come true, or simply to have solved a complex problem brilliantly.

Every project and every space needs the right light.

We create the right light by designing optics, looking for new reflections and adding nuances and shades.
Today lighting does not just mean light and shade rather it is the art of adding weight or lightness to the myriad of nuances that separate them. This is why we have created a wide range of optics that add different – more significant – weight to nuances.
At first glance it could seem that a museum or a shop need to be treated similarly: the same accent light that helps to focus attention towards objects. Yet if in a museum perfect, precise beams without any blurred edges and clean light to focus on the works on display are favoured, a shop uses softer gradient tones to attract people's attention without creating sharp boundaries and without favouring one product more than another.
This was the reason behind the idea of creating optics with the same beam width that ensure effects with different gradient tones.

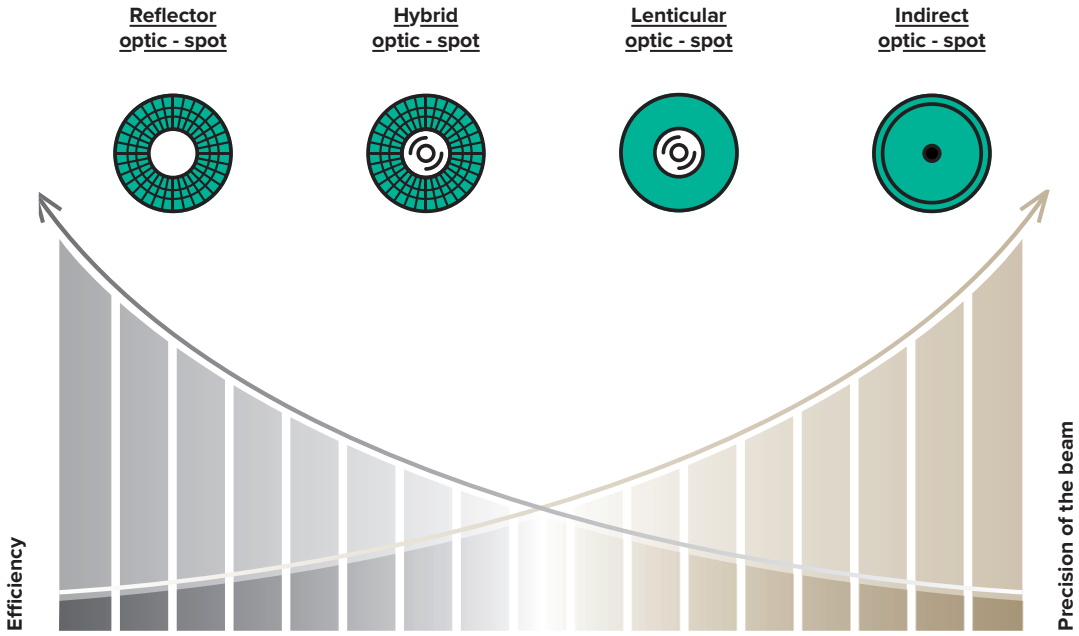

At right Chapelle du Collège Carpentras, France
Sacha Leray Exposition
Photographer : Hugo Hebrard



Indirect optics

Millimeter beam precision for evocative effects

One of the optics in the Targetti range is the indirect version, that makes it possible to obtain an extremely narrow light beam (6°) that is precise and well defined even at great distances. It uses the principle of lighting technology where a parabolic reflector is lit by a light source that is turned backwards and completely hidden from view. It works therefore by reflection, but the special shape makes the beams converge in an extraordinary way to create an extremely narrow, focused and defined effect with no falloff which is a normal result of uncontrolled light. Given its sophisticated shape this optic is only available in a Narrow Spot version.



Lenticular optics

Sophisticated geometries for precise beams

These are most commonly used in museums because they make it possible to obtain precise and defined beams that frame works of art without interfering with the background. They are available from Narrow Spot right up to Flood openings. They are small in size, use high quality materials and have sophisticated shapes to collimate beams to eliminate all indirect emission components. This extreme precision entails a small sacrifice in terms of performance which in museums is not an essential requirement because low power fixtures are often used.



Hybrid optics

The best compromise between beam efficiency and definition

The light emission of these type of optics is the result of the combined use of reflectors and lenses. A reflector controls peripheral light while one or more lenses manage the central part of the beam which is usually uncontrolled. Cancelling “spurious” light is combined with flow recovery and an increase in the intensity inside the beam. These optics are available for Spot and Flood emissions.

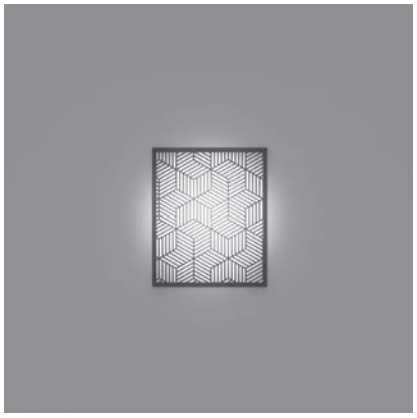

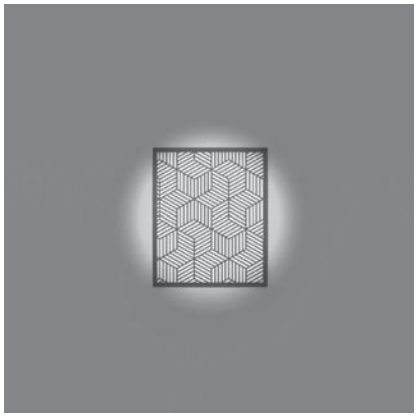

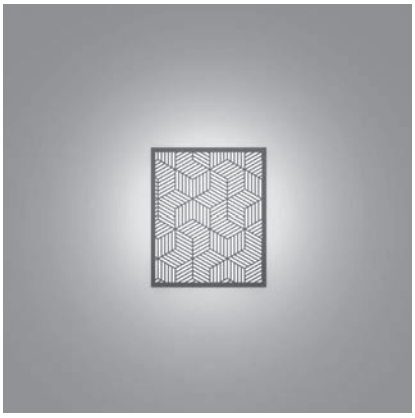

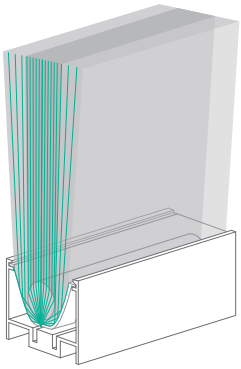



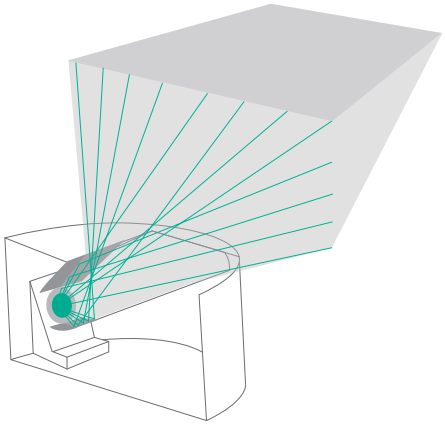

Grazing optics

Grazing lighting is a kind of light used to enhance vertical surfaces in a uniform way

With a gradient tone that moves away from the emitting source softly and is suitable for linear fixtures.
Fixtures with this type of optic must be positioned near to the surface to be illuminated because the photometric solid is in reality a blade with maximum intensity at the emission point which then fades as it moves out. In the Targetti collection the Grazing optic was created thanks to an intuition by our optical department which studied a simple yet highly effective solution. It is a cylindrical lens positioned above the LED source along the entire length of the fixture. The result is a soft continuous light effect that “attaches” to the wall near the fixture without any unpleasant scorching, yet still able to reach the floor or the ceiling depending on where the fixture is positioned.

Reflector optics

Precise and enveloping light

These optics ensure the best performance and are available with all beam spread (spot, flood, medium wide flood and wide flood). They allow for excellent light mixing with broad, soft tones between light and shade. They are particularly suitable when a homogeneous balance between luminance and a more neutral and less dramatic effect is required. The reflective aluminium or metallised polycarbonate they are made of ensure high optical efficiency.

Wall Washer optics

Uniform light and contemporary atmosphere

These type of optics allow for completely uniform effects even on large wall surfaces. What makes them unique is the ability to direct the light right to the top of the surface and to its full height. The distance between different fixtures will provide uniformity along the entire length of the wall.
Wall-washer optics are ideally used where uniformity is required in the entire space or where particular emphasis on a large work of art displayed on a wall is needed.
The contrast with the rest of the space will emphasize the dramatic effect.

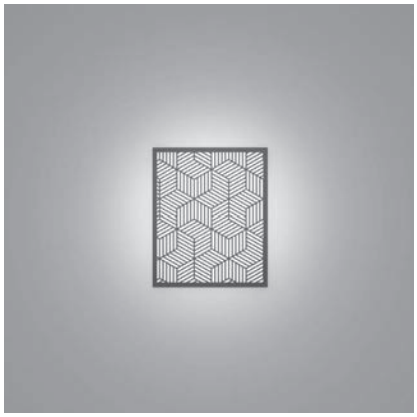

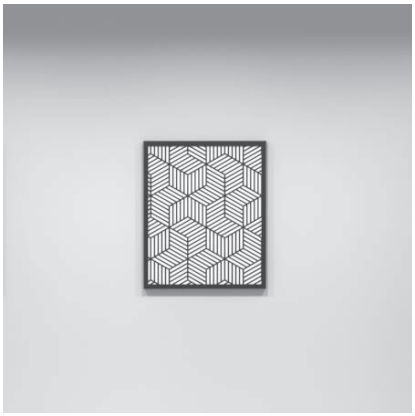

Light is colour

Exalting the wealth of possible combinations every day

We do not like simplifications and standards, for us showing the inexhaustible potential of light is a responsibility and a duty.

Hues, tones and shades: every time we aspire to create the right composition for a particular material or a work of art we have taken on to reproduce its colours and essence with the utmost fidelity.

We have always chosen the LED source for our fixtures very carefully, LED lamps that are capable of ensuring high performance, long life and excellent light quality. This means not choosing just one type of source for the entire collection but the ones we believe are the most suitable to be fitted in particular fixtures or new optical systems.

Despite this we are always able to ensure the same hue of light in all our fixtures.

At left Photographer: Ingmar Hoogerhoud

TM30

TM-30-15 IES – is the acronym for the Illuminating Engineering Society – the organisation that developed the scale as a new method for evaluating the colour rendering of a light source. It appears to be more reliable than the previous Ra because it is based on the colour rendering comparison of 99 “colour patches" rather than 8+6 like the CRI. In addition, where the CRI provides a single score, therefore it does not significantly express the narrow but broad relationship between light and colour, the TM-30 appears to be more complete because it is identified using three different parameters: an Rf Fidelity index, an Rg Gamut index and a colour vector graphic. These combine to provide a more accurate image of the colour fidelity of a light source and a better explanation of the exceptional colour rendering capabilities of LED sources.

Rf (Fidelity)
The TM-30 Fidelity index uses 99 colours, rather than 8+4 of the CRI, chosen from real world objects. Like the CRI the points of the Fidelity index go from 0 to 100. A score of less than 60 is too poor for indoor use and a 90+ score is ideal for an effect that is similar to daylight.

The TM-30, 99 “colour patches" are classified into seven groups (nature, skin tones, textiles, paints, plastics, printed material and colour systems). This categorisation helps because the light source can be tested on specific application areas.

Rg (Gamut)
Evaluates the intensity of colours under a certain light, therefore it provides indications of the source’s ability to reproduce colour saturation (breadth of colour range).

A score range equal to 100 indicates that the light source does not change the hue or colour saturation that are reproduced in the same way as the sample source.

R>100 indicates an increase in colour saturation, therefore they appear more intense.
R<100 indicates a decrease in saturation.

TM-30 colour vector graphic
Indicates which colours appear to be saturated and which desaturated.
In the TM- 30 colour vector graphic the black circle represents the sample light, while the red circle is the light being tested. If the circles overlap perfectly the tested light corresponds to sunlight.

The areas that extend beyond the black circle indicate that the colours are more intense compared to the sample, however those that remain inside represent colours that appear desaturated.

Unlike the Fidelity and Gamut indexes which are numerical scores, the colour vector graphic is a visual representation that makes it possible to understand which colours are more and less intense.

This is particular useful when it is necessary to highlight a particular colour, for example in retail applications.

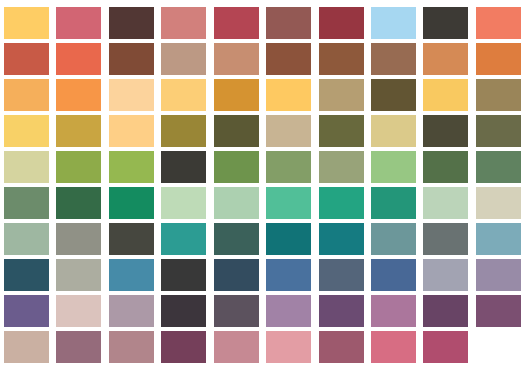

TM-30 Colour Range

COLOUR DISTORTION GRAPHIC

MacAdam

Another fundamental parameter for us when choosing a light source is Colour Tolerance, i.e. the colour characteristics of light highlighted by Step MacAdam.

Targetti fixtures equipped with LED COB have 1.5 step MacAdam guaranteed throughout the life of the source.

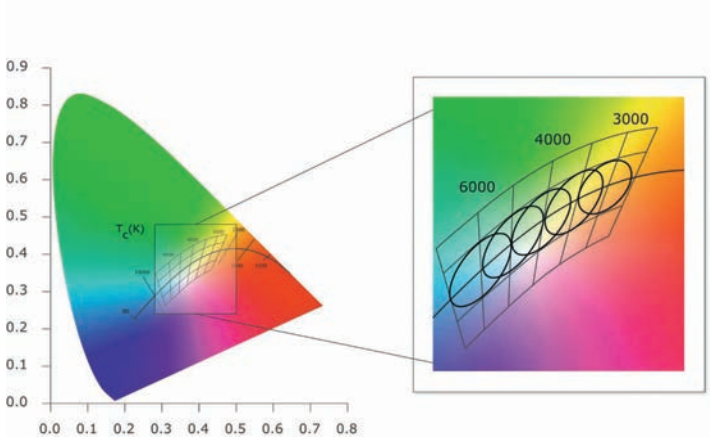

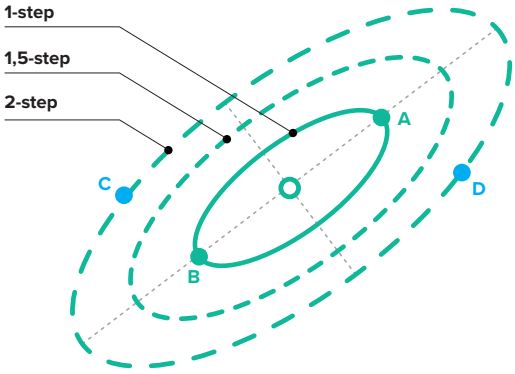

To help read the data it is possible to refer to the guide on page → 806

These are the LED sources our fixtures are fitted with



LED
COB (chip on board)

This type provides maximum performance in terms of lumen, efficiency and density. They are typically made of a matrix of small blue chips covered in phosphorous. The large number of chips used makes it possible to achieve excellent efficiency while maintaining low current in individual chips.

COLOUR TEMPERATURE

2700 K • 3000 K
3500 K • 4000 K

EFFICACY

100 • 150 lm/W

COLOUR RENDERING

Ra84 • Ra92 • Ra97

COLOUR CONSISTENCY

1.5 SDCM
(Steps MacAdam)

LED
Mid power

Characterised by high efficiency and low unit power (< 1W). This makes it possible to create large light sources. It is typically used in linear fixtures and in fixtures that have large emission areas of diffused light in order to obtain excellent performance while maintaining lower wattage.

COLOUR TEMPERATURE

2700 K • 3000 K
3500 K • 4000 K

EFFICACY

100 • 150 lm/W

COLOUR RENDERING

Ra84 • Ra92 • Ra97

COLOUR CONSISTENCY

2 SDCM
(Steps MacAdam)



LED
Emitter

Characterised by a very small light emitting area and high unit power (2-9W), it is typically used to make fixtures with predefined light beams.

COLOUR TEMPERATURE

2700 K • 3000 K
3500 K • 4000 K

EFFICACY

100 • 150 lm/W

COLOUR RENDERING

Ra84 • Ra92

COLOUR CONSISTENCY

3 SDCM
(Steps MacAdam)
2 SDCM on request

LED COB

LED COB
Ra84 2700K

SOURCE
2700 K

R_f	84
R_g	95
CCT (K)	2714
D_{uv}	0,0000
x	0,4587
y	0,4102
CIE R_a	82,9
CIE R9	6,5

SPECTRAL POWER DISTRIBUTION COMPARISON

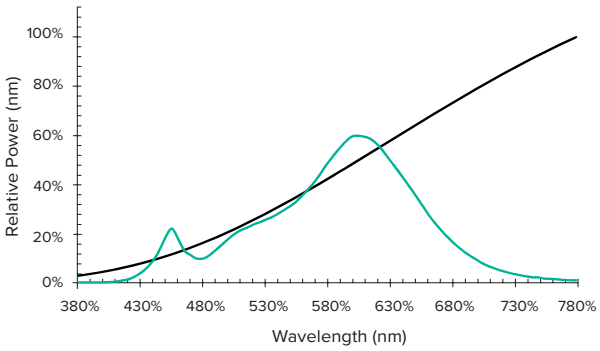

COLOUR DISTORTION GRAPHIC

LED COB
Ra84 3000K

SOURCE
3000 K

R_f	84
R_g	98
CCT (K)	3030
D_{uv}	0,0005
x	0,4356
y	0,4050
CIE R_a	84,2
CIE R9	16,1

SPECTRAL POWER DISTRIBUTION COMPARISON

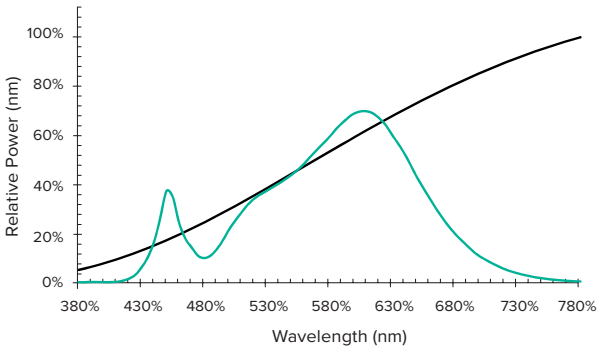

COLOUR DISTORTION GRAPHIC

LED COB
Ra85 4000K

SOURCE
4000 K

R_f	83
R_g	99
CCT (K)	3958
D_{uv}	0,0000
x	0,3823
y	0,3780
CIE R_a	85,2
CIE R9	20,9

SPECTRAL POWER DISTRIBUTION COMPARISON

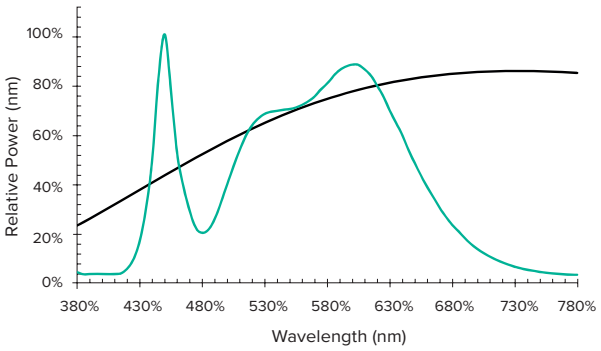

COLOUR DISTORTION GRAPHIC

LED COB
Ra93 3000K

SOURCE
3000 K

R_f	92
R_g	99
CCT (K)	3044
D_{uv}	0,0001
x	0,4340
y	0,4032
CIE R_a	93,7
CIE R9	61,5

SPECTRAL POWER DISTRIBUTION COMPARISON

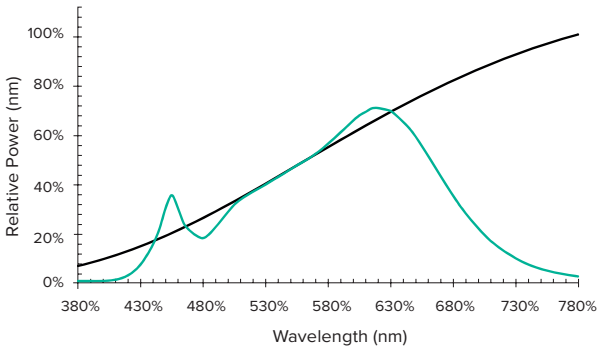

COLOUR DISTORTION GRAPHIC

LED COB
Ra90 4000K

SOURCE
4000 K

R_f	90
R_g	98
CCT (K)	3980
D_{uv}	0,0011
x	0,3821
y	0,3800
CIE R_a	93,5
CIE R9	66,4

SPECTRAL POWER DISTRIBUTION COMPARISON

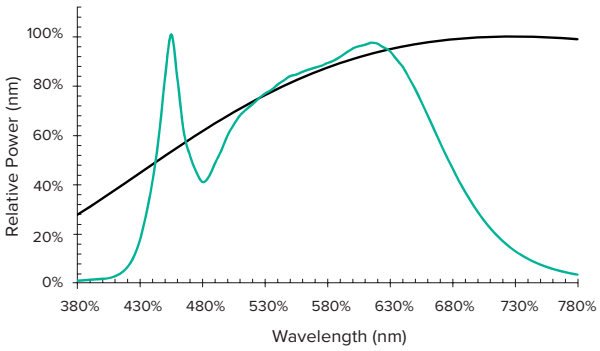

COLOUR DISTORTION GRAPHIC

LED COB
Ra97 3000K

SOURCE
3000 K

R_f	96
R_g	102
CCT (K)	3006
D_{uv}	0,0001
x	0,4364
y	0,4036
CIE R_a	98,1
CIE R9	97,8

SPECTRAL POWER
DISTRIBUTION COMPARISON

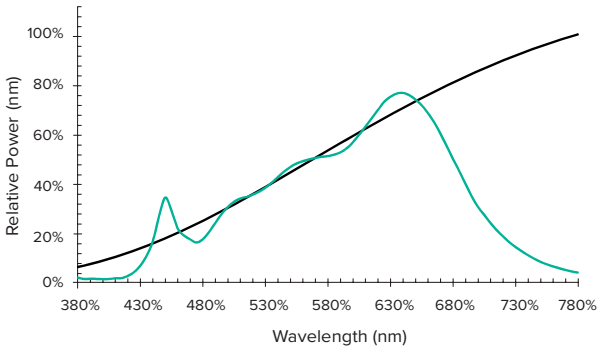

COLOUR DISTORTION
GRAPHIC

LED COB
Ra97 4000K

SOURCE
4000 K

R_f	93
R_g	100
CCT (K)	3905
D_{uv}	0,0002
x	0,3849
y	0,3800
CIE R_a	98,4
CIE R9	99,2

SPECTRAL POWER
DISTRIBUTION COMPARISON

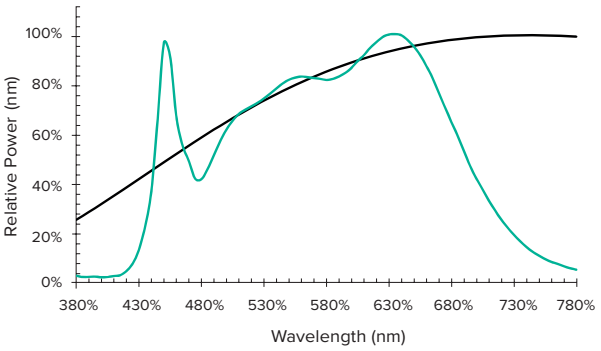

COLOUR DISTORTION
GRAPHIC

We adorn with light

An essential addition to make a place unforgettable

When we work with architecture light is part of everything:

it must be functional to the project, enhance it and emphasise its communication message. To this purpose fixtures must discretely integrate into the architecture without overpowering it, participate as functional elements and if necessary disappear. This is why we dress our light with a simple yet at times meticulous design with canonical shapes that can be easily combined together.
Colours are always simple to disappear into the environment: black, grey and white.

Architecture however is not always black and white, it can be an explosion of colours. Lighting has the task of adapting to its style.

This is why our fixtures can be painted, with any RAL finish (after the feasibility study) chosen by customers from the RAL Classic.

We have many colours to provide light with an ever changing style able to perfectly mach any context.

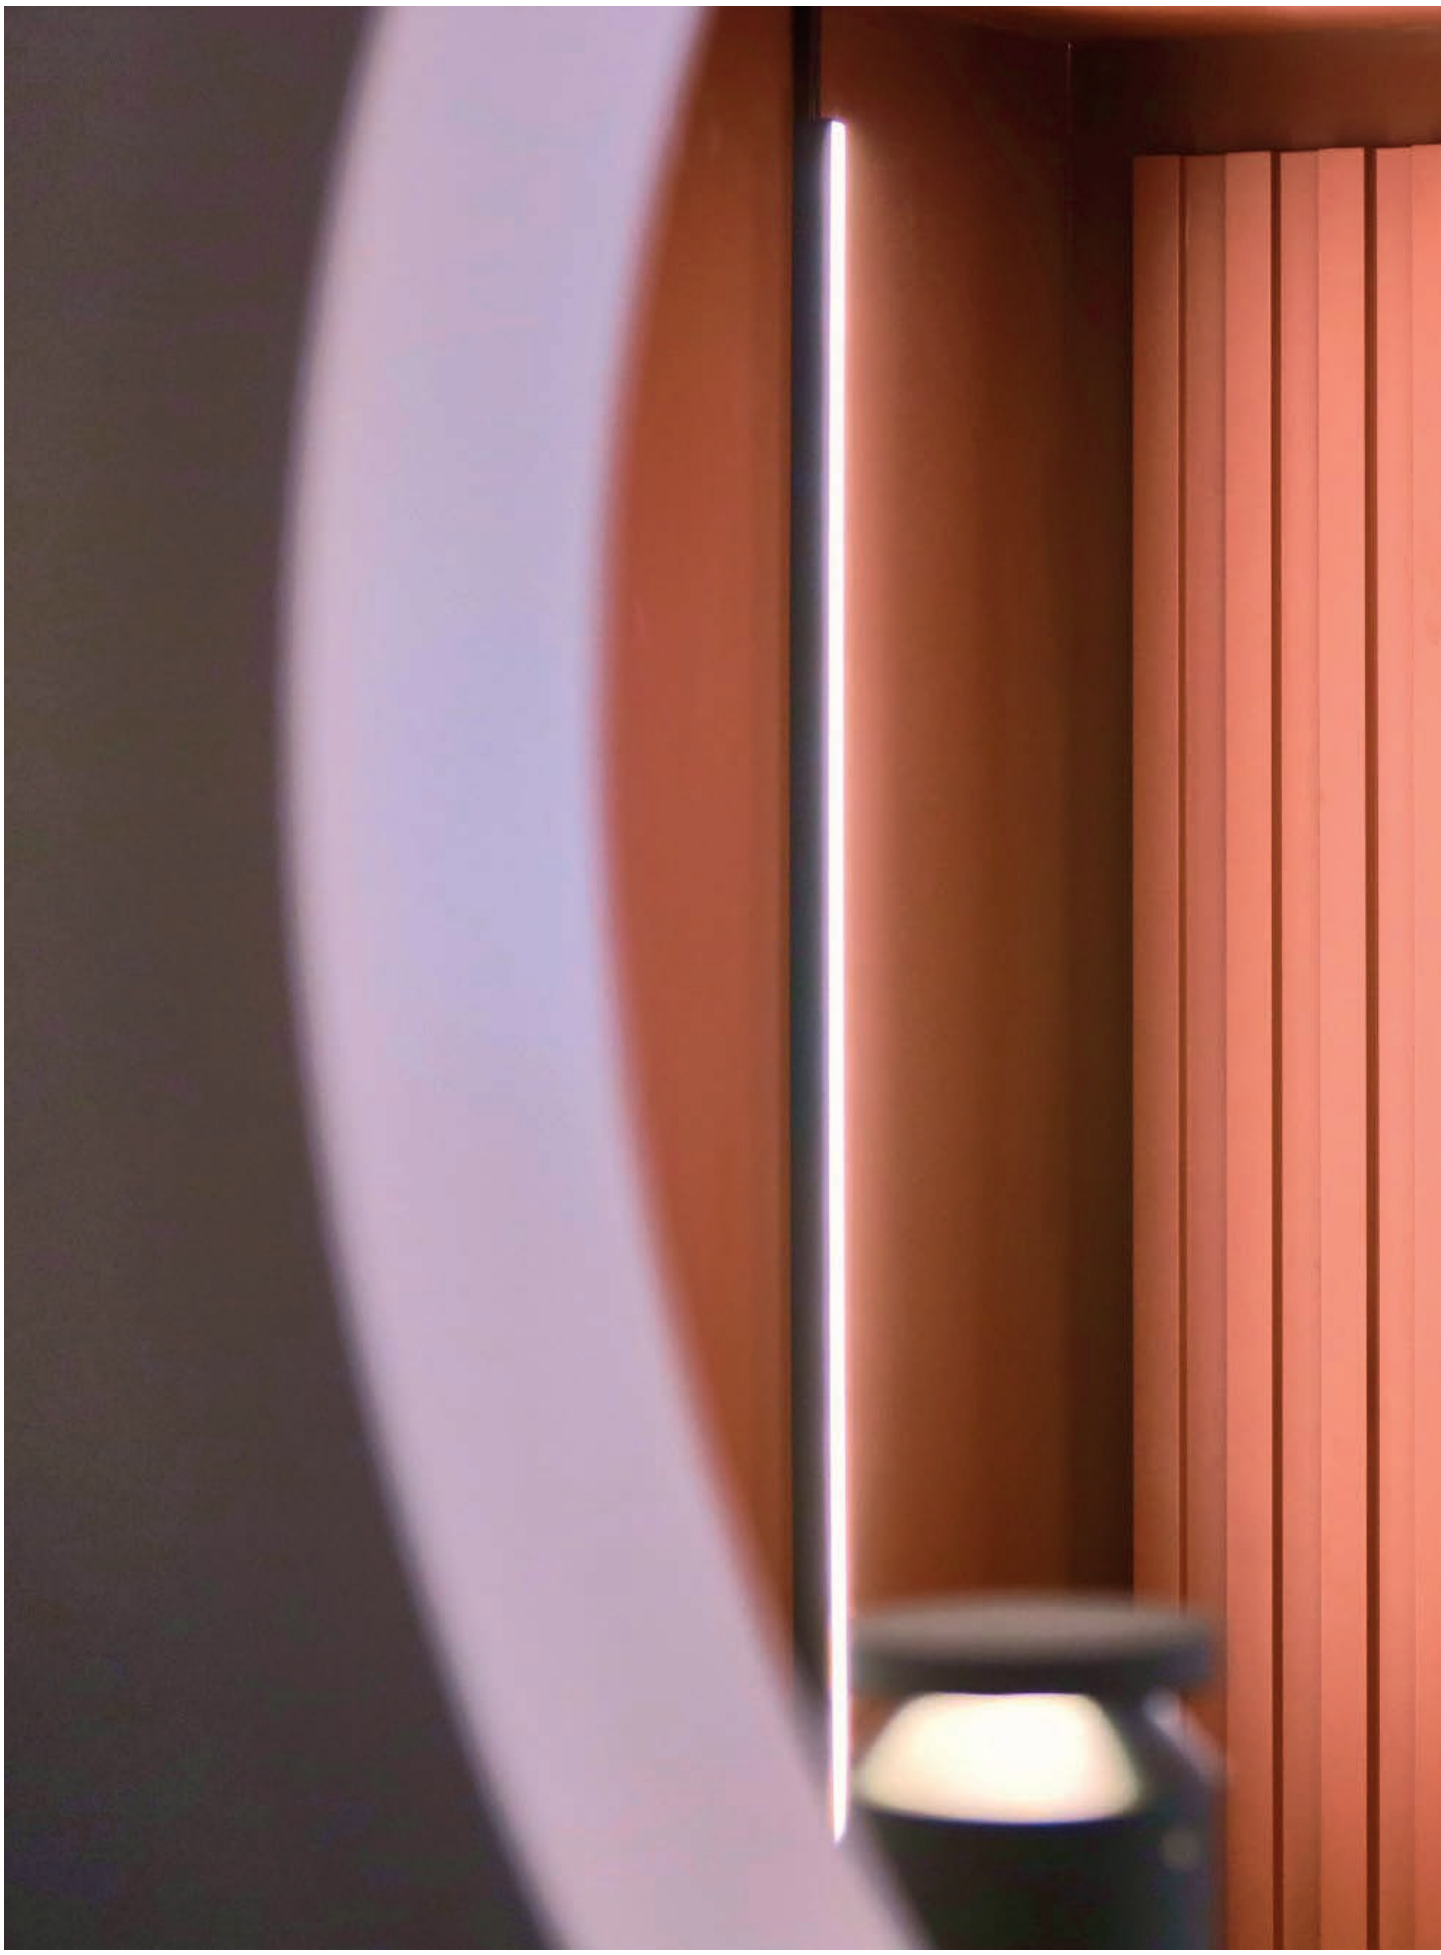

We control light

Deciding on how much light, where and how in a few easy steps

The digital revolution – in particular the increase in Wi-Fi connections – has made it possible to control many everyday tools remotely, opening the door to simple and customised use of many things. Light is one of them.

At left Photographer: Sayo Garcia

Many of our fixtures can be activated and managed remotely using Bluetooth Low Energy (BLE) technology by Casambi, the leader company in wireless lighting control solutions.

By downloading a simple application onto a smartphone or tablet– for iOS and Android platforms- you can control your systems wirelessly however simple or complex it is.

It is possible to control every fixture

and decide whether to activate it individually or in combination with others depending on the needs and functionality required. Manage simple On-Off modes, dim sources, set up different configurations depending on specific functional requirements and even create dynamic scenes.
The system is also capable of interfacing with standard control Drivers such as Dali and 1-10V.

The fixtures in our collection are controlled using components integrated into the product or external accessories. Our added value is the wide range of custom and standard devices available that have been developed to respond to even the most particular design needs in a flexible way.
Some simple icons in the catalogue help to identify fixtures in the collection that are already fitted with Casambi components and those to accessorise with special control units. You can find all the technical specifications and accessories in the control systems section of the catalogue.

At right Samsung KX , London - UK
Project: Heatherwick Studio
Lighting design: Nulty Lighting

News 2020
Indoor

Iso

Logico

New lighting modules

Omega

OZ

New modules

Label 2

Zeno Medium

Zoom

News 2020
Outdoor
Zedge

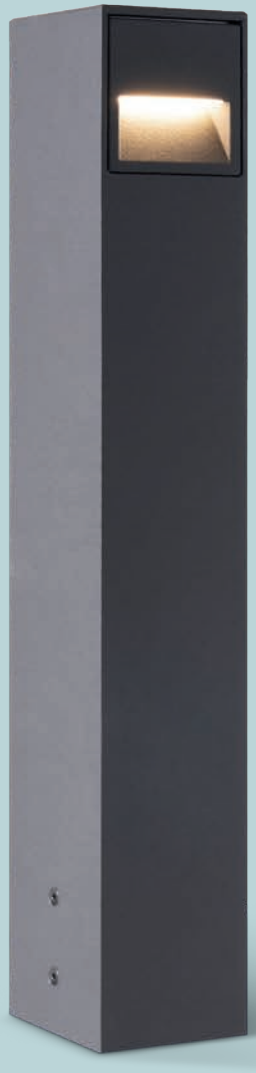

Zedge bollard

Zedge Line Opal

Jupiter Pro

Mr & Mrs Smith

Keplero Mini

Wall Washer

Jedi Compact

Recessed

Coming soon

Zeno

Family

A
Zeno Small
Casambi

B
Zeno Medium
EL - DALI - Casambi

C
Zeno Medium
1-10V dimm on board

D
Zeno Large
EL - DALI - Casambi
1-10V Dimm on board

The Zeno range, designed to meet the lighting needs of exhibition spaces, will be subject to a restyling with the main objective being to minimise the size of the driver box.

A new design and faster installation. Integration into the architecture is then maximum when the option of the driver integrated into the track is selected.
At present available on request.
In 2021 also for the Medium version.

Label 7

The Label range is extending the family with the arrival of the new best performing Label 7! Available with two different optical systems, with lenses or reflectors to obtain performance and project-friendly effects with the same beam opening.

CCT EVO

Family

A

CCT EVO
Architectural

B

CCT EVO
Downlight

C

CCT EVO
Extractable

CCT EVO is here. Not a single “point of light” but an entire range of recessed fixtures developed on two different platforms to create two different types of products with the same family feeling.

“Architectural” recessed Downlight and Projector.

The Downlight is characterised by its essentiality, excellent performance, high efficiency, IP54 and the extent of the range. Lots of different diameters to choose from.

The Architectural platform is built around the Label range in order to have aesthetic and performance continuity between products with different installation types (track projectors, adjustable recessed projectors and extractable recessed projectors).

CCT EVO Architectural in accordance with Targetti tradition will be equipped with a complete set of accessories to design light according to requirements.

Even in this case there is an extensive range; the guiding principle is to create a range of products for different types of applications and sizes to provide a comprehensive collection of tools for our partners.

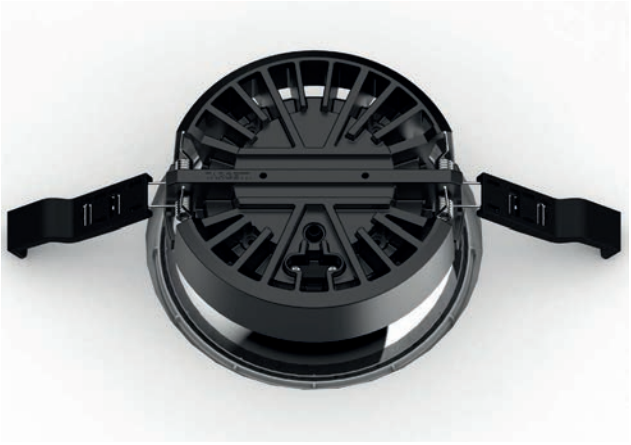

Coming soon

New DBS Range

The DBS programme is continuing and extending its range

OZ DBS

Targetti confirms its place as leader in the design of optical systems with new LCD micro-screens with a very small diameter compatible with the DBS system, engineered ad hoc for us.

Soon it will be possible to vary the beam opening of very small Oz light units even remotely.

CCTLED
Architectural Mini

Cloud
Mini

Coro
Small

Zeno
Small

Label 6

Ra>90

State of art LED technology allows for good flux with high colour rendering.

Targetti has set themselves the goal of equipping all fixtures with LED Ra minimum >90 by 2021.

Indoor

Recessed

Linear recessed

82
LOGICO
Stand alone

Recessed

94
THREESIXTY

106
CCTLED
Smart-Tech-Feel

120
CCTLED
Smart-Tech-Feel
Trimless

117
CCTLED
Deep

118
CCTLED
Wall Washer

123
CCTLED
Wall Washer
Trimless

124
CCTLED
Mini

124
CCTLED
Mini WW

126
CCTLED
Micro

128
CCT Flash

132
CCTLED Arch.
Fix



144
CCTLED Arch.
Fix Trimless

138
CCTLED Arch.
Adj

146
CCTLED Arch.
Adj Trimless

141
CCTLED Arch.
HP Adj

151
CCTLED Arch.
Mini fix

152
CCTLED Arch.
Mini adj

158
CCTLED Arch.
Micro

New

160
OZ
Stand alone

176
STORE

192
ZENO Small

196
CLOUD

208
COZY

210
BEBOP

212
QUICKLED

214
POLKA

218
OTTO
Semi Recessed

219
OTTO
Recessed

LOGICO

Stand Alone
Recessed

GENERAL INFO
Modules of variable lengths with flange or trimless installation without visible frames.
Lenghts: 1135mm – 1695mm – 3377mm

LED
LED engine
From 2520lm to21600lm
3000K – 4000K
Ra84
Ra90 To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 109lm/W

OPTICS
OPAL – UGR – WW

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Powder coated, extruded, calendered aluminium.

A versatile fixture available in three different lengths, each with Low- Power and High-Power lumen and different finishes and installation types.

There are two different versions available. One with a light module without a flange to be accessorised with an outer casing for trimless installation or with a flange, and a light module with a flange that does not require an outer casing. It can be also in semi-recessed installation.

It is available with diffused light, UGR<19 controlled light ideal for lighting workplaces or wall-washer for lighting large vertical surfaces.

There are also versions available for ceiling, wall or suspension installation.

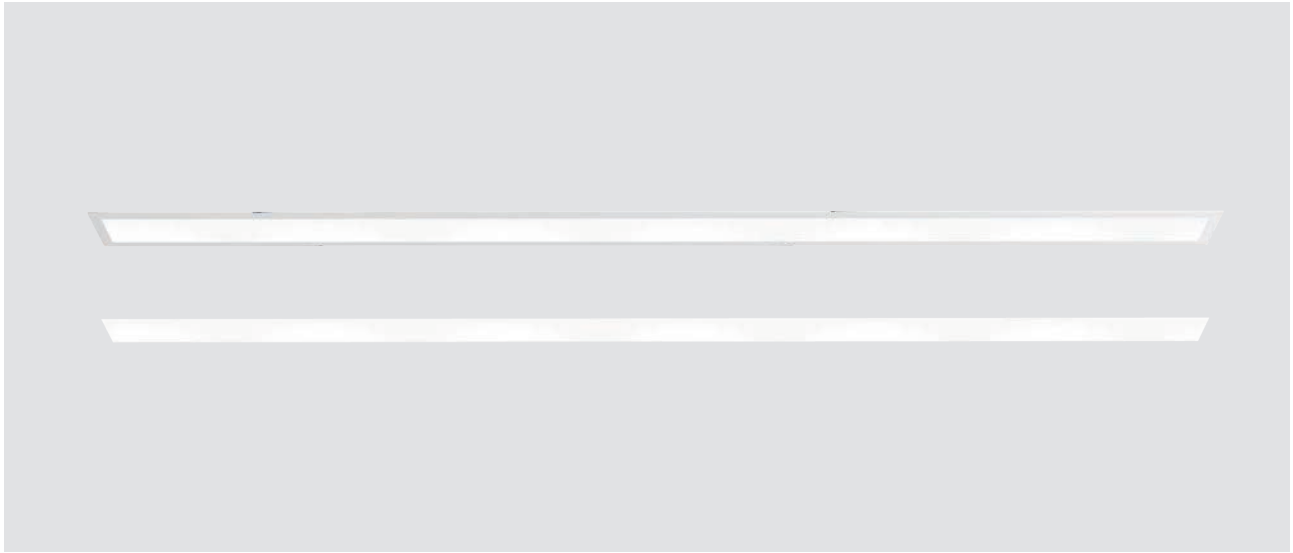

Zonamerica

Architect
Estudio Dovat Arquitectos

Lighting Design
Estudio Hofstadter

Photographer
Ferrés - Cánepa

Country
Montevideo, Uruguay

01

Magnetic assembling

A magnet makes it possible to fix the light unit complete with a reflector to the housing, while the screen is attached with a simple “click”. No need to use tools. This particular fastening system means that the fixture can also be wall mounted.

02

Recessed version with or without a flange

The version without the flange allows for a trimless finish that totally disappears into the ceiling or for semi-recessed installations. Just accessorise the fixture with a special casing to be fitted flush into the ceiling.

Solutions available on request

Custom tailor made length modules and emergency modules.

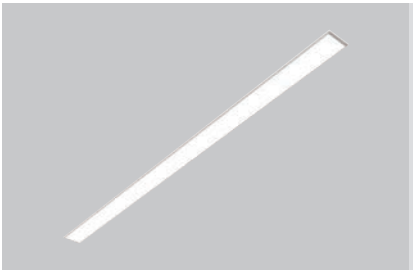

Stand Alone Recessed
L. 1135mm



LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	27W	1	2.66		903
Source Flux	3480lm	2	5.33		226
Fixture Flux	2370lm	3	7.99		100
Efficacy	88lm/W	4	10.65		56
TS991 Imax=259cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5779EL**	**1T5780EL**
EL.	●	**1T5781EL**	**1T5782EL**
DALI	○	**1T5779DA**	**1T5780DA**
DALI	●	**1T5781DA**	**1T5782DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	54W	1	2.66		1785
Source Flux	6880lm	2	5.33		446
Fixture Flux	4685lm	3	7.99		198
Efficacy	87lm/W	4	10.65		112
TS996 Imax=259cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5783EL**	**1T5784EL**
EL.	●	**1T5785EL**	**1T5786EL**
DALI	○	**1T5783DA**	**1T5784DA**
DALI	●	**1T5785DA**	**1T5786DA**

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	18W	1	1.51		1113
Source Flux	2520lm	2	3.02		278
Fixture Flux	1631lm	3	4.52		124
Efficacy	91lm/W	4	6.03		70
TS992 Imax=442cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5787EL**	**1T5788EL**
EL.	●	**1T5789EL**	**1T5790EL**
DALI	○	**1T5787DA**	**1T5788DA**
DALI	●	**1T5789DA**	**1T5790DA**

LED / 24W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55		2801
Source Flux	3480lm	2	4.56	5.10		700
Fixture Flux	2739lm	3	6.84	7.64		311
Efficacy	101lm/W	4	9.12	10.19		175
TS993 Imax=1001cd/klm	Imax	3485cd	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	○	**1T5791EL**	**1T5792EL**
EL.	●	**1T5793EL**	**1T5794EL**
DALI	○	**1T5791DA**	**1T5792DA**
DALI	●	**1T5793DA**	**1T5794DA**

LED / 48W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	54W	1	2.28	2.55		5537
Source Flux	6880lm	2	4.56	5.10		1384
Fixture Flux	5415lm	3	6.84	7.64		615
Efficacy	100lm/W	4	9.12	10.19		346
TS997 Imax=1001cd/klm	Imax	6890cd	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	○	**1T5795EL**	**1T5796EL**
EL.	●	**1T5797EL**	**1T5798EL**
DALI	○	**1T5795DA**	**1T5796DA**
DALI	●	**1T5797DA**	**1T5798DA**

LOGICO

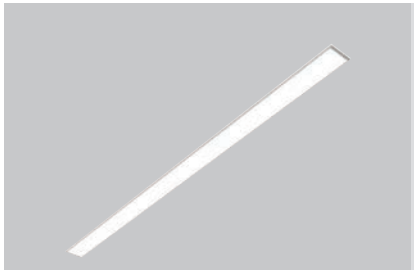

Stand Alone Recessed
L. 1695mm



LED / 36W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	40W	1	2.66	1354
Source Flux	5220lm	2	5.33	338
Fixture Flux	3555lm	3	7.99	150
Efficacy	89lm/W	4	10.65	85
TS991 Imax=259cd/klm	Imax 1354cd	5	13.32	54

Driver	Colour	3000K	4000K
EL.	○	**1T5799EL**	**1T5800EL**
EL.	●	**1T5801EL**	**1T5802EL**
DALI	○	**1T5799DA**	**1T5800DA**
DALI	●	**1T5801DA**	**1T5802DA**

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2677
Source Flux	10320lm	2	5.33	669
Fixture Flux	7028lm	3	7.99	297
Efficacy	87lm/W	4	10.65	167
TS996 Imax=259cd/klm	Imax 2677cd	5	13.32	107

Driver	Colour	3000K	4000K
EL.	○	**1T5803EL**	**1T5804EL**
EL.	●	**1T5805EL**	**1T5806EL**
DALI	○	**1T5803DA**	**1T5804DA**
DALI	●	**1T5805DA**	**1T5806DA**

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
TS992 Imax=442cd/klm	Imax 1669cd	5	7.54	67

Driver	Colour	3000K	4000K
EL.	○	**1T5807EL**	**1T5808EL**
EL.	●	**1T5809EL**	**1T5810EL**
DALI	○	**1T5807DA**	**1T5808DA**
DALI	●	**1T5809DA**	**1T5810DA**

LED / 36W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	40W	1	2.28	2.55	4201
Source Flux	5220lm	2	4.56	5.10	1050
Fixture Flux	4108lm	3	6.84	7.64	467
Efficacy	103lm/W	4	9.12	10.19	263
TS993 Imax=1001cd/klm	Imax 5228cd	5	11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	○	**1T5811EL**	**1T5812EL**
EL.	●	**1T5813EL**	**1T5814EL**
DALI	○	**1T5811DA**	**1T5812DA**
DALI	●	**1T5813DA**	**1T5814DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8305
Source Flux	10320lm	2	4.56	5.10	2076
Fixture Flux	8122lm	3	6.84	7.64	923
Efficacy	100lm/W	4	9.12	10.19	519
TS997 Imax=1001cd/klm	Imax 10335cd	5	11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	○	**1T5815EL**	**1T5816EL**
EL.	●	**1T5817EL**	**1T5818EL**
DALI	○	**1T5815DA**	**1T5816DA**
DALI	●	**1T5817DA**	**1T5818DA**

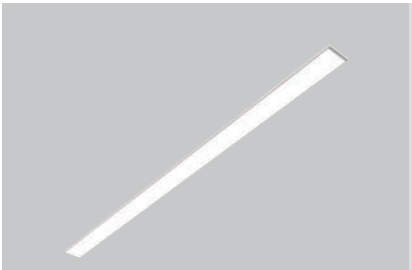

Stand Alone Recessed
L. 3377mm



LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2708
Source Flux		10440lm	2	5.33	677
Fixture Flux		7110lm	3	7.99	301
Efficacy		88lm/W	4	10.65	169
TS991	Imax=259cd/klm	Imax	5	13.32	108

Driver	Colour	3000K	4000K
EL.	○	**1T5819EL**	**1T5820EL**
EL.	●	**1T5821EL**	**1T5822EL**
DALI	○	**1T5819DA**	**1T5820DA**
DALI	●	**1T5821DA**	**1T5822DA**

LED / 144W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		163W	1	2.66	5354
Source Flux		20640lm	2	5.33	1338
Fixture Flux		14056lm	3	7.99	595
Efficacy		86lm/W	4	10.65	335
TS996	Imax=259cd/klm	Imax	5	13.32	214

Driver	Colour	3000K	4000K
EL.	○	**1T5823EL**	**1T5824EL**
EL.	●	**1T5825EL**	**1T5826EL**
DALI	○	**1T5823DA**	**1T5824DA**
DALI	●	**1T5825DA**	**1T5826DA**

LED / 48W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		54W	1	1.51	3338
Source Flux		7560lm	2	3.02	834
Fixture Flux		4894lm	3	4.52	371
Efficacy		91lm/W	4	6.03	209
TS992	Imax=442cd/klm	Imax	5	7.54	134

Driver	Colour	3000K	4000K
EL.	○	**1T5827EL**	**1T5828EL**
EL.	●	**1T5829EL**	**1T5830EL**
DALI	○	**1T5827DA**	**1T5828DA**
DALI	●	**1T5829DA**	**1T5830DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		81W	1	2.28	2.55	8402
Source Flux		10440lm	2	4.56	5.10	2101
Fixture Flux		8216lm	3	6.84	7.64	934
Efficacy		101lm/W	4	9.12	10.19	525
TS993	Imax=1001cd/klm	Imax	5	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	○	**1T5831EL**	**1T5832EL**
EL.	●	**1T5833EL**	**1T5834EL**
DALI	○	**1T5831DA**	**1T5832DA**
DALI	●	**1T5833DA**	**1T5834DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

LOGICO

LED / 144W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	163W	1	2.28	2.55	16611
Source Flux	20640lm	2	4.56	5.10	4153
Fixture Flux	16244lm	3	6.84	7.64	1846
Efficacy	100lm/W	4	9.12	10.19	1038
TS997 Imax=1001cd/klm	Imax 20670cd	5	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	○	**1T5835EL**	**1T5836EL**
EL.	●	**1T5837EL**	**1T5838EL**
DALI	○	**1T5835DA**	**1T5836DA**
DALI	●	**1T5837DA**	**1T5838DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

Insertion Box



Kg	Cutout hole	L	Colour	Code
3.2	80x1150	1171	○	**1T5918**
3.8	80x1710	1731	○	**1T5919**
7.5	80x3390	3416	○	**1T5920**

Outer casing for recessed and semi-recessed installation with a flange.



Kg	Cutout hole	L	Code
3.2	80x1150	1172	**1T6012**
3.8	80x1710	1732	**1T6013**
7.5	80x3390	3414	**1T6014**

Outer casing for recessed and semi-recessed trimless installation.

Accessories

Screen



Code
1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

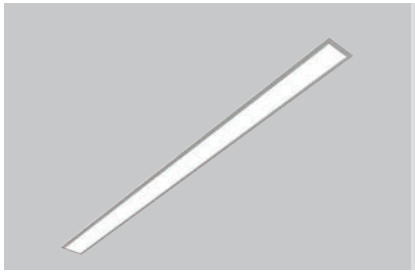

Stand Alone Recessed with flange L. 1146mm



LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		27W	1	2.66	903
Source Flux		3480lm	2	5.33	226
Fixture Flux		2370lm	3	7.99	100
Efficacy		88lm/W	4	10.65	56
TS991	Imax=259cd/klm	Imax	5	13.32	36

Driver	Colour	3000K	4000K
EL.	◯	**1T5431EL**	**1T5432EL**
DALI	◯	**1T5431DA**	**1T5432DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		54W	1	2.66	1785
Source Flux		6880lm	2	5.33	446
Fixture Flux		4685lm	3	7.99	198
Efficacy		87lm/W	4	10.65	112
TS996	Imax=259cd/klm	Imax	5	13.32	71

Driver	Colour	3000K	4000K
EL.	◯	**1T5433EL**	**1T5434EL**
DALI	◯	**1T5433DA**	**1T5434DA**

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		18W	1	1.51	1113
Source Flux		2520lm	2	3.02	278
Fixture Flux		1631lm	3	4.52	124
Efficacy		91lm/W	4	6.03	70
TS992	Imax=442cd/klm	Imax	5	7.54	45

Driver	Colour	3000K	4000K
EL.	◯	**1T5435EL**	**1T5436EL**
DALI	◯	**1T5435DA**	**1T5436DA**

LED / 24W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		27W	1	2.28	2.55	2801
Source Flux		3480lm	2	4.56	5.10	700
Fixture Flux		2739lm	3	6.84	7.64	311
Efficacy		101lm/W	4	9.12	10.19	175
TS993	Imax=1001cd/klm	Imax	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	◯	**1T5437EL**	**1T5438EL**
DALI	◯	**1T5437DA**	**1T5438DA**

LED / 48W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		54W	1	2.28	2.55	5537
Source Flux		6880lm	2	4.56	5.10	1384
Fixture Flux		5415lm	3	6.84	7.64	615
Efficacy		100lm/W	4	9.12	10.19	346
TS997	Imax=1001cd/klm	Imax	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	◯	**1T5439EL**	**1T5440EL**
DALI	◯	**1T5439DA**	**1T5440DA**

LOGICO

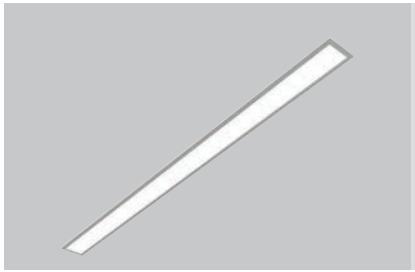

Stand Alone Recessed with flange L. 1706mm



LED / 36W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	40W		1	2.66	1354
Source Flux	5220lm		2	5.33	338
Fixture Flux	3555lm		3	7.99	150
Efficacy	89lm/W		4	10.65	85
TS991	Imax=259cd/klm	Imax	5	13.32	54

Driver	Colour	3000K	4000K
EL.	◯	**1T5441EL**	**1T5442EL**
DALI	◯	**1T5441DA**	**1T5442DA**

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	81W		1	2.66	2677
Source Flux	10320lm		2	5.33	669
Fixture Flux	7028lm		3	7.99	297
Efficacy	87lm/W		4	10.65	167
TS996	Imax=259cd/klm	Imax	5	13.32	107

Driver	Colour	3000K	4000K
EL.	◯	**1T5443EL**	**1T5444EL**
DALI	◯	**1T5443DA**	**1T5444DA**

LED / 24W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	27W		1	1.51	1669
Source Flux	3780lm		2	3.02	417
Fixture Flux	2447lm		3	4.52	185
Efficacy	91lm/W		4	6.03	104
TS992	Imax=442cd/klm	Imax	5	7.54	67

Driver	Colour	3000K	4000K
EL.	◯	**1T5445EL**	**1T5446EL**
DALI	◯	**1T5445DA**	**1T5446DA**

LED / 36W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	40W		1	2.28	2.55	4201
Source Flux	5220lm		2	4.56	5.10	1050
Fixture Flux	4108lm		3	6.84	7.64	467
Efficacy	103lm/W		4	9.12	10.19	263
TS993	Imax=1001cd/klm	Imax	5	11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	◯	**1T5447EL**	**1T5448EL**
DALI	◯	**1T5447DA**	**1T5448DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	81W		1	2.28	2.55	8305
Source Flux	10320lm		2	4.56	5.10	2076
Fixture Flux	8122lm		3	6.84	7.64	923
Efficacy	100lm/W		4	9.12	10.19	519
TS997	Imax=1001cd/klm	Imax	5	11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	◯	**1T5449EL**	**1T5450EL**
DALI	◯	**1T5449DA**	**1T5450DA**

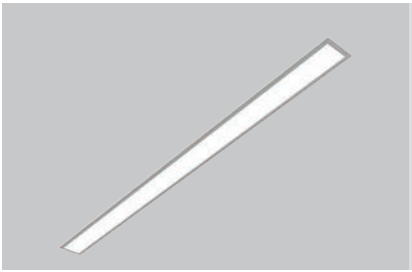

Stand Alone Recessed with flange L. 3386mm



LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2708
Source Flux	10440lm	2	5.33	677
Fixture Flux	7110lm	3	7.99	301
Efficacy	88lm/W	4	10.65	169
TS991 Imax=259cd/klm	Imax 2708cd	5	13.32	108

Driver	Colour	3000K	4000K
EL.	◯	**1T5451EL**	**1T5452EL**
DALI	◯	**1T5451DA**	**1T5452DA**

LED / 144W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	163W	1	2.66	5354
Source Flux	20640lm	2	5.33	1338
Fixture Flux	14056lm	3	7.99	595
Efficacy	86lm/W	4	10.65	335
TS996 Imax=259cd/klm	Imax 5354cd	5	13.32	214

Driver	Colour	3000K	4000K
EL.	◯	**1T5453EL**	**1T5454EL**
DALI	◯	**1T5453DA**	**1T5454DA**

LED / 48W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	54W	1	1.51	3338
Source Flux	7560lm	2	3.02	834
Fixture Flux	4894lm	3	4.52	371
Efficacy	91lm/W	4	6.03	209
TS992 Imax=442cd/klm	Imax 3338cd	5	7.54	134

Driver	Colour	3000K	4000K
EL.	◯	**1T5455EL**	**1T5456EL**
DALI	◯	**1T5455DA**	**1T5456DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8402
Source Flux	10440lm	2	4.56	5.10	2101
Fixture Flux	8216lm	3	6.84	7.64	934
Efficacy	101lm/W	4	9.12	10.19	525
TS993 Imax=1001cd/klm	Imax 10455cd	5	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	◯	**1T5457EL**	**1T5458EL**
DALI	◯	**1T5457DA**	**1T5458DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

LOGICO

LED / 144W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	163W	1	2.28	2.55	16611
Source Flux	20640lm	2	4.56	5.10	4153
Fixture Flux	16244lm	3	6.84	7.64	1846
Efficacy	100lm/W	4	9.12	10.19	1038
TS997 Imax=1001cd/klm	Imax 20670cd	5	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	◯	**1T5459EL**	**1T5460EL**
DALI	◯	**1T5459DA**	**1T5460DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Accessories

Screen



Code
1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 2 for the 562mm version, 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Zonamerica

Architect
Estudio Dovat Arquitectos

Lighting Design
Estudio Hofstadter

Photographer
Ferrés - Cánepa

Country
Montevideo, Uruguay

THREESIXTY

Recessed

GENERAL INFO
Circular light fixture available in four different diameters. Can be installed recessed or semi-recessed.
Ø384mm - Ø590mm - Ø870mm - Ø1150mm

LED
Circular boards
From 2017lm to 44809lm
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 106lm/W

OPTICS
OPAL – UGR – OPAL+HALO – UGR+HALO

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Powder coated, extruded, calendered aluminium.
OPAL Version – Opal polycarbonate screen
UGR Version – Microprismatic PMMA screen with opal diffuser filter

A fixture with a pure and simple design in four different diameters and five different installation types : recessed, semi-recessed, ceiling mounted, suspension and wall mounted. Any light fixture can be configured in various ways when accessorised with different installation elements.

Available only with direct, direct/indirect light or in a direct light version combined with a slight indirect HALO component. a solution that is particularly suitable for the ceiling mounted, wall mounted or semi-recessed versions to create a soft frame of light. Also available in UGR<19 for the two smaller diameters.

The 384 mm and 590 mm versions can also be recessed wall mounted using a special accessory outer casing.

01

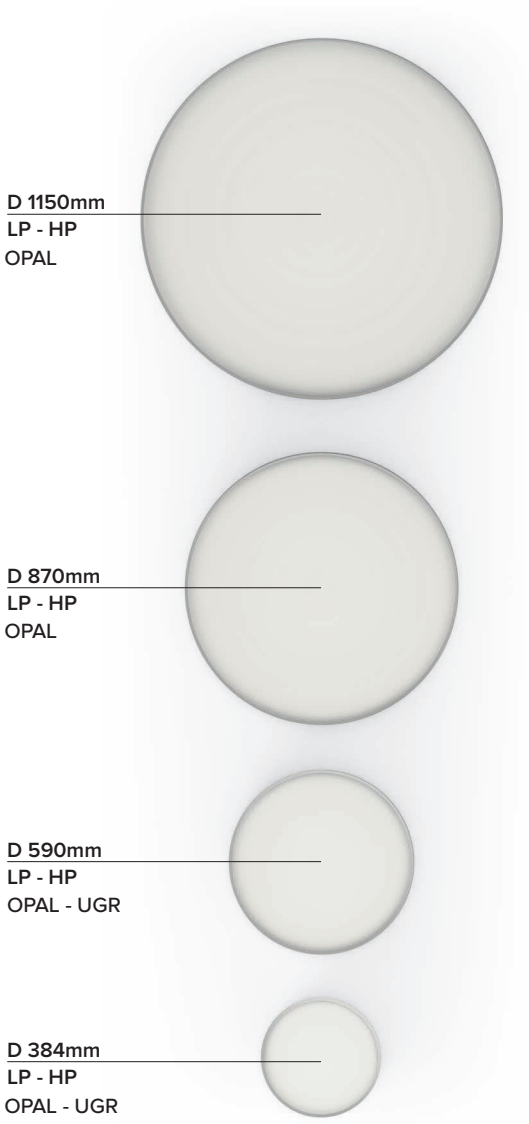

Four different diameters

To light spaces with different characteristics. Compact solutions to light environments with limited heights and large size fixtures to light great heights and showrooms.

02

A wide range of direct or direct/ indirect lighting effects

Diffused light, controlled light UGR<19 and a particular Halo effect

Wall and ceiling mounted

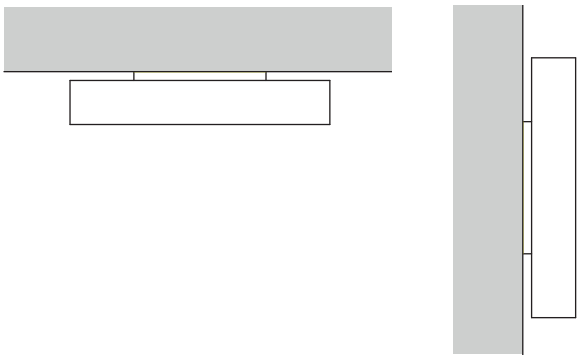

The fixture can be ceiling or wall mounted without the use of any accessories. For suspension installation a special suspension kit must be used.

Suspension

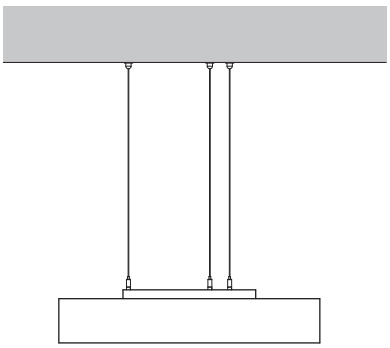

Recessed - Semi Recessed

Standard frame

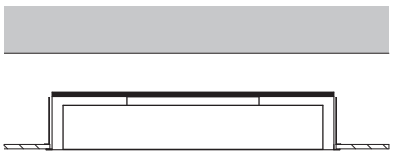

Frame HALO

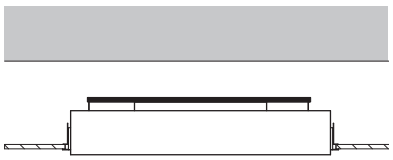

Adjustable frame

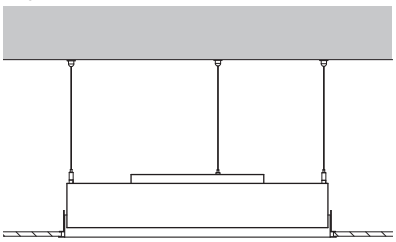

For recessed or semi-recessed installations it must be completed with special outer casings.

The 384 mm and 590 mm versions are compatible with an accessory standard or HALO version load bearing outer frame that attaches directly to the false ceiling.
The 384 mm, 590 mm, 870 mm and 1150 mm versions are compatible with a recessed non load bearing frame that attaches to the main ceiling.

THREESIXTY

Ø 384mm



LED / 21W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		24W	1	3.09	636
Source Flux		3033lm	2	6.17	159
Fixture Flux		1836lm	3	9.26	71
Efficacy		76lm/W	4	12.35	40
TS1002	Imax=210cd/klm	Imax	636cd	5	15.43	25

Driver	Colour	3000K	4000K
EL.	○	**1T6066EL**	**1T6067EL**
EL.	●	**1T6070EL**	**1T6071EL**
EL.	◐	**1T6068EL**	**1T6069EL**
DALI	○	**1T6066DA**	**1T6067DA**
DALI	●	**1T6070DA**	**1T6071DA**
DALI	◐	**1T6068DA**	**1T6069DA**

LED / 29W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		33W	1	3.09	848
Source Flux		4044lm	2	6.17	212
Fixture Flux		2448lm	3	9.26	94
Efficacy		74lm/W	4	12.35	53
TS1003	Imax=210cd/klm	Imax	848cd	5	15.43	34

Driver	Colour	3000K	4000K
EL.	○	**1T6072EL**	**1T6073EL**
EL.	●	**1T6076EL**	**1T6077EL**
EL.	◐	**1T6074EL**	**1T6075EL**
DALI	○	**1T6072DA**	**1T6073DA**
DALI	●	**1T6076DA**	**1T6077DA**
DALI	◐	**1T6074DA**	**1T6075DA**

LED / 13W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		15W	1	2.07	702
Source Flux		2017lm	2	4.15	176
Fixture Flux		1458lm	3	6.22	78
Efficacy		97lm/W	4	8.29	44
TS1018	Imax=348cd/klm	Imax	702cd	5	10.36	28

Driver	Colour	3000K	4000K
EL.	○	**1T6102EL**	**1T6103EL**
EL.	●	**1T6106EL**	**1T6107EL**
EL.	◐	**1T6104EL**	**1T6105EL**
DALI	○	**1T6102DA**	**1T6103DA**
DALI	●	**1T6106DA**	**1T6107DA**
DALI	◐	**1T6104DA**	**1T6105DA**

LED / 35W (40,5W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		24W	1	3.09	636
Source Flux		3033lm	2	6.17	159
Fixture Flux		1836lm	3	9.26	71
Efficacy		76lm/W	4	12.35	40
TS1002	Imax=210cd/klm	Imax	636cd	5	15.43	25

Driver	Colour	3000K	4000K
EL.	○	**1T6078EL**	**1T6079EL**
EL.	●	**1T6082EL**	**1T6083EL**
EL.	◐	**1T6080EL**	**1T6081EL**
DALI	○	**1T6078DA**	**1T6079DA**
DALI	●	**1T6082DA**	**1T6083DA**
DALI	◐	**1T6080DA**	**1T6081DA**

LED / 43W (49,5W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		33W	1	3.09	848
Source Flux		4044lm	2	6.17	212
Fixture Flux		2448lm	3	9.26	94
Efficacy		74lm/W	4	12.35	53
TS1003	Imax=210cd/klm	Imax	848cd	5	15.43	34

Driver	Colour	3000K	4000K
EL.	○	**1T6084EL**	**1T6085EL**
EL.	●	**1T6088EL**	**1T6089EL**
EL.	◐	**1T6086EL**	**1T6087EL**
DALI	○	**1T6084DA**	**1T6085DA**
DALI	●	**1T6088DA**	**1T6089DA**
DALI	◐	**1T6086DA**	**1T6087DA**

LED / 27W (31,5W fixture power) / UGR + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		15W	1	2.07	702
Source Flux		2017lm	2	4.15	176
Fixture Flux		1458lm	3	6.22	78
Efficacy		97lm/W	4	8.29	44
TS1018	Imax=348cd/klm	Imax	5	10.36	28

Driver	Colour	3000K	4000K
EL.	○	**1T6114EL**	**1T6115EL**
EL.	●	**1T6118EL**	**1T6119EL**
EL.	◌	**1T6116EL**	**1T6117EL**
DALI	○	**1T6114DA**	**1T6115DA**
DALI	●	**1T6118DA**	**1T6119DA**
DALI	◌	**1T6116DA**	**1T6117DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

Check mounting instructions to verify the quantity of DALI drivers installed.

Ø 590mm



LED / 50W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		57W	1	3.09	1555
Source Flux		7418lm	2	6.17	389
Fixture Flux		4490lm	3	9.26	173
Efficacy		79lm/W	4	12.35	97
TS1002	Imax=210cd/klm	Imax	5	15.43	62

Driver	Colour	3000K	4000K
EL.	○	**1T6138EL**	**1T6139EL**
EL.	●	**1T6142EL**	**1T6143EL**
EL.	◌	**1T6140EL**	**1T6141EL**
DALI	○	**1T6138DA**	**1T6139DA**
DALI	●	**1T6142DA**	**1T6143DA**
DALI	◌	**1T6140DA**	**1T6141DA**

LED / 67W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		75W	1	3.09	2079
Source Flux		9917lm	2	6.17	520
Fixture Flux		6003lm	3	9.26	231
Efficacy		80lm/W	4	12.35	130
TS1003	Imax=210cd/klm	Imax	5	15.43	83

Driver	Colour	3000K	4000K
EL.	○	**1T6144EL**	**1T6145EL**
EL.	●	**1T6148EL**	**1T6149EL**
EL.	◌	**1T6146EL**	**1T6147EL**
DALI	○	**1T6144DA**	**1T6145DA**
DALI	●	**1T6148DA**	**1T6149DA**
DALI	◌	**1T6146DA**	**1T6147DA**

LED / 31W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		35W	1	2.07	1722
Source Flux		4944lm	2	4.15	430
Fixture Flux		3575lm	3	6.22	191
Efficacy		102lm/W	4	8.29	108
TS1019	Imax=348cd/klm	Imax	5	10.36	69

Driver	Colour	3000K	4000K
EL.	○	**1T6174EL**	**1T6175EL**
EL.	●	**1T6178EL**	**1T6179EL**
EL.	◌	**1T6176EL**	**1T6177EL**
DALI	○	**1T6174DA**	**1T6175DA**
DALI	●	**1T6178DA**	**1T6179DA**
DALI	◌	**1T6176DA**	**1T6177DA**

THREESIXTY

LED / 70W (81W fixture power) / OPAL + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	57W	1	3.09	1555
Source Flux	7418lm	2	6.17	389
Fixture Flux	4490lm	3	9.26	173
Efficacy	79lm/W	4	12.35	97
TS1002 Imax=210cd/klm	Imax 1555cd	5	15.43	62

Driver	Colour	3000K	4000K
EL.	○	**1T6150EL**	**1T6151EL**
EL.	●	**1T6154EL**	**1T6155EL**
EL.	◌	**1T6152EL**	**1T6153EL**
DALI	○	**1T6150DA**	**1T6151DA**
DALI	●	**1T6154DA**	**1T6155DA**
DALI	◌	**1T6152DA**	**1T6153DA**

LED / 87W (99W fixture power) / OPAL + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	75W	1	3.09	2079
Source Flux	9917lm	2	6.17	520
Fixture Flux	6003lm	3	9.26	231
Efficacy	80lm/W	4	12.35	130
TS1003 Imax=210cd/klm	Imax 2079cd	5	15.43	83

Driver	Colour	3000K	4000K
EL.	○	**1T6156EL**	**1T6157EL**
EL.	●	**1T6160EL**	**1T6161EL**
EL.	◌	**1T6158EL**	**1T6159EL**
DALI	○	**1T6156DA**	**1T6157DA**
DALI	●	**1T6160DA**	**1T6161DA**
DALI	◌	**1T6158DA**	**1T6159DA**

LED / 51W (59W fixture power) / UGR + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			92°	
Fixture Power	35W	1	2.07	1722
Source Flux	4944lm	2	4.15	430
Fixture Flux	3575lm	3	6.22	191
Efficacy	102lm/W	4	8.29	108
TS1019 Imax=348cd/klm	Imax 1722cd	5	10.36	69

Driver	Colour	3000K	4000K
EL.	○	**1T6186EL**	**1T6187EL**
EL.	●	**1T6190EL**	**1T6191EL**
EL.	◌	**1T6188EL**	**1T6189EL**
DALI	○	**1T6186DA**	**1T6187DA**
DALI	●	**1T6190DA**	**1T6191DA**
DALI	◌	**1T6188DA**	**1T6189DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

Check mounting instructions to verify the quantity of DALI drivers installed.

Ø 870mm



LED / 113W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	127W	1	3.09	3404
Source Flux	16238lm	2	6.17	851
Fixture Flux	9829lm	3	9.26	378
Efficacy	77lm/W	4	12.35	213
TS1002 Imax=210cd/klm	Imax 3404cd	5	15.43	136

Driver	Colour	3000K	4000K
EL.	○	**1T6210EL**	**1T6211EL**
EL.	●	**1T6214EL**	**1T6215EL**
EL.	◌	**1T6212EL**	**1T6213EL**
DALI	○	**1T6210DA**	**1T6211DA**
DALI	●	**1T6214DA**	**1T6215DA**
DALI	◌	**1T6212DA**	**1T6213DA**

LED / 144W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		162W	1	3.09	4548
Source Flux		21693lm	2	6.17	1137
Fixture Flux		13131lm	3	9.26	505
Efficacy		81lm/W	4	12.35	284
TS1003	Imax=210cd/klm	Imax	4548cd	5	15.43	182

	Driver	Colour	3000K	4000K
	EL.	○	**1T6216EL**	**1T6217EL**
	EL.	●	**1T6220EL**	**1T6221EL**
	EL.	◍	**1T6218EL**	**1T6219EL**
	DALI	○	**1T6216DA**	**1T6217DA**
	DALI	●	**1T6220DA**	**1T6221DA**
	DALI	◍	**1T6218DA**	**1T6219DA**

LED / 138W (160W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		127W	1	3.09	3404
Source Flux		16238lm	2	6.17	851
Fixture Flux		9829lm	3	9.26	378
Efficacy		77lm/W	4	12.35	213
TS1002	Imax=210cd/klm	Imax	3404cd	5	15.43	136

	Driver	Colour	3000K	4000K
	EL.	○	**1T6222EL**	**1T6223EL**
	EL.	●	**1T6226EL**	**1T6227EL**
	EL.	◍	**1T6224EL**	**1T6225EL**
	DALI	○	**1T6222DA**	**1T6223DA**
	DALI	●	**1T6226DA**	**1T6227DA**
	DALI	◍	**1T6224DA**	**1T6225DA**

LED / 174W (201W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		162W	1	3.09	4548
Source Flux		21693lm	2	6.17	1137
Fixture Flux		13131lm	3	9.26	505
Efficacy		81lm/W	4	12.35	284
TS1003	Imax=210cd/klm	Imax	4548cd	5	15.43	182

	Driver	Colour	3000K	4000K
	EL.	○	**1T6228EL**	**1T6229EL**
	EL.	●	**1T6232EL**	**1T6233EL**
	EL.	◍	**1T6230EL**	**1T6231EL**
	DALI	○	**1T6228DA**	**1T6229DA**
	DALI	●	**1T6232DA**	**1T6233DA**
	DALI	◍	**1T6230DA**	**1T6231DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

Check mounting instructions to verify the quantity of DALI drivers installed.

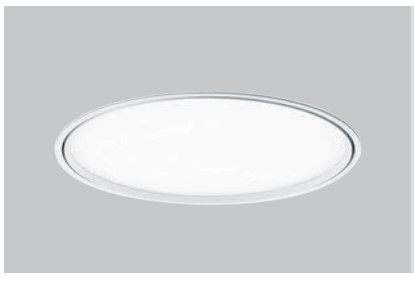

Ø 1150mm



LED / 182W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		204W	1	3.09	5760
Source Flux		27475lm	2	6.17	1440
Fixture Flux		16631lm	3	9.26	640
Efficacy		82lm/W	4	12.35	360
TS1002	Imax=210cd/klm	Imax	5760cd	5	15.43	230

	Driver	Colour	3000K	4000K
	EL.	○	**1T6246EL**	**1T6247EL**
	EL.	●	**1T6250EL**	**1T6251EL**
	EL.	◍	**1T6248EL**	**1T6249EL**
	DALI	○	**1T6246DA**	**1T6247DA**
	DALI	●	**1T6250DA**	**1T6251DA**
	DALI	◍	**1T6248DA**	**1T6249DA**

THREESIXTY

LED / 243W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	273W	1	3.09	7695
Source Flux	36705lm	2	6.17	1924
Fixture Flux	22218lm	3	9.26	855
Efficacy	81lm/W	4	12.35	481
TS1003 Imax=210cd/klm	Imax	7695cd	5	15.43	308

Driver	Colour	3000K	4000K
EL.	○	**1T6252EL**	**1T6253EL**
EL.	●	**1T6256EL**	**1T6257EL**
EL.	◌	**1T6254EL**	**1T6255EL**
DALI	○	**1T6252DA**	**1T6253DA**
DALI	●	**1T6256DA**	**1T6257DA**
DALI	◌	**1T6254DA**	**1T6255DA**

LED / 226W (258W fixture power) / OPAL + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	204W	1	3.09	5760
Source Flux	27475lm	2	6.17	1440
Fixture Flux	16631lm	3	9.26	640
Efficacy	82lm/W	4	12.35	360
TS1002 Imax=210cd/klm	Imax	5760cd	5	15.43	230

Driver	Colour	3000K	4000K
EL.	○	**1T6258EL**	**1T6259EL**
EL.	●	**1T6262EL**	**1T6263EL**
EL.	◌	**1T6260EL**	**1T6261EL**
DALI	○	**1T6258DA**	**1T6259DA**
DALI	●	**1T6262DA**	**1T6263DA**
DALI	◌	**1T6260DA**	**1T6261DA**

LED / 286W (325W fixture power) / OPAL + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	273W	1	3.09	7695
Source Flux	36705lm	2	6.17	1924
Fixture Flux	22218lm	3	9.26	855
Efficacy	81lm/W	4	12.35	481
TS1003 Imax=210cd/klm	Imax	7695cd	5	15.43	308

Driver	Colour	3000K	4000K
EL.	○	**1T6264EL**	**1T6265EL**
EL.	●	**1T6268EL**	**1T6269EL**
EL.	◌	**1T6266EL**	**1T6267EL**
DALI	○	**1T6264DA**	**1T6265DA**
DALI	●	**1T6268DA**	**1T6269DA**
DALI	◌	**1T6266DA**	**1T6267DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

Insertion Box



Cutout hole	Ø	Colour	Code
Ø410	421	○	**1T6291**
Ø410	421	●	**1T6292**
Ø410	421	◍	**1T6293**
Ø615	627	○	**1T6294**
Ø615	627	●	**1T6295**
Ø615	627	◍	**1T6296**
Ø895	907	○	**1T6297**
Ø895	907	●	**1T6298**
Ø895	907	◍	**1T6299**
Ø1175	1187	○	**1T6300**
Ø1175	1187	●	**1T6301**
Ø1175	1187	◍	**1T6302**

Adjustable frame for semi or completely recessed installation.
Non load bearing frame compatible with all sizes.
Powder coated, extruded, calendered aluminium body.
The outer casing attaches to the ceiling with pre-galvanised steel brackets.
The fixture must then be fixed to the ceiling using a suspension cable with an ABS control system installed in the outer casing.





Cutout hole	Ø	Colour	Code
Ø450	460	○	**1T6401**
Ø450	460	●	**1T6402**
Ø450	460	◍	**1T6403**
Ø660	670	○	**1T6404**
Ø660	670	●	**1T6405**
Ø660	670	◍	**1T6406**

Casing for semi or completely recessed installation.
Load bearing outer casing measuring 384mm and 590mm.
Powder coated, spun aluminium body.
The outer casing attaches to the ceiling with pre-galvanised steel brackets.
Halo Version.



Cutout hole	Ø	Colour	Code
Ø410	421	○	**1T6303**
Ø410	421	●	**1T6304**
Ø410	421	◍	**1T6305**
Ø615	627	○	**1T6306**
Ø615	627	●	**1T6307**
Ø615	627	◍	**1T6308**

Frame for semi or completely recessed installation.
Load bearing outer frame measuring 384mm and 590mm.
Powder coated, extruded, calendered aluminium body.
The outer frame attaches to the ceiling with pre-galvanised steel brackets.
Standard Version.

Accessories

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

THREESIXTY

CCTLED Downlight

GENERAL INFO
LED recessed Classic and trimless downlight.
CCT LED Ø175mm
CCT LED MINI Ø120mm
CCT LED MICRO Ø80mm

LED
Chip on board
From 1798lm to 4462lm
2700K (excluding the MINI and MICRO version)
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code (excluding the MICRO and SMART HE version).
Ra97 only for selected codes

PRODUCT EFFICACY
Up to 144lm/W

OPTICS
SMART HE – TECH – FEEL – DEEP
WALL WASHER
SP - FL - WFL

POWER SUPPLY
Electronic – DALI
1-10V only for Ø175mm version
Emergency kit available as an accessory.
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Die-cast aluminium white painted for the recessed trimless versions, black painted die-cast aluminium for the recessed ring versions.

CCTLED is the range of LED products with various applications and optical solutions. Available in three different sizes - CCTLED, CCTLED Mini AND CCTLED Micro - they have the same design and colour consistency of the source to provide coordinated solutions for different project needs.

Also available with optics that are suitable for offices (UGR<19) and a classic ring or trimless finish for complete integration into the architecture.

Boston Logan Airport Terminal B

Lighting Design
Collaborative
LIGHTING, LLC

Country
Boston - USA

01
CCTLED

A complete range to light any environment

From offices where visual comfort is indispensable to common spaces where it is necessary to combine performance with excellent light quality.

Smart High Efficacy versions available

Equipped with high performance LED lamps, they achieve an efficiency equal to 144 lm/W.

02
CCTLED Mini

03
CCTLED Micro

A wide range of performance

And optical possibilities while keeping the same design and colour constancy between the various LED lamps allows for great freedom of design.

3 sizes, 5 power supplies and 7 different optical solutions

Provide the same family feeling.

04
CCTLED

SMART optic

The ideal solution for diffused and perfectly homogeneous general lighting. Its soft light is the result of the combination between the particular geometry of the reflector and the micro-prismatic dome refractor that shields the LED lamp distributing the light in a soft and diffused way.

05
CCTLED

TECH optic

It can be installed not only in all those environments that are governed by EN12464-1 regulations relating to limits on direct glare, but also in spaces with high or double volume ceilings where light control is critical to ensure good illumination values, precision and visual comfort. The first reflector emits light in an efficient and controlled way; the second creates a luminous ring that enhances the overall effect.

06
CCTLED

Ottica FEEL

A technical solution for an effective, comfortable light, in line with EN 12464-1 (UGR<19) regulations. The highly sophisticated optical system works on reflection, hiding the lamp from sight for maximum visual comfort.

07
CCTLED

Wall Washer optic

It is ideal for lighting up large vertical surfaces. A 120 cm spacing between each fixture is sufficient to provide a completely uniform effect.

CCTLED DOWNLIGHT

Smart HE Facetted



LED / 17W / FACETTED / VWFL

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			81°	
Fixture Power		19W	1	1.71	1559
Source Flux		3003lm	2	3.42	390
Fixture Flux		2591lm	3	5.14	173
Efficacy		136lm/W	4	6.85	97
TS1100	Imax=596cd/klm	Imax	1789cd	5	8.56	62

Driver	2700K	3000K	4000K
EL.	**1T6995EL**	**1T6979EL**	**1T6980EL**
1-10V	**1T6995D**	**1T6979D**	**1T6980D**
DALI	**1T6995DA**	**1T6979DA**	**1T6980DA**

LED / 23W / FACETTED / VWFL

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			81°	
Fixture Power		26W	1	1.71	2136
Source Flux		4114lm	2	3.42	534
Fixture Flux		3549lm	3	5.14	237
Efficacy		137lm/W	4	6.85	133
TS1100	Imax=596cd/klm	Imax	2451cd	5	8.56	85

Driver	2700K	3000K	4000K
EL.	**1T6996EL**	**1T6981EL**	**1T6982EL**
1-10V	**1T6996D**	**1T6981D**	**1T6982D**
DALI	**1T6996DA**	**1T6981DA**	**1T6982DA**

Smart HE Matt



LED / 17W / MATT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			85°	
Fixture Power		19W	1	1.83	1486
Source Flux		3003lm	2	3.66	371
Fixture Flux		2469lm	3	5.49	165
Efficacy		130lm/W	4	7.32	93
TS1101	Imax=495cd/klm	Imax	1486cd	5	9.15	59

Driver	2700K	3000K	4000K
EL.	**1T6997EL**	**1T6983EL**	**1T6984EL**
1-10V	**1T6997D**	**1T6983D**	**1T6984D**
DALI	**1T6997DA**	**1T6983DA**	**1T6984DA**

LED / 23W / MATT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			85°	
Fixture Power		26W	1	1.83	2036
Source Flux		4114lm	2	3.66	509
Fixture Flux		3382lm	3	5.49	226
Efficacy		130lm/W	4	7.32	127
TS1101	Imax=495cd/klm	Imax	2036cd	5	9.15	81

Driver	2700K	3000K	4000K
EL.	**1T6998EL**	**1T6985EL**	**1T6986EL**
1-10V	**1T6998D**	**1T6985D**	**1T6986D**
DALI	**1T6998DA**	**1T6985DA**	**1T6986DA**

Related codes

Decorative Ring



Ø	Colour	Code
180	○	**1T2933**
180	●	**1T3529**

Round ring.



Ø	Colour	Code
180	○	**1T2935**
180	●	**1T3530**

Square ring.



Ø	Colour	Code
180	○	**1T2939**

Square ring with external silk screen printed screen.
IP43.



Ø	Colour	Code
180	○	**1T3035**

Square ring with micro prismatic diffusive screen.
IP43.

Plaster



Cutout hole	Code
Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

CCTLED DOWNLIGHT

Tech Secondary facetted



LED / 15W / SECONDARY FACETTED / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			70°	
	Fixture Power	17W	1	1.39	1689
	Source Flux	2520lm	2	2.78	422
	Fixture Flux	2070lm	3	4.16	188
	Efficacy	120lm/W	4	5.55	106
TS660	Imax=721cd/klm	Imax	1817cd	5	6.94	68

Driver	2700K	3000K	4000K
EL.	**1T3256EL**	**1T2921EL**	**1T2922EL**
1-10V	**1T3256D**	**1T2921D**	**1T2922D**
DALI	**1T3256DA**	**1T2921DA**	**1T2922DA**

LED / 21W / SECONDARY FACETTED / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			70°	
	Fixture Power	24W	1	1.39	2172
	Source Flux	3240lm	2	2.78	543
	Fixture Flux	2662lm	3	4.16	241
	Efficacy	111lm/W	4	5.55	136
TS655	Imax=721cd/klm	Imax	2336cd	5	6.94	87

Driver	2700K	3000K	4000K
EL.	**1T3257EL**	**1T2923EL**	**1T2924EL**
1-10V	**1T3257D**	**1T2923D**	**1T2924D**
DALI	**1T3257DA**	**1T2923DA**	**1T2924DA**

Tech Secondary matt



LED / 15W / SECONDARY MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			69°	
	Fixture Power	17W	1	1.38	1679
	Source Flux	2520lm	2	2.77	420
	Fixture Flux	2070lm	3	4.15	187
	Efficacy	120lm/W	4	5.54	105
TS659	Imax=733cd/klm	Imax	1847cd	5	6.92	67

Driver	2700K	3000K	4000K
EL.	**1T3258EL**	**1T2925EL**	**1T2926EL**
1-10V	**1T3258D**	**1T2925D**	**1T2926D**
DALI	**1T3258DA**	**1T2925DA**	**1T2926DA**

LED / 21W / SECONDARY MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			69°	
	Fixture Power	24W	1	1.38	2159
	Source Flux	3240lm	2	2.77	540
	Fixture Flux	2662lm	3	4.15	240
	Efficacy	111lm/W	4	5.54	135
TS656	Imax=733cd/klm	Imax	2375cd	5	6.92	86

Driver	2700K	3000K	4000K
EL.	**1T3259EL**	**1T2927EL**	**1T2928EL**
1-10V	**1T3259D**	**1T2927D**	**1T2928D**
DALI	**1T3259DA**	**1T2927DA**	**1T2928DA**

Related codes

Decorative Ring



Ø	Colour	Code
180	○	**1T2933**
180	●	**1T3529**

Round ring.



Ø	Colour	Code
180	○	**1T2934**
180	●	**1T3531**

XL ring.



Ø	Colour	Code
180	○	**1T2935**
180	●	**1T3530**

Square ring.



Ø	Colour	Code
180	○	**1T2939**

Square ring with external silk screen printed screen.
IP43.

Plaster



Cutout hole	Code
Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

CCTLED DOWNLIGHT

Feel Facetted



LED / 14W / FACETTED / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			73°	
Fixture Power	15W	1	1.48	967
Source Flux	2269lm	2	2.96	242
Fixture Flux	1423lm	3	4.44	107
Efficacy	93lm/W	4	5.92	60
TS662 Imax=501cd/klm	Imax	1137cd	5	7.40	39

	Driver	2700K	3000K	4000K
	EL.	**1T3260EL**	**1T2929EL**	**1T2930EL**
	1-10V	**1T3260D**	**1T2929D**	**1T2930D**
	DALI	**1T3260DA**	**1T2929DA**	**1T2930DA**

Feel Matt



LED / 14W / MATT / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			70°	
Fixture Power	15W	1	1.41	898
Source Flux	2269lm	2	2.82	225
Fixture Flux	1268lm	3	4.23	100
Efficacy	83lm/W	4	5.64	56
TS663 Imax=415cd/klm	Imax	941cd	5	7.05	36

	Driver	2700K	3000K	4000K
	EL.	**1T3261EL**	**1T2931EL**	**1T2932EL**
	1-10V	**1T3261D**	**1T2931D**	**1T2932D**
	DALI	**1T3261DA**	**1T2931DA**	**1T2932DA**

Related codes

Decorative Ring



	Ø	Colour	Code
	180	○	**1T2933**
	180	●	**1T3529**

Round ring.



	Ø	Colour	Code
	180	○	**1T2935**
	180	●	**1T3530**

Square ring.



	Ø	Colour	Code
	180	○	**1T2939**

Square ring with external silk screen printed screen.
IP43.

Plaster



	Cutout hole	Code
	Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

Deep



LED / 33W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			21°	
	Fixture Power	36W	1	0.36	24354
	Source Flux	4351lm	2	0.72	6089
	Fixture Flux	3457lm	3	1.09	2706
	Efficacy	97lm/W	4	1.45	1522
TS708	Imax=5597cd/klm	Imax	24354cd	5	1.81	974

	Driver	3000K	4000K
	EL.	**1T3157EL**	**1T3158EL**
	1-10V	**1T3157D**	**1T3158D**
	DALI	**1T3157DA**	**1T3158DA**

LED / 33W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			33°	
	Fixture Power	36W	1	0.59	10995
	Source Flux	4351lm	2	1.18	2749
	Fixture Flux	3378lm	3	1.78	1222
	Efficacy	95lm/W	4	2.37	687
TS709	Imax=2537cd/klm	Imax	11039cd	5	2.96	440

	Driver	3000K	4000K
	EL.	**1T3159EL**	**1T3160EL**
	1-10V	**1T3159D**	**1T3160D**
	DALI	**1T3159DA**	**1T3160DA**

Related codes

Decorative Ring



	Ø	Colour	Code
	180	○	**1T2933**
	180	●	**1T3529**

Round ring.



	Ø	Colour	Code
	180	○	**1T2935**
	180	●	**1T3530**

Square ring.



	Ø	Colour	Code
	180	○	**1T2939**

Square ring with external silk screen printed screen.
IP43.

Plaster



	Cutout hole	Code
	Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

CCTLED DOWNLIGHT

Wall Washer



LED / 21W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			78°	75°	
Fixture Power	24W	1	1.62	1.65	1305
Source Flux	3232lm	2	3.23	3.31	326
Fixture Flux	1904lm	3	4.85	4.96	145
Efficacy	79lm/W	4	6.46	6.61	82
TS722 Imax=428cd/klm	Imax 1382cd	5	8.08	8.27	52

Driver	2700K	3000K	4000K
EL.	**1T3368EL**	**1T3369EL**	**1T3370EL**
1-10V	**1T3368D**	**1T3369D**	**1T3370D**
DALI	**1T3368DA**	**1T3369DA**	**1T3370DA**

LED / 33W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			78°	75°	
Fixture Power	36W	1	1.62	1.65	1757
Source Flux	4351lm	2	3.23	3.31	439
Fixture Flux	2563lm	3	4.85	4.96	195
Efficacy	72lm/W	4	6.46	6.61	110
TS723 Imax=428cd/klm	Imax 1860cd	5	8.08	8.27	70

Driver	2700K	3000K	4000K
EL.	**1T3371EL**	**1T3372EL**	**1T3373EL**
1-10V	**1T3371D**	**1T3372D**	**1T3373D**
DALI	**1T3371DA**	**1T3372DA**	**1T3373DA**

Related codes

Decorative Ring



Ø	Colour	Code
180	○	**1T2933**
180	●	**1T3529**

Round ring.



Ø	Colour	Code
180	○	**1T2935**
180	●	**1T3530**

Square ring.

Plaster



Cutout hole	Code
Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

Accessories

Carter



Code
1T2960

Housing for concrete installation.
Polycarbonate box to be used for installation in brick or reinforced concrete walls and ceilings.
To be completed with driver housing and a special grid.
Accessory is not compatible with the DEEP and Trimless versions.



Code
1T2961

Carter for concrete installation of the external driver.
Polycarbonate box to house the external driver to be used together with the carter for concrete installation in brick or reinforced concrete ceilings and walls.
Accessory is not compatible with the DEEP and Trimless versions.

Installation grid



Code
1T2962

Installation grid.
White polycarbonate radial grid for installation of the fixture in the dedicated carter.
The special ring shape of the grid allows for simple and safe plastering of the fixture.
Accessory is not compatible with the DEEP and Trimless versions.

IP Kit



Ø	Code
180	**1T2937**

IP54 ring.
Square ring with transparent screen.
Accessories not compatible with Trimless versions.

Insertion Ring



Code
1T3725

Retrofit kit for CCTLed Classic.
White polycarbonate outer ring with bayonet locking system.
Outer ring suitable for recessed holes of between 190 and 215mm.
The accessory in not compatible with the decorative rings available for CCTLed.
Accessories not compatible with Trimless versions.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED DOWNLIGHT

Smart HE Trimless Facetted



LED / 17W / FACETTED / VWFL

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			81°	
Fixture Power		19W	1	1.71	1559
Source Flux		3003lm	2	3.42	390
Fixture Flux		2591lm	3	5.14	173
Efficacy		136lm/W	4	6.85	97
TS1100	Imax=596cd/klm	Imax	1789cd	5	8.56	62

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T6999EL**	**1T6987EL**	**1T6988EL**
1-10V	◯	**1T6999D**	**1T6987D**	**1T6988D**
DALI	◯	**1T6999DA**	**1T6987DA**	**1T6988DA**

LED / 23W / FACETTED / VWFL

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			81°	
Fixture Power		26W	1	1.71	2136
Source Flux		4114lm	2	3.42	534
Fixture Flux		3549lm	3	5.14	237
Efficacy		137lm/W	4	6.85	133
TS1100	Imax=596cd/klm	Imax	2451cd	5	8.56	85

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T7000EL**	**1T6989EL**	**1T6990EL**
1-10V	◯	**1T7000D**	**1T6989D**	**1T6990D**
DALI	◯	**1T7000DA**	**1T6989DA**	**1T6990DA**

Smart HE Trimless Matt



LED / 17W / MATT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			85°	
Fixture Power		19W	1	1.83	1486
Source Flux		3003lm	2	3.66	371
Fixture Flux		2469lm	3	5.49	165
Efficacy		130lm/W	4	7.32	93
TS1101	Imax=495cd/klm	Imax	1486cd	5	9.15	59

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T7001EL**	**1T6991EL**	**1T6992EL**
1-10V	◯	**1T7001D**	**1T6991D**	**1T6992D**
DALI	◯	**1T7001DA**	**1T6991DA**	**1T6992DA**

LED / 23W / MATT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			85°	
Fixture Power		26W	1	1.83	2036
Source Flux		4114lm	2	3.66	509
Fixture Flux		3382lm	3	5.49	226
Efficacy		130lm/W	4	7.32	127
TS1101	Imax=495cd/klm	Imax	2036cd	5	9.15	81

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T7002EL**	**1T6993EL**	**1T6994EL**
1-10V	◯	**1T7002D**	**1T6993D**	**1T6994D**
DALI	◯	**1T7002DA**	**1T6993DA**	**1T6994DA**

Tech Trimless Secondary facetted



LED / 15W / SECONDARY FACETTED / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			70°	
	Fixture Power	17W	1	1.39	1689
	Source Flux	2520lm	2	2.78	422
	Fixture Flux	2070lm	3	4.16	188
	Efficacy	120lm/W	4	5.55	106
TS660	Imax=721cd/klm	Imax	1817cd	5	6.94	68

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3266EL**	**1T2948EL**	**1T2949EL**
1-10V	◯	**1T3266D**	**1T2948D**	**1T2949D**
DALI	◯	**1T3266DA**	**1T2948DA**	**1T2949DA**

LED / 21W / SECONDARY FACETTED / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			70°	
	Fixture Power	24W	1	1.39	2172
	Source Flux	3240lm	2	2.78	543
	Fixture Flux	2662lm	3	4.16	241
	Efficacy	111lm/W	4	5.55	136
TS655	Imax=721cd/klm	Imax	2336cd	5	6.94	87

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3267EL**	**1T2950EL**	**1T2951EL**
1-10V	◯	**1T3267D**	**1T2950D**	**1T2951D**
DALI	◯	**1T3267DA**	**1T2950DA**	**1T2951DA**

Tech Trimless Secondary matt



LED / 15W / SECONDARY MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			69°	
	Fixture Power	17W	1	1.38	1679
	Source Flux	2520lm	2	2.77	420
	Fixture Flux	2070lm	3	4.15	187
	Efficacy	120lm/W	4	5.54	105
TS659	Imax=733cd/klm	Imax	1847cd	5	6.92	67

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3268EL**	**1T2952EL**	**1T2953EL**
1-10V	◯	**1T3268D**	**1T2952D**	**1T2953D**
DALI	◯	**1T3268DA**	**1T2952DA**	**1T2953DA**

LED / 21W / SECONDARY MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			69°	
	Fixture Power	24W	1	1.38	2159
	Source Flux	3240lm	2	2.77	540
	Fixture Flux	2662lm	3	4.15	240
	Efficacy	111lm/W	4	5.54	135
TS656	Imax=733cd/klm	Imax	2375cd	5	6.92	86

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3269EL**	**1T2954EL**	**1T2955EL**
1-10V	◯	**1T3269D**	**1T2954D**	**1T2955D**
DALI	◯	**1T3269DA**	**1T2954DA**	**1T2955DA**

CCTLED DOWNLIGHT

Feel Trimless Facetted



LED / 14W / FACETTED / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			73°	
Fixture Power	15W	1	1.48	967
Source Flux	2269lm	2	2.96	242
Fixture Flux	1423lm	3	4.44	107
Efficacy	93lm/W	4	5.92	60
Imax	1137cd	5	7.40	39

TS662 Imax=501cd/klm

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3270EL**	**1T2956EL**	**1T2957EL**
1-10V	◯	**1T3270D**	**1T2956D**	**1T2957D**
DALI	◯	**1T3270DA**	**1T2956DA**	**1T2957DA**

Feel Trimless Matt



LED / 14W / MATT / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			70°	
Fixture Power	15W	1	1.41	898
Source Flux	2269lm	2	2.82	225
Fixture Flux	1268lm	3	4.23	100
Efficacy	83lm/W	4	5.64	56
Imax	941cd	5	7.05	36

TS663 Imax=415cd/klm

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3271EL**	**1T2958EL**	**1T2959EL**
1-10V	◯	**1T3271D**	**1T2958D**	**1T2959D**
DALI	◯	**1T3271DA**	**1T2958DA**	**1T2959DA**

Wall Washer Trimless



LED / 21W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			78°	75°	
Fixture Power	24W	1	1.62	1.65	1305
Source Flux	3232lm	2	3.23	3.31	326
Fixture Flux	1904lm	3	4.85	4.96	145
Efficacy	79lm/W	4	6.46	6.61	82
TS722 Imax=428cd/klm	Imax 1382cd	5	8.08	8.27	52

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3374EL**	**1T3375EL**	**1T3376EL**
1-10V	◯	**1T3374D**	**1T3375D**	**1T3376D**
DALI	◯	**1T3374DA**	**1T3375DA**	**1T3376DA**

LED / 33W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			78°	75°	
Fixture Power	36W	1	1.62	1.65	1757
Source Flux	4351lm	2	3.23	3.31	439
Fixture Flux	2563lm	3	4.85	4.96	195
Efficacy	72lm/W	4	6.46	6.61	110
TS723 Imax=428cd/klm	Imax 1860cd	5	8.08	8.27	70

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3377EL**	**1T3378EL**	**1T3379EL**
1-10V	◯	**1T3377D**	**1T3378D**	**1T3379D**
DALI	◯	**1T3377DA**	**1T3378DA**	**1T3379DA**

Accessories

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED DOWNLIGHT

Mini
standard - trimless



LED / 12W / MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			75°	
Fixture Power	14W		1	1.54	1211
Source Flux	1971lm		2	3.08	303
Fixture Flux	1516lm		3	4.62	135
Efficacy	112lm/W		4	6.16	76
TS908	Imax=615cd/klm	Imax	5	7.70	48

	Driver	3000K	4000K
	EL.	**1T4821EL**	**1T4822EL**
	DALI	**1T4821DA**	**1T4822DA**

LED / 17W / MATT / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			75°	
Fixture Power	19W		1	1.54	1650
Source Flux	2684lm		2	3.08	412
Fixture Flux	2064lm		3	4.62	183
Efficacy	107lm/W		4	6.16	103
TS908	Imax=615cd/klm	Imax	5	7.70	66

	Driver	3000K	4000K
	EL.	**1T4823EL**	**1T4824EL**
	DALI	**1T4823DA**	**1T4824DA**

Mini Wall Washer
standard - trimless



LED / 12W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			68°	70°	
Fixture Power	14W		1	1.34	1.59	765
Source Flux	1971lm		2	2.68	3.18	191
Fixture Flux	1064lm		3	4.02	4.77	85
Efficacy	79lm/W		4	5.36	6.35	48
TS909	Imax=397cd/klm	Imax	5	6.70	7.94	31

	Driver	3000K	4000K
	EL.	**1T4825EL**	**1T4826EL**
	DALI	**1T4825DA**	**1T4826DA**

LED / 17W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			68°	70°	
Fixture Power	19W		1	1.34	1.59	1042
Source Flux	2684lm		2	2.68	3.18	261
Fixture Flux	1449lm		3	4.02	4.77	116
Efficacy	75lm/W		4	5.36	6.35	65
TS909	Imax=397cd/klm	Imax	5	6.70	7.94	42

	Driver	3000K	4000K
	EL.	**1T4827EL**	**1T4828EL**
	DALI	**1T4827DA**	**1T4828DA**

Accessories

Insertion Ring



Cutout hole	Colour	Code
Ø125	○	**1T5242**
Ø125	●	**1T5243**
Ø125	●	**1T5244**

Accessory for trimless inspectable installation.
Secondary reflector.

Decorative Ring



Ø	Colour	Code
125	○	**1T4696**
125	●	**1T4697**

Round ring.



L	Colour	Code
125	○	**1T4698**
125	●	**1T4699**

Square ring.



Ø	Colour	Code
125	○	**1T4704**
125	●	**1T4705**

Round ring (IP54).

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED DOWNLIGHT

Micro



LED / 12W / WFL

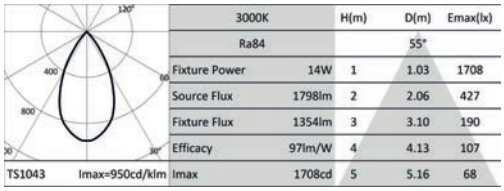

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			55°	
	Fixture Power	14W	1	1.03	1708
	Source Flux	1798lm	2	2.06	427
	Fixture Flux	1354lm	3	3.10	190
	Efficacy	97lm/W	4	4.13	107
	Imax	1708cd	5	5.16	68

	Power supply	Colour	3000K	4000K
	350mA	○	**1T6373**	**1T6374**
	350mA	●	**1T6375**	**1T6376**

Related codes

Power Supply



Code
1T6503

Electronic power supply max 15W, LxHxP=101.5x29.5x51mm, 220-240V-AC 50-60Hz, 350mA, IP20.



Code
1T6504

DALI dimmable electronic power supply max 15W, LxHxP=146.5x30x44mm, 220-240V-AC 50-60Hz, 350mA, IP20.

Accessories

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCT Flash LED

GENERAL INFO
Recessed downlight
CCTLED Ø225mm

LED
COB Chip on board
From 2342lm to 2403lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 104lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic - DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Body and ring in white polycarbonate.

Recessed LED fixture that combines high performance and excellent light distribution. Quick and easy to install, with a high efficiency soft light.

Perfect retrofit of fluorescent versions with a cutout hole 215mm diameter.

LED



LED / 17W / VWFL

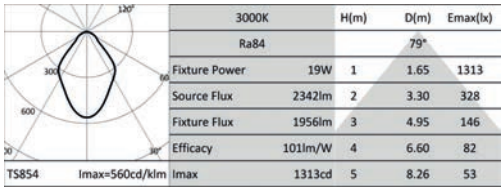

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			79°	
	Fixture Power	19W	1	1.65	1313
	Source Flux	2342lm	2	3.30	328
	Fixture Flux	1956lm	3	4.95	146
	Efficacy	101lm/W	4	6.60	82
	Imax	1313cd	5	8.26	53

	Driver	Colour	3000K	4000K
	EL.	◯	**1T4304**	**1T4305**
	DALI	◯	**1T4304DA**	**1T4305DA**

Accessories

Diffuser

Code
47282

Decorative cylindrical component made of transparent sandblasted polycarbonate.

Screen

Code
1T1173

Polycarbonate IP44 screen, transparent in the centre.
Cannot be mounted together with the decorative metal ring.

Code
1T1245

Polycarbonate IP44 screen, sandblasted in the centre.
Cannot be mounted together with the decorative metal ring.

Glass

Code
47293

Tempered flush mounted IP24 glass, silk screen printed in the centre.
IP44 protection degree is obtained by combining the decorative ring, made of polycarbonate, and the borosilicate glass.

Code
47294

Tempered flush mounted IP24 glass, sandblasted in the centre.
IP44 protection degree is obtained by combining the decorative ring, made of polycarbonate, and the borosilicate glass.

CCT FLASH

	Code
	47291

Tempered protruding IP44 glass, silk screen printed at the centre.

	Code
	47292

Tempered protruding IP44 glass, sandblasted at the centre.

Mounting System

	L	Ø	Code
	290	212	**47382**
	390	212	**47385**

Plate for plank ceiling mounting.
The plates with a side measurement of 290mm can be installed on planks with a 300 or 100mm opening and take up the space of 1 or 3 components, respectively.
The plates with a side measurement of 390mm can be installed on planks with a 200mm opening and take up the space of 2 components.

IP Kit



	Code
	1T2418

IP54 Kit. Silicone sealing kit for round ring.
The IP54 degree of protection is obtained by combining the silicone kit with the protective screens IP44.

Decorative Ring



	Colour	Code
	◯	**47274**

Decorative ring made of polycarbonate.
IP44 protection degree is obtained by combining the decorative ring, made of polycarbonate, and the borosilicate glass.

	Colour	Code
	Chrome	**54091**
	Aluminium	**54091L**
	Brushed steel	**1T1463**

Decorative ring made of metal.
It can only be used with flush glass.

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED Architectural

GENERAL INFO
Fixed and Adjustable recessed projectors
CCTLED Ø175mm
CCTLED MINI Ø120mm
CCTLED MICRO Ø80mm

LED
Chip on board
From 200lm to 8749lm
2700K – 3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.
Ra97 on selected codes.
MINI GU10 version LED lamps not included.

PRODUCT EFFICACY
Up to 120lm/W

OPTICS
NSP – SP – FL – MWFL – WFL
DBS - Digital beam opening control
SP – FL – WFL for only MICRO version

POWER SUPPLY
Electronic – DALI
1-10V per only Ø175mm version.
Emergency kit available as an accessory.
Casambi control: DBS version Casambi on board. DALI version is fitted with special accessories.

MATERIAL
Black painted die-cast aluminium body for the ring version, white painted for the trimless versions.
Adjustable 355° in the horizontal plane and 30° in the vertical plane with micrometric aiming system. Double aiming lock.

A range of recessed projectors for professional lighting from the CCTLED range. The construction, size and original heat sink are inherited from the downlight version in a low luminance projected light version designed for professional architectural lighting that meets performance, precision and versatility requirements.
Available in three different sizes - CCTLED Architectural, Mini and Micro - in the double fixed and adjustable version; the first two are both recessed and trimless. Also available in a DBS - Dynamic Beam Shaper- version for the ø175mm version.

		CCTLED	CCTLED HP	CCTLED MINI	CCTLED MICRO
		Ø 175mm	Ø 175mm	Ø 120mm	Ø 80mm
LED	Flux (lm)	2289-4441	8533-8749	200-2520	1798-1855
	Power	14W-33W	54W	3W-18W	12W
OPTICS					
NSP	Lenticular			•	
	Hybrid	•			
SP	Lenticular			•	
	Hybrid				
	Reflector	•	•		
FL	Lenticular			•	
	Hybrid	•			
	Reflector	•	•		•
MWFL	Reflector	•		•	
WFL	Reflector	•		•	•
DBS	Changeable	•			

Chaoyang Park Plaza

Architect
Ma Yansong,
MAD Architects

Country
Beijing - China

01
CCTLED Architectural

The largest version in the range with a diameter of 175mm

It is available in a fixed and adjustable double version with two different finishes Classic and Trimless. The versatility of CTLED ARCHITECTURAL is given by the different optical systems that produce beams from NSP, SP, FL, MWFL and WFL. The high quality LED lamps and the wide range of power supply and control solutions make it a complete and extraordinarily efficient professional fixture.

02
CCTLED Architectural Mini

03
CCTLED Architectural Micro

The Mini version is the most elegant solution in the range

Because it combines design flexibility and particular attention to detail. A small recessed projector that conceals its technological heart and blends in with the architecture thanks to the different aesthetic solutions available.

The Micro version is the latest fixture in the range

The 12W power output versions are available with three different beam openings: SP, FL and WFL. Precision PMMA optics for high efficiency solutions with beams with soft gradient tones make it particularly suitable for example for Retail installations or in Entertainment environments. The LED lamp is retracted to ensure maximum visual comfort. With an installation depth of just 76mm and an 80mm diameter, the MICRO version has a maximum adjustability of 30° on the vertical plane.

CCTLED ARCHITECTURAL

Fixed



LED / 14W / HYBRID / NSP



3000K		H(m)	D(m)	Emax(lx)
Ra84			10°	
Fixture Power	18W	1	0.17	30508
Source Flux	2055lm	2	0.34	7627
Fixture Flux	1290lm	3	0.52	3390
Efficacy	71lm/W	4	0.69	1907
TS920 Imax=14846cd/klm	Imax	30508cd	5	0.86	1220

Driver	2700K	3000K	4000K
EL.	**1T4805EL**	**1T4801EL**	**1T4802EL**
1-10V	**1T4805D**	**1T4801D**	**1T4802D**
DALI	**1T4805DA**	**1T4801DA**	**1T4802DA**

LED / 26W / HYBRID / FL



3000K		H(m)	D(m)	Emax(lx)
Ra84			33°	
Fixture Power	28W	1	0.58	7556
Source Flux	3387lm	2	1.17	1889
Fixture Flux	2067lm	3	1.75	840
Efficacy	74lm/W	4	2.33	472
TS921 Imax=2231cd/klm	Imax	7556cd	5	2.92	302

Driver	2700K	3000K	4000K
EL.	**1T4815EL**	**1T4811EL**	**1T4812EL**
1-10V	**1T4815D**	**1T4811D**	**1T4812D**
DALI	**1T4815DA**	**1T4811DA**	**1T4812DA**

LED / 25W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			45°	
Fixture Power	27W	1	0.82	5842
Source Flux	3594lm	2	1.64	1460
Fixture Flux	3123lm	3	2.46	649
Efficacy	116lm/W	4	3.28	365
TS738 Imax=1655cd/klm	Imax	5947cd	5	4.10	234

Driver	2700K	3000K	4000K
EL.	**1T3551EL**	**1T3114EL**	**1T3115EL**
1-10V	**1T3551D**	**1T3114D**	**1T3115D**
DALI	**1T3551DA**	**1T3114DA**	**1T3115DA**

LED / 25W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			59°	
Fixture Power	27W	1	1.13	4066
Source Flux	3594lm	2	2.26	1017
Fixture Flux	3168lm	3	3.39	452
Efficacy	117lm/W	4	4.51	254
TS739 Imax=1142cd/klm	Imax	4105cd	5	5.64	163

Driver	2700K	3000K	4000K
EL.	**1T3553EL**	**1T3118EL**	**1T3119EL**
1-10V	**1T3553D**	**1T3118D**	**1T3119D**
DALI	**1T3553DA**	**1T3118DA**	**1T3119DA**

LED / 33W / REFLECTOR / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			14°	
Fixture Power	36W	1	0.24	33910
Source Flux	4331lm	2	0.48	8478
Fixture Flux	3683lm	3	0.72	3768
Efficacy	103lm/W	4	0.96	2119
TS732 Imax=7830cd/klm	Imax	33910cd	5	1.20	1356

Driver	2700K	3000K	4000K
EL.	**1T3548EL**	**1T3108EL**	**1T3109EL**
1-10V	**1T3548D**	**1T3108D**	**1T3109D**
DALI	**1T3548DA**	**1T3108DA**	**1T3109DA**

LED / 33W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power	36W	1		0.50	12789
Source Flux	4331lm	2		1.00	3197
Fixture Flux	3666lm	3		1.50	1421
Efficacy	103lm/W	4		2.00	799
TS733 Imax=2953cd/klm	Imax	12789cd	5	2.50	512

Driver	2700K	3000K	4000K
EL.	**1T3550EL**	**1T3112EL**	**1T3113EL**
1-10V	**1T3550D**	**1T3112D**	**1T3113D**
DALI	**1T3550DA**	**1T3112DA**	**1T3113DA**

LED / 33W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	36W	1		0.82	7040
Source Flux	4331lm	2		1.64	1760
Fixture Flux	3764lm	3		2.46	782
Efficacy	105lm/W	4		3.28	440
TS734 Imax=1655cd/klm	Imax	7166cd	5	4.10	282

Driver	2700K	3000K	4000K
EL.	**1T3552EL**	**1T3116EL**	**1T3117EL**
1-10V	**1T3552D**	**1T3116D**	**1T3117D**
DALI	**1T3552DA**	**1T3116DA**	**1T3117DA**

LED / 33W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power	36W	1		1.13	4900
Source Flux	4331lm	2		2.26	1225
Fixture Flux	3817lm	3		3.39	544
Efficacy	107lm/W	4		4.51	306
TS735 Imax=1142cd/klm	Imax	4947cd	5	5.64	196

Driver	2700K	3000K	4000K
EL.	**1T3554EL**	**1T3120EL**	**1T3121EL**
1-10V	**1T3554D**	**1T3120D**	**1T3121D**
DALI	**1T3554DA**	**1T3120DA**	**1T3121DA**

LED / 26W / DBS



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	28W	1		0.25	19042
Source Flux	3387lm	2		0.50	4761
Fixture Flux	1619lm	3		0.75	2116
Efficacy	58lm/W	4		1.00	1190
TS1102 Imax=5622cd/klm	Imax	19042cd	5	1.26	762



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power	28W	1		0.43	6755
Source Flux	3387lm	2		0.86	1689
Fixture Flux	1575lm	3		1.29	751
Efficacy	56lm/W	4		1.72	422
TS1103 Imax=1994cd/klm	Imax	6755cd	5	2.15	270



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power	28W	1		0.56	4104
Source Flux	3387lm	2		1.13	1026
Fixture Flux	1525lm	3		1.69	456
Efficacy	54lm/W	4		2.25	256
TS1104 Imax=1212cd/klm	Imax	4104cd	5	2.82	164



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	28W	1		0.83	1955
Source Flux	3387lm	2		1.67	489
Fixture Flux	1338lm	3		2.50	217
Efficacy	48lm/W	4		3.34	122
TS1105 Imax=577cd/klm	Imax	1955cd	5	4.17	78

Driver	2700K	3000K	4000K
CASAMBI		**1T6971CA**	**1T6972CA**

CCTLED ARCHITECTURAL

Related codes

Decorative Ring



Ø	Colour	Code
180	○	**1T2933**
180	●	**1T3529**

Round ring.



Ø	Colour	Code
180	○	**1T2935**
180	●	**1T3530**

Square ring.

Plaster



Cutout hole	Code
Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

Adjustable



LED / 14W / HYBRID / NSP / CRI84

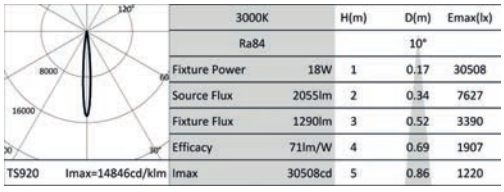

3000K		H(m)	D(m)	Emax(lx)
Ra84			10°	
Fixture Power	18W	1	0.17	30508
Source Flux	2055lm	2	0.34	7627
Fixture Flux	1290lm	3	0.52	3390
Efficacy	71lm/W	4	0.69	1907
Imax	30508cd	5	0.86	1220

Driver	2700K	3000K	4000K
EL.	**1T4806EL**	**1T4797EL**	**1T4798EL**
1-10V	**1T4806D**	**1T4797D**	**1T4798D**
DALI	**1T4806DA**	**1T4797DA**	**1T4798DA**

LED / 26W / HYBRID / FL / CRI84

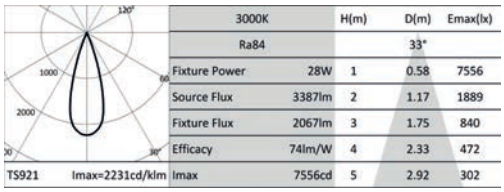

3000K		H(m)	D(m)	Emax(lx)
Ra84			33°	
Fixture Power	28W	1	0.58	7556
Source Flux	3387lm	2	1.17	1889
Fixture Flux	2067lm	3	1.75	840
Efficacy	74lm/W	4	2.33	472
Imax	7556cd	5	2.92	302

Driver	2700K	3000K	4000K
EL.	**1T4816EL**	**1T4819EL**	**1T4820EL**
1-10V	**1T4816D**	**1T4819D**	**1T4820D**
DALI	**1T4816DA**	**1T4819DA**	**1T4820DA**

LED / 25W / REFLECTOR / MWFL / CRI84

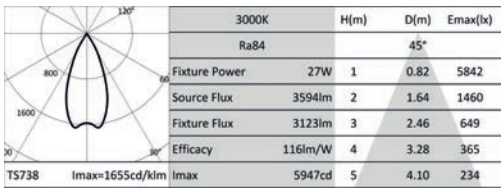

3000K		H(m)	D(m)	Emax(lx)
Ra84			45°	
Fixture Power	27W	1	0.82	5842
Source Flux	3594lm	2	1.64	1460
Fixture Flux	3123lm	3	2.46	649
Efficacy	116lm/W	4	3.28	365
Imax	5947cd	5	4.10	234

Driver	2700K	3000K	4000K
EL.	**1T3559EL**	**1T3082EL**	**1T3083EL**
1-10V	**1T3559D**	**1T3082D**	**1T3083D**
DALI	**1T3559DA**	**1T3082DA**	**1T3083DA**

LED / 25W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		27W	1	1.13	4066
Source Flux		3594lm	2	2.26	1017
Fixture Flux		3168lm	3	3.39	452
Efficacy		117lm/W	4	4.51	254
TS739	Imax=1142cd/klm	Imax	4105cd	5	5.64	163

Driver	2700K	3000K	4000K
EL.	**1T3561EL**	**1T3086EL**	**1T3087EL**
1-10V	**1T3561D**	**1T3086D**	**1T3087D**
DALI	**1T3561DA**	**1T3086DA**	**1T3087DA**

LED / 33W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		36W	1	0.24	33910
Source Flux		4331lm	2	0.48	8478
Fixture Flux		3683lm	3	0.72	3768
Efficacy		103lm/W	4	0.96	2119
TS732	Imax=7830cd/klm	Imax	33910cd	5	1.20	1356

Driver	2700K	3000K	4000K
EL.	**1T3556EL**	**1T3076EL**	**1T3077EL**
1-10V	**1T3556D**	**1T3076D**	**1T3077D**
DALI	**1T3556DA**	**1T3076DA**	**1T3077DA**

LED / 33W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		36W	1	0.24	26089
Source Flux		3332lm	2	0.48	6522
Fixture Flux		2834lm	3	0.72	2899
Efficacy		79lm/W	4	0.96	1631
TS732	Imax=7830cd/klm	Imax	26089cd	5	1.20	1044

Driver	2700K	3000K	4000K
EL.		**1T4264EL**	
1-10V		**1T4264D**	
DALI		**1T4264DA**	

LED / 33W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power		36W	1	0.50	12789
Source Flux		4331lm	2	1.00	3197
Fixture Flux		3666lm	3	1.50	1421
Efficacy		103lm/W	4	2.00	799
TS733	Imax=2953cd/klm	Imax	12789cd	5	2.50	512

Driver	2700K	3000K	4000K
EL.	**1T3558EL**	**1T3080EL**	**1T3081EL**
1-10V	**1T3558D**	**1T3080D**	**1T3081D**
DALI	**1T3558DA**	**1T3080DA**	**1T3081DA**

LED / 33W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
Fixture Power		36W	1	0.50	9839
Source Flux		3332lm	2	1.00	2460
Fixture Flux		2820lm	3	1.50	1093
Efficacy		79lm/W	4	2.00	615
TS733	Imax=2953cd/klm	Imax	9839cd	5	2.50	394

Driver	2700K	3000K	4000K
EL.		**1T4266EL**	
1-10V		**1T4266D**	
DALI		**1T4266DA**	

LED / 33W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		36W	1	0.82	7040
Source Flux		4331lm	2	1.64	1760
Fixture Flux		3764lm	3	2.46	782
Efficacy		105lm/W	4	3.28	440
TS734	Imax=1655cd/klm	Imax	7166cd	5	4.10	282

Driver	2700K	3000K	4000K
EL.	**1T3560EL**	**1T3084EL**	**1T3085EL**
1-10V	**1T3560D**	**1T3084D**	**1T3085D**
DALI	**1T3560DA**	**1T3084DA**	**1T3085DA**

LED / 33W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		36W	1	0.82	5416
Source Flux		3332lm	2	1.64	1354
Fixture Flux		2895lm	3	2.46	602
Efficacy		81lm/W	4	3.28	338
TS734	Imax=1655cd/klm	Imax	5513cd	5	4.10	217

Driver	2700K	3000K	4000K
EL.		**1T4268EL**	
1-10V		**1T4268D**	
DALI		**1T4268DA**	

CCTLED ARCHITECTURAL

LED / 33W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		36W	1	1.13	4900
Source Flux		4331lm	2	2.26	1225
Fixture Flux		3817lm	3	3.39	544
Efficacy		107lm/W	4	4.51	306
TS735	Imax=1142cd/klm	Imax	4947cd	5	5.64	196

Driver	2700K	3000K	4000K
EL.	**1T3562EL**	**1T3088EL**	**1T3089EL**
1-10V	**1T3562D**	**1T3088D**	**1T3089D**
DALI	**1T3562DA**	**1T3088DA**	**1T3089DA**

LED / 33W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		36W	1	1.13	3770
Source Flux		3332lm	2	2.26	942
Fixture Flux		2937lm	3	3.39	419
Efficacy		82lm/W	4	4.51	236
TS735	Imax=1142cd/klm	Imax	3806cd	5	5.64	151

Driver	2700K	3000K	4000K
EL.		**1T4270EL**	
1-10V		**1T4270D**	
DALI		**1T4270DA**	

LED / 26W / DBS / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		28W	1	0.25	19042
Source Flux		3387lm	2	0.50	4761
Fixture Flux		1619lm	3	0.75	2116
Efficacy		58lm/W	4	1.00	1190
TS1102	Imax=5622cd/klm	Imax	19042cd	5	1.26	762



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		28W	1	0.43	6755
Source Flux		3387lm	2	0.86	1689
Fixture Flux		1575lm	3	1.29	751
Efficacy		56lm/W	4	1.72	422
TS1103	Imax=1994cd/klm	Imax	6755cd	5	2.15	270



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power		28W	1	0.56	4104
Source Flux		3387lm	2	1.13	1026
Fixture Flux		1525lm	3	1.69	456
Efficacy		54lm/W	4	2.25	256
TS1104	Imax=1212cd/klm	Imax	4104cd	5	2.82	164



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		28W	1	0.83	1955
Source Flux		3387lm	2	1.67	489
Fixture Flux		1338lm	3	2.50	217
Efficacy		48lm/W	4	3.34	122
TS1105	Imax=577cd/klm	Imax	1955cd	5	4.17	78

Driver	2700K	3000K	4000K
CASAMBI		**1T6975CA**	**1T6976CA**

Related codes

Decorative Ring

Ø	Colour	Code
180	○	**1T2933**
180	●	**1T3529**

Round ring.

Ø	Colour	Code
180	○	**1T2935**
180	●	**1T3530**

Square ring.

Plaster



Cutout hole	Code
Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

HP Adjustable



LED / 54W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			23°	
	Fixture Power	63W	1	0.41	29000
	Source Flux	8533lm	2	0.81	7250
	Fixture Flux	7257lm	3	1.22	3222
	Efficacy	115lm/W	4	1.63	1812
TS914	Imax=3399cd/klm	Imax	29000cd	5	2.03	1160

	Driver	3000K	4000K
	EL.	**1T4838EL**	**1T4839EL**
	1-10V	**1T4838D**	**1T4839D**
	DALI	**1T4838DA**	**1T4839DA**

LED / 54W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			36°	
	Fixture Power	63W	1	0.64	17848
	Source Flux	8533lm	2	1.29	4462
	Fixture Flux	7223lm	3	1.93	1983
	Efficacy	115lm/W	4	2.58	1115
TS915	Imax=2092cd/klm	Imax	17848cd	5	3.22	714

	Driver	3000K	4000K
	EL.	**1T4840EL**	**1T4841EL**
	1-10V	**1T4840D**	**1T4841D**
	DALI	**1T4840DA**	**1T4841DA**

Related codes

Decorative Ring



	Ø	Colour	Code
	180	○	**1T2933**
	180	●	**1T3529**

Round ring.



	Ø	Colour	Code
	180	○	**1T2935**
	180	●	**1T3530**

Square ring.

Plaster



	Cutout hole	Code
	Ø367	**1T4213**

Plaster ring for installation in false ceilings.
To be completed with a decorative ring.

CCTLED ARCHITECTURAL

Accessories

Reflector

Colour	Code
	1T3138
	1T3139
	1T3422

Secondary reflector.

Grid



Ø	Code
80	**1T3423**

Anti-glare louver.
Black painted metal honeycomb structure.

Filter



Filter	Ø	Code
Red	80	**1T3424**
Green	80	**1T3425**
Blue	80	**1T3426**
Yellow	80	**1T3427**
Magenta	80	**1T3428**

Flat glass interference chromatic filter.



Ø	Code
80	**1T3141**

Flat glass, grooved refractive blade light filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.



Ø	Code
80	**1T3140**

Flat glass micro prismatic refractive diffusive filter.
This softens the luminous effect.



Filter	Ø	Code
Halogen +	80	**1T6382**
Vivid +	80	**1T6384**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	80	**1T6386**
Fish	80	**1T6388**
Bread	80	**1T6390**
Vegetables	80	**1T6392**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6386
To be used only with 3000K and Ra80 fixtures.
1T6388
To be used only with 4000K and Ra80 fixtures.
1T6390
To be used only with 3000K and Ra80 fixtures.
1T6392
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	80	**1T6394**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

IP Kit



Ø	Code
180	**1T2937**

IP54 ring.
Square ring with transparent screen.
Accessories not compatible with Trimless versions.

Insertion Ring



Code
1T3725

Retrofit kit for CCTLed Classic.
White polycarbonate outer ring with bayonet locking system.
Outer ring suitable for recessed holes of between 190 and 215mm.
The accessory in not compatible with the decorative rings available for CCTLed.
Accessories not compatible with Trimless versions.

Cable

Code
1T2833

Sync cable. It synchronizes the dimming between 2 drivers.
It is possible to connect up to 10 drivers in order to maintain a uniform effect for all fixtures.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED ARCHITECTURAL

Fixed Trimless



LED / 14W / HYBRID / NSP



3000K		H(m)	D(m)	Emax(lx)
Ra84			10°	
Fixture Power	18W	1	0.17	30508
Source Flux	2055lm	2	0.34	7627
Fixture Flux	1290lm	3	0.52	3390
Efficacy	71lm/W	4	0.69	1907
TS920 Imax=14846cd/klm	Imax	30508cd	5	0.86	1220

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T4807EL**	**1T4803EL**	**1T4804EL**
1-10V	◯	**1T4807D**	**1T4803D**	**1T4804D**
DALI	◯	**1T4807DA**	**1T4803DA**	**1T4804DA**

LED / 26W / HYBRID / FL



3000K		H(m)	D(m)	Emax(lx)
Ra84			33°	
Fixture Power	28W	1	0.58	7556
Source Flux	3387lm	2	1.17	1889
Fixture Flux	2067lm	3	1.75	840
Efficacy	74lm/W	4	2.33	472
TS921 Imax=2231cd/klm	Imax	7556cd	5	2.92	302

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T4817EL**	**1T4813EL**	**1T4814EL**
1-10V	◯	**1T4817D**	**1T4813D**	**1T4814D**
DALI	◯	**1T4817DA**	**1T4813DA**	**1T4814DA**

LED / 25W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			45°	
Fixture Power	27W	1	0.82	5842
Source Flux	3594lm	2	1.64	1460
Fixture Flux	3123lm	3	2.46	649
Efficacy	116lm/W	4	3.28	365
TS738 Imax=1655cd/klm	Imax	5947cd	5	4.10	234

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3567EL**	**1T3130EL**	**1T3131EL**
1-10V	◯	**1T3567D**	**1T3130D**	**1T3131D**
DALI	◯	**1T3567DA**	**1T3130DA**	**1T3131DA**

LED / 25W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			59°	
Fixture Power	27W	1	1.13	4066
Source Flux	3594lm	2	2.26	1017
Fixture Flux	3168lm	3	3.39	452
Efficacy	117lm/W	4	4.51	254
TS739 Imax=1142cd/klm	Imax	4105cd	5	5.64	163

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3569EL**	**1T3134EL**	**1T3135EL**
1-10V	◯	**1T3569D**	**1T3134D**	**1T3135D**
DALI	◯	**1T3569DA**	**1T3134DA**	**1T3135DA**

LED / 33W / REFLECTOR / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			14°	
Fixture Power	36W	1	0.24	33910
Source Flux	4331lm	2	0.48	8478
Fixture Flux	3683lm	3	0.72	3768
Efficacy	103lm/W	4	0.96	2119
TS732 Imax=7830cd/klm	Imax	33910cd	5	1.20	1356

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3564EL**	**1T3124EL**	**1T3125EL**
1-10V	◯	**1T3564D**	**1T3124D**	**1T3125D**
DALI	◯	**1T3564DA**	**1T3124DA**	**1T3125DA**

LED / 33W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power	36W	1		0.50	12789
Source Flux	4331lm	2		1.00	3197
Fixture Flux	3666lm	3		1.50	1421
Efficacy	103lm/W	4		2.00	799
TS733 Imax=2953cd/klm	Imax	12789cd	5	2.50	512

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3566EL**	**1T3128EL**	**1T3129EL**
1-10V	◯	**1T3566D**	**1T3128D**	**1T3129D**
DALI	◯	**1T3566DA**	**1T3128DA**	**1T3129DA**

LED / 33W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	36W	1		0.82	7040
Source Flux	4331lm	2		1.64	1760
Fixture Flux	3764lm	3		2.46	782
Efficacy	105lm/W	4		3.28	440
TS734 Imax=1655cd/klm	Imax	7166cd	5	4.10	282

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3568EL**	**1T3132EL**	**1T3133EL**
1-10V	◯	**1T3568D**	**1T3132D**	**1T3133D**
DALI	◯	**1T3568DA**	**1T3132DA**	**1T3133DA**

LED / 33W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power	36W	1		1.13	4900
Source Flux	4331lm	2		2.26	1225
Fixture Flux	3817lm	3		3.39	544
Efficacy	107lm/W	4		4.51	306
TS735 Imax=1142cd/klm	Imax	4947cd	5	5.64	196

Driver	Colour	2700K	3000K	4000K
EL.	◯	**1T3570EL**	**1T3136EL**	**1T3137EL**
1-10V	◯	**1T3570D**	**1T3136D**	**1T3137D**
DALI	◯	**1T3570DA**	**1T3136DA**	**1T3137DA**

LED / 26W / DBS



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	28W	1		0.25	19042
Source Flux	3387lm	2		0.50	4761
Fixture Flux	1619lm	3		0.75	2116
Efficacy	58lm/W	4		1.00	1190
TS1102 Imax=5622cd/klm	Imax	19042cd	5	1.26	762



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power	28W	1		0.43	6755
Source Flux	3387lm	2		0.86	1689
Fixture Flux	1575lm	3		1.29	751
Efficacy	56lm/W	4		1.72	422
TS1103 Imax=1994cd/klm	Imax	6755cd	5	2.15	270



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power	28W	1		0.56	4104
Source Flux	3387lm	2		1.13	1026
Fixture Flux	1525lm	3		1.69	456
Efficacy	54lm/W	4		2.25	256
TS1104 Imax=1212cd/klm	Imax	4104cd	5	2.82	164



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	28W	1		0.83	1955
Source Flux	3387lm	2		1.67	489
Fixture Flux	1338lm	3		2.50	217
Efficacy	48lm/W	4		3.34	122
TS1105 Imax=577cd/klm	Imax	1955cd	5	4.17	78

Driver	Colour	2700K	3000K	4000K
CASAMBI	◯		**1T6973CA**	**1T6974CA**

CCTLED ARCHITECTURAL

Adjustable Trimless



LED / 14W / HYBRID / NSP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			10°	
Fixture Power	18W		1	0.17	30508
Source Flux	2055lm		2	0.34	7627
Fixture Flux	1290lm		3	0.52	3390
Efficacy	71lm/W		4	0.69	1907
TS920	Imax=14846cd/klm	Imax	5	0.86	1220

Driver	2700K	3000K	4000K
EL.	**1T4808EL**	**1T4799EL**	**1T4800EL**
1-10V	**1T4808D**	**1T4799D**	**1T4800D**
DALI	**1T4808DA**	**1T4799DA**	**1T4800DA**

LED / 26W / HYBRID / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			33°	
Fixture Power	28W		1	0.58	7556
Source Flux	3387lm		2	1.17	1889
Fixture Flux	2067lm		3	1.75	840
Efficacy	74lm/W		4	2.33	472
TS921	Imax=2231cd/klm	Imax	5	2.92	302

Driver	2700K	3000K	4000K
EL.	**1T4818EL**	**1T4809EL**	**1T4810EL**
1-10V	**1T4818D**	**1T4809D**	**1T4810D**
DALI	**1T4818DA**	**1T4809DA**	**1T4810DA**

LED / 25W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	27W		1	0.82	5842
Source Flux	3594lm		2	1.64	1460
Fixture Flux	3123lm		3	2.46	649
Efficacy	116lm/W		4	3.28	365
TS738	Imax=1655cd/klm	Imax	5	4.10	234

Driver	2700K	3000K	4000K
EL.	**1T3575EL**	**1T3098EL**	**1T3099EL**
1-10V	**1T3575D**	**1T3098D**	**1T3099D**
DALI	**1T3575DA**	**1T3098DA**	**1T3099DA**

LED / 25W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power	27W		1	1.13	4066
Source Flux	3594lm		2	2.26	1017
Fixture Flux	3168lm		3	3.39	452
Efficacy	117lm/W		4	4.51	254
TS739	Imax=1142cd/klm	Imax	5	5.64	163

Driver	2700K	3000K	4000K
EL.	**1T3577EL**	**1T3102EL**	**1T3103EL**
1-10V	**1T3577D**	**1T3102D**	**1T3103D**
DALI	**1T3577DA**	**1T3102DA**	**1T3103DA**

LED / 33W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	36W		1	0.24	33910
Source Flux	4331lm		2	0.48	8478
Fixture Flux	3683lm		3	0.72	3768
Efficacy	103lm/W		4	0.96	2119
TS732	Imax=7830cd/klm	Imax	5	1.20	1356

Driver	2700K	3000K	4000K
EL.	**1T3572EL**	**1T3092EL**	**1T3093EL**
1-10V	**1T3572D**	**1T3092D**	**1T3093D**
DALI	**1T3572DA**	**1T3092DA**	**1T3093DA**

LED / 33W / REFLECTOR / SP / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			14°	
Fixture Power	36W	1	0.24	26089
Source Flux	3332lm	2	0.48	6522
Fixture Flux	2834lm	3	0.72	2899
Efficacy	79lm/W	4	0.96	1631
TS732 Imax=7830cd/klm	Imax	26089cd	5	1.20	1044

Driver	2700K	3000K	4000K
EL.		**1T4272EL**	
1-10V		**1T4272D**	
DALI		**1T4272DA**	

LED / 33W / REFLECTOR / FL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			28°	
Fixture Power	36W	1	0.50	12789
Source Flux	4331lm	2	1.00	3197
Fixture Flux	3666lm	3	1.50	1421
Efficacy	103lm/W	4	2.00	799
TS733 Imax=2953cd/klm	Imax	12789cd	5	2.50	512

Driver	2700K	3000K	4000K
EL.	**1T3574EL**	**1T3096EL**	**1T3097EL**
1-10V	**1T3574D**	**1T3096D**	**1T3097D**
DALI	**1T3574DA**	**1T3096DA**	**1T3097DA**

LED / 33W / REFLECTOR / FL / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			28°	
Fixture Power	36W	1	0.50	9839
Source Flux	3332lm	2	1.00	2460
Fixture Flux	2820lm	3	1.50	1093
Efficacy	79lm/W	4	2.00	615
TS733 Imax=2953cd/klm	Imax	9839cd	5	2.50	394

Driver	2700K	3000K	4000K
EL.		**1T4274EL**	
1-10V		**1T4274D**	
DALI		**1T4274DA**	

LED / 33W / REFLECTOR / MWFL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			45°	
Fixture Power	36W	1	0.82	7040
Source Flux	4331lm	2	1.64	1760
Fixture Flux	3764lm	3	2.46	782
Efficacy	105lm/W	4	3.28	440
TS734 Imax=1655cd/klm	Imax	7166cd	5	4.10	282

Driver	2700K	3000K	4000K
EL.	**1T3576EL**	**1T3100EL**	**1T3101EL**
1-10V	**1T3576D**	**1T3100D**	**1T3101D**
DALI	**1T3576DA**	**1T3100DA**	**1T3101DA**

LED / 33W / REFLECTOR / MWFL / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			45°	
Fixture Power	36W	1	0.82	5416
Source Flux	3332lm	2	1.64	1354
Fixture Flux	2895lm	3	2.46	602
Efficacy	81lm/W	4	3.28	338
TS734 Imax=1655cd/klm	Imax	5513cd	5	4.10	217

Driver	2700K	3000K	4000K
EL.		**1T4276EL**	
1-10V		**1T4276D**	
DALI		**1T4276DA**	

LED / 33W / REFLECTOR / WFL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			59°	
Fixture Power	36W	1	1.13	4900
Source Flux	4331lm	2	2.26	1225
Fixture Flux	3817lm	3	3.39	544
Efficacy	107lm/W	4	4.51	306
TS735 Imax=1142cd/klm	Imax	4947cd	5	5.64	196

Driver	2700K	3000K	4000K
EL.	**1T3578EL**	**1T3104EL**	**1T3105EL**
1-10V	**1T3578D**	**1T3104D**	**1T3105D**
DALI	**1T3578DA**	**1T3104DA**	**1T3105DA**

CCTLED ARCHITECTURAL

LED / 33W / REFLECTOR / WFL / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			59°	
Fixture Power	36W	1	1.13	3770
Source Flux	3332lm	2	2.26	942
Fixture Flux	2937lm	3	3.39	419
Efficacy	82lm/W	4	4.51	236
TS735 Imax=1142cd/klm	Imax	3806cd	5	5.64	151

Driver	2700K	3000K	4000K
EL.		**1T4278EL**	
1-10V		**1T4278D**	
DALI		**1T4278DA**	

LED / 26W / DBS / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			14°	
Fixture Power	28W	1	0.25	19042
Source Flux	3387lm	2	0.50	4761
Fixture Flux	1619lm	3	0.75	2116
Efficacy	58lm/W	4	1.00	1190
TS1102 Imax=5622cd/klm	Imax	19042cd	5	1.26	762



3000K		H(m)	D(m)	Emax(lx)
Ra84			24°	
Fixture Power	28W	1	0.43	6755
Source Flux	3387lm	2	0.86	1689
Fixture Flux	1575lm	3	1.29	751
Efficacy	56lm/W	4	1.72	422
TS1103 Imax=1994cd/klm	Imax	6755cd	5	2.15	270



3000K		H(m)	D(m)	Emax(lx)
Ra84			31°	
Fixture Power	28W	1	0.56	4104
Source Flux	3387lm	2	1.13	1026
Fixture Flux	1525lm	3	1.69	456
Efficacy	54lm/W	4	2.25	256
TS1104 Imax=1212cd/klm	Imax	4104cd	5	2.82	164



3000K		H(m)	D(m)	Emax(lx)
Ra84			45°	
Fixture Power	28W	1	0.83	1955
Source Flux	3387lm	2	1.67	489
Fixture Flux	1338lm	3	2.50	217
Efficacy	48lm/W	4	3.34	122
TS1105 Imax=577cd/klm	Imax	1955cd	5	4.17	78

Driver	2700K	3000K	4000K
CASAMBI		**1T6977CA**	**1T6978CA**

Accessories

Reflector

Colour	Code
	1T3138
	1T3139
	1T3422

Secondary reflector.

Grid



Ø	Code
80	**1T3423**

Anti-glare louver.
Black painted metal honeycomb structure.

Filter



Filter	Ø	Code
Red	80	**1T3424**
Green	80	**1T3425**
Blue	80	**1T3426**
Yellow	80	**1T3427**
Magenta	80	**1T3428**

Flat glass interference chromatic filter.



Ø	Code
80	**1T3141**

Flat glass, grooved refractive blade light filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.



Ø	Code
80	**1T3140**

Flat glass micro prismatic refractive diffusive filter.
This softens the luminous effect.



Filter	Ø	Code
Halogen +	80	**1T6382**
Vivid +	80	**1T6384**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	80	**1T6386**
Fish	80	**1T6388**
Bread	80	**1T6390**
Vegetables	80	**1T6392**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6386
To be used only with 3000K and Ra80 fixtures.
1T6388
To be used only with 4000K and Ra80 fixtures.
1T6390
To be used only with 3000K and Ra80 fixtures.
1T6392
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	80	**1T6394**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

CCTLED ARCHITECTURAL

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cable

Code
1T2833

Sync cable. It synchronizes the dimming between 2 drivers.
It is possible to connect up to 10 drivers in order to maintain a uniform effect for all fixtures.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Mini Fixed
Standard - Trimless



LED / 11W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		14W	1	0.27	16914
Source Flux		1786lm	2	0.53	4229
Fixture Flux		1336lm	3	0.80	1879
Efficacy		98lm/W	4	1.07	1057
TS874	Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	◯	**1T4644EL**	**1T4645EL**
DALI	◯	**1T4644DA**	**1T4645DA**

LED / 18W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		20W	1	0.43	8803
Source Flux		2466lm	2	0.87	2201
Fixture Flux		1800lm	3	1.30	978
Efficacy		89lm/W	4	1.73	550
TS870	Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	◯	**1T4656EL**	**1T4657EL**
DALI	◯	**1T4656DA**	**1T4657DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		14W	1	0.54	4825
Source Flux		1837lm	2	1.09	1206
Fixture Flux		1315lm	3	1.63	536
Efficacy		97lm/W	4	2.17	302
TS872	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	◯	**1T4648EL**	**1T4649EL**
DALI	◯	**1T4648DA**	**1T4649DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		14W	1	0.90	2476
Source Flux		1837lm	2	1.80	619
Fixture Flux		1520lm	3	2.69	275
Efficacy		113lm/W	4	3.59	155
TS873	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	◯	**1T4652EL**	**1T4653EL**
DALI	◯	**1T4652DA**	**1T4653DA**

LED / 18W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		20W	1	0.90	3323
Source Flux		2466lm	2	1.80	831
Fixture Flux		2041lm	3	2.69	369
Efficacy		101lm/W	4	3.59	208
TS869	Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	◯	**1T4660EL**	**1T4661EL**
DALI	◯	**1T4660DA**	**1T4661DA**

LED / 18W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
Fixture Power		20W	1	1.16	2406
Source Flux		2466lm	2	2.32	601
Fixture Flux		1979lm	3	3.47	267
Efficacy		98lm/W	4	4.63	150
TS871	Imax=976cd/klm	Imax	2407cd	5	5.79	96

Driver	Colour	3000K	4000K
EL.	◯	**1T4664EL**	**1T4665EL**
DALI	◯	**1T4664DA**	**1T4665DA**

CCTLED ARCHITECTURAL

Mini Adjustable
Standard - Trimless



LED / 2,7W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power	5W		1	0.15	4436
Source Flux	200lm		2	0.30	1109
Fixture Flux	163lm		3	0.45	493
Efficacy	31lm/W		4	0.60	277
TS875	Imax=22178cd/klm	Imax	4436cd	5	0.75	177

Driver	Colour	3000K	4000K
EL.	◯	**1T4668EL**	**1T4669EL**
DALI	◯	**1T4668DA**	**1T4669DA**

LED / 11W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power	14W		1	0.27	16914
Source Flux	1786lm		2	0.53	4229
Fixture Flux	1336lm		3	0.80	1879
Efficacy	98lm/W		4	1.07	1057
TS874	Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	◯	**1T4672EL**	**1T4673EL**
DALI	◯	**1T4672DA**	**1T4673DA**

LED / 18W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power	20W		1	0.43	8803
Source Flux	2466lm		2	0.87	2201
Fixture Flux	1800lm		3	1.30	978
Efficacy	89lm/W		4	1.73	550
TS870	Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	◯	**1T4684EL**	**1T4685EL**
DALI	◯	**1T4684DA**	**1T4685DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power	14W		1	0.54	4825
Source Flux	1837lm		2	1.09	1206
Fixture Flux	1315lm		3	1.63	536
Efficacy	97lm/W		4	2.17	302
TS872	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	◯	**1T4676EL**	**1T4677EL**
DALI	◯	**1T4676DA**	**1T4677DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power	14W		1	0.90	2476
Source Flux	1837lm		2	1.80	619
Fixture Flux	1520lm		3	2.69	275
Efficacy	113lm/W		4	3.59	155
TS873	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	◯	**1T4680EL**	**1T4681EL**
DALI	◯	**1T4680DA**	**1T4681DA**

LED / 18W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	20W	1	0.90	3323
Source Flux	2466lm	2	1.80	831
Fixture Flux	2041lm	3	2.69	369
Efficacy	101lm/W	4	3.59	208
TS869 Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	○	**1T4688EL**	**1T4689EL**
DALI	○	**1T4688DA**	**1T4689DA**

LED / 18W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			60°	
Fixture Power	20W	1	1.16	2406
Source Flux	2466lm	2	2.32	601
Fixture Flux	1979lm	3	3.47	267
Efficacy	98lm/W	4	4.63	150
TS871 Imax=976cd/klm	Imax	2407cd	5	5.79	96

Driver	Colour	3000K	4000K
EL.	○	**1T4692EL**	**1T4693EL**
DALI	○	**1T4692DA**	**1T4693DA**

Accessories

Decorative Ring



Ø	Colour	Code
125	○	**1T4696**
125	●	**1T4697**

Round ring.



Ø	Colour	Code
125	○	**1T4702**
125	●	**1T4703**

Pinhole ring for the adjustable version.
We recommend this in combination with the black secondary reflector.



Ø	Colour	Code
125	○	**1T4704**
125	●	**1T4705**

Round ring (IP54).

L	Colour	Code
125	○	**1T4698**
125	●	**1T4699**

Square ring.



L	Colour	Code
125	○	**1T4714**
125	●	**1T4715**
125	○ ◌	**1T4716**
125	○ ●	**1T4717**

Square ring with square hole.
For the adjustable version.

CCTLED ARCHITECTURAL

Reflector

Colour	Code
○	**1T4710**
●	**1T4711**

Secondary reflector for the adjustable version.

Colour	Code
○	**1T4706**
●	**1T4707**

Secondary reflector for the fixed version.

Filter



Filter	Ø	Code
Red	50	**49881**
Green	50	**49882**
Blue	50	**49886**
Yellow	50	**49887**
Magenta	50	**49959**

Flat glass interference chromatic filter.

Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

Insertion Ring



Cutout hole	Colour	Code
Ø125	○	**1T5242**
Ø125	●	**1T5243**
Ø125	◍	**1T5244**

Accessory for trimless inspectable installation.
Secondary reflector.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED ARCHITECTURAL

Mini GU10 Fixed Standard -Trimless



LED MR16 / 6-7-7,5W / GU10

	Power supply	Colour	Code
	220-240Vac	◯	**1T5935**

Mini GU10 Adjustable Standard -Trimless



LED MR16 / 6-7-7,5W / GU10

	Power supply	Colour	Code
	220-240Vac	◯	**1T5936**

Note

Lamp height max 58mm. To ensure CCTLED ARCHITECTURAL MINI GU10 functions correctly, we recommend you use the lamps indicated in this catalogue.

Accessories

Source

Code
38630P

PAR16 LED on/off 6W (3000K) 700cd (38°) GU10.
230V
H=57.5mm.

Code
38640P

PAR16 LED on/off 6W (4000K) 725cd (38°) GU10.
230V
H=57.5mm.

Reflector

Colour	Code
○	**1T4710**
●	**1T4711**

Secondary reflector for the adjustable version.

Colour	Code
○	**1T4706**
●	**1T4707**

Secondary reflector for the fixed version.

Decorative Ring



Ø	Colour	Code
125	○	**1T4696**
125	●	**1T4697**

Round ring.



L	Colour	Code
125	○	**1T4698**
125	●	**1T4699**

Square ring.



Ø	Colour	Code
125	○	**1T4700**
125	●	**1T4701**

Pinhole ring for the fixed version.
We recommend this in combination with the black secondary reflector.

Ø	Colour	Code
125	○	**1T4702**
125	●	**1T4703**

Pinhole ring for the adjustable version.
We recommend this in combination with the black secondary reflector.



L	Colour	Code
125	○	**1T4714**
125	●	**1T4715**
125	○ ●	**1T4716**
125	○ ●	**1T4717**

Square ring with square hole.
For the adjustable version.



Ø	Colour	Code
125	○	**1T4704**
125	●	**1T4705**

Round ring (IP54).

Insertion Ring



Cutout hole	Colour	Code
Ø125	○	**1T5242**
Ø125	●	**1T5243**
Ø125	◌	**1T5244**

Accessory for trimless inspectable installation.
Secondary reflector.

CCTLED ARCHITECTURAL

Micro



LED / 12W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			21°	
	Fixture Power	14W	1	0.37	7337
	Source Flux	1798lm	2	0.73	1834
	Fixture Flux	1453lm	3	1.10	815
	Efficacy	104lm/W	4	1.46	459
TS1041	Imax=4080cd/klm	Imax	5	1.83	293

Power supply	Colour	3000K	4000K
350mA	○	**1T6361**	**1T6362**
350mA	●	**1T6367**	**1T6368**

LED / 12W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			36°	
	Fixture Power	14W	1	0.64	3320
	Source Flux	1798lm	2	1.28	830
	Fixture Flux	1458lm	3	1.92	369
	Efficacy	104lm/W	4	2.56	207
TS1042	Imax=1846cd/klm	Imax	5	3.20	133

Power supply	Colour	3000K	4000K
350mA	○	**1T6363**	**1T6364**
350mA	●	**1T6369**	**1T6370**

LED / 12W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			55°	
	Fixture Power	14W	1	1.03	1708
	Source Flux	1798lm	2	2.06	427
	Fixture Flux	1354lm	3	3.10	190
	Efficacy	97lm/W	4	4.13	107
TS1043	Imax=950cd/klm	Imax	5	5.16	68

Power supply	Colour	3000K	4000K
350mA	○	**1T6365**	**1T6366**
350mA	●	**1T6371**	**1T6372**

Related codes

Power Supply



Code
1T6503

Electronic power supply max 15W, LxHxP=101.5x29.5x51mm, 220-240V-AC 50-60Hz, 350mA, IP20.



Code
1T6504

DALI dimmable electronic power supply max 15W, LxHxP=146.5x30x44mm, 220-240V-AC 50-60Hz, 350mA, IP20.
For the Cozy product: the driver is bigger than the cutout hole needed by the luminaire.

Accessories

Reflector

Colour	Code
○	**1T6407**
●	**1T6408**

Secondary reflector.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

OZ
Stand alone

GENERAL INFO
Recessed fixed LED single or multi-optic projectors.

Small

	Trimless	Classic
1x	30x30mm h.50mm	35x35mm h.49mm
3x	80x35mm h.50mm	85x35mm h.49mm
5x	130x35mm h.50mm	135x35mm h.49mm

Large

	Trimless	Classic
1x	53x53mm h.61mm	60x60mm h.59mm
3x	153x53mm h.61mm	160x60mm h.59mm
5x	253x53mm h.61mm	260x60mm h.59mm

LED
LED emitter for the Small version
LED Chip on Board for the Large version
From 188lm to 3295lm
2700K – 3000K – 3500K - 4000K
Ra90

PRODUCT EFFICACY
Up to 101lm/W

OPTICS
SP – FL – MWFL

POWER SUPPLY
Electronic remote and DALI driver for the Small versions. Electronic and DALI driver integrated into the body of the fixture for the Large versions.
Casambi control system available with an accessory (only for DALI version products).

MATERIAL
White painted die-cast aluminium body and black polycarbonate frame.

New single or multi-optic downlights with a new design with miniaturised optics inspired by the OZ 48V version. Available in two different sizes, Small and Large, for ceiling or recessed installation. SP, FL and MWFL optics are suitable for installation in work environments - UGR<13 for the Small versions and UGR<17 for the Large versions (EN12464-1).

Large version available also for the ceiling installation.

01
OZ Stand alone

SMALL
1x

SMALL
3x

SMALL
Trimless
1x

SMALL
Trimless
3x

LARGE
1x

LARGE
3x

LARGE
Trimless
1x

LARGE
Trimless
3x

Great variety of solutions

Different solutions in terms of size, aesthetics, performance and installation to provide a valid solution for all project needs.

LARGE
Plafone
3x

SMALL
5x

SMALL
Trimless
5x

LARGE
5x

LARGE
Trimless
5x

LARGE
Plafone
5x

02

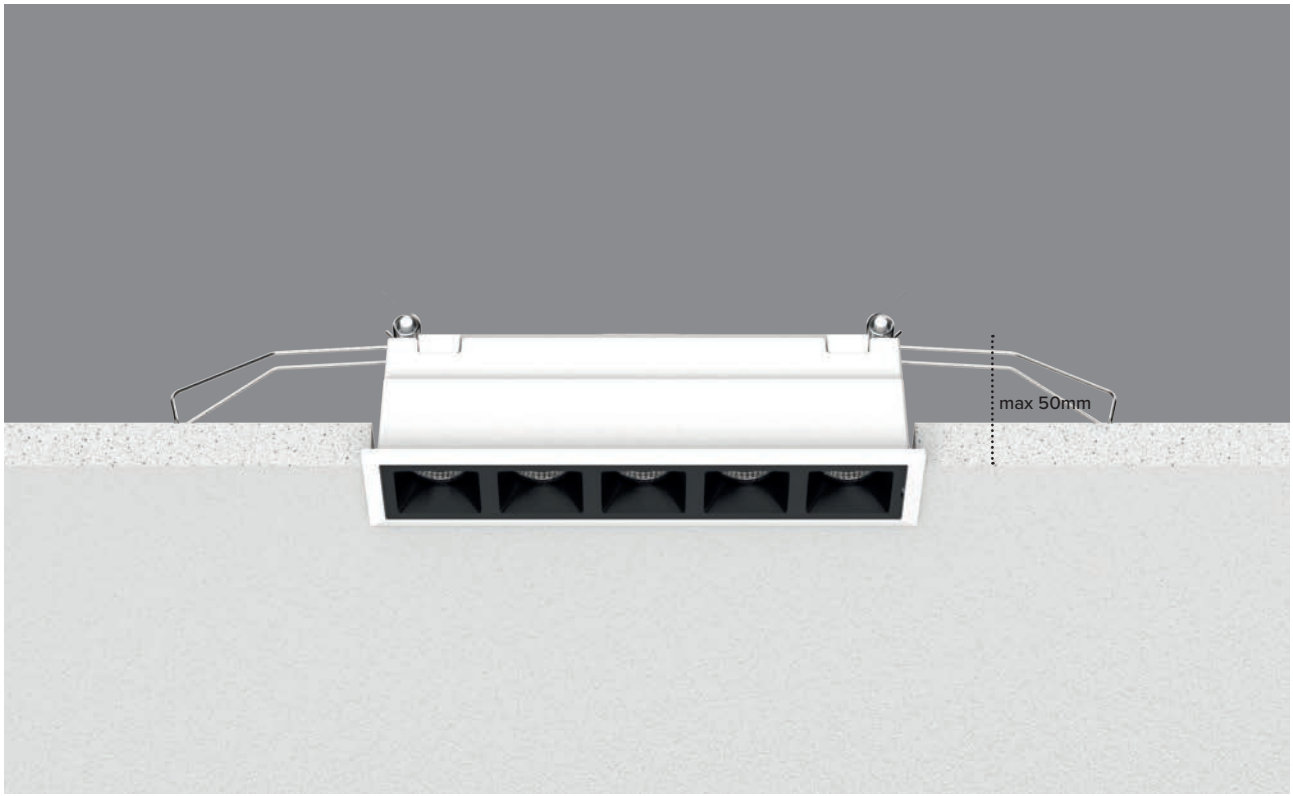

Very narrow installation dept

Both the Small and the Large versions have a very narrow installation depth. 5 cm for Small solutions and 6.1 cm for Large solutions.

Integrated or remote power supply

Electronic remote and DALI driver for the Small versions. Electronic and DALI driver integrated into the body of the fixture for the Large versions.

Stand Alone Recessed Small 1X (35x35mm)



LED / 2,6W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			12°	
	Fixture Power	3W	1	0.20	2863
	Source Flux	236lm	2	0.40	716
	Fixture Flux	202lm	3	0.61	318
	Efficacy	77lm/W	4	0.81	179
TS1191	Imax=12133cd/klm	Imax	2863cd	5	1.01	115

Power supply	Colour	2700K	3000K	3500K	4000K
900mA	○	**1T7602**	**1T7603**	**1T7604**	**1T7605**
900mA	●	**1T7614**	**1T7615**	**1T7616**	**1T7617**

LED / 2,6W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			29°	
	Fixture Power	3W	1	0.51	752
	Source Flux	236lm	2	1.02	188
	Fixture Flux	197lm	3	1.53	84
	Efficacy	76lm/W	4	2.04	47
TS1192	Imax=3188cd/klm	Imax	752cd	5	2.55	30

Power supply	Colour	2700K	3000K	3500K	4000K
900mA	○	**1T7606**	**1T7607**	**1T7608**	**1T7609**
900mA	●	**1T7618**	**1T7619**	**1T7620**	**1T7621**

LED / 2,6W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			56°	
	Fixture Power	3W	1	1.07	268
	Source Flux	236lm	2	2.14	67
	Fixture Flux	198lm	3	3.21	30
	Efficacy	76lm/W	4	4.28	17
TS1193	Imax=1171cd/klm	Imax	276cd	5	5.35	11

Power supply	Colour	2700K	3000K	3500K	4000K
900mA	○	**1T7610**	**1T7611**	**1T7612**	**1T7613**
900mA	●	**1T7622**	**1T7623**	**1T7624**	**1T7625**

Stand Alone Recessed Small 3X (85x35mm)



LED / 5,2W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			12°	
	Fixture Power	5W	1	0.20	5751
	Source Flux	474lm	2	0.40	1438
	Fixture Flux	406lm	3	0.61	639
	Efficacy	78lm/W	4	0.81	359
TS1191	Imax=12133cd/klm	Imax	5751cd	5	1.01	230

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7626**	**1T7627**	**1T7628**	**1T7629**
600mA	●	**1T7638**	**1T7639**	**1T7640**	**1T7641**

OZ

LED / 5,2W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			29°	
Fixture Power	5W	1	0.51	1511
Source Flux	474lm	2	1.02	378
Fixture Flux	397lm	3	1.53	168
Efficacy	76lm/W	4	2.04	94
TS1192 Imax=3188cd/klm	Imax	1511cd	5	2.55	60

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7630**	**1T7631**	**1T7632**	**1T7633**
600mA	●	**1T7642**	**1T7643**	**1T7644**	**1T7645**

LED / 5,2W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			56°	
Fixture Power	5W	1	1.07	538
Source Flux	474lm	2	2.14	134
Fixture Flux	397lm	3	3.21	60
Efficacy	76lm/W	4	4.28	34
TS1193 Imax=1171cd/klm	Imax	555cd	5	5.35	22

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7634**	**1T7635**	**1T7636**	**1T7637**
600mA	●	**1T7646**	**1T7647**	**1T7648**	**1T7649**

Stand Alone Recessed Small 5X (135x35mm)



LED / 8,7W / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			12°	
Fixture Power	9W	1	0.20	9598
Source Flux	791lm	2	0.40	2399
Fixture Flux	678lm	3	0.61	1066
Efficacy	78lm/W	4	0.81	600
TS1191 Imax=12133cd/klm	Imax	9598cd	5	1.01	384

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7650**	**1T7651**	**1T7652**	**1T7653**
600mA	●	**1T7662**	**1T7663**	**1T7664**	**1T7665**

LED / 8,7W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			29°	
Fixture Power	9W	1	0.51	2522
Source Flux	791lm	2	1.02	630
Fixture Flux	662lm	3	1.53	280
Efficacy	76lm/W	4	2.04	158
TS1192 Imax=3188cd/klm	Imax	2522cd	5	2.55	101

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7654**	**1T7655**	**1T7656**	**1T7657**
600mA	●	**1T7666**	**1T7667**	**1T7668**	**1T7669**

LED / 8,7W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			56°	
Fixture Power	9W	1	1.07	898
Source Flux	791lm	2	2.14	224
Fixture Flux	663lm	3	3.21	100
Efficacy	76lm/W	4	4.28	56
TS1193 Imax=1171cd/klm	Imax	926cd	5	5.35	36

Power supply	Colour	2700K	3000K	3500K	4000K
600mA	○	**1T7658**	**1T7659**	**1T7660**	**1T7661**
600mA	●	**1T7670**	**1T7671**	**1T7672**	**1T7673**

Note

Small version: to be completed with an electronic or DALI driver.

Related codes

Power Supply



	Code
900mA - for 1x version. Can power series of up to 5 OZ	**1T5295EL**
600mA - for 3x - 5x versions. Can power series of up to 3 OZ of 3x and 2 OZ of 5x	**1T8172EL**
Electronic power supply 20W, LxHxP=110x22x52mm, 110-240V, 900mA, IP20. Note: the driver is larger than the recessed hole.	



	Code
900mA - for 1x version. Can power series of up to 5 OZ	**1T7686DA**
600mA - for 3x - 5x versions. Can power series of up to 3 OZ of 3x and 2 OZ of 5x	**1T8172DA**
DALI power supply 20W, LxHxW=156x25,5x51,5mm, 230V, IP20. Note: the driver is larger than the recessed hole.	

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Stand Alone Recessed Small 1X (60x60mm)



LED / 6W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
	Fixture Power	7W	1	0.33	3138
	Source Flux	656lm	2	0.66	785
	Fixture Flux	513lm	3	0.99	349
	Efficacy	74lm/W	4	1.32	196
TS1194	Imax=4784cd/klm	Imax	3138cd	5	1.65	126

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7746EL**	**1T7747EL**	**1T7748EL**	**1T7749EL**
EL.	●	**1T7758EL**	**1T7759EL**	**1T7760EL**	**1T7761EL**
DALI	○	**1T7746DA**	**1T7747DA**	**1T7748DA**	**1T7749DA**
DALI	●	**1T7758DA**	**1T7759DA**	**1T7760DA**	**1T7761DA**

LED / 6W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
	Fixture Power	7W	1	0.61	1748
	Source Flux	839lm	2	1.22	437
	Fixture Flux	599lm	3	1.83	194
	Efficacy	87lm/W	4	2.43	109
TS1195	Imax=2083cd/klm	Imax	1748cd	5	3.04	70

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7750EL**	**1T7751EL**	**1T7752EL**	**1T7753EL**
EL.	●	**1T7762EL**	**1T7763EL**	**1T7764EL**	**1T7765EL**
DALI	○	**1T7750DA**	**1T7751DA**	**1T7752DA**	**1T7753DA**
DALI	●	**1T7762DA**	**1T7763DA**	**1T7764DA**	**1T7765DA**

LED / 6W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
	Fixture Power	7W	1	0.93	1052
	Source Flux	839lm	2	1.85	263
	Fixture Flux	649lm	3	2.78	117
	Efficacy	94lm/W	4	3.71	66
TS1196	Imax=1254cd/klm	Imax	1052cd	5	4.64	42

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7754EL**	**1T7755EL**	**1T7756EL**	**1T7757EL**
EL.	●	**1T7766EL**	**1T7767EL**	**1T7768EL**	**1T7769EL**
DALI	○	**1T7754DA**	**1T7755DA**	**1T7756DA**	**1T7757DA**
DALI	●	**1T7766DA**	**1T7767DA**	**1T7768DA**	**1T7769DA**

Stand Alone Recessed Small 3X (160x60mm)



LED / 18W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
	Fixture Power	20W	1	0.33	9415
	Source Flux	1968lm	2	0.66	2354
	Fixture Flux	1538lm	3	0.99	1046
	Efficacy	77lm/W	4	1.32	588
TS1194	Imax=4784cd/klm	Imax	9415cd	5	1.65	377

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7770EL**	**1T7771EL**	**1T7772EL**	**1T7773EL**
EL.	●	**1T7782EL**	**1T7783EL**	**1T7784EL**	**1T7785EL**
DALI	○	**1T7770DA**	**1T7771DA**	**1T7772DA**	**1T7773DA**
DALI	●	**1T7782DA**	**1T7783DA**	**1T7784DA**	**1T7785DA**

OZ

LED / 18W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
Fixture Power	20W	1		0.61	5243
Source Flux	2517lm	2		1.22	1311
Fixture Flux	1797lm	3		1.83	583
Efficacy	90lm/W	4		2.43	328
TS1195 Imax=2083cd/klm	Imax	5243cd	5	3.04	210

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7774EL**	**1T7775EL**	**1T7776EL**	**1T7777EL**
EL.	●	**1T7786EL**	**1T7787EL**	**1T7788EL**	**1T7789EL**
DALI	○	**1T7774DA**	**1T7775DA**	**1T7776DA**	**1T7777DA**
DALI	●	**1T7786DA**	**1T7787DA**	**1T7788DA**	**1T7789DA**

LED / 18W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
Fixture Power	20W	1		0.93	3157
Source Flux	2517lm	2		1.85	789
Fixture Flux	1947lm	3		2.78	351
Efficacy	97lm/W	4		3.71	197
TS1196 Imax=1254cd/klm	Imax	3157cd	5	4.64	126

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7778EL**	**1T7779EL**	**1T7780EL**	**1T7781EL**
EL.	●	**1T7790EL**	**1T7791EL**	**1T7792EL**	**1T7793EL**
DALI	○	**1T7778DA**	**1T7779DA**	**1T7780DA**	**1T7781DA**
DALI	●	**1T7790DA**	**1T7791DA**	**1T7792DA**	**1T7793DA**

Stand Alone Recessed Large 5X (260x60mm)



LED / 30W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power	34W	1		0.33	15692
Source Flux	3280lm	2		0.66	3923
Fixture Flux	2563lm	3		0.99	1744
Efficacy	75lm/W	4		1.32	981
TS1194 Imax=4784cd/klm	Imax	15692cd	5	1.65	628

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7794EL**	**1T7795EL**	**1T7796EL**	**1T7797EL**
EL.	●	**1T7806EL**	**1T7807EL**	**1T7808EL**	**1T7809EL**
DALI	○	**1T7794DA**	**1T7795DA**	**1T7796DA**	**1T7797DA**
DALI	●	**1T7806DA**	**1T7807DA**	**1T7808DA**	**1T7809DA**

LED / 30W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
Fixture Power	34W	1		0.61	8739
Source Flux	4195lm	2		1.22	2185
Fixture Flux	2996lm	3		1.83	971
Efficacy	88lm/W	4		2.43	546
TS1195 Imax=2083cd/klm	Imax	8739cd	5	3.04	350

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7798EL**	**1T7799EL**	**1T7800EL**	**1T7801EL**
EL.	●	**1T7810EL**	**1T7811EL**	**1T7812EL**	**1T7813EL**
DALI	○	**1T7798DA**	**1T7799DA**	**1T7800DA**	**1T7801DA**
DALI	●	**1T7810DA**	**1T7811DA**	**1T7812DA**	**1T7813DA**

LED / 30W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
Fixture Power	34W	1		0.93	5262
Source Flux	4195lm	2		1.85	1315
Fixture Flux	3246lm	3		2.78	585
Efficacy	95lm/W	4		3.71	329
TS1196 Imax=1254cd/klm	Imax	5262cd	5	4.64	210

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7802EL**	**1T7803EL**	**1T7804EL**	**1T7805EL**
EL.	●	**1T7814EL**	**1T7815EL**	**1T7816EL**	**1T7817EL**
DALI	○	**1T7802DA**	**1T7803DA**	**1T7804DA**	**1T7805DA**
DALI	●	**1T7814DA**	**1T7815DA**	**1T7816DA**	**1T7817DA**

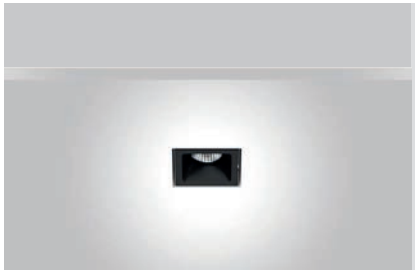

Stand Alone Trimless Small 1X (30x30mm)



LED / 2,6W / SP



	3000K	H(m)	D(m)	Emax(lx)
	Ra90		12°	
Fixture Power	3W	1	0.20	2863
Source Flux	236lm	2	0.40	716
Fixture Flux	202lm	3	0.61	318
Efficacy	77lm/W	4	0.81	179
Imax	2863cd	5	1.01	115

Power supply	2700K	3000K	3500K	4000K
900mA	**1T7674**	**1T7675**	**1T7676**	**1T7677**

LED / 2,6W / FL



	3000K	H(m)	D(m)	Emax(lx)
	Ra90		29°	
Fixture Power	3W	1	0.51	752
Source Flux	236lm	2	1.02	188
Fixture Flux	197lm	3	1.53	84
Efficacy	76lm/W	4	2.04	47
Imax	752cd	5	2.55	30

Power supply	2700K	3000K	3500K	4000K
900mA	**1T7678**	**1T7679**	**1T7680**	**1T7681**

LED / 2,6W / WFL



	3000K	H(m)	D(m)	Emax(lx)
	Ra90		56°	
Fixture Power	3W	1	1.07	268
Source Flux	236lm	2	2.14	67
Fixture Flux	198lm	3	3.21	30
Efficacy	76lm/W	4	4.28	17
Imax	276cd	5	5.35	11

Power supply	2700K	3000K	3500K	4000K
900mA	**1T7682**	**1T7683**	**1T7684**	**1T7685**

Stand Alone Trimless Small 3X (80x30mm)



LED / 5,2W / SP



	3000K	H(m)	D(m)	Emax(lx)
	Ra90		12°	
Fixture Power	5W	1	0.20	5751
Source Flux	474lm	2	0.40	1438
Fixture Flux	406lm	3	0.61	639
Efficacy	78lm/W	4	0.81	359
Imax	5751cd	5	1.01	230

Power supply	2700K	3000K	3500K	4000K
600mA	**1T7698**	**1T7699**	**1T7700**	**1T7701**

LED / 5,2W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			29°	
Fixture Power	5W		1	0.51	1511
Source Flux	474lm		2	1.02	378
Fixture Flux	397lm		3	1.53	168
Efficacy	76lm/W		4	2.04	94
TS1192	Imax=3188cd/klm	Imax	1511cd	5	2.55	60

Power supply	Driver	2700K	3000K	3500K	4000K
600mA		**1T7702**	**1T7703**	**1T7704**	**1T7705**

LED / 5,2W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			56°	
Fixture Power	5W		1	1.07	538
Source Flux	474lm		2	2.14	134
Fixture Flux	397lm		3	3.21	60
Efficacy	76lm/W		4	4.28	34
TS1193	Imax=1171cd/klm	Imax	555cd	5	5.35	22

Power supply	Driver	2700K	3000K	3500K	4000K
600mA		**1T7706**	**1T7707**	**1T7708**	**1T7709**

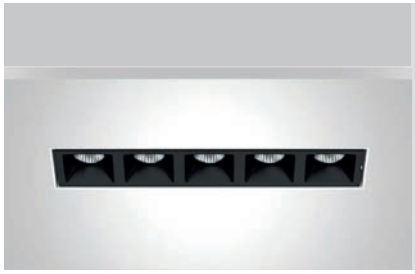

Stand Alone Trimless Small 5X (130x30mm)



LED / 13W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			12°	
Fixture Power	9W		1	0.20	9598
Source Flux	791lm		2	0.40	2399
Fixture Flux	678lm		3	0.61	1066
Efficacy	78lm/W		4	0.81	600
TS1191	Imax=12133cd/klm	Imax	9598cd	5	1.01	384

Power supply	2700K	3000K	3500K	4000K
600mA	**1T7722**	**1T7723**	**1T7724**	**1T7725**

LED / 13W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			29°	
Fixture Power	9W		1	0.51	2522
Source Flux	791lm		2	1.02	630
Fixture Flux	662lm		3	1.53	280
Efficacy	76lm/W		4	2.04	158
TS1192	Imax=3188cd/klm	Imax	2522cd	5	2.55	101

Power supply	2700K	3000K	3500K	4000K
600mA	**1T7726**	**1T7727**	**1T7728**	**1T7729**

LED / 13W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			56°	
Fixture Power	9W		1	1.07	898
Source Flux	791lm		2	2.14	224
Fixture Flux	663lm		3	3.21	100
Efficacy	76lm/W		4	4.28	56
TS1193	Imax=1171cd/klm	Imax	926cd	5	5.35	36

Power supply	2700K	3000K	3500K	4000K
600mA	**1T7730**	**1T7731**	**1T7732**	**1T7733**

Note

Small version: to be completed with an electronic or DALI driver.

OZ

Related codes

Power Supply



	Code
900mA - for 1x version. Can power series of up to 5 OZ	**1T5295EL**
600mA - for 3x - 5x versions. Can power series of up to 3 OZ of 3x and 2 OZ of 5x	**1T8172EL**
Electronic power supply 20W, LxHxP=110x22x52mm, 110-240V, 900mA, IP20. Note: the driver is larger than the recessed hole.	



	Code
900mA - for 1x version. Can power series of up to 5 OZ	**1T7686DA**
600mA - for 3x - 5x versions. Can power series of up to 3 OZ of 3x and 2 OZ of 5x	**1T8172DA**
DALI power supply 20W, LxHxW=156x25,5x51,5mm, 230V, IP20. Note: the driver is larger than the recessed hole.	

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Stand Alone Trimless Large 1X (53x53mm)



LED / 6W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
	Fixture Power	7W	1	0.33	3138
	Source Flux	656lm	2	0.66	785
	Fixture Flux	513lm	3	0.99	349
	Efficacy	74lm/W	4	1.32	196
TS1194	Imax=4784cd/klm	Imax	5	1.65	126

Driver	2700K	3000K	3500K	4000K
EL.	**1T7818EL**	**1T7819EL**	**1T7820EL**	**1T7821EL**
DALI	**1T7818DA**	**1T7819DA**	**1T7820DA**	**1T7821DA**

LED / 6W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
	Fixture Power	7W	1	0.61	1748
	Source Flux	839lm	2	1.22	437
	Fixture Flux	599lm	3	1.83	194
	Efficacy	87lm/W	4	2.43	109
TS1195	Imax=2083cd/klm	Imax	5	3.04	70

Driver	2700K	3000K	3500K	4000K
EL.	**1T7822EL**	**1T7823EL**	**1T7824EL**	**1T7825EL**
DALI	**1T7822DA**	**1T7823DA**	**1T7824DA**	**1T7825DA**

LED / 6W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
	Fixture Power	7W	1	0.93	1052
	Source Flux	839lm	2	1.85	263
	Fixture Flux	649lm	3	2.78	117
	Efficacy	94lm/W	4	3.71	66
TS1196	Imax=1254cd/klm	Imax	5	4.64	42

Driver	2700K	3000K	3500K	4000K
EL.	**1T7826EL**	**1T7827EL**	**1T7828EL**	**1T7829EL**
DALI	**1T7826DA**	**1T7827DA**	**1T7828DA**	**1T7829DA**

Stand Alone Trimless Large 3X (153x53mm)



LED / 18W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
	Fixture Power	20W	1	0.33	9415
	Source Flux	1968lm	2	0.66	2354
	Fixture Flux	1538lm	3	0.99	1046
	Efficacy	77lm/W	4	1.32	588
TS1194	Imax=4784cd/klm	Imax	5	1.65	377

Driver	2700K	3000K	3500K	4000K
EL.	**1T7842EL**	**1T7843EL**	**1T7844EL**	**1T7845EL**
DALI	**1T7842DA**	**1T7843DA**	**1T7844DA**	**1T7845DA**

LED / 18W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			34°	
Fixture Power	20W	1	0.61	5243
Source Flux	2517lm	2	1.22	1311
Fixture Flux	1797lm	3	1.83	583
Efficacy	90lm/W	4	2.43	328
TS1195 Imax=2083cd/klm	Imax	5243cd	5	3.04	210

Driver	2700K	3000K	3500K	4000K
EL.	**1T7846EL**	**1T7847EL**	**1T7848EL**	**1T7849EL**
DALI	**1T7846DA**	**1T7847DA**	**1T7848DA**	**1T7849DA**

LED / 18W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			50°	
Fixture Power	20W	1	0.93	3157
Source Flux	2517lm	2	1.85	789
Fixture Flux	1947lm	3	2.78	351
Efficacy	97lm/W	4	3.71	197
TS1196 Imax=1254cd/klm	Imax	3157cd	5	4.64	126

Driver	2700K	3000K	3500K	4000K
EL.	**1T7850EL**	**1T7851EL**	**1T7852EL**	**1T7853EL**
DALI	**1T7850DA**	**1T7851DA**	**1T7852DA**	**1T7853DA**

Stand Alone Trimless Large 5X (253x53mm)



LED / 30W / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			19°	
Fixture Power	34W	1	0.33	15692
Source Flux	3280lm	2	0.66	3923
Fixture Flux	2563lm	3	0.99	1744
Efficacy	75lm/W	4	1.32	981
TS1194 Imax=4784cd/klm	Imax	15692cd	5	1.65	628

Driver	2700K	3000K	3500K	4000K
EL.	**1T7866EL**	**1T7867EL**	**1T7868EL**	**1T7869EL**
DALI	**1T7866DA**	**1T7867DA**	**1T7868DA**	**1T7869DA**

LED / 30W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			34°	
Fixture Power	34W	1	0.61	8739
Source Flux	4195lm	2	1.22	2185
Fixture Flux	2996lm	3	1.83	971
Efficacy	88lm/W	4	2.43	546
TS1195 Imax=2083cd/klm	Imax	8739cd	5	3.04	350

Driver	2700K	3000K	3500K	4000K
EL.	**1T7870EL**	**1T7871EL**	**1T7872EL**	**1T7873EL**
DALI	**1T7870DA**	**1T7871DA**	**1T7872DA**	**1T7873DA**

LED / 30W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			50°	
Fixture Power	34W	1	0.93	5262
Source Flux	4195lm	2	1.85	1315
Fixture Flux	3246lm	3	2.78	585
Efficacy	95lm/W	4	3.71	329
TS1196 Imax=1254cd/klm	Imax	5262cd	5	4.64	210

Driver	2700K	3000K	3500K	4000K
EL.	**1T7874EL**	**1T7875EL**	**1T7876EL**	**1T7877EL**
DALI	**1T7874DA**	**1T7875DA**	**1T7876DA**	**1T7877DA**

STORE

Gimbal

GENERAL INFO
Recessed adjustable projector.
Gimbal System to adjust the optical unit 30° vertically and 355° horizontally.

LED
Chip on board
From 2257lm to 4385lm
3000K – 4000K
Ra84 - Ra97

PRODUCT EFFICACY
Up to 119lm/W

OPTICS
NSP – SP – FL – MWFL – WFL

OPTICS
Electronic - DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Painted die-cast aluminium projector body and external ring. Polycarbonate internal ring.

Range of recessed fixtures available in two different sizes, designed to meet the particular needs of the retail market where excellent performance, minimal design and controlled light are required.

The light units can be single, and multi-optic 1x, 2x and 3x. Mini versions available with a frame with a Trimless finish.

Also available in a projector version.

	STORE with springs	STORE with magnets	STORE MINI with springs	STORE MINI with magnets
	160x160mm	160x160mm	145x145mm	145x145mm
1x	without a frame	only with a frame accessory	with or without a trimless frame accessory	only with a frame accessory
2x	no	only with a frame accessory	with or without a trimless frame accessory	only with a frame accessory
3x	no	only with a frame accessory	with or without a trimless frame accessory	only with a frame accessory

Bruyninx DS Store

Photographer
Eddy Vanoppen

Country
Hasselt - Belgium

Gimbal modules with springs



LED / 19W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		22W	1	0.24	23022
Source Flux		2935lm	2	0.48	5755
Fixture Flux		2494lm	3	0.72	2558
Efficacy		112lm/W	4	0.96	1439
TS947	Imax=7844cd/klm	Imax	23022cd	5	1.20	921

Driver	Colour	3000K	4000K
EL.	○	**1T5114EL**	**1T5116EL**
EL.	●	**1T5098EL**	**1T5100EL**
DALI	○	**1T5114DA**	**1T5116DA**
DALI	●	**1T5098DA**	**1T5100DA**

LED / 19W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		22W	1	0.24	17704
Source Flux		2257lm	2	0.48	4426
Fixture Flux		1918lm	3	0.72	1967
Efficacy		86lm/W	4	0.96	1106
TS947	Imax=7844cd/klm	Imax	17704cd	5	1.20	708

Driver	Colour	3000K	4000K
EL.	○	**1T5115EL**	**1T5117EL**
EL.	●	**1T5099EL**	**1T5101EL**
DALI	○	**1T5115DA**	**1T5117DA**
DALI	●	**1T5099DA**	**1T5101DA**

LED / 19W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		22W	1	0.49	9061
Source Flux		2935lm	2	0.97	2265
Fixture Flux		2486lm	3	1.46	1007
Efficacy		112lm/W	4	1.95	566
TS948	Imax=3087cd/klm	Imax	9061cd	5	2.43	362

Driver	Colour	3000K	4000K
EL.	○	**1T5118EL**	**1T5120EL**
EL.	●	**1T5102EL**	**1T5104EL**
DALI	○	**1T5118DA**	**1T5120DA**
DALI	●	**1T5102DA**	**1T5104DA**

LED / 19W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power		22W	1	0.49	6968
Source Flux		2257lm	2	0.97	1742
Fixture Flux		1912lm	3	1.46	774
Efficacy		86lm/W	4	1.95	435
TS948	Imax=3087cd/klm	Imax	6968cd	5	2.43	279

Driver	Colour	3000K	4000K
EL.	○	**1T5119EL**	**1T5121EL**
EL.	●	**1T5103EL**	**1T5105EL**
DALI	○	**1T5119DA**	**1T5121DA**
DALI	●	**1T5103DA**	**1T5105DA**

LED / 19W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		22W	1	0.82	4770
Source Flux		2935lm	2	1.64	1193
Fixture Flux		2550lm	3	2.46	530
Efficacy		115lm/W	4	3.28	298
TS949	Imax=1655cd/klm	Imax	4856cd	5	4.10	191

Driver	Colour	3000K	4000K
EL.	○	**1T5122EL**	**1T5124EL**
EL.	●	**1T5106EL**	**1T5108EL**
DALI	○	**1T5122DA**	**1T5124DA**
DALI	●	**1T5106DA**	**1T5108DA**

LED / 19W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		22W	1	0.82	3668
Source Flux		2257lm	2	1.64	917
Fixture Flux		1961lm	3	2.46	408
Efficacy		88lm/W	4	3.28	229
TS949	Imax=1655cd/klm	Imax	3734cd	5	4.10	147

Driver	Colour	3000K	4000K
EL.	○	**1T5123EL**	**1T5125EL**
EL.	●	**1T5107EL**	**1T5109EL**
DALI	○	**1T5123DA**	**1T5125DA**
DALI	●	**1T5107DA**	**1T5109DA**

LED / 19W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		22W	1	1.13	3318
Source Flux		2935lm	2	2.26	830
Fixture Flux		2585lm	3	3.39	369
Efficacy		116lm/W	4	4.51	207
TS950	Imax=1141cd/klm	Imax	3350cd	5	5.64	133

Driver	Colour	3000K	4000K
EL.	○	**1T5126EL**	**1T5128EL**
EL.	●	**1T5110EL**	**1T5112EL**
DALI	○	**1T5126DA**	**1T5128DA**
DALI	●	**1T5110DA**	**1T5112DA**

LED / 19W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		22W	1	1.13	2552
Source Flux		2257lm	2	2.26	638
Fixture Flux		1988lm	3	3.39	284
Efficacy		90lm/W	4	4.51	159
TS950	Imax=1141cd/klm	Imax	2576cd	5	5.64	102

Driver	Colour	3000K	4000K
EL.	○	**1T5127EL**	**1T5129EL**
EL.	●	**1T5111EL**	**1T5113EL**
DALI	○	**1T5127DA**	**1T5129DA**
DALI	●	**1T5111DA**	**1T5113DA**

LED / 33W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		36W	1	0.24	33552
Source Flux		4277lm	2	0.48	8388
Fixture Flux		3635lm	3	0.72	3728
Efficacy		102lm/W	4	0.96	2097
TS951	Imax=7845cd/klm	Imax	33552cd	5	1.20	1342

Driver	Colour	3000K	4000K
EL.	○	**1T5146EL**	**1T5148EL**
EL.	●	**1T5130EL**	**1T5132EL**
DALI	○	**1T5146DA**	**1T5148DA**
DALI	●	**1T5130DA**	**1T5132DA**

LED / 33W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		36W	1	0.24	25809
Source Flux		3290lm	2	0.48	6452
Fixture Flux		2796lm	3	0.72	2868
Efficacy		78lm/W	4	0.96	1613
TS951	Imax=7845cd/klm	Imax	25809cd	5	1.20	1032

Driver	Colour	3000K	4000K
EL.	○	**1T5147EL**	**1T5149EL**
EL.	●	**1T5131EL**	**1T5133EL**
DALI	○	**1T5147DA**	**1T5149DA**
DALI	●	**1T5131DA**	**1T5133DA**

LED / 33W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		36W	1	0.49	13204
Source Flux		4277lm	2	0.97	3301
Fixture Flux		3622lm	3	1.46	1467
Efficacy		101lm/W	4	1.95	825
TS952	Imax=3087cd/klm	Imax	13204cd	5	2.43	528

Driver	Colour	3000K	4000K
EL.	○	**1T5150EL**	**1T5152EL**
EL.	●	**1T5134EL**	**1T5136EL**
DALI	○	**1T5150DA**	**1T5152DA**
DALI	●	**1T5134DA**	**1T5136DA**

STORE

LED / 33W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power		36W	1	0.49	10157
Source Flux		3290lm	2	0.97	2539
Fixture Flux		2786lm	3	1.46	1129
Efficacy		78lm/W	4	1.95	635
TS952	Imax=3087cd/klm	Imax	5	2.43	406

Driver	Colour	3000K	4000K
EL.	○	**1T5151EL**	**1T5153EL**
EL.	●	**1T5135EL**	**1T5137EL**
DALI	○	**1T5151DA**	**1T5153DA**
DALI	●	**1T5135DA**	**1T5137DA**

LED / 33W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		36W	1	0.82	6951
Source Flux		4277lm	2	1.64	1738
Fixture Flux		3716lm	3	2.46	772
Efficacy		104lm/W	4	3.28	434
TS953	Imax=1655cd/klm	Imax	5	4.10	278

Driver	Colour	3000K	4000K
EL.	○	**1T5154EL**	**1T5156EL**
EL.	●	**1T5138EL**	**1T5140EL**
DALI	○	**1T5154DA**	**1T5156DA**
DALI	●	**1T5138DA**	**1T5140DA**

LED / 33W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		36W	1	0.82	5347
Source Flux		3290lm	2	1.64	1337
Fixture Flux		2859lm	3	2.46	594
Efficacy		80lm/W	4	3.28	334
TS953	Imax=1655cd/klm	Imax	5	4.10	214

Driver	Colour	3000K	4000K
EL.	○	**1T5155EL**	**1T5157EL**
EL.	●	**1T5139EL**	**1T5141EL**
DALI	○	**1T5155DA**	**1T5157DA**
DALI	●	**1T5139DA**	**1T5141DA**

LED / 33W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		36W	1	1.13	4836
Source Flux		4277lm	2	2.26	1209
Fixture Flux		3768lm	3	3.39	537
Efficacy		106lm/W	4	4.51	302
TS954	Imax=1142cd/klm	Imax	5	5.64	193

Driver	Colour	3000K	4000K
EL.	○	**1T5158EL**	**1T5160EL**
EL.	●	**1T5142EL**	**1T5144EL**
DALI	○	**1T5158DA**	**1T5160DA**
DALI	●	**1T5142DA**	**1T5144DA**

LED / 33W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		36W	1	1.13	3720
Source Flux		3290lm	2	2.26	930
Fixture Flux		2898lm	3	3.39	413
Efficacy		81lm/W	4	4.51	233
TS954	Imax=1142cd/klm	Imax	5	5.64	149

Driver	Colour	3000K	4000K
EL.	○	**1T5159EL**	**1T5161EL**
EL.	●	**1T5143EL**	**1T5145EL**
DALI	○	**1T5159DA**	**1T5161DA**
DALI	●	**1T5143DA**	**1T5145DA**

Gimbal modules with magnets



LED / 19W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	22W		1	0.24	23022
Source Flux	2935lm		2	0.48	5755
Fixture Flux	2494lm		3	0.72	2558
Efficacy	112lm/W		4	0.96	1439
TS947	Imax=7844cd/klm	Imax	5	1.20	921

Driver	Colour	3000K	4000K
EL.	○	**1T6445EL**	**1T6447EL**
EL.	●	**1T6429EL**	**1T6431EL**
DALI	○	**1T6445DA**	**1T6447DA**
DALI	●	**1T6429DA**	**1T6431DA**

LED / 19W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power	22W		1	0.24	17704
Source Flux	2257lm		2	0.48	4426
Fixture Flux	1918lm		3	0.72	1967
Efficacy	86lm/W		4	0.96	1106
TS947	Imax=7844cd/klm	Imax	5	1.20	708

Driver	Colour	3000K	4000K
EL.	○	**1T6446EL**	**1T6448EL**
EL.	●	**1T6430EL**	**1T6432EL**
DALI	○	**1T6446DA**	**1T6448DA**
DALI	●	**1T6430DA**	**1T6432DA**

LED / 19W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power	22W		1	0.49	9061
Source Flux	2935lm		2	0.97	2265
Fixture Flux	2486lm		3	1.46	1007
Efficacy	112lm/W		4	1.95	566
TS948	Imax=3087cd/klm	Imax	5	2.43	362

Driver	Colour	3000K	4000K
EL.	○	**1T6449EL**	**1T6451EL**
EL.	●	**1T6433EL**	**1T6435EL**
DALI	○	**1T6449DA**	**1T6451DA**
DALI	●	**1T6433DA**	**1T6435DA**

LED / 19W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power	22W		1	0.49	6968
Source Flux	2257lm		2	0.97	1742
Fixture Flux	1912lm		3	1.46	774
Efficacy	86lm/W		4	1.95	435
TS948	Imax=3087cd/klm	Imax	5	2.43	279

Driver	Colour	3000K	4000K
EL.	○	**1T6450EL**	**1T6452EL**
EL.	●	**1T6434EL**	**1T6436EL**
DALI	○	**1T6450DA**	**1T6452DA**
DALI	●	**1T6434DA**	**1T6436DA**

LED / 19W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	22W		1	0.82	4770
Source Flux	2935lm		2	1.64	1193
Fixture Flux	2550lm		3	2.46	530
Efficacy	115lm/W		4	3.28	298
TS949	Imax=1655cd/klm	Imax	5	4.10	191

Driver	Colour	3000K	4000K
EL.	○	**1T6453EL**	**1T6455EL**
EL.	●	**1T6437EL**	**1T6439EL**
DALI	○	**1T6453DA**	**1T6455DA**
DALI	●	**1T6437DA**	**1T6439DA**

STORE

LED / 19W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		22W	1	0.82	3668
Source Flux		2257lm	2	1.64	917
Fixture Flux		1961lm	3	2.46	408
Efficacy		88lm/W	4	3.28	229
TS949	Imax=1655cd/klm	Imax	3734cd	5	4.10	147

Driver	Colour	3000K	4000K
EL.	○	**1T6454EL**	**1T6456EL**
EL.	●	**1T6438EL**	**1T6440EL**
DALI	○	**1T6454DA**	**1T6456DA**
DALI	●	**1T6438DA**	**1T6440DA**

LED / 19W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		22W	1	1.13	3318
Source Flux		2935lm	2	2.26	830
Fixture Flux		2585lm	3	3.39	369
Efficacy		116lm/W	4	4.51	207
TS950	Imax=1141cd/klm	Imax	3350cd	5	5.64	133

Driver	Colour	3000K	4000K
EL.	○	**1T6457EL**	**1T6459EL**
EL.	●	**1T6441EL**	**1T6443EL**
DALI	○	**1T6457DA**	**1T6459DA**
DALI	●	**1T6441DA**	**1T6443DA**

LED / 19W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		22W	1	1.13	2552
Source Flux		2257lm	2	2.26	638
Fixture Flux		1988lm	3	3.39	284
Efficacy		90lm/W	4	4.51	159
TS950	Imax=1141cd/klm	Imax	2576cd	5	5.64	102

Driver	Colour	3000K	4000K
EL.	○	**1T6458EL**	**1T6460EL**
EL.	●	**1T6442EL**	**1T6444EL**
DALI	○	**1T6458DA**	**1T6460DA**
DALI	●	**1T6442DA**	**1T6444DA**

LED / 33W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		36W	1	0.24	33552
Source Flux		4277lm	2	0.48	8388
Fixture Flux		3635lm	3	0.72	3728
Efficacy		102lm/W	4	0.96	2097
TS951	Imax=7845cd/klm	Imax	33552cd	5	1.20	1342

Driver	Colour	3000K	4000K
EL.	○	**1T6477EL**	**1T6479EL**
EL.	●	**1T6461EL**	**1T6463EL**
DALI	○	**1T6477DA**	**1T6479DA**
DALI	●	**1T6461DA**	**1T6463DA**

LED / 33W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		36W	1	0.24	25809
Source Flux		3290lm	2	0.48	6452
Fixture Flux		2796lm	3	0.72	2868
Efficacy		78lm/W	4	0.96	1613
TS951	Imax=7845cd/klm	Imax	25809cd	5	1.20	1032

Driver	Colour	3000K	4000K
EL.	○	**1T6478EL**	**1T6480EL**
EL.	●	**1T6462EL**	**1T6464EL**
DALI	○	**1T6478DA**	**1T6480DA**
DALI	●	**1T6462DA**	**1T6464DA**

LED / 33W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		36W	1	0.49	13204
Source Flux		4277lm	2	0.97	3301
Fixture Flux		3622lm	3	1.46	1467
Efficacy		101lm/W	4	1.95	825
TS952	Imax=3087cd/klm	Imax	13204cd	5	2.43	528

Driver	Colour	3000K	4000K
EL.	○	**1T6481EL**	**1T6483EL**
EL.	●	**1T6465EL**	**1T6467EL**
DALI	○	**1T6481DA**	**1T6483DA**
DALI	●	**1T6465DA**	**1T6467DA**

LED / 33W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power	36W		1	0.49	10157
Source Flux	3290lm		2	0.97	2539
Fixture Flux	2786lm		3	1.46	1129
Efficacy	78lm/W		4	1.95	635
TS952	Imax=3087cd/klm	Imax	5	2.43	406

Driver	Colour	3000K	4000K
EL.	○	**1T6482EL**	**1T6484EL**
EL.	●	**1T6466EL**	**1T6468EL**
DALI	○	**1T6482DA**	**1T6484DA**
DALI	●	**1T6466DA**	**1T6468DA**

LED / 33W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power	36W		1	0.82	6951
Source Flux	4277lm		2	1.64	1738
Fixture Flux	3716lm		3	2.46	772
Efficacy	104lm/W		4	3.28	434
TS953	Imax=1655cd/klm	Imax	5	4.10	278

Driver	Colour	3000K	4000K
EL.	○	**1T6485EL**	**1T6487EL**
EL.	●	**1T6469EL**	**1T6471EL**
DALI	○	**1T6485DA**	**1T6487DA**
DALI	●	**1T6469DA**	**1T6471DA**

LED / 33W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power	36W		1	0.82	5347
Source Flux	3290lm		2	1.64	1337
Fixture Flux	2859lm		3	2.46	594
Efficacy	80lm/W		4	3.28	334
TS953	Imax=1655cd/klm	Imax	5	4.10	214

Driver	Colour	3000K	4000K
EL.	○	**1T6486EL**	**1T6488EL**
EL.	●	**1T6470EL**	**1T6472EL**
DALI	○	**1T6486DA**	**1T6488DA**
DALI	●	**1T6470DA**	**1T6472DA**

LED / 33W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power	36W		1	1.13	4836
Source Flux	4277lm		2	2.26	1209
Fixture Flux	3768lm		3	3.39	537
Efficacy	106lm/W		4	4.51	302
TS954	Imax=1142cd/klm	Imax	5	5.64	193

Driver	Colour	3000K	4000K
EL.	○	**1T6489EL**	**1T6491EL**
EL.	●	**1T6473EL**	**1T6475EL**
DALI	○	**1T6489DA**	**1T6491DA**
DALI	●	**1T6473DA**	**1T6475DA**

LED / 33W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power	36W		1	1.13	3720
Source Flux	3290lm		2	2.26	930
Fixture Flux	2898lm		3	3.39	413
Efficacy	81lm/W		4	4.51	233
TS954	Imax=1142cd/klm	Imax	5	5.64	149

Driver	Colour	3000K	4000K
EL.	○	**1T6490EL**	**1T6492EL**
EL.	●	**1T6474EL**	**1T6476EL**
DALI	○	**1T6490DA**	**1T6492DA**
DALI	●	**1T6474DA**	**1T6476DA**

Nota: Version with magnets to be complet with insertion box.

Related codes

Insertion Box



Cutout hole	Colour	Code
180x180	○	**1T6496**
180x180	●	**1T6493**

Frame 1x.



Cutout hole	Colour	Code
335x180	○	**1T6497**
335x180	●	**1T6494**

Frame 2x.

STORE



	Cutout hole	Colour	Code
	485x180	○	**1T6498**
	485x180	●	**1T6495**

Frame 3x.

Accessories

Filter



	Filter	Ø	Code
	Red	70	**1T1712**
	Green	70	**1T1713**
	Blue	70	**1T1714**
	Yellow	70	**1T1715**
	Magenta	70	**1T1716**

Flat glass interference chromatic filter.
To be completed with an additional holder ring.



	Ø	Code
	70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.



	Ø	Code
	70	**1T1709**

Flat glass wired refractive diffusive filter.
This softens the luminous effect.
To be completed with an additional holder ring.



	Filter	Ø	Code
	Halogen +	70	**1T6506**
	Vivid +	70	**1T6507**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Filter	Ø	Code
Meat	70	**1T6508**
Fish	70	**1T6509**
Bread	70	**1T6510**
Vegetables	70	**1T6511**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be completed with an additional holder ring.
1T6508
To be used only with 3000K and Ra80 fixtures.
1T6509
To be used only with 4000K and Ra80 fixtures.
1T6510
To be used only with 3000K and Ra80 fixtures.
1T6511
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	70	**1T6512**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.

Screen



Ø	Code
80	**1T6522**

Protective screen.

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring for Cloud, Ray Mini, Store, Label 9 and Keplero Mini HE.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

STORE

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Mini Gimbal modules with springs



LED / 2,7W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
	Fixture Power	5W	1	0.15	4436
	Source Flux	200lm	2	0.30	1109
	Fixture Flux	163lm	3	0.45	493
	Efficacy	31lm/W	4	0.60	277
TS965	Imax=22178cd/klm	Imax	4436cd	5	0.75	177

Driver	Colour	3000K	4000K
EL.	○	**1T4934EL**	**1T4935EL**
EL.	●	**1T4926EL**	**1T4927EL**
DALI	○	**1T4934DA**	**1T4935DA**
DALI	●	**1T4926DA**	**1T4927DA**

LED / 11W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
	Fixture Power	15W	1	0.27	16914
	Source Flux	1786lm	2	0.53	4229
	Fixture Flux	1336lm	3	0.80	1879
	Efficacy	90lm/W	4	1.07	1057
TS966	Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	○	**1T4936EL**	**1T4937EL**
EL.	●	**1T4928EL**	**1T4929EL**
DALI	○	**1T4936DA**	**1T4937DA**
DALI	●	**1T4928DA**	**1T4929DA**

LED / 18W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
	Fixture Power	20W	1	0.43	8803
	Source Flux	2466lm	2	0.87	2201
	Fixture Flux	1800lm	3	1.30	978
	Efficacy	89lm/W	4	1.73	550
TS969	Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	○	**1T4948EL**	**1T4949EL**
EL.	●	**1T4942EL**	**1T4943EL**
DALI	○	**1T4948DA**	**1T4949DA**
DALI	●	**1T4942DA**	**1T4943DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
	Fixture Power	14W	1	0.54	4825
	Source Flux	1837lm	2	1.09	1206
	Fixture Flux	1315lm	3	1.63	536
	Efficacy	97lm/W	4	2.17	302
TS967	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	○	**1T4938EL**	**1T4939EL**
EL.	●	**1T4930EL**	**1T4931EL**
DALI	○	**1T4938DA**	**1T4939DA**
DALI	●	**1T4930DA**	**1T4931DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
	Fixture Power	14W	1	0.90	2476
	Source Flux	1837lm	2	1.80	619
	Fixture Flux	1520lm	3	2.69	275
	Efficacy	113lm/W	4	3.59	155
TS968	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	○	**1T4940EL**	**1T4941EL**
EL.	●	**1T4932EL**	**1T4933EL**
DALI	○	**1T4940DA**	**1T4941DA**
DALI	●	**1T4932DA**	**1T4933DA**

STORE

LED / 18W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	20W	1	0.90	3323
Source Flux	2466lm	2	1.80	831
Fixture Flux	2041lm	3	2.69	369
Efficacy	101lm/W	4	3.59	208
TS970 Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	○	**1T4950EL**	**1T4951EL**
EL.	●	**1T4944EL**	**1T4945EL**
DALI	○	**1T4950DA**	**1T4951DA**
DALI	●	**1T4944DA**	**1T4945DA**

LED / 18W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			60°	
Fixture Power	20W	1	1.16	2406
Source Flux	2466lm	2	2.32	601
Fixture Flux	1979lm	3	3.47	267
Efficacy	98lm/W	4	4.63	150
TS971 Imax=976cd/klm	Imax	2407cd	5	5.79	96

Driver	Colour	3000K	4000K
EL.	○	**1T4952EL**	**1T4953EL**
EL.	●	**1T4946EL**	**1T4947EL**
DALI	○	**1T4952DA**	**1T4953DA**
DALI	●	**1T4946DA**	**1T4947DA**

Mini Gimbal modules with magnets



LED / 2,7W / LENS / NSP



3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	5W	1	0.15	4436
Source Flux	200lm	2	0.30	1109
Fixture Flux	163lm	3	0.45	493
Efficacy	31lm/W	4	0.60	277
TS965 Imax=22178cd/klm	Imax	4436cd	5	0.75	177

Driver	Colour	3000K	4000K
EL.	○	**1T5960EL**	**1T5961EL**
EL.	●	**1T5952EL**	**1T5953EL**
DALI	○	**1T5960DA**	**1T5961DA**
DALI	●	**1T5952DA**	**1T5953DA**

LED / 11W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			15°	
Fixture Power	15W	1	0.27	16914
Source Flux	1786lm	2	0.53	4229
Fixture Flux	1336lm	3	0.80	1879
Efficacy	90lm/W	4	1.07	1057
TS966 Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	○	**1T5962EL**	**1T5963EL**
EL.	●	**1T5954EL**	**1T5955EL**
DALI	○	**1T5962DA**	**1T5963DA**
DALI	●	**1T5954DA**	**1T5955DA**

LED / 18W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			24°	
Fixture Power	20W	1	0.43	8803
Source Flux	2466lm	2	0.87	2201
Fixture Flux	1800lm	3	1.30	978
Efficacy	89lm/W	4	1.73	550
TS969 Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	○	**1T5974EL**	**1T5975EL**
EL.	●	**1T5968EL**	**1T5969EL**
DALI	○	**1T5974DA**	**1T5975DA**
DALI	●	**1T5968DA**	**1T5969DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power	14W	1	0.54	4825	
Source Flux	1837lm	2	1.09	1206	
Fixture Flux	1315lm	3	1.63	536	
Efficacy	97lm/W	4	2.17	302	
TS967	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	○	**1T5964EL**	**1T5965EL**
EL.	●	**1T5956EL**	**1T5957EL**
DALI	○	**1T5964DA**	**1T5965DA**
DALI	●	**1T5956DA**	**1T5957DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power	14W	1	0.90	2476	
Source Flux	1837lm	2	1.80	619	
Fixture Flux	1520lm	3	2.69	275	
Efficacy	113lm/W	4	3.59	155	
TS968	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	○	**1T5966EL**	**1T5967EL**
EL.	●	**1T5958EL**	**1T5959EL**
DALI	○	**1T5966DA**	**1T5967DA**
DALI	●	**1T5958DA**	**1T5959DA**

LED / 18W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power	20W	1	0.90	3323	
Source Flux	2466lm	2	1.80	831	
Fixture Flux	2041lm	3	2.69	369	
Efficacy	101lm/W	4	3.59	208	
TS970	Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	○	**1T6419EL**	**1T6420EL**
EL.	●	**1T5970EL**	**1T5971EL**
DALI	○	**1T6419DA**	**1T6420DA**
DALI	●	**1T5970DA**	**1T5971DA**

LED / 18W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
Fixture Power	20W	1	1.16	2406	
Source Flux	2466lm	2	2.32	601	
Fixture Flux	1979lm	3	3.47	267	
Efficacy	98lm/W	4	4.63	150	
TS971	Imax=976cd/klm	Imax	2407cd	5	5.79	96

Driver	Colour	3000K	4000K
EL.	○	**1T6421EL**	**1T6422EL**
EL.	●	**1T5972EL**	**1T5973EL**
DALI	○	**1T6421DA**	**1T6422DA**
DALI	●	**1T5972DA**	**1T5973DA**

Nota: Version with magnets to be complet with insertion box.

Related codes

Insertion Box



Cutout hole	Colour	Code
150x150	○	**1T6426**
150x150	●	**1T6423**

Frame 1x. For version with magnets.



Cutout hole	Colour	Code
300x150	○	**1T6427**
300x150	●	**1T6424**

Frame 2x. For version with magnets.



Cutout hole	Colour	Code
450x150	○	**1T6428**
450x150	●	**1T6425**

Frame 3x. For version with magnets.



Cutout hole	Code
149x149	**1T7404**

Trimless frame 1x. For version with springs.

STORE



Cutout hole	Code
149x295	**1T7405**

Trimless frame 2x. For version with springs.



Cutout hole	Code
149x441	**1T7406**

Trimless frame 3x. For version with springs.

Accessories

Filter



Filter	Ø	Code
Red	50	**49881**
Green	50	**49882**
Blue	50	**49886**
Yellow	50	**49887**
Magenta	50	**49959**

Flat glass interference chromatic filter.



Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.

Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Screen



Ø	Code
50	**1T4325**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.



Ø	Code
50	**1T6521**

Protective screen.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

ZENO

Small exctractable

GENERAL INFO
Recessed, extractable and adjustable LED professional projector.
The optical unit can be adjusted from 0 to 90° on the vertical plane and 360° on the orizontal plane with the possibility to block beam.
Ø105mm

LED
COB Chip on board
From 1430lm to 1692lm
3000K – 4000K
Ra97

PRODUCT EFFICACY
Up to 90lm/W

OPTICS
NSP – SP – FL – MWFL – WFL

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Die-cast painted aluminium body.

A range of professional projectors especially for museum lighting, given the quality of the LED sources, the cutting edge optics and installation flexibility.

Also available in a projector version in three different sizes.

ZENO SMALL		
		Ø105mm
LED	Flux (lm)	1430- 1692
	Power	11W - 12W
OPTICS		
NSP	Lens	•
SP	Lens	•
FL	Lens	•
MWFL	Reflector	•
WFL	Reflector	•

01

Trimless and complete with decorative ring

Recessed extractable fixture that can combine the flexibility of a projector with the ability to blend into the architecture.

02

The optical body

To be moved into four different positions.

ZENO

Small Extractable



LED / 11W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			7°	
	Fixture Power	15W	1	0.13	24183
	Source Flux	1619lm	2	0.26	6046
	Fixture Flux	712lm	3	0.39	2687
	Efficacy	48lm/W	4	0.52	1511
TS1063	Imax=14937cd/klm	Imax	24183cd	5	0.65	967

Driver	Colour	3000K	4000K
EL.	○	**1T6551EL**	**1T6552EL**
EL.	●	**1T6553EL**	**1T6554EL**
DALI	○	**1T6551DA**	**1T6552DA**
DALI	●	**1T6553DA**	**1T6554DA**

LED / 12W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			10°	
	Fixture Power	14W	1	0.18	17263
	Source Flux	1430lm	2	0.36	4316
	Fixture Flux	1101lm	3	0.54	1918
	Efficacy	82lm/W	4	0.72	1079
TS1064	Imax=12072cd/klm	Imax	17263cd	5	0.89	691

Driver	Colour	3000K	4000K
EL.	○	**1T6555EL**	**1T6556EL**
EL.	●	**1T6557EL**	**1T6558EL**
DALI	○	**1T6555DA**	**1T6556DA**
DALI	●	**1T6557DA**	**1T6558DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
	Fixture Power	14W	1	0.49	4536
	Source Flux	1430lm	2	0.99	1134
	Fixture Flux	1115lm	3	1.48	504
	Efficacy	83lm/W	4	1.98	284
TS1065	Imax=3172cd/klm	Imax	4536cd	5	2.47	181

Driver	Colour	3000K	4000K
EL.	○	**1T6559EL**	**1T6560EL**
EL.	●	**1T6561EL**	**1T6562EL**
DALI	○	**1T6559DA**	**1T6560DA**
DALI	●	**1T6561DA**	**1T6562DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			48°	
	Fixture Power	14W	1	0.90	1860
	Source Flux	1430lm	2	1.79	465
	Fixture Flux	1178lm	3	2.69	207
	Efficacy	87lm/W	4	3.59	116
TS1066	Imax=1307cd/klm	Imax	1870cd	5	4.48	74

Driver	Colour	3000K	4000K
EL.	○	**1T6563EL**	**1T6564EL**
EL.	●	**1T6565EL**	**1T6566EL**
DALI	○	**1T6563DA**	**1T6564DA**
DALI	●	**1T6565DA**	**1T6566DA**

LED / 12W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			58°	
	Fixture Power	14W	1	1.11	1400
	Source Flux	1430lm	2	2.21	350
	Fixture Flux	1188lm	3	3.32	156
	Efficacy	88lm/W	4	4.43	88
TS1067	Imax=1001cd/klm	Imax	1432cd	5	5.53	56

Driver	Colour	3000K	4000K
EL.	○	**1T6567EL**	**1T6568EL**
EL.	●	**1T6569EL**	**1T6570EL**
DALI	○	**1T6567DA**	**1T6568DA**
DALI	●	**1T6569DA**	**1T6570DA**

Related codes

Decorative Ring



Ø	Colour	Code
146	○	**1T6579**
146	●	**1T6580**

Round ring.

Accessories

Filter



Code
1T6572

Blade of light filter.
Methacrylate holographic filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with a dedicated holder ring.

Grid



Code
1T6573

Anti-glare louver.
Black lacquered aluminium honeycomb structure.
To be completed with a dedicated holder ring.

Cut-off



Code
1T6574

Black painted steel cut-off.
To be completed with a dedicated holder ring.



Code
1T6575

Black painted steel asymmetric cut-off.
To be completed with a dedicated holder ring.

Ray Shade



Code
1T6576

Adjustable barn doors flaps made of black painted steel.
To be completed with a dedicated holder ring.

Holder Ring



Colour	Code
●	**1T6571**

Black painted aluminium accessory holder ring.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CLOUD

GENERAL INFO
Extractable recessed projectors
CLOUD Ø108mm
CLOUD MINI Ø73,5mm

LED
Chip on board
From 1798lm to 7139lm
3000K – 4000K
Ra84
Ra97 (only for large version)

PRODUCT EFFICACY
Up to 117lm/W

OPTICS
SP – FL – MWFL – WFL
DBS - Digital beam opening control

POWER SUPPLY
Electronic – DALI – 1-10V
Casambi control: DBS version Casambi on board. DALI version is fitted with special accessories.

MATERIAL
Extractible head and remote heat sink in die-cast aluminium painted in plaster white or deep black finish, with rotation system by friction on hinges. Removable front ring made of die-cast aluminium painted in plaster white or deep black finish for the insertion of dedicated optical accessories. Installation frame made of die-cast aluminium painted.

A range of recessed extractable projectors with different solutions in terms of size, lumens, colour temperature. CLOUD can be completely recessed for complete formal simplicity or extracted up to 75° to project light where it is needed.

It comes in two different sizes Cloud and Cloud Mini

		CLOUD	CLOUD MINI
		Ø 108mm	Ø 73.5mm
LED	Flux	3299-7139	1798-2550
	Power	25W-50W	11W-18W
OTTICHE			
SP	Lenticolare		•
	Hybrid	•	
	Reflector	•	
FL	Lenticular		•
	Hybrid	•	
	Reflector	•	
MWFL	Reflector	•	•
WFL	Reflector	•	•

01

02

Both the large and the small version

Are accessorised with a special Kicker that makes it possible to disappear into the false ceiling when the optical body is not fully extracted.

The product can be adjusted vertically

From 75° to -25° for the CLOUD version and from 75° to -20° for the CLOUD MINI version making it possible to retract the optic

There is also a DBS - Dynamic Beam Shaper- version

For CLOUD Ra97 only.

Venchi

Architect
Studio Ceri

Country
Florence - Italy

CLOUD



LED / 25W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		28W	1	0.26	24360
Source Flux		3577lm	2	0.52	6090
Fixture Flux		3040lm	3	0.77	2707
Efficacy		109lm/W	4	1.03	1522
TS753	Imax=6810cd/klm	Imax	24360cd	5	1.29	974

Driver	Colour	3000K	4000K
EL.	○	**1T3607EL**	**1T4112EL**
EL.	●	**1T3616EL**	**1T4114EL**
1-10V	○	**1T3607D**	**1T4112D**
1-10V	●	**1T3616D**	**1T4114D**
DALI	○	**1T3607DA**	**1T4112DA**
DALI	●	**1T3616DA**	**1T4114DA**

LED / 39W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		42W	1	0.25	35015
Source Flux		4920lm	2	0.51	8754
Fixture Flux		4182lm	3	0.76	3891
Efficacy		99lm/W	4	1.02	2188
TS755	Imax=7117cd/klm	Imax	35015cd	5	1.27	1401

Driver	Colour	3000K	4000K
EL.	○	**1T3609EL**	**1T4116EL**
EL.	●	**1T3618EL**	**1T4120EL**
1-10V	○	**1T3609D**	**1T4116D**
1-10V	●	**1T3618D**	**1T4120D**
DALI	○	**1T3609DA**	**1T4116DA**
DALI	●	**1T3618DA**	**1T4120DA**

LED / 25W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power		28W	1	0.55	8984
Source Flux		3577lm	2	1.09	2246
Fixture Flux		3028lm	3	1.64	998
Efficacy		108lm/W	4	2.19	561
TS754	Imax=2512cd/klm	Imax	8984cd	5	2.73	359

Driver	Colour	3000K	4000K
EL.	○	**1T3608EL**	**1T4113EL**
EL.	●	**1T3617EL**	**1T4115EL**
1-10V	○	**1T3608D**	**1T4113D**
1-10V	●	**1T3617D**	**1T4115D**
DALI	○	**1T3608DA**	**1T4113DA**
DALI	●	**1T3617DA**	**1T4115DA**

LED / 39W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power		42W	1	0.50	13675
Source Flux		4920lm	2	1.01	3419
Fixture Flux		4165lm	3	1.51	1519
Efficacy		98lm/W	4	2.02	855
TS756	Imax=2779cd/klm	Imax	13675cd	5	2.52	547

Driver	Colour	3000K	4000K
EL.	○	**1T3610EL**	**1T4117EL**
EL.	●	**1T3619EL**	**1T4121EL**
1-10V	○	**1T3610D**	**1T4117D**
1-10V	●	**1T3619D**	**1T4121D**
DALI	○	**1T3610DA**	**1T4117DA**
DALI	●	**1T3619DA**	**1T4121DA**

LED / 50W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			36°	
Fixture Power		54W	1	0.64	14555
Source Flux		6959lm	2	1.29	3639
Fixture Flux		5891lm	3	1.93	1617
Efficacy		110lm/W	4	2.58	910
TS759	Imax=2092cd/klm	Imax	14555cd	5	3.22	582

Driver	Colour	3000K	4000K
EL.	○	**1T3613EL**	**1T4124EL**
EL.	●	**1T3622EL**	**1T4127EL**
1-10V	○	**1T3613D**	**1T4124D**
1-10V	●	**1T3622D**	**1T4127D**
DALI	○	**1T3613DA**	**1T4124DA**
DALI	●	**1T3622DA**	**1T4127DA**

CLOUD

LED / 39W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			43°	
	Fixture Power	42W	1	0.79	8155
	Source Flux	4920lm	2	1.59	2039
	Fixture Flux	4275lm	3	2.38	906
	Efficacy	101lm/W	4	3.18	510
TS757	Imax=1685cd/klm	Imax	5	3.97	326

Driver	Colour	3000K	4000K
EL.	○	**1T3611EL**	**1T4118EL**
EL.	●	**1T3620EL**	**1T4122EL**
1-10V	○	**1T3611D**	**1T4118D**
1-10V	●	**1T3620D**	**1T4122D**
DALI	○	**1T3611DA**	**1T4118DA**
DALI	●	**1T3620DA**	**1T4122DA**

LED / 50W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			47°	
	Fixture Power	54W	1	0.87	10238
	Source Flux	6959lm	2	1.75	2559
	Fixture Flux	6047lm	3	2.62	1138
	Efficacy	113lm/W	4	3.50	640
TS760	Imax=1472cd/klm	Imax	5	4.37	410

Driver	Colour	3000K	4000K
EL.	○	**1T3614EL**	**1T4125EL**
EL.	●	**1T3623EL**	**1T4128EL**
1-10V	○	**1T3614D**	**1T4125D**
1-10V	●	**1T3623D**	**1T4128D**
DALI	○	**1T3614DA**	**1T4125DA**
DALI	●	**1T3623DA**	**1T4128DA**

LED / 39W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			57°	
	Fixture Power	42W	1	1.08	5804
	Source Flux	4920lm	2	2.16	1451
	Fixture Flux	4330lm	3	3.24	645
	Efficacy	102lm/W	4	4.32	363
TS758	Imax=1180cd/klm	Imax	5	5.40	232

Driver	Colour	3000K	4000K
EL.	○	**1T3612EL**	**1T4119EL**
EL.	●	**1T3621EL**	**1T4123EL**
1-10V	○	**1T3612D**	**1T4119D**
1-10V	●	**1T3621D**	**1T4123D**
DALI	○	**1T3612DA**	**1T4119DA**
DALI	●	**1T3621DA**	**1T4123DA**

LED / 50W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
	Fixture Power	54W	1	1.13	7368
	Source Flux	6959lm	2	2.26	1842
	Fixture Flux	6124lm	3	3.40	819
	Efficacy	114lm/W	4	4.53	461
TS761	Imax=1076cd/klm	Imax	5	5.66	295

Driver	Colour	3000K	4000K
EL.	○	**1T3615EL**	**1T4126EL**
EL.	●	**1T3624EL**	**1T4129EL**
1-10V	○	**1T3615D**	**1T4126D**
1-10V	●	**1T3624D**	**1T4129D**
DALI	○	**1T3615DA**	**1T4126DA**
DALI	●	**1T3624DA**	**1T4129DA**

LED / 34W / HYBRID / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			13°	
	Fixture Power	37W	1	0.23	30351
	Source Flux	3299lm	2	0.46	7588
	Fixture Flux	2139lm	3	0.69	3372
	Efficacy	58lm/W	4	0.92	1897
TS916	Imax=9200cd/klm	Imax	5	1.14	1214

Driver	Colour	3000K	4000K
EL.	○	**1T4791EL**	
1-10V	○	**1T4791D**	
DALI	○	**1T4791DA**	

LED / 39W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			15°	
	Fixture Power	42W	1	0.25	26931
	Source Flux	3784lm	2	0.51	6733
	Fixture Flux	3216lm	3	0.76	2992
	Efficacy	76lm/W	4	1.02	1683
TS755	Imax=7117cd/klm	Imax	5	1.27	1077

Driver	Colour	3000K	4000K
EL.	○	**1T4297EL**	
1-10V	○	**1T4297D**	
DALI	○	**1T4297DA**	

LED / 34W / HYBRID / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			33°	
Fixture Power		37W	1	0.58	7356
Source Flux		3299lm	2	1.17	1839
Fixture Flux		2014lm	3	1.75	817
Efficacy		54lm/W	4	2.33	460
TS917	Imax=2230cd/klm	Imax	5	2.92	294

Driver	Colour	3000K	4000K
EL.	◯	**1T4792EL**	
1-10V	◯	**1T4792D**	
DALI	◯	**1T4792DA**	

LED / 39W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
Fixture Power		42W	1	0.50	10518
Source Flux		3784lm	2	1.01	2629
Fixture Flux		3203lm	3	1.51	1169
Efficacy		76lm/W	4	2.02	657
TS756	Imax=2779cd/klm	Imax	5	2.52	421

Driver	Colour	3000K	4000K
EL.	◯	**1T4298EL**	
1-10V	◯	**1T4298D**	
DALI	◯	**1T4298DA**	

LED / 50W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			36°	
Fixture Power		54W	1	0.64	11200
Source Flux		5355lm	2	1.29	2800
Fixture Flux		4533lm	3	1.93	1244
Efficacy		85lm/W	4	2.58	700
TS759	Imax=2092cd/klm	Imax	5	3.22	448

Driver	Colour	3000K	4000K
EL.	◯	**1T4301EL**	
1-10V	◯	**1T4301D**	
DALI	◯	**1T4301DA**	

LED / 39W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			43°	
Fixture Power		42W	1	0.79	6272
Source Flux		3784lm	2	1.59	1568
Fixture Flux		3288lm	3	2.38	697
Efficacy		78lm/W	4	3.18	392
TS757	Imax=1685cd/klm	Imax	5	3.97	251

Driver	Colour	3000K	4000K
EL.	◯	**1T4299EL**	
1-10V	◯	**1T4299D**	
DALI	◯	**1T4299DA**	

LED / 50W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			47°	
Fixture Power		54W	1	0.87	7878
Source Flux		5355lm	2	1.75	1970
Fixture Flux		4653lm	3	2.62	875
Efficacy		87lm/W	4	3.50	492
TS760	Imax=1472cd/klm	Imax	5	4.37	315

Driver	Colour	3000K	4000K
EL.	◯	**1T4302EL**	
1-10V	◯	**1T4302D**	
DALI	◯	**1T4302DA**	

LED / 39W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			57°	
Fixture Power		42W	1	1.08	4464
Source Flux		3784lm	2	2.16	1116
Fixture Flux		3330lm	3	3.24	496
Efficacy		79lm/W	4	4.32	279
TS758	Imax=1180cd/klm	Imax	5	5.40	179

Driver	Colour	3000K	4000K
EL.	◯	**1T4300EL**	
1-10V	◯	**1T4300D**	
DALI	◯	**1T4300DA**	

CLOUD

LED / 50W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		54W	1	1.13	5670
Source Flux		5355lm	2	2.26	1418
Fixture Flux		4712lm	3	3.40	630
Efficacy		88lm/W	4	4.53	354
TS761	Imax=1076cd/klm	Imax	5764cd	5	5.66	227

Driver	Colour	3000K	4000K
EL.	◯	**1T4303EL**	
1-10V	◯	**1T4303D**	
DALI	◯	**1T4303DA**	

LED / 34W / DBS / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		37W	1	0.28	15397
Source Flux		3299lm	2	0.56	3849
Fixture Flux		1577lm	3	0.84	1711
Efficacy		42lm/W	4	1.12	962
TS1106	Imax=4667cd/klm	Imax	15397cd	5	1.40	616



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
Fixture Power		37W	1	0.45	5921
Source Flux		3299lm	2	0.89	1480
Fixture Flux		1524lm	3	1.34	658
Efficacy		41lm/W	4	1.79	370
TS1107	Imax=1795cd/klm	Imax	5921cd	5	2.24	237



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		37W	1	0.61	3248
Source Flux		3299lm	2	1.23	812
Fixture Flux		1481lm	3	1.84	361
Efficacy		40lm/W	4	2.45	203
TS1108	Imax=985cd/klm	Imax	3248cd	5	3.07	130



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			42°	
Fixture Power		37W	1	0.78	2047
Source Flux		3299lm	2	1.55	512
Fixture Flux		1405lm	3	2.33	227
Efficacy		38lm/W	4	3.11	128
TS1109	Imax=621cd/klm	Imax	2047cd	5	3.88	82

Driver	Colour	3000K	4000K
CASAMBI	◯	**1T6950CA**	

Accessories

Filter

Filter	Ø	Code
Red	70	**1T1712**
Green	70	**1T1713**
Blue	70	**1T1714**
Yellow	70	**1T1715**
Magenta	70	**1T1716**

Flat glass interference chromatic filter.
To be completed with an additional holder ring.

Ø	Code
70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.



Ø	Code
70	**1T1709**

Flat glass wired refractive diffusive filter.
This softens the luminous effect.
To be completed with an additional holder ring.



Filter	Ø	Code
Halogen +	70	**1T6506**
Vivid +	70	**1T6507**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Filter	Ø	Code
Meat	70	**1T6508**
Fish	70	**1T6509**
Bread	70	**1T6510**
Vegetables	70	**1T6511**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be completed with an additional holder ring.
1T6508
To be used only with 3000K and Ra80 fixtures.
1T6509
To be used only with 4000K and Ra80 fixtures.
1T6510
To be used only with 3000K and Ra80 fixtures.
1T6511
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	70	**1T6512**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.

Screen



Ø	Code
80	**1T6522**

Protective screen.

CLOUD

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Mini



LED / 11W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		14W	1	0.27	16914
Source Flux		1786lm	2	0.53	4229
Fixture Flux		1336lm	3	0.80	1879
Efficacy		98lm/W	4	1.07	1057
TS844	Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	○	**1T4216EL**	**1T4228EL**
EL.	●	**1T4217EL**	**1T4229EL**
DALI	○	**1T4216DA**	**1T4228DA**
DALI	●	**1T4217DA**	**1T4229DA**

LED / 18W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		20W	1	0.43	8803
Source Flux		2466lm	2	0.87	2201
Fixture Flux		1800lm	3	1.30	978
Efficacy		89lm/W	4	1.73	550
TS847	Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	○	**1T4222EL**	**1T4234EL**
EL.	●	**1T4223EL**	**1T4235EL**
DALI	○	**1T4222DA**	**1T4234DA**
DALI	●	**1T4223DA**	**1T4235DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		14W	1	0.54	4825
Source Flux		1837lm	2	1.09	1206
Fixture Flux		1315lm	3	1.63	536
Efficacy		97lm/W	4	2.17	302
TS845	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	○	**1T4218EL**	**1T4230EL**
EL.	●	**1T4219EL**	**1T4231EL**
DALI	○	**1T4218DA**	**1T4230DA**
DALI	●	**1T4219DA**	**1T4231DA**

LED / 18W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		20W	1	0.54	6478
Source Flux		2466lm	2	1.09	1620
Fixture Flux		1766lm	3	1.63	720
Efficacy		87lm/W	4	2.17	405
TS932	Imax=2627cd/klm	Imax	6478cd	5	2.72	259

Driver	Colour	3000K	4000K
EL.	○	**1T4793EL**	**1T4795EL**
EL.	●	**1T4794EL**	**1T4796EL**
DALI	○	**1T4793DA**	**1T4795DA**
DALI	●	**1T4794DA**	**1T4796DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		14W	1	0.90	2476
Source Flux		1837lm	2	1.80	619
Fixture Flux		1520lm	3	2.69	275
Efficacy		113lm/W	4	3.59	155
TS846	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	○	**1T4220EL**	**1T4232EL**
EL.	●	**1T4221EL**	**1T4233EL**
DALI	○	**1T4220DA**	**1T4232DA**
DALI	●	**1T4221DA**	**1T4233DA**

CLOUD

LED / 18W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		20W	1	0.90	3323
Source Flux		2466lm	2	1.80	831
Fixture Flux		2041lm	3	2.69	369
Efficacy		101lm/W	4	3.59	208
TS848	Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	○	**1T4224EL**	**1T4236EL**
EL.	●	**1T4225EL**	**1T4237EL**
DALI	○	**1T4224DA**	**1T4236DA**
DALI	●	**1T4225DA**	**1T4237DA**

LED / 18W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
Fixture Power		20W	1	1.16	2406
Source Flux		2466lm	2	2.32	601
Fixture Flux		1979lm	3	3.47	267
Efficacy		98lm/W	4	4.63	150
TS849	Imax=976cd/klm	Imax	2407cd	5	5.79	96

Driver	Colour	3000K	4000K
EL.	○	**1T4226EL**	**1T4238EL**
EL.	●	**1T4227EL**	**1T4239EL**
DALI	○	**1T4226DA**	**1T4238DA**
DALI	●	**1T4227DA**	**1T4239DA**

Accessories

Filter



Filter	Ø	Code
Red	50	**49881**
Green	50	**49882**
Blue	50	**49886**
Yellow	50	**49887**
Magenta	50	**49959**

Flat glass interference chromatic filter.



Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Screen



Ø	Code
50	**1T6521**

Protective screen.



Ø	Code
50	**1T4325**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

COZY

GENERAL INFO
Small recessed downlight, trimless (Ø55mm) or complete with decorative ring (Ø40mm).

LED
Chip on board
From 1798lm to 1855lm
3000K – 4000K
Ra84
Ra97 on request

PRODUCT EFFICACY
Up to 35lm/W

OPTIC
SP

POWER SUPPLY
Remote: Electronic - DALI
Casambi control: DALI driver fitted with special accessories.

MATERIAL
Polished aluminium body and integrated heat sink with painted flange. Painted, polished, removable front ring. The LED lamps are set back 40mm into the fixture to limit glare.

COZY is the smallest recessed downlight in the Targetti Collection. Just 40 mm in diameter (version with ring) it has an anti-glare solution thanks to the LED lamp that is set back 40mm from the emission surface.

The spot optic makes this recessed projector perfect for decorative accent lighting.
Quick and easy system for installation in plasterboard ceilings of 5mm and more using AISI steel springs.
There is also a double version with a visible or trimless finishing ring

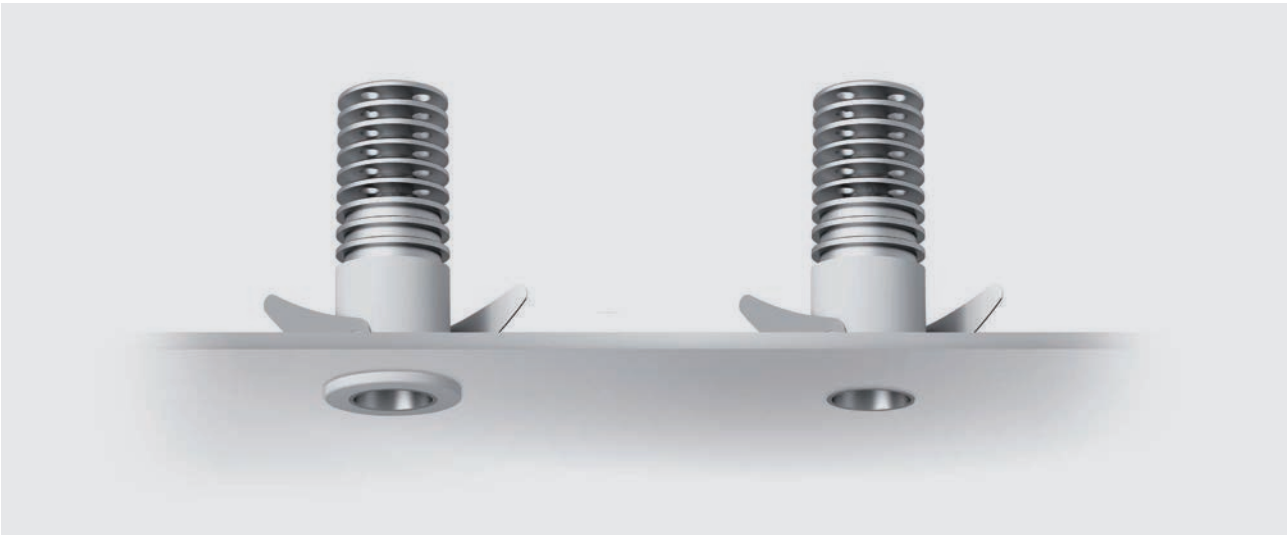

With ring



LED / 12W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		14W	1	0.45	1814
Source Flux		1798lm	2	0.90	453
Fixture Flux		476lm	3	1.35	202
Efficacy		34lm/W	4	1.80	113
TS1044	Imax=1009cd/klm	Imax	1814cd	5	2.25	73

Power supply	Colour	3000K	4000K
350mA	○	**1T6377**	**1T6378**
350mA	●	**1T6379**	**1T6380**

Trimless



LED / 12W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		14W	1	0.45	1814
Source Flux		1798lm	2	0.90	453
Fixture Flux		476lm	3	1.35	202
Efficacy		34lm/W	4	1.80	113
TS1044	Imax=1009cd/klm	Imax	1814cd	5	2.25	73

Power supply	Colour	3000K	4000K
350mA	○	**1T7400**	**1T7401**

Related codes

Power Supply

	Code
Electronic power supply max 15W - 158x19x22mm	**1T6505**
DALI dimmable electronic power supply max 15W - 67x103x21mm*	**1T6504**

220-240V-AC 50-60Hz, 350mA - IP20.
*Driver's size is bigger than the cutout hole needed by the luminaire.

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.

Control systems

	Code
	1T5349

A wireless control module with a DALI interface. It generates a local DALI bus which makes it possible to connect a LED driver directly to a DALI interface. The module can only be used in a closed system and cannot be connected to an existing DALI network. The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology. IP20

	Code
	1T5352

IP20 Extender for wireless control with DALI interfaces. It generates a local DALI bus with the capacity to drive up to 64 fixtures and can control groups of fixtures in indoor applications. It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

BEBOP

Recessed

GENERAL INFO
Recessed downlight
Ø90mm

LED
Chip on board
From 1302lm to 1909lm
3000K – 4000K
Ra84
Ra90 To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 88lm/W

OPTICS
MWFL - WFL

POWER SUPPLY
Eletctronic - DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Painted polycarbonate body and rounded ring. Die-cast aluminium finned heat sink, side wiring complete with power supply.

A range of high performance characterised by simple, soft and rounded lines. Available in three different versions for ceiling mounted, suspension and recessed installation. In all versions the LED lamps are retracted and hidden from view to ensure optimum visual comfort. The flexible installation makes it possible to use the same type of light in environments with different architectural characteristics.

The recessed version has a reduced depth and a polycarbonate finishing ring with a white finish that “disappears” into ceilings creating the illusion of a plaster finish.

Recessed



LED / 9W / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	12W	1	0.90	1391
Source Flux	1302lm	2	1.79	348
Fixture Flux	1000lm	3	2.69	155
Efficacy	86lm/W	4	3.59	87
Imax	1404cd	5	4.48	56

TS897 Imax=1079cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T4756EL**	**1T4757EL**
EL.	●	**1T5406EL**	**1T5407EL**
DALI	○	**1T4756DA**	**1T4757DA**
DALI	●	**1T5406DA**	**1T5407DA**

LED / 9W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			64°	
Fixture Power	12W	1	1.24	830
Source Flux	1302lm	2	2.49	207
Fixture Flux	980lm	3	3.73	92
Efficacy	85lm/W	4	4.98	52
Imax	896cd	5	6.22	33

TS896 Imax=688cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T4754EL**	**1T4755EL**
EL.	●	**1T5408EL**	**1T5409EL**
DALI	○	**1T4754DA**	**1T4755DA**
DALI	●	**1T5408DA**	**1T5409DA**

LED / 15W / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	16W	1	0.90	1990
Source Flux	1863lm	2	1.79	498
Fixture Flux	1431lm	3	2.69	221
Efficacy	87lm/W	4	3.59	124
Imax	2010cd	5	4.48	80

TS899 Imax=1079cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T4760EL**	**1T4761EL**
EL.	●	**1T5410EL**	**1T5411EL**
DALI	○	**1T4760DA**	**1T4761DA**
DALI	●	**1T5410DA**	**1T5411DA**

LED / 15W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			64°	
Fixture Power	16W	1	1.24	1187
Source Flux	1863lm	2	2.49	297
Fixture Flux	1403lm	3	3.73	132
Efficacy	86lm/W	4	4.98	74
Imax	1282cd	5	6.22	47

TS898 Imax=688cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T4758EL**	**1T4759EL**
EL.	●	**1T5412EL**	**1T5413EL**
DALI	○	**1T4758DA**	**1T4759DA**
DALI	●	**1T5412DA**	**1T5413DA**

Accessories

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

QUICKLED

GENERAL INFO
Compact rrecessed downlight
Ø85mm

LED
Chip on board
From 1302lm to 1909lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 92lm/W

OPTICS
MWFL

POWER SUPPLY
Electronic - DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Metallised polycarbonate body with decorative ring in anodised aluminium or painted white. Finned heat sink made of die-cast aluminium, side wiring complete with power supply.

A high performance compact downlight with excellent light distribution.

The special diffuser screen ensures extremely soft and homogeneous light distribution and also gives the fixture an IP44 rating making it suitable for installation in public spaces.



LED / 9W / MWFL

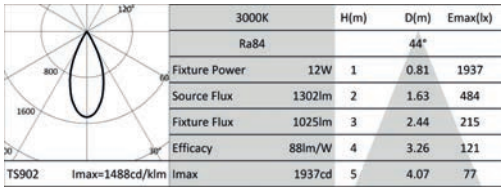

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			44°	
	Fixture Power	12W	1	0.81	1937
	Source Flux	1302lm	2	1.63	484
	Fixture Flux	1025lm	3	2.44	215
	Efficacy	88lm/W	4	3.26	121
	Imax	1937cd	5	4.07	77

	Driver	Colour	3000K	4000K
	EL.	○	**1T4770EL**	**1T4771EL**
	EL.	●	**1T4772EL**	**1T4773EL**
	DALI	○	**1T4770DA**	**1T4771DA**
	DALI	●	**1T4772DA**	**1T4773DA**

LED / 15W / MWFL

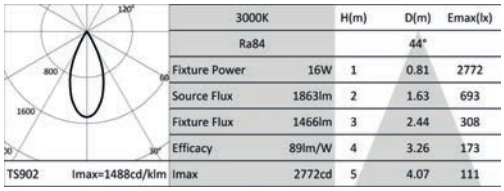

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			44°	
	Fixture Power	16W	1	0.81	2772
	Source Flux	1863lm	2	1.63	693
	Fixture Flux	1466lm	3	2.44	308
	Efficacy	89lm/W	4	3.26	173
	Imax	2772cd	5	4.07	111

	Driver	Colour	3000K	4000K
	EL.	○	**1T4774EL**	**1T4775EL**
	EL.	●	**1T4776EL**	**1T4777EL**
	DALI	○	**1T4774DA**	**1T4775DA**
	DALI	●	**1T4776DA**	**1T4777DA**

Accessories

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

POLKA

GENERAL INFO
Ultra compact LED recessed ceiling fixture.
MINI Ø36mm
FIX Ø77mm
FLEX Ø70mm

LED
Chip on board
From 59lm to 901lm
3000K
Ra80

PRODUCT EFFICACY
Up to 64lm/W

OPTICS
VWFL - MWFL

POWER SUPPLY
Remote electronic

MATERIAL
Aluminium body and ring to guarantee perfect heat dissipation. Available painted or brushed chrome finish with a circular or square decorative ring.

A series of high performance compact LED mini-recessed ceiling fixtures designed right down to the last detail.

Available in three different versions-MINI, FIX and FLEX- all of which are available with square or circular rings. The FLEX version is the smallest adjustable recessed fixture in the collection, precise and discrete for punctual and projected light. Adjustable to +/-22°.

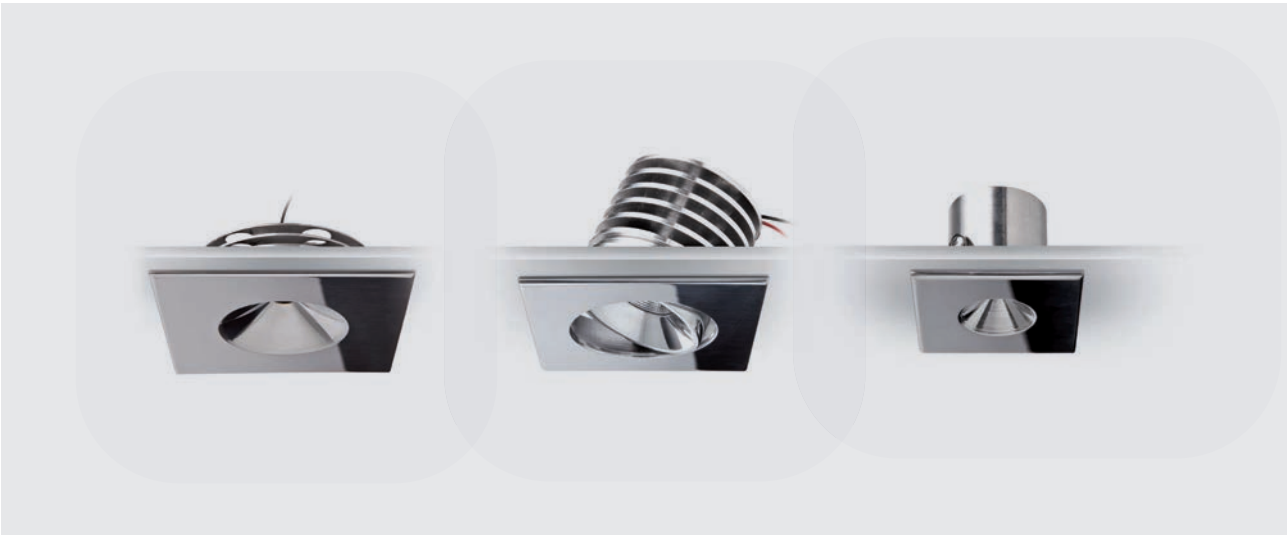

Fix Round ring



LED / 12W / VWFL

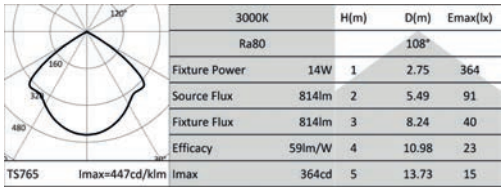

3000K		H(m)	D(m)	Emax(lx)
Ra80			108°	
Fixture Power	14W	1	2.75	364
Source Flux	814lm	2	5.49	91
Fixture Flux	814lm	3	8.24	40
Efficacy	59lm/W	4	10.98	23
Imax	364cd	5	13.73	15

Power supply	Colour	3000K
350mA	○	**1T3699**
350mA	◐	**1T3700**
350mA	●	**1T6415**

Fix Squared ring



LED / 12W / VWFL

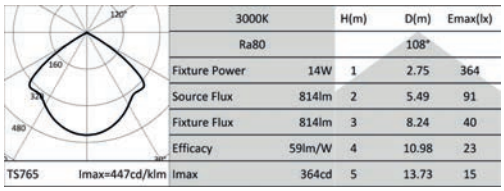

3000K		H(m)	D(m)	Emax(lx)
Ra80			108°	
Fixture Power	14W	1	2.75	364
Source Flux	814lm	2	5.49	91
Fixture Flux	814lm	3	8.24	40
Efficacy	59lm/W	4	10.98	23
Imax	364cd	5	13.73	15

Power supply	Colour	3000K
350mA	○	**1T3937**
350mA	◐	**1T3938**
350mA	●	**1T6416**

Related codes

Power Supply



Code
1T1757

Electronic power supply 15W, LxHxP=119x22x52mm, 220-240V, 350mA, IP20.
For Polka Mini: can feed up to 10 fixtures connected in series in constant current; the driver is bigger than the cutout hole needed by the luminaire.

POLKA

Flex Round ring



LED / 12W / MWFL



			3000K	H(m)	D(m)	Emax(lx)
			Ra80		45°	
	Fixture Power	14W	1	0.82	1479
	Source Flux	901lm	2	1.64	370
	Fixture Flux	901lm	3	2.46	164
	Efficacy	64lm/W	4	3.28	92
TS766	Imax	1479cd	5	4.10	59
	Imax=1641cd/klm				

Power supply	Colour	3000K
350mA	○	**1T3701**
350mA	◐	**1T3702**
350mA	●	**1T6417**

Flex Squared ring



LED / 12W / MWFL



			3000K	H(m)	D(m)	Emax(lx)
			Ra80		45°	
	Fixture Power	14W	1	0.82	1479
	Source Flux	901lm	2	1.64	370
	Fixture Flux	901lm	3	2.46	164
	Efficacy	64lm/W	4	3.28	92
TS766	Imax	1479cd	5	4.10	59
	Imax=1641cd/klm				

Power supply	Colour	3000K
350mA	○	**1T3939**
350mA	◐	**1T3940**
350mA	●	**1T6418**

Related codes

Power Supply



Code
1T1757

Electronic power supply 15W, LxHxP=119x22x52mm, 220-240V, 350mA, IP20.
For Polka Mini: can feed up to 10 fixtures connected in series in constant current; the driver is bigger than the cutout hole needed by the luminaire.

Mini Round ring



LED / 1,2W / VWFL

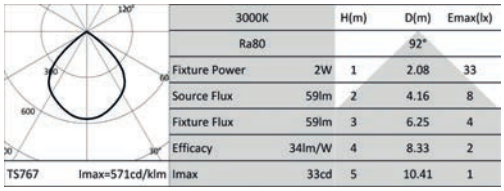

3000K		H(m)	D(m)	Emax(lx)
Ra80			92°	
Fixture Power	2W	1	2.08	33
Source Flux	59lm	2	4.16	8
Fixture Flux	59lm	3	6.25	4
Efficacy	34lm/W	4	8.33	2
Imax	33cd	5	10.41	1

Power supply	Colour	3000K
350mA	○	**1T3697**
350mA	◐	**1T3698**
350mA	●	**1T5422**

Mini Squared ring



LED / 1,2W / VWFL

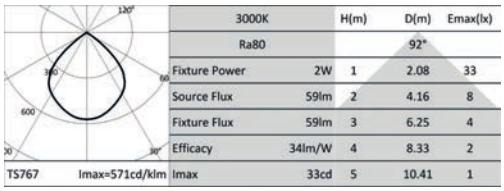

3000K		H(m)	D(m)	Emax(lx)
Ra80			92°	
Fixture Power	2W	1	2.08	33
Source Flux	59lm	2	4.16	8
Fixture Flux	59lm	3	6.25	4
Efficacy	34lm/W	4	8.33	2
Imax	33cd	5	10.41	1

Power supply	Colour	3000K
350mA	○	**1T3935**
350mA	◐	**1T3936**
350mA	●	**1T5423**

Related codes

Power Supply



Code
1T1757

Electronic power supply 15W, LxHxP=119x22x52mm, 220-240V, 350mA, IP20.
For Polka Mini: can feed up to 10 fixtures connected in series in constant current; the driver is bigger than the cutout hole needed by the luminaire.

OTTO

Recessed

GENERAL INFO
Extractable recessed projector
Ø30mm

LED
LED Emitter
From 370lm to 397lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 30lm/W

OPTIC
ZOOM: from SP to FL

POWER SUPPLY
Electronic remote

MATERIAL
Painted or anodised aluminium body.

A range of projectors with a minimal footprint with different installation types characterised by manual focus.

Available also in a single or multi-optical pole mounted version.

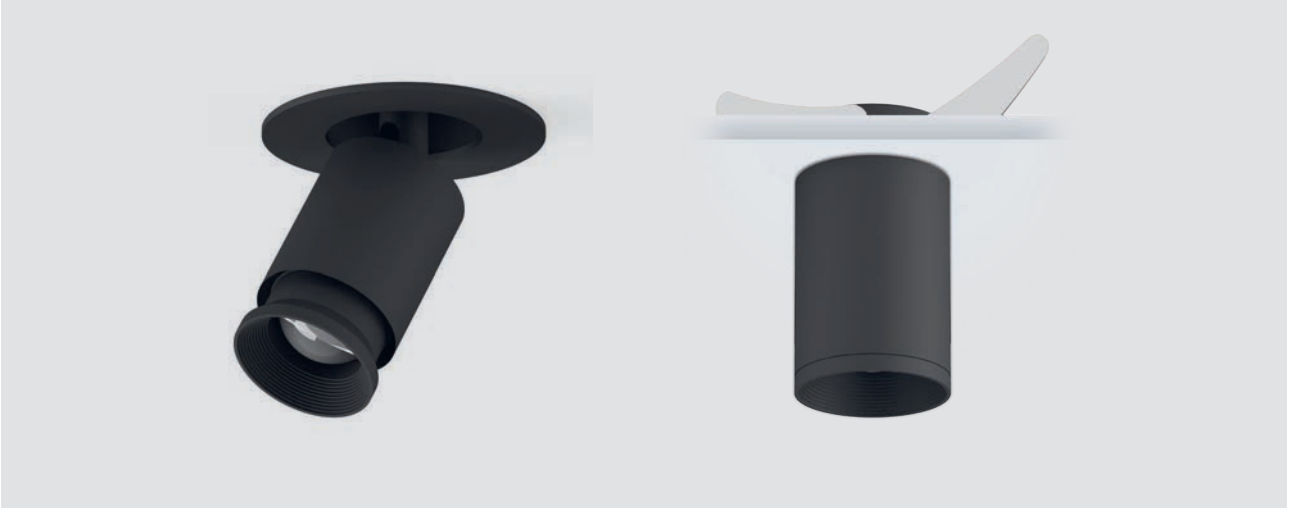

Semi-Recessed



LED / 3W / ZOOM / SP-FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
	Fixture Power	5W	1	0.24	2069
	Source Flux	370lm	2	0.49	517
	Fixture Flux	117lm	3	0.73	230
	Efficacy	23lm/W	4	0.98	129
TS1039	Imax=5593cd/klm	Imax	2069cd	5	1.22	83



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
	Fixture Power	5W	1	0.62	481
	Source Flux	370lm	2	1.23	120
	Fixture Flux	141lm	3	1.85	53
	Efficacy	28lm/W	4	2.46	30
TS1040	Imax=1301cd/klm	Imax	481cd	5	3.08	19

Power supply	Colour	3000K	4000K
1050mA	○	**1T6335**	**1T6336**
1050mA	●	**1T6347**	**1T6348**
1050mA	◌	**1T6359**	**1T6360**

Recessed extractable
Extractable



LED / 3W / ZOOM / SP-FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
	Fixture Power	5W	1	0.24	2069
	Source Flux	370lm	2	0.49	517
	Fixture Flux	117lm	3	0.73	230
	Efficacy	23lm/W	4	0.98	129
TS1039	Imax=5593cd/klm	Imax	2069cd	5	1.22	83



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
	Fixture Power	5W	1	0.62	481
	Source Flux	370lm	2	1.23	120
	Fixture Flux	141lm	3	1.85	53
	Efficacy	28lm/W	4	2.46	30
TS1040	Imax=1301cd/klm	Imax	481cd	5	3.08	19

Power supply	Colour	3000K	4000K
1050mA	○	**1T6333**	**1T6334**
1050mA	●	**1T6345**	**1T6346**
1050mA	◌	**1T6357**	**1T6358**

Related codes

Power Supply



Code
1T6524

Electronic power supply 42W, LxHxP=129x30x42mm, 220-240V-AC 50-60Hz, 1050mA, IP20.
Can drive up to 12 OTTO 1x simultaneously.
OTTO Semi-Recessed: the driver is bigger than the cutout hole needed by the luminaire.

Indoor

Projectors

Track projectors

222
ZENO Large

229
ZENO Medium

233
ZENO Small

236
LABEL 6

238
LABEL 9

242
STORE

250
STORE Mini

254
LEDÒ

266
RAY

271
RAY Mini

276
RAY Micro

278
EUROSTANDARD
Plus

Surface projectors

284
JEDI
Compact

292
ZENO
Applique

296
VOLTA

302
CORO Large

317
CORO Small

324
OTTO
Base

328
OTTO
Multi-Optic

ZENO

GENERAL INFO
Professional LED projector.
The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.
LARGE Ø184mm
MEDIUM Ø134mm
SMALL Ø105mm

LED
Chip on board
From 1430lm to 5121lm
3000K – 4000K
Ra97

PRODUCT EFFICACY
Up to 90lm/W

OPTICS
NSP – SP – FL – MWFL – WFL – WW
DBS - Digital beam opening control

POWER SUPPLY
Electronic – DALI - Casambi on board

MATERIAL
Die-cast painted aluminium optical unit and power supply body.

A range of professional projectors especially for museum lighting, given the quality of the LED sources, the cutting edge optics and installation flexibility.

Also available in an applique and recessed version.

		SMALL	MEDIUM	LARGE
		Ø105mm	Ø134mm	Ø184mm
LED	Flux (lm)	1430-1692	1881-2688	2463-5121
	Power	11W - 12W	18W - 26W	26W - 52W
OPTICS				
NSP	Lens	•		
	Indirect		•	•
SP	Lens	•		
	Hybrid			•
FL	Lens	•		
	Hybrid		•	•
MWFL	Reflector	•	•	•
WFL	Reflector	•	•	•
WW	Reflector		•	•
DBS			•	•

Merendoni Palace

Photographer
Ivan Rossi

Country
Bologna - Italy

01

Designed around the LED source

It has six different optical systems for as many lighting effects, three installation types - projector, wall mounted and recessed -and three different sizes. Particularly innovative from the point of view of the optics, it includes the “indirect Narrow spot” optic that works on reflection and makes it possible to obtain extremely narrow (6°), clean and defined beams.

Also available in a DBS – Dynamic Beam Shaper

02

Design studied right down to the smallest detail

The proportions, depth reduced to a minimum while maintaining excellent heat dissipation, the shape of the distinctive bracket element that disappears and becomes an integral part of the power supply body, are just some of the characteristics of the range.

03

04

05

Great variety of optical accessories

Such as a Flap, Zoom, Cut-Off and corrective filters to satisfy even the most complex lighting requirements.

Zeno Large and Medium equipped with an indirect Narrow Spot optic

To obtain a clean, precise and extremely powerful beam. Great variety of optical accessories. It works by reflection which means the lamp is hidden from sight and aimed towards the parabolic reflector which collimates the beam and emits a particularly defined, precise cone of light. This makes it suitable for museum lighting or where defined, narrow beams with minimum fall-off are required.

Zeno Zoom

The ZOOM version is the most flexible in the Targetti collection; a single optical system with a “variable beam with continuity” from Spot (12°) to Flood (52°). The beam is changed manually, but no tools are needed. This lets you choose the best effect for your needs, where you need it. The telescopic optical system consists of an optical glass lens, internal reflector in specular anodised aluminium with very high reflectance, and PMMA front diffuser for precise and defined beams.

ZENO

Large NSP



LED / 26W / INDIRECT / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			6°	
	Fixture Power	28W	1	0.11	121856
	Source Flux	2463lm	2	0.22	30464
	Fixture Flux	1736lm	3	0.33	13540
	Efficacy	62lm/W	4	0.45	7616
TS980	Imax=49475cd/klm	Imax	121856cd	5	0.56	4874

Driver	Colour	3000K	4000K
EL.	○	**1T5377EL**	**1T5378EL**
EL.	●	**1T5379EL**	**1T5380EL**
DALI	○	**1T5377DA**	**1T5378DA**
DALI	●	**1T5379DA**	**1T5380DA**
CASAMBI	○	**1T5377DACA**	**1T5378DACA**
CASAMBI	●	**1T5379DACA**	**1T5380DACA**

Large



LED / 51W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			17°	
	Fixture Power	54W	1	0.30	26788
	Source Flux	4985lm	2	0.60	6697
	Fixture Flux	2842lm	3	0.89	2976
	Efficacy	52lm/W	4	1.19	1674
TS981	Imax=5374cd/klm	Imax	26788cd	5	1.49	1072

Driver	Colour	3000K	4000K
EL.	○	**1T5381EL**	**1T5382EL**
EL.	●	**1T5383EL**	**1T5384EL**
DALI	○	**1T5381DA**	**1T5382DA**
DALI	●	**1T5383DA**	**1T5384DA**
CASAMBI	○	**1T5381DACA**	**1T5382DACA**
CASAMBI	●	**1T5383DACA**	**1T5384DACA**

LED / 51W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
	Fixture Power	54W	1	0.47	15064
	Source Flux	4985lm	2	0.94	3766
	Fixture Flux	3194lm	3	1.42	1674
	Efficacy	59lm/W	4	1.89	942
TS982	Imax=3022cd/klm	Imax	15064cd	5	2.36	603

Driver	Colour	3000K	4000K
EL.	○	**1T5385EL**	**1T5386EL**
EL.	●	**1T5387EL**	**1T5388EL**
DALI	○	**1T5385DA**	**1T5386DA**
DALI	●	**1T5387DA**	**1T5388DA**
CASAMBI	○	**1T5385DACA**	**1T5386DACA**
CASAMBI	●	**1T5387DACA**	**1T5388DACA**

LED / 51W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			38°	
	Fixture Power	54W	1	0.69	7001
	Source Flux	4985lm	2	1.38	1750
	Fixture Flux	4088lm	3	2.07	778
	Efficacy	75lm/W	4	2.76	438
TS983	Imax=1417cd/klm	Imax	7066cd	5	3.44	280

Driver	Colour	3000K	4000K
EL.	○	**1T5389EL**	**1T5390EL**
EL.	●	**1T5391EL**	**1T5392EL**
DALI	○	**1T5389DA**	**1T5390DA**
DALI	●	**1T5391DA**	**1T5392DA**
CASAMBI	○	**1T5389DACA**	**1T5390DACA**
CASAMBI	●	**1T5391DACA**	**1T5392DACA**

LED / 51W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			52°	
	Fixture Power	54W	1	0.97	5123
	Source Flux	4985lm	2	1.94	1281
	Fixture Flux	4078lm	3	2.91	569
	Efficacy	75lm/W	4	3.88	320
TS984	Imax=1028cd/klm	Imax	5123cd	4.85	205

Driver	Colour	3000K	4000K
EL.	○	**1T5393EL**	**1T5394EL**
EL.	●	**1T5395EL**	**1T5396EL**
DALI	○	**1T5393DA**	**1T5394DA**
DALI	●	**1T5395DA**	**1T5396DA**
CASAMBI	○	**1T5393DACA**	**1T5394DACA**
CASAMBI	●	**1T5395DACA**	**1T5396DACA**

Large WW



LED / 52W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra97			34°	81°	
	Fixture Power	56W	1	0.98	1.99	1761
	Source Flux	4995lm	2	1.96	3.98	440
	Fixture Flux	2413lm	3	2.94	5.96	196
	Efficacy	43lm/W	4	3.92	7.95	110
TS985	Imax=520cd/klm	Imax	2599cd	4.91	9.94	70

Driver	Colour	3000K	4000K
EL.	○	**1T5397EL**	**1T5398EL**
EL.	●	**1T5399EL**	**1T5400EL**
DALI	○	**1T5397DA**	**1T5398DA**
DALI	●	**1T5399DA**	**1T5400DA**
CASAMBI	○	**1T5397DACA**	**1T5398DACA**
CASAMBI	●	**1T5399DACA**	**1T5400DACA**

Accessories

Filter



Code
1T6054

Methacrylate holographic filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with a dedicated holder ring.

Grid



Code
1T6055

Anti-glare louver.
Black lacquered aluminium honeycomb structure.
To be completed with a dedicated holder ring.

Cut-off



Code
1T6056

Black painted steel cut-off.
To be completed with a dedicated holder ring.



Code
1T6057

Black painted steel asymmetric cut-off.
To be completed with a dedicated holder ring.

ZENO

Ray Shade

Code
1T6058

Adjustable barn doors flaps made of black painted steel.
To be completed with a dedicated holder ring.

Holder Ring



	Code
○	**1T6053**
●	**1T6500**

Black painted aluminium accessory holder ring.ed aluminium accessory holder ring.

Adapter



	Ø	H	Driver	Colour	Code
	100	32	EL.	○	**1T2221**
	100	32	EL.	●	**1T2220**
	100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



	Ø	H	Driver	Colour	Code
	118	38	DALI	○	**9000/BPU-D-W**
	118	38	DALI	●	**9000/BPU-D-B**
	118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Medium NSP



LED / 18W / INDIRECT / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			9°	
Fixture Power		20W	1	0.16	29156
Source Flux		1881lm	2	0.33	7289
Fixture Flux		978lm	3	0.49	3240
Efficacy		48lm/W	4	0.65	1822
TS974	Imax=15500cd/klm	Imax	29156cd	5	0.82	1166

Driver	Colour	3000K	4000K
EL.	○	**1T5353EL**	**1T5354EL**
EL.	●	**1T5355EL**	**1T5356EL**
DALI	○	**1T5353DA**	**1T5354DA**
DALI	●	**1T5355DA**	**1T5356DA**
CASAMBI	○	**1T5353DACA**	**1T5354DACA**
CASAMBI	●	**1T5355DACA**	**1T5356DACA**

Medium



LED / 26W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		28W	1	0.27	17721
Source Flux		2602lm	2	0.55	4430
Fixture Flux		1735lm	3	0.82	1969
Efficacy		62lm/W	4	1.10	1108
TS975	Imax=6811cd/klm	Imax	17721cd	5	1.37	709

Driver	Colour	3000K	4000K
EL.	○	**1T5357EL**	**1T5358EL**
EL.	●	**1T5359EL**	**1T5360EL**
DALI	○	**1T5357DA**	**1T5358DA**
DALI	●	**1T5359DA**	**1T5360DA**
CASAMBI	○	**1T5357DACA**	**1T5358DACA**
CASAMBI	●	**1T5359DACA**	**1T5360DACA**

LED / 26W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			32°	
Fixture Power		28W	1	0.56	5622
Source Flux		2602lm	2	1.13	1405
Fixture Flux		1554lm	3	1.69	625
Efficacy		55lm/W	4	2.26	351
TS976	Imax=2161cd/klm	Imax	5622cd	5	2.82	225

Driver	Colour	3000K	4000K
EL.	○	**1T5361EL**	**1T5362EL**
EL.	●	**1T5363EL**	**1T5364EL**
DALI	○	**1T5361DA**	**1T5362DA**
DALI	●	**1T5363DA**	**1T5364DA**
CASAMBI	○	**1T5361DACA**	**1T5362DACA**
CASAMBI	●	**1T5363DACA**	**1T5364DACA**

LED / 26W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			46°	
Fixture Power		28W	1	0.84	3642
Source Flux		2602lm	2	1.68	911
Fixture Flux		2128lm	3	2.52	405
Efficacy		76lm/W	4	3.37	228
TS977	Imax=1417cd/klm	Imax	3687cd	5	4.21	146

Driver	Colour	3000K	4000K
EL.	○	**1T5365EL**	**1T5366EL**
EL.	●	**1T5367EL**	**1T5368EL**
DALI	○	**1T5365DA**	**1T5366DA**
DALI	●	**1T5367DA**	**1T5368DA**
CASAMBI	○	**1T5365DACA**	**1T5366DACA**
CASAMBI	●	**1T5367DACA**	**1T5368DACA**

ZENO

LED / 26W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		28W	1	1.12	2590
Source Flux		2602lm	2	2.24	648
Fixture Flux		2136lm	3	3.36	288
Efficacy		76lm/W	4	4.48	162
TS978	Imax=996cd/klm	Imax	5	5.60	104

Driver	Colour	3000K	4000K
EL.	○	**1T5369EL**	**1T5370EL**
EL.	●	**1T5371EL**	**1T5372EL**
DALI	○	**1T5369DA**	**1T5370DA**
DALI	●	**1T5371DA**	**1T5372DA**
CASAMBI	○	**1T5369DACA**	**1T5370DACA**
CASAMBI	●	**1T5371DACA**	**1T5372DACA**

Medium



LED / 26W / DBS



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		28W	1	0.28	12144
Source Flux		2602lm	2	0.56	3036
Fixture Flux		1244lm	3	0.84	1349
Efficacy		44lm/W	4	1.12	759
TS1096	Imax=4667cd/klm	Imax	5	1.40	486



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
Fixture Power		28W	1	0.45	4670
Source Flux		2602lm	2	0.89	1167
Fixture Flux		1202lm	3	1.34	519
Efficacy		43lm/W	4	1.79	292
TS1097	Imax=1795cd/klm	Imax	5	2.24	187



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			42°	
Fixture Power		28W	1	0.78	1615
Source Flux		2602lm	2	1.55	404
Fixture Flux		1108lm	3	2.33	179
Efficacy		40lm/W	4	3.11	101
TS1099	Imax=620cd/klm	Imax	5	3.88	65



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		28W	1	0.61	2562
Source Flux		2602lm	2	1.23	640
Fixture Flux		1168lm	3	1.84	285
Efficacy		42lm/W	4	2.45	160
TS1098	Imax=984cd/klm	Imax	5	3.07	102

Driver	Colour	3000K	4000K
CASAMBI	○	**1T6941CA**	**1T6943CA**
CASAMBI	●	**1T6942CA**	**1T6944CA**

Medium WW



LED / 26W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra97			34°	54°	
Fixture Power		28W	1	1.06	1.18	1345
Source Flux		2602lm	2	2.11	2.35	336
Fixture Flux		1473lm	3	3.17	3.53	149
Efficacy		53lm/W	4	4.23	4.71	84
TS979	Imax=745cd/klm	Imax	5	5.28	5.89	54

Driver	Colour	3000K	4000K
EL.	○	**1T5373EL**	**1T5374EL**
EL.	●	**1T5375EL**	**1T5376EL**
DALI	○	**1T5373DA**	**1T5374DA**
DALI	●	**1T5375DA**	**1T5376DA**
CASAMBI	○	**1T5373DACA**	**1T5374DACA**
CASAMBI	●	**1T5375DACA**	**1T5376DACA**

Accessories

Filter



Code
1T6060

Methacrylate holographic filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with a dedicated holder ring.

Grid



Code
1T6061

Anti-glare louver.
Black lacquered aluminium honeycomb structure.
To be completed with a dedicated holder ring.

Cut-off



Code
1T6062

Black painted steel cut-off.
To be completed with a dedicated holder ring.



Code
1T6063

Black painted steel asymmetric cut-off.
To be completed with a dedicated holder ring.

Ray Shade

Code
1T6064

Adjustable barn doors flaps made of black painted steel.
To be completed with a dedicated holder ring.

Holder Ring



Colour	Code
○	**1T6059**
●	**1T6501**

Black painted aluminium accessory holder ring.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Ø	H	Driver	Colour	Code
118	38	DALI	○	**9000/BPU-D-W**
118	38	DALI	●	**9000/BPU-D-B**
118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

ZENO

Medium Zoom



LED / 26W / ZOOM / SP-WFL

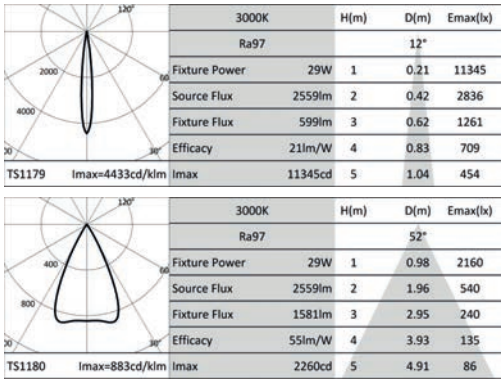

3000K		H(m)	D(m)	Emax(lx)
Ra97			12°	
Fixture Power	29W	1	0.21	11345
Source Flux	2559lm	2	0.42	2836
Fixture Flux	599lm	3	0.62	1261
Efficacy	21lm/W	4	0.83	709
Imax	11345cd	5	1.04	454

3000K		H(m)	D(m)	Emax(lx)
Ra97			52°	
Fixture Power	29W	1	0.98	2160
Source Flux	2559lm	2	1.96	540
Fixture Flux	1581lm	3	2.95	240
Efficacy	55lm/W	4	3.93	135
Imax	2260cd	5	4.91	86

	Driver	Colour	3000K	4000K
	EL.	○	**1T7502EL**	**1T7504EL**
	EL.	●	**1T7503EL**	**1T7505EL**
	DALI	○	**1T7502DA**	**1T7504DA**
	DALI	●	**1T7503DA**	**1T7505DA**
	CASAMBI	○	**1T7502DACA**	**1T7504DACA**
	CASAMBI	●	**1T7503DACA**	**1T7505DACA**

Accessories

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.

Ø	H	Driver	Colour	Code
118	38	DALI	○	**9000/BPU-D-W**
118	38	DALI	●	**9000/BPU-D-B**
118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Small



LED / 11W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			7°	
	Fixture Power	15W	1	0.13	24183
	Source Flux	1619lm	2	0.26	6046
	Fixture Flux	712lm	3	0.39	2687
	Efficacy	48lm/W	4	0.52	1511
TS1063	Imax=14937cd/klm	Imax	24183cd	5	0.65	967

Driver	Colour	3000K	4000K
EL.	○	**1T6531EL**	**1T6532EL**
EL.	●	**1T6533EL**	**1T6534EL**
DALI	○	**1T6531DA**	**1T6532DA**
DALI	●	**1T6533DA**	**1T6534DA**

LED / 12W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			10°	
	Fixture Power	14W	1	0.18	17263
	Source Flux	1430lm	2	0.36	4316
	Fixture Flux	1101lm	3	0.54	1918
	Efficacy	82lm/W	4	0.72	1079
TS1064	Imax=12072cd/klm	Imax	17263cd	5	0.89	691

Driver	Colour	3000K	4000K
EL.	○	**1T6535EL**	**1T6536EL**
EL.	●	**1T6537EL**	**1T6538EL**
DALI	○	**1T6535DA**	**1T6536DA**
DALI	●	**1T6537DA**	**1T6538DA**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
	Fixture Power	14W	1	0.49	4536
	Source Flux	1430lm	2	0.99	1134
	Fixture Flux	1115lm	3	1.48	504
	Efficacy	83lm/W	4	1.98	284
TS1065	Imax=3172cd/klm	Imax	4536cd	5	2.47	181

Driver	Colour	3000K	4000K
EL.	○	**1T6539EL**	**1T6540EL**
EL.	●	**1T6541EL**	**1T6542EL**
DALI	○	**1T6539DA**	**1T6540DA**
DALI	●	**1T6541DA**	**1T6542DA**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			48°	
	Fixture Power	14W	1	0.90	1860
	Source Flux	1430lm	2	1.79	465
	Fixture Flux	1178lm	3	2.69	207
	Efficacy	87lm/W	4	3.59	116
TS1066	Imax=1307cd/klm	Imax	1870cd	5	4.48	74

Driver	Colour	3000K	4000K
EL.	○	**1T6543EL**	**1T6544EL**
EL.	●	**1T6545EL**	**1T6546EL**
DALI	○	**1T6543DA**	**1T6544DA**
DALI	●	**1T6545DA**	**1T6546DA**

LED / 12W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			58°	
	Fixture Power	14W	1	1.11	1400
	Source Flux	1430lm	2	2.21	350
	Fixture Flux	1188lm	3	3.32	156
	Efficacy	88lm/W	4	4.43	88
TS1067	Imax=1001cd/klm	Imax	1432cd	5	5.53	56

Driver	Colour	3000K	4000K
EL.	○	**1T6547EL**	**1T6548EL**
EL.	●	**1T6549EL**	**1T6550EL**
DALI	○	**1T6547DA**	**1T6548DA**
DALI	●	**1T6549DA**	**1T6550DA**

Accessories

Filter

Code
1T6572

Blade of light filter.
Methacrylate holographic filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with a dedicated holder ring.

Grid

Code
1T6573

Anti-glare louver.
Black lacquered aluminium honeycomb structure.
To be completed with a dedicated holder ring.

Cut-off

Code
1T6574

Black painted steel cut-off.
To be completed with a dedicated holder ring.

Code
1T6575

Black painted steel asymmetric cut-off.
To be completed with a dedicated holder ring.

Ray Shade

Code
1T6576

Adjustable barn doors flaps made of black painted steel.
To be completed with a dedicated holder ring.

Holder Ring

Colour	Code
●	**1T6571**

Black painted aluminium accessory holder ring.

Control systems

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Magnani Rocca Foundation

Lighting design
Cavazzoni Associati

Photographer
Ivan Rossi

Country
Bologna - Italy

LABEL 230V

GENERAL INFO
Adjustable professional LED projector.
The optical unit can be adjusted from 0° a 90° on the vertical plane and 355° on the horizontal plane with the possibility to block the beam on the horizontal plane (friction blocking system on the vertical plane).
Ø60mm – Ø88mm

LED
Chip on board
From 2100lm to 3287lm
3000K – 4000K
Ra97

PRODUCT EFFICACY
Up to 82lm/W

OPTICS
SP – FL – MWFL

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Die-cast painted aluminium body.

A coordinated range of projectors with track installation designed for applications in the retail, interior and hospitality industry. Available in two different sizes - LABEL 6 and LABEL 9 - with a retractable power supply in the track.

Every version has optics with reflectors for soft effects with broad tones. The set back LED lamp ensures perfect visual comfort.

Rinascimento Store
Teddy Spa Group

Architect
WOMArchitettura
Arch. Teresa D'Alessandro
Arch. Caterina Pulcinella

Country
Cremona - Italy

LABEL

LABEL 6



LED / 19W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
	Fixture Power	21W	1	0.28	12581
	Source Flux	2100lm	2	0.55	3145
	Fixture Flux	1542lm	3	0.83	1398
	Efficacy	73lm/W	4	1.11	786
TS1057	Imax=5991cd/klm	Imax	12581cd	5	1.39	503

Driver	Colour	3000K	4000K
EL.	○	**1T6582EL**	**1T6583EL**
EL.	●	**1T6584EL**	**1T6585EL**
EL.	◍	**1T6586EL**	**1T6587EL**
DALI	○	**1T6582DA**	**1T6583DA**
DALI	●	**1T6584DA**	**1T6585DA**
DALI	◍	**1T6586DA**	**1T6587DA**

LED / 19W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			31°	
	Fixture Power	21W	1	0.56	5165
	Source Flux	2100lm	2	1.12	1291
	Fixture Flux	1623lm	3	1.67	574
	Efficacy	77lm/W	4	2.23	323
TS1058	Imax=2459cd/klm	Imax	5165cd	5	2.79	207

Driver	Colour	3000K	4000K
EL.	○	**1T6588EL**	**1T6589EL**
EL.	●	**1T6590EL**	**1T6591EL**
EL.	◍	**1T6592EL**	**1T6593EL**
DALI	○	**1T6588DA**	**1T6589DA**
DALI	●	**1T6590DA**	**1T6591DA**
DALI	◍	**1T6592DA**	**1T6593DA**

LED / 19W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			48°	
	Fixture Power	21W	1	0.88	2879
	Source Flux	2100lm	2	1.77	720
	Fixture Flux	1609lm	3	2.65	320
	Efficacy	76lm/W	4	3.53	180
TS1059	Imax=1379cd/klm	Imax	2895cd	5	4.41	115

Driver	Colour	3000K	4000K
EL.	○	**1T6594EL**	**1T6595EL**
EL.	●	**1T6596EL**	**1T6597EL**
EL.	◍	**1T6598EL**	**1T6599EL**
DALI	○	**1T6594DA**	**1T6595DA**
DALI	●	**1T6596DA**	**1T6597DA**
DALI	◍	**1T6598DA**	**1T6599DA**

LABEL 9



LED / 31W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
	Fixture Power	34W	1	0.29	17467
	Source Flux	3207lm	2	0.57	4367
	Fixture Flux	2322lm	3	0.86	1941
	Efficacy	69lm/W	4	1.14	1092
TS1060	Imax=5446cd/klm	Imax	17467cd	5	1.43	699

Driver	Colour	3000K	4000K
EL.	○	**1T6600EL**	**1T6601EL**
EL.	●	**1T6602EL**	**1T6603EL**
EL.	◍	**1T6604EL**	**1T6605EL**

LED / 25W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		28W	1	0.29	15081
Source Flux		2769lm	2	0.57	3770
Fixture Flux		2005lm	3	0.86	1676
Efficacy		72lm/W	4	1.14	943
TS1060	Imax=5446cd/klm	Imax	15081cd	5	1.43	603

Driver	Colour	3000K	4000K
DALI	○	**1T6600DA**	**1T6601DA**
DALI	●	**1T6602DA**	**1T6603DA**
DALI	◌	**1T6604DA**	**1T6605DA**

LED / 31W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			29°	
Fixture Power		34W	1	0.52	8572
Source Flux		3207lm	2	1.03	2143
Fixture Flux		2427lm	3	1.55	952
Efficacy		72lm/W	4	2.07	536
TS1061	Imax=2673cd/klm	Imax	8572cd	5	2.58	343

Driver	Colour	3000K	4000K
EL.	○	**1T6606EL**	**1T6607EL**
EL.	●	**1T6608EL**	**1T6609EL**
EL.	◌	**1T6610EL**	**1T6611EL**

LED / 25W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			29°	
Fixture Power		28W	1	0.52	7401
Source Flux		2769lm	2	1.03	1850
Fixture Flux		2096lm	3	1.55	822
Efficacy		75lm/W	4	2.07	463
TS1061	Imax=2673cd/klm	Imax	7401cd	5	2.58	296

Driver	Colour	3000K	4000K
DALI	○	**1T6606DA**	**1T6607DA**
DALI	●	**1T6608DA**	**1T6609DA**
DALI	◌	**1T6610DA**	**1T6611DA**

LED / 31W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			46°	
Fixture Power		34W	1	0.85	4471
Source Flux		3207lm	2	1.70	1118
Fixture Flux		2384lm	3	2.55	497
Efficacy		71lm/W	4	3.40	279
TS1062	Imax=1426cd/klm	Imax	4572cd	5	4.25	179

Driver	Colour	3000K	4000K
EL.	○	**1T6612EL**	**1T6613EL**
EL.	●	**1T6614EL**	**1T6615EL**
EL.	◌	**1T6616EL**	**1T6617EL**

LED / 25W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			46°	
Fixture Power		28W	1	0.85	3860
Source Flux		2769lm	2	1.70	965
Fixture Flux		2058lm	3	2.55	429
Efficacy		74lm/W	4	3.40	241
TS1062	Imax=1426cd/klm	Imax	3947cd	5	4.25	154

Driver	Colour	3000K	4000K
DALI	○	**1T6612DA**	**1T6613DA**
DALI	●	**1T6614DA**	**1T6615DA**
DALI	◌	**1T6616DA**	**1T6617DA**

Label 6 accessories

Screen



Ø	Code
50	**1T6521**

Protective screen.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

LABEL

Filter



Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.

Control systems

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relative that can control non-dimmable fixtures up to a maximum of 6A.

Label 9 accessories

Screen



Ø	Code
77	**1T6618**

Protective screen.

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring for Cloud, Ray Mini, Store, Label 9 and Keplero Mini HE.

Filter



Filter	Ø	Code
Halogen +	70	**1T6506**
Vivid +	70	**1T6507**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Filter	Ø	Code
Meat	70	**1T6508**
Fish	70	**1T6509**
Bread	70	**1T6510**
Vegetables	70	**1T6511**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be completed with an additional holder ring.
1T6508
To be used only with 3000K and Ra80 fixtures.
1T6509
To be used only with 4000K and Ra80 fixtures.
1T6510
To be used only with 3000K and Ra80 fixtures.
1T6511
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	70	**1T6512**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Ø	Code
70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.



Ø	Code
70	**1T1709**

Flat glass wired refractive diffusive filter.
This softens the luminous effect.
To be completed with an additional holder ring.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Control systems

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

STORE

GENERAL INFO
Professional projector for LED sources.
Optical chamber adjustable 0° - 90° vertically and 355° horizontally. Mechanical aiming lock in the horizontal plane and blocking equipped with a friction system in the vertical plane.
STORE Ø93mm
STORE MINI Ø75mm

LED
Chip on board
From 1786lm to 4385lm
3000K – 4000K
Ra84 - Ra97

PRODUCT EFFICACY
Up to 119lm/W

OPTICS
SP – FL – MWFL – WFL

POWER SUPPLY
Electronic – DALI

MATERIAL
Optical chamber and power box in painted die-cast aluminium. Front ring for accessories in painted aluminium.

A range of projectors designed to meet the particular requirements of the Retail market where excellent performance, minimal design and controlled light are required. Available in a projector and recessed versions, both in two different sizes.

The projector version comes in two different sizes: a large version with a separate driver box and a Mini version with a driver hidden in the track.

		STORE	STORE MINI
		Ø 93mm	Ø 75mm
LED	Flux (lm)	2257- 4385	1786 - 2532
	Power	19W - 33W	11W - 18W
OPTICS			
SP	Lenticular		•
	Reflector	•	
FL	Lenticular		•
	Reflector	•	
MWFL	Reflector	•	•
WFL	Reflector	•	•

Mc Laren Showroom

Country
Milan - Italy

Projector



LED / 19W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		22W	1	0.24	23022
Source Flux		2935lm	2	0.48	5755
Fixture Flux		2494lm	3	0.72	2558
Efficacy		112lm/W	4	0.96	1439
TS947	Imax=7844cd/klm	Imax	23022cd	5	1.20	921

Driver	Colour	3000K	4000K
EL.	○	**1T5050EL**	**1T5052EL**
EL.	●	**1T5034EL**	**1T5036EL**
DALI	○	**1T5050DA**	**1T5052DA**
DALI	●	**1T5034DA**	**1T5036DA**

LED / 19W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		22W	1	0.24	17704
Source Flux		2257lm	2	0.48	4426
Fixture Flux		1918lm	3	0.72	1967
Efficacy		86lm/W	4	0.96	1106
TS947	Imax=7844cd/klm	Imax	17704cd	5	1.20	708

Driver	Colour	3000K	4000K
EL.	○	**1T5051EL**	**1T5053EL**
EL.	●	**1T5035EL**	**1T5037EL**
DALI	○	**1T5051DA**	**1T5053DA**
DALI	●	**1T5035DA**	**1T5037DA**

LED / 19W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		22W	1	0.49	9061
Source Flux		2935lm	2	0.97	2265
Fixture Flux		2486lm	3	1.46	1007
Efficacy		112lm/W	4	1.95	566
TS948	Imax=3087cd/klm	Imax	9061cd	5	2.43	362

Driver	Colour	3000K	4000K
EL.	○	**1T5054EL**	**1T5056EL**
EL.	●	**1T5038EL**	**1T5040EL**
DALI	○	**1T5054DA**	**1T5056DA**
DALI	●	**1T5038DA**	**1T5040DA**

LED / 19W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power		22W	1	0.49	6968
Source Flux		2257lm	2	0.97	1742
Fixture Flux		1912lm	3	1.46	774
Efficacy		86lm/W	4	1.95	435
TS948	Imax=3087cd/klm	Imax	6968cd	5	2.43	279

Driver	Colour	3000K	4000K
EL.	○	**1T5055EL**	**1T5057EL**
EL.	●	**1T5039EL**	**1T5041EL**
DALI	○	**1T5055DA**	**1T5057DA**
DALI	●	**1T5039DA**	**1T5041DA**

LED / 19W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		22W	1	0.82	4770
Source Flux		2935lm	2	1.64	1193
Fixture Flux		2550lm	3	2.46	530
Efficacy		115lm/W	4	3.28	298
TS949	Imax=1655cd/klm	Imax	4856cd	5	4.10	191

Driver	Colour	3000K	4000K
EL.	○	**1T5058EL**	**1T5060EL**
EL.	●	**1T5042EL**	**1T5044EL**
DALI	○	**1T5058DA**	**1T5060DA**
DALI	●	**1T5042DA**	**1T5044DA**

LED / 19W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		22W	1	0.82	3668
Source Flux		2257lm	2	1.64	917
Fixture Flux		1961lm	3	2.46	408
Efficacy		88lm/W	4	3.28	229
TS949	Imax=1655cd/klm	Imax	3734cd	5	4.10	147

Driver	Colour	3000K	4000K
EL.	○	**1T5059EL**	**1T5061EL**
EL.	●	**1T5043EL**	**1T5045EL**
DALI	○	**1T5059DA**	**1T5061DA**
DALI	●	**1T5043DA**	**1T5045DA**

LED / 19W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		22W	1	1.13	3318
Source Flux		2935lm	2	2.26	830
Fixture Flux		2585lm	3	3.39	369
Efficacy		116lm/W	4	4.51	207
TS950	Imax=1141cd/klm	Imax	3350cd	5	5.64	133

Driver	Colour	3000K	4000K
EL.	○	**1T5062EL**	**1T5064EL**
EL.	●	**1T5046EL**	**1T5048EL**
DALI	○	**1T5062DA**	**1T5064DA**
DALI	●	**1T5046DA**	**1T5048DA**

LED / 19W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		22W	1	1.13	2552
Source Flux		2257lm	2	2.26	638
Fixture Flux		1988lm	3	3.39	284
Efficacy		90lm/W	4	4.51	159
TS950	Imax=1141cd/klm	Imax	2576cd	5	5.64	102

Driver	Colour	3000K	4000K
EL.	○	**1T5063EL**	**1T5065EL**
EL.	●	**1T5047EL**	**1T5049EL**
DALI	○	**1T5063DA**	**1T5065DA**
DALI	●	**1T5047DA**	**1T5049DA**

LED / 33W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		36W	1	0.24	33552
Source Flux		4277lm	2	0.48	8388
Fixture Flux		3635lm	3	0.72	3728
Efficacy		102lm/W	4	0.96	2097
TS951	Imax=7845cd/klm	Imax	33552cd	5	1.20	1342

Driver	Colour	3000K	4000K
EL.	○	**1T5082EL**	**1T5084EL**
EL.	●	**1T5066EL**	**1T5068EL**
DALI	○	**1T5082DA**	**1T5084DA**
DALI	●	**1T5066DA**	**1T5068DA**

LED / 33W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
Fixture Power		36W	1	0.24	25809
Source Flux		3290lm	2	0.48	6452
Fixture Flux		2796lm	3	0.72	2868
Efficacy		78lm/W	4	0.96	1613
TS951	Imax=7845cd/klm	Imax	25809cd	5	1.20	1032

Driver	Colour	3000K	4000K
EL.	○	**1T5083EL**	**1T5085EL**
EL.	●	**1T5067EL**	**1T5069EL**
DALI	○	**1T5083DA**	**1T5085DA**
DALI	●	**1T5067DA**	**1T5069DA**

LED / 33W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		36W	1	0.49	13204
Source Flux		4277lm	2	0.97	3301
Fixture Flux		3622lm	3	1.46	1467
Efficacy		101lm/W	4	1.95	825
TS952	Imax=3087cd/klm	Imax	13204cd	5	2.43	528

Driver	Colour	3000K	4000K
EL.	○	**1T5086EL**	**1T5088EL**
EL.	●	**1T5070EL**	**1T5072EL**
DALI	○	**1T5086DA**	**1T5088DA**
DALI	●	**1T5070DA**	**1T5072DA**

STORE

LED / 33W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			27°	
Fixture Power		36W	1	0.49	10157
Source Flux		3290lm	2	0.97	2539
Fixture Flux		2786lm	3	1.46	1129
Efficacy		78lm/W	4	1.95	635
TS952	Imax=3087cd/klm	Imax	10157cd	5	2.43	406

Driver	Colour	3000K	4000K
EL.	○	**1T5087EL**	**1T5089EL**
EL.	●	**1T5071EL**	**1T5073EL**
DALI	○	**1T5087DA**	**1T5089DA**
DALI	●	**1T5071DA**	**1T5073DA**

LED / 33W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		36W	1	0.82	6951
Source Flux		4277lm	2	1.64	1738
Fixture Flux		3716lm	3	2.46	772
Efficacy		104lm/W	4	3.28	434
TS953	Imax=1655cd/klm	Imax	7076cd	5	4.10	278

Driver	Colour	3000K	4000K
EL.	○	**1T5090EL**	**1T5092EL**
EL.	●	**1T5074EL**	**1T5076EL**
DALI	○	**1T5090DA**	**1T5092DA**
DALI	●	**1T5074DA**	**1T5076DA**

LED / 33W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
Fixture Power		36W	1	0.82	5347
Source Flux		3290lm	2	1.64	1337
Fixture Flux		2859lm	3	2.46	594
Efficacy		80lm/W	4	3.28	334
TS953	Imax=1655cd/klm	Imax	5443cd	5	4.10	214

Driver	Colour	3000K	4000K
EL.	○	**1T5091EL**	**1T5093EL**
EL.	●	**1T5075EL**	**1T5077EL**
DALI	○	**1T5091DA**	**1T5093DA**
DALI	●	**1T5075DA**	**1T5077DA**

LED / 33W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			59°	
Fixture Power		36W	1	1.13	4836
Source Flux		4277lm	2	2.26	1209
Fixture Flux		3768lm	3	3.39	537
Efficacy		106lm/W	4	4.51	302
TS954	Imax=1142cd/klm	Imax	4882cd	5	5.64	193

Driver	Colour	3000K	4000K
EL.	○	**1T5094EL**	**1T5096EL**
EL.	●	**1T5078EL**	**1T5080EL**
DALI	○	**1T5094DA**	**1T5096DA**
DALI	●	**1T5078DA**	**1T5080DA**

LED / 33W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
Fixture Power		36W	1	1.13	3720
Source Flux		3290lm	2	2.26	930
Fixture Flux		2898lm	3	3.39	413
Efficacy		81lm/W	4	4.51	233
TS954	Imax=1142cd/klm	Imax	3756cd	5	5.64	149

Driver	Colour	3000K	4000K
EL.	○	**1T5095EL**	**1T5097EL**
EL.	●	**1T5079EL**	**1T5081EL**
DALI	○	**1T5095DA**	**1T5097DA**
DALI	●	**1T5079DA**	**1T5081DA**

Accessories

Filter



Filter	Ø	Code
Red	70	**1T1712**
Green	70	**1T1713**
Blue	70	**1T1714**
Yellow	70	**1T1715**
Magenta	70	**1T1716**

Flat glass interference chromatic filter.
To be completed with an additional holder ring.



Ø	Code
70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.



Ø	Code
70	**1T1709**

Flat glass wired refractive diffusive filter.
This softens the luminous effect.
To be completed with an additional holder ring.



Filter	Ø	Code
Halogen +	70	**1T6506**
Vivid +	70	**1T6507**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Filter	Ø	Code
Meat	70	**1T6508**
Fish	70	**1T6509**
Bread	70	**1T6510**
Vegetables	70	**1T6511**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be completed with an additional holder ring.

To be used only with 3000K and Ra80 fixtures.
1T6509
To be used only with 4000K and Ra80 fixtures.
1T6510
To be used only with 3000K and Ra80 fixtures.
1T6511
To be used only with 3000K and Ra80 fixtures.

Filter	Ø	Code
Beauty	70	**1T6512**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.

STORE

Screen



Ø	Code
80	**1T6522**

Protective screen.

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

Adapter



	Ø	H	Driver	Colour	Code
	100	32	EL.	○	**1T2221**
	100	32	EL.	●	**1T2220**
	100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.

	Ø	H	Driver	Colour	Code
	118	38	DALI	○	**9000/BPU-D-W**
	118	38	DALI	●	**9000/BPU-D-B**
	118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Mini Projector



LED / 11W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		15W	1	0.27	16914
Source Flux		1786lm	2	0.53	4229
Fixture Flux		1336lm	3	0.80	1879
Efficacy		90lm/W	4	1.07	1057
TS966	Imax=9470cd/klm	Imax	16914cd	5	1.33	677

Driver	Colour	3000K	4000K
EL.	○	**1T5016EL**	**1T5017EL**
EL.	●	**1T5010EL**	**1T5011EL**

LED / 12W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		14W	1	0.54	4825
Source Flux		1837lm	2	1.09	1206
Fixture Flux		1315lm	3	1.63	536
Efficacy		97lm/W	4	2.17	302
TS967	Imax=2627cd/klm	Imax	4825cd	5	2.72	193

Driver	Colour	3000K	4000K
EL.	○	**1T5018EL**	**1T5019EL**
EL.	●	**1T5012EL**	**1T5013EL**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		14W	1	0.90	2476
Source Flux		1837lm	2	1.80	619
Fixture Flux		1520lm	3	2.69	275
Efficacy		113lm/W	4	3.59	155
TS968	Imax=1372cd/klm	Imax	2520cd	5	4.49	99

Driver	Colour	3000K	4000K
EL.	○	**1T5020EL**	**1T5021EL**
EL.	●	**1T5014EL**	**1T5015EL**

LED / 18W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		20W	1	0.43	8803
Source Flux		2466lm	2	0.87	2201
Fixture Flux		1800lm	3	1.30	978
Efficacy		89lm/W	4	1.73	550
TS969	Imax=3570cd/klm	Imax	8803cd	5	2.17	352

Driver	Colour	3000K	4000K
EL.	○	**1T5028EL**	**1T5029EL**
EL.	●	**1T5022EL**	**1T5023EL**

LED / 18W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		20W	1	0.90	3323
Source Flux		2466lm	2	1.80	831
Fixture Flux		2041lm	3	2.69	369
Efficacy		101lm/W	4	3.59	208
TS970	Imax=1372cd/klm	Imax	3383cd	5	4.49	133

Driver	Colour	3000K	4000K
EL.	○	**1T5030EL**	**1T5031EL**
EL.	●	**1T5024EL**	**1T5025EL**

LED / 18W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			60°	
Fixture Power	20W	1	1.16	2406
Source Flux	2466lm	2	2.32	601
Fixture Flux	1979lm	3	3.47	267
Efficacy	98lm/W	4	4.63	150
Imax	2407cd	5	5.79	96

TS971 Imax=976cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T5032EL**	**1T5033EL**
EL.	●	**1T5026EL**	**1T5027EL**

Mini Projector



LED / 11W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			15°	
Fixture Power	15W	1	0.27	16914
Source Flux	1786lm	2	0.53	4229
Fixture Flux	1336lm	3	0.80	1879
Efficacy	90lm/W	4	1.07	1057
Imax	16914cd	5	1.33	677

TS966 Imax=9470cd/klm

Driver	Colour	3000K	4000K
DALI	○	**1T5016DA**	**1T5017DA**
DALI	●	**1T5010DA**	**1T5011DA**

LED / 12W / LENS / FL



3000K		H(m)	D(m)	Emax(lx)
Ra84			30°	
Fixture Power	14W	1	0.54	4825
Source Flux	1837lm	2	1.09	1206
Fixture Flux	1315lm	3	1.63	536
Efficacy	97lm/W	4	2.17	302
Imax	4825cd	5	2.72	193

TS967 Imax=2627cd/klm

Driver	Colour	3000K	4000K
DALI	○	**1T5018DA**	**1T5019DA**
DALI	●	**1T5012DA**	**1T5013DA**

LED / 12W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	14W	1	0.90	2476
Source Flux	1837lm	2	1.80	619
Fixture Flux	1520lm	3	2.69	275
Efficacy	113lm/W	4	3.59	155
Imax	2520cd	5	4.49	99

TS968 Imax=1372cd/klm

Driver	Colour	3000K	4000K
DALI	○	**1T5020DA**	**1T5021DA**
DALI	●	**1T5014DA**	**1T5015DA**

LED / 18W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			24°	
Fixture Power	20W	1	0.43	8803
Source Flux	2466lm	2	0.87	2201
Fixture Flux	1800lm	3	1.30	978
Efficacy	89lm/W	4	1.73	550
Imax	8803cd	5	2.17	352

TS969 Imax=3570cd/klm

Driver	Colour	3000K	4000K
DALI	○	**1T5028DA**	**1T5029DA**
DALI	●	**1T5022DA**	**1T5023DA**

STORE

LED / 18W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	20W	1	0.90	3323
Source Flux	2466lm	2	1.80	831
Fixture Flux	2041lm	3	2.69	369
Efficacy	101lm/W	4	3.59	208
TS970 Imax=1372cd/klm	Imax 3383cd	5	4.49	133

Driver	Colour	3000K	4000K
DALI	○	**1T5030DA**	**1T5031DA**
DALI	●	**1T5024DA**	**1T5025DA**

LED / 18W / REFLECTOR / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			60°	
Fixture Power	20W	1	1.16	2406
Source Flux	2466lm	2	2.32	601
Fixture Flux	1979lm	3	3.47	267
Efficacy	98lm/W	4	4.63	150
TS971 Imax=976cd/klm	Imax 2407cd	5	5.79	96

Driver	Colour	3000K	4000K
DALI	○	**1T5032DA**	**1T5033DA**
DALI	●	**1T5026DA**	**1T5027DA**

Accessories

Filter



Filter	Ø	Code
Red	50	**49881**
Green	50	**49882**
Blue	50	**49886**
Yellow	50	**49887**
Magenta	50	**49959**

Flat glass interference chromatic filter.



Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.



Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Screen



Ø	Code
50	**1T4325**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.



Ø	Code
50	**1T6521**

Protective screen.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

LEDÒ

GENERAL INFO
Professional adjustable LED projector.
The body can be adjusted from 0° to 90° on a vertical plane and by 355° on a horizontal plane with double blocking equipped with a friction system.
LEDÒ L. 178mm
LEDÒ TUNABLE and DBS L. 213mm

LED
STANDARD E DBS: Chip on board
From 2524lm to 3155lm
3000K – 4000K
Ra97
TUNABLE: Chip on board
From 1960lm to 2290lm
From 2700K to 5700K
Ra90

PRODUCT EFFICACY
Up to 92lm/W

OPTICS
SP – FL – MWFL – WFL
DBS - Digital beam opening control

POWER SUPPLY
Electronic – DALI
Control: Dimmer on board – Casambi on board

MATERIAL
Painted die-cast aluminium body (L=178 mm) or extruded painted aluminium body (L=213 mm). Front interchangeable optic camera in black polycarbonate for the standard version and in the same colour of the body for the LOF version, back ring with radial grid for heat dissipation.

Track projectors designed for museum lighting given the precise beam modelling, the high colour quality of the light and excellent colour rendering. Available with a fixed optic with a DBS system to modulate the beam on the object to be lit up to 50°.

The Tunable version on the other hand allows to vary the colour temperature from 2700K to 5700K.

The different versions are available with an electronic driver, a dimmable on board driver or can be controlled with a smartphone using the Casambi app to manage the luminous intensity of every single fixture.

The electronic, DALI and DBS versions have an integrated driver. The Tunable version has a separate driver.

Saint Germain des Prés

Lighting Design
Armand Zadkian

Photographer
Hugo Hebrard

Country
Paris - France

L. 178mm



LED / 25W / HYBRID / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			13°	
	Fixture Power	27W	1	0.23	23221
	Source Flux	2524lm	2	0.46	5805
	Fixture Flux	1637lm	3	0.69	2580
	Efficacy	61lm/W	4	0.92	1451
TS928	Imax=9200cd/klm	Imax	23221cd	5	1.14	929

	Driver	Colour	3000K	4000K
	EL.	○	**1T4882**	**1T4883**
	EL.	●	**1T4886**	**1T4887**
	EL.	◍	**1T4878**	**1T4879**
	DIMM ON BOARD	◐	**1T4890**	
	DIMM ON BOARD	○	**1T4892**	
	DIMM ON BOARD	●	**1T4894**	
	DALI	◐	**1T4896**	
	DALI	○	**1T4898**	
	DALI	●	**1T4900**	

LED / 25W / HYBRID / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			33°	
	Fixture Power	27W	1	0.58	5627
	Source Flux	2524lm	2	1.17	1407
	Fixture Flux	1541lm	3	1.75	625
	Efficacy	57lm/W	4	2.33	352
TS929	Imax=2230cd/klm	Imax	5627cd	5	2.92	225

	Driver	Colour	3000K	4000K
	EL.	○	**1T4884**	**1T4885**
	EL.	●	**1T4888**	**1T4889**
	EL.	◍	**1T4880**	**1T4881**
	DIMM ON BOARD	◐	**1T4891**	
	DIMM ON BOARD	○	**1T4893**	
	DIMM ON BOARD	●	**1T4895**	
	DALI	◐	**1T4897**	
	DALI	○	**1T4899**	
	DALI	●	**1T4901**	

LED / 25W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
	Fixture Power	27W	1	0.82	4412
	Source Flux	2714lm	2	1.64	1103
	Fixture Flux	2358lm	3	2.46	490
	Efficacy	87lm/W	4	3.28	276
TS930	Imax=1655cd/klm	Imax	4491cd	5	4.10	176

	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3491**	**1T3492**
ENEC	EL.	●	**1T3499**	**1T3500**
ENEC	EL.	◍	**1T3483**	**1T3484**
	DIMM ON BOARD	◐	**1T4369**	
	DIMM ON BOARD	○	**1T4373**	
	DIMM ON BOARD	●	**1T4377**	
	DALI	◐	**1T4381**	
	DALI	○	**1T4385**	
	DALI	●	**1T4389**	

LED / 25W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
	Fixture Power	27W	1	1.13	3071
	Source Flux	2714lm	2	2.26	768
	Fixture Flux	2392lm	3	3.39	341
	Efficacy	89lm/W	4	4.51	192
TS931	Imax=1142cd/klm	Imax	3100cd	5	5.64	123

	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3493**	**1T3494**
ENEC	EL.	●	**1T3501**	**1T3502**
ENEC	EL.	◍	**1T3485**	**1T3486**
	DIMM ON BOARD	◐	**1T4370**	
	DIMM ON BOARD	○	**1T4374**	
	DIMM ON BOARD	●	**1T4378**	
	DALI	◐	**1T4382**	
	DALI	○	**1T4386**	
	DALI	●	**1T4390**	

LEDÒ

CASAMBI L. 178mm



LED / 25W / HYBRID / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			13°	
	Fixture Power	27W	1	0.23	23221
	Source Flux	2524lm	2	0.46	5805
	Fixture Flux	1637lm	3	0.69	2580
	Efficacy	61lm/W	4	0.92	1451
TS928	Imax=9200cd/klm	Imax	23221cd	5	1.14	929

Driver	Colour	3000K	4000K
CASAMBI		**1T4896CA**	
CASAMBI		**1T4898CA**	
CASAMBI		**1T4900CA**	

LED / 25W / HYBRID / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			33°	
	Fixture Power	27W	1	0.58	5627
	Source Flux	2524lm	2	1.17	1407
	Fixture Flux	1541lm	3	1.75	625
	Efficacy	57lm/W	4	2.33	352
TS929	Imax=2230cd/klm	Imax	5627cd	5	2.92	225

Driver	Colour	3000K	4000K
CASAMBI		**1T4897CA**	
CASAMBI		**1T4899CA**	
CASAMBI		**1T4901CA**	

LED / 25W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
	Fixture Power	27W	1	0.82	4412
	Source Flux	2714lm	2	1.64	1103
	Fixture Flux	2358lm	3	2.46	490
	Efficacy	87lm/W	4	3.28	276
TS930	Imax=1655cd/klm	Imax	4491cd	5	4.10	176

Driver	Colour	3000K	4000K
CASAMBI		**1T4381CA**	
CASAMBI		**1T4385CA**	
CASAMBI		**1T4389CA**	

LED / 25W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			59°	
	Fixture Power	27W	1	1.13	3071
	Source Flux	2714lm	2	2.26	768
	Fixture Flux	2392lm	3	3.39	341
	Efficacy	89lm/W	4	4.51	192
TS931	Imax=1142cd/klm	Imax	3100cd	5	5.64	123

Driver	Colour	3000K	4000K
CASAMBI		**1T4382CA**	
CASAMBI		**1T4386CA**	
CASAMBI		**1T4390CA**	

DBS L. 213mm



LED / 25W / DBS / CRI97

	Driver	Colour	3000K	4000K
	CASAMBI	○	**1T6955CA**	**1T6959CA**
	CASAMBI	●	**1T6956CA**	**1T6960CA**
	CASAMBI	◍	**1T6957CA**	**1T6961CA**
	CASAMBI	◌	**1T6958CA**	**1T6962CA**



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		27W	1	0.28	11780
Source Flux		2524lm	2	0.56	2945
Fixture Flux		1206lm	3	0.84	1309
Efficacy		45lm/W	4	1.12	736
TS1114	Imax=4667cd/klm	Imax	11780cd	5	1.40	471



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
Fixture Power		27W	1	0.45	4530
Source Flux		2524lm	2	0.89	1132
Fixture Flux		1166lm	3	1.34	503
Efficacy		43lm/W	4	1.79	283
TS1115	Imax=1795cd/klm	Imax	4530cd	5	2.24	181



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			42°	
Fixture Power		27W	1	0.78	1566
Source Flux		2524lm	2	1.55	392
Fixture Flux		1075lm	3	2.33	174
Efficacy		40lm/W	4	3.11	98
TS1117	Imax=620cd/klm	Imax	1566cd	5	3.88	63



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		27W	1	0.61	2485
Source Flux		2524lm	2	1.23	621
Fixture Flux		1133lm	3	1.84	276
Efficacy		42lm/W	4	2.45	155
TS1116	Imax=984cd/klm	Imax	2485cd	5	3.07	99

LED / 31W / DBS / CRI97

	Driver	Colour	3000K	4000K
	CASAMBI	○	**1T6963CA**	**1T6967CA**
	CASAMBI	●	**1T6964CA**	**1T6968CA**
	CASAMBI	◍	**1T6965CA**	**1T6969CA**
	CASAMBI	◌	**1T6966CA**	**1T6970CA**



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			16°	
Fixture Power		34W	1	0.28	14361
Source Flux		3077lm	2	0.56	3590
Fixture Flux		1471lm	3	0.84	1596
Efficacy		43lm/W	4	1.12	898
TS1114	Imax=4667cd/klm	Imax	14361cd	5	1.40	574



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
Fixture Power		34W	1	0.45	5522
Source Flux		3077lm	2	0.89	1381
Fixture Flux		1422lm	3	1.34	614
Efficacy		41lm/W	4	1.79	345
TS1115	Imax=1795cd/klm	Imax	5522cd	5	2.24	221



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			42°	
Fixture Power		34W	1	0.78	1909
Source Flux		3077lm	2	1.55	477
Fixture Flux		1311lm	3	2.33	212
Efficacy		38lm/W	4	3.11	119
TS1117	Imax=620cd/klm	Imax	1909cd	5	3.88	76



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		34W	1	0.61	3029
Source Flux		3077lm	2	1.23	757
Fixture Flux		1382lm	3	1.84	337
Efficacy		40lm/W	4	2.45	189
TS1116	Imax=984cd/klm	Imax	3029cd	5	3.07	121

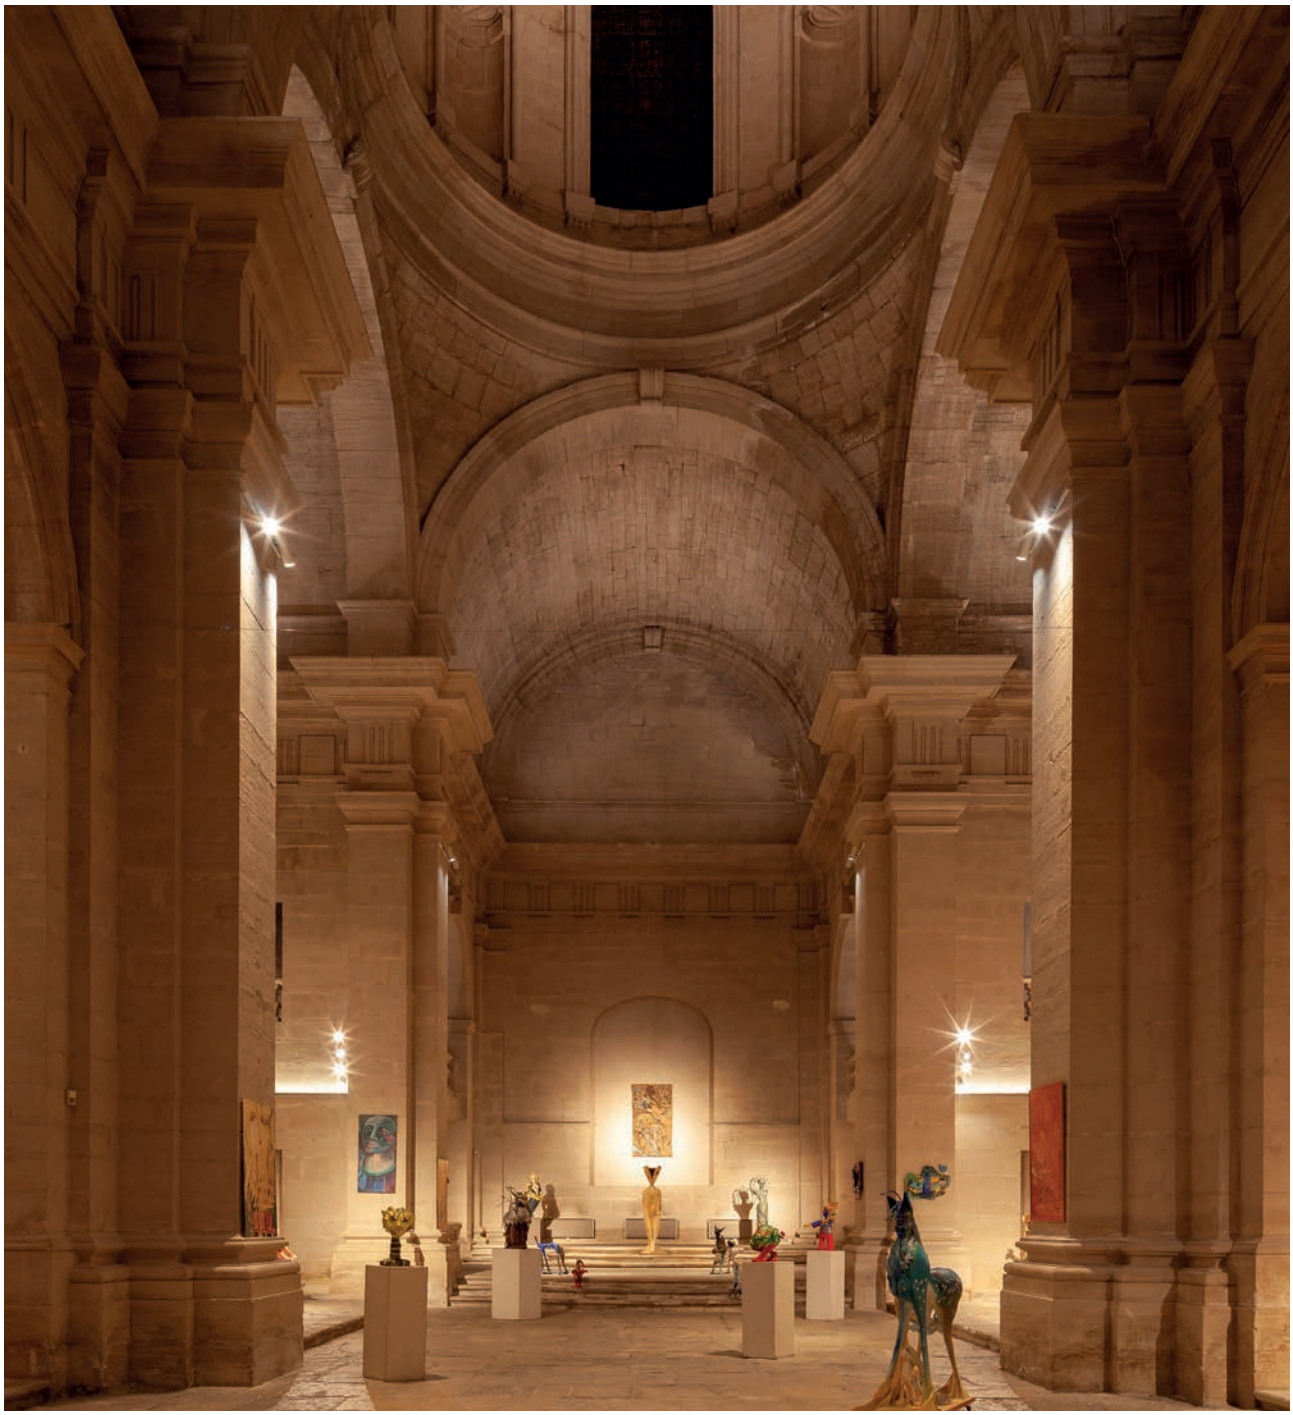

Chapelle du Collège Sacha Leray Exposition

Photographer
Hugo Hebrard

Country
Carpentras - France

Accessories

Filter

Filter	Ø	Code
Red	80	**1T3424**
Green	80	**1T3425**
Blue	80	**1T3426**
Yellow	80	**1T3427**
Magenta	80	**1T3428**

Flat glass interference chromatic filter.

Ø	Code
80	**1T3141**

Flat glass, grooved refractive blade light filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.



Ø	Code
80	**1T3140**

Flat glass micro prismatic refractive diffusive filter.
This softens the luminous effect.

Filter	Ø	Code
Halogen +	80	**1T6382**
Vivid +	80	**1T6384**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	80	**1T6386**
Fish	80	**1T6388**
Bread	80	**1T6390**
Vegetables	80	**1T6392**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6386
To be used only with 3000K and Ra80 fixtures.
1T6388
To be used only with 4000K and Ra80 fixtures.
1T6390
To be used only with 3000K and Ra80 fixtures.
1T6392
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	80	**1T6394**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Screen



Ø	Code
80	**1T6522**

Protective screen.

Grid



Ø	Code
80	**1T3423**

Anti-glare louver.
Black painted metal honeycomb structure.

LEDÒ

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Ø	H	Driver	Colour	Code
118	38	DALI	○	**9000/BPU-D-W**
118	38	DALI	●	**9000/BPU-D-B**
118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Tunable
2700K - 5700K



LED / 25W / SP



	5000K		H(m)	D(m)	Emax(lx)
	Ra90			14°	
	Fixture Power	29W	1	0.24	17965
	Source Flux	2290lm	2	0.48	4491
	Fixture Flux	1947lm	3	0.72	1996
	Efficacy	67lm/W	4	0.96	1123
TS1022	Imax=7845cd/klm	Imax	17965cd	5	1.20	719

Driver	Colour	CTC
CASAMBI		**1T4439CA**
CASAMBI		**1T4443CA**
CASAMBI		**1T4447CA**

LED / 25W / FL



	5000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
	Fixture Power	29W	1	0.49	7070
	Source Flux	2290lm	2	0.97	1768
	Fixture Flux	1940lm	3	1.46	786
	Efficacy	67lm/W	4	1.95	442
TS1023	Imax=3087cd/klm	Imax	7070cd	5	2.43	283

Driver	Colour	CTC
CASAMBI		**1T4440CA**
CASAMBI		**1T4444CA**
CASAMBI		**1T4448CA**

LED / 25W / MWFL



	5000K		H(m)	D(m)	Emax(lx)
	Ra90			45°	
	Fixture Power	29W	1	0.82	3722
	Source Flux	2290lm	2	1.64	931
	Fixture Flux	1990lm	3	2.46	414
	Efficacy	69lm/W	4	3.28	233
TS1024	Imax=1655cd/klm	Imax	3789cd	5	4.10	149

Driver	Colour	CTC
CASAMBI		**1T4441CA**
CASAMBI		**1T4445CA**
CASAMBI		**1T4449CA**

LED / 25W / WFL



	5000K		H(m)	D(m)	Emax(lx)
	Ra90			59°	
	Fixture Power	29W	1	1.13	2590
	Source Flux	2290lm	2	2.26	647
	Fixture Flux	2018lm	3	3.39	288
	Efficacy	70lm/W	4	4.51	162
TS1025	Imax=1142cd/klm	Imax	2614cd	5	5.64	104

Driver	Colour	CTC
CASAMBI		**1T4442CA**
CASAMBI		**1T4446CA**
CASAMBI		**1T4450CA**

Accessories

Filter



Ø	Code
80	**1T3141**

Flat glass, grooved refractive blade light filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.



Ø	Code
80	**1T3140**

Flat glass micro prismatic refractive diffusive filter.
This softens the luminous effect.

APE Museum

Cultural and museum center
of Monteparma Fondation

Lighting Design
Pozzi Associati Luce

Photographer
Ivan Rossi

Country
Bologna - Italy

Screen



Ø	Code
80	**1T6522**

Protective screen.

Grid



Ø	Code
80	**1T3423**

Anti-glare louver.
Black painted metal honeycomb structure.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◍	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◍	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.

RAY

GENERAL INFO
Professional adjustable LED projector.
Adjustable from 0° to -90° in the vertical plane and 359° in the horizontal plane. Mechanical aiming lock in vertical plane and graduated ring nut for locking in the horizontal plane. The centre of gravity always remains in axis with the track irrespective of where it is aimed.
RAY Ø163mm
RAY MINI Ø115mm
RAY MICRO Ø89mm

LED
Chip on board
From 1949lm to 7232lm
3000K – 4000K
Ra84
Ra97 (excluding the MICRO version)

PRODUCT EFFICACY
Up to 125lm/W

OPTICS
SP – FL – MWFL - WFL

POWER SUPPLY
Electronic – DALI ((excluding the MICRO version)

MATERIAL
Die-cast aluminium body painted. Front ring made of black ryton.

A range of projectors characterised by an essential design and high performance. Clearly intended for the Retail environment there are three different sizes and with four different power supplies to satisfy size and performance requirements within the same project.

All versions have optics with reflectors to obtain soft, delicate tones on all beam openings.

Almacruz Hotel

Ligting Design
Katerina Jofre

Photographer
Nicolás Saieh

Country
Santiago - Cile

Project
Mas Fernades arquitectos asociados

RAY



LED / 32W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			12°	
Fixture Power		35W	1	0.21	59854
Source Flux		4522lm	2	0.41	14963
Fixture Flux		3861lm	3	0.62	6650
Efficacy		111lm/W	4	0.82	3741
TS742	Imax=13236cd/klm	Imax	5	1.03	2394

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3684**	
ENEC	EL.	●	**1T3685**	
	DALI	○	**1T3684DA**	**1T5321DA**
	DALI	●	**1T3685DA**	**1T5322DA**
	EL.	○		**1T5321**
	EL.	●		**1T5322**

LED / 32W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			12°	
Fixture Power		35W	1	0.21	45757
Source Flux		3457lm	2	0.41	11439
Fixture Flux		2952lm	3	0.62	5084
Efficacy		85lm/W	4	0.82	2860
TS742	Imax=13236cd/klm	Imax	5	1.03	1830

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4249**	
ENEC	EL.	●	**1T4250**	
	DALI	○	**1T4249DA**	**1T5329DA**
	DALI	●	**1T4250DA**	**1T5330DA**
	EL.	○		**1T5329**
	EL.	●		**1T5330**

LED / 32W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		35W	1	0.45	15416
Source Flux		4522lm	2	0.90	3854
Fixture Flux		3776lm	3	1.35	1713
Efficacy		109lm/W	4	1.80	964
TS740	Imax=3409cd/klm	Imax	5	2.25	617

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3686**	
ENEC	EL.	●	**1T3687**	
	DALI	○	**1T3686DA**	**1T5323DA**
	DALI	●	**1T3687DA**	**1T5324DA**
	EL.	○		**1T5323**
	EL.	●		**1T5324**

LED / 32W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
Fixture Power		35W	1	0.45	11785
Source Flux		3457lm	2	0.90	2946
Fixture Flux		2887lm	3	1.35	1309
Efficacy		83lm/W	4	1.80	737
TS740	Imax=3409cd/klm	Imax	5	2.25	471

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4251**	
ENEC	EL.	●	**1T4252**	
	DALI	○	**1T4251DA**	**1T5331DA**
	DALI	●	**1T4252DA**	**1T5332DA**
	EL.	○		**1T5331**
	EL.	●		**1T5332**

LED / 50W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		54W	1	0.43	24335
Source Flux		7050lm	2	0.85	6084
Fixture Flux		5851lm	3	1.28	2704
Efficacy		109lm/W	4	1.70	1521
TS741	Imax=3452cd/klm	Imax	5	2.13	973

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3692**	
ENEC	EL.	●	**1T3693**	
	DALI	○	**1T3692DA**	**1T5325DA**
	DALI	●	**1T3693DA**	**1T5326DA**
	EL.	○		**1T5325**
	EL.	●		**1T5326**

LED / 50W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			24°	
	Fixture Power	54W	1	0.43	18729
	Source Flux	5426lm	2	0.85	4682
	Fixture Flux	4503lm	3	1.28	2081
	Efficacy	84lm/W	4	1.70	1171
TS741	Imax=3452cd/klm	Imax	18729cd	5	2.13	749

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4253**	
ENEC	EL.	●	**1T4254**	
	DALI	○	**1T4253DA**	**1T5333DA**
	DALI	●	**1T4254DA**	**1T5334DA**
	EL.	○		**1T5333**
	EL.	●		**1T5334**

LED / 50W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			53°	
	Fixture Power	54W	1	0.99	9030
	Source Flux	7050lm	2	1.97	2257
	Fixture Flux	5781lm	3	2.96	1003
	Efficacy	108lm/W	4	3.95	564
TS743	Imax=1284cd/klm	Imax	9049cd	5	4.93	361

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T3694**	
ENEC	EL.	●	**1T3695**	
	DALI	○	**1T3694DA**	**1T5327DA**
	DALI	●	**1T3695DA**	**1T5328DA**
	EL.	○		**1T5327**
	EL.	●		**1T5328**

LED / 50W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			53°	
	Fixture Power	54W	1	0.99	6950
	Source Flux	5426lm	2	1.97	1737
	Fixture Flux	4449lm	3	2.96	772
	Efficacy	83lm/W	4	3.95	434
TS743	Imax=1284cd/klm	Imax	6965cd	5	4.93	278

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4255**	
ENEC	EL.	●	**1T4256**	
	DALI	○	**1T4255DA**	**1T5335DA**
	DALI	●	**1T4256DA**	**1T5336DA**
	EL.	○		**1T5335**
	EL.	●		**1T5336**

Accessories

Screen

Code
1T6523

Protective screen.

Grid

Code
1T6918

Anti-glare louver.
Black painted metal honeycomb structure.

Ray Shade

Code
1T3696

Adjustable barn doors flaps.

RAY

Adapter





	Ø	H	Driver	Colour	Code
	100	32	EL.	○	**1T2221**
	100	32	EL.	●	**1T2220**
	100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.

	Ø	H	Driver	Colour	Code
	118	38	DALI	○	**9000/BPU-D-W**
	118	38	DALI	●	**9000/BPU-D-B**
	118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Mini

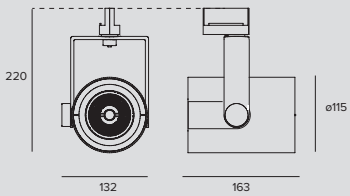

LED / 30W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
	Fixture Power	32W	1	0.24	33623
	Source Flux	4141lm	2	0.48	8406
	Fixture Flux	3520lm	3	0.72	3736
	Efficacy	111lm/W	4	0.96	2101
TS832	Imax=8119cd/klm	Imax	33623cd	5	1.20	1345

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4201**	
ENEC	EL.	●	**1T4197**	
	DALI	○	**1T4201DA**	**1T5340DA**
	DALI	●	**1T4197DA**	**1T5337DA**
	EL.	○		**1T5340**
	EL.	●		**1T5337**

LED / 30W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
	Fixture Power	32W	1	0.24	25276
	Source Flux	3113lm	2	0.48	6319
	Fixture Flux	2646lm	3	0.72	2808
	Efficacy	83lm/W	4	0.96	1580
TS832	Imax=8119cd/klm	Imax	25276cd	5	1.20	1011

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4260**	
ENEC	EL.	●	**1T4257**	
	DALI	○	**1T4260DA**	**1T5346DA**
	DALI	●	**1T4257DA**	**1T5343DA**
	EL.	○		**1T5346**
	EL.	●		**1T5343**

LED / 30W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
	Fixture Power	32W	1	0.44	14085
	Source Flux	4141lm	2	0.88	3521
	Fixture Flux	3505lm	3	1.32	1565
	Efficacy	110lm/W	4	1.76	880
TS833	Imax=3401cd/klm	Imax	14085cd	5	2.20	563

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4202**	
ENEC	EL.	●	**1T4198**	
	DALI	○	**1T4202DA**	**1T5341DA**
	DALI	●	**1T4198DA**	**1T5338DA**
	EL.	○		**1T5341**
	EL.	●		**1T5338**

LED / 30W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			25°	
	Fixture Power	32W	1	0.44	10588
	Source Flux	3113lm	2	0.88	2647
	Fixture Flux	2635lm	3	1.32	1176
	Efficacy	83lm/W	4	1.76	662
TS833	Imax=3401cd/klm	Imax	10588cd	5	2.20	424

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4261**	
ENEC	EL.	●	**1T4258**	
	DALI	○	**1T4261DA**	**1T5347DA**
	DALI	●	**1T4258DA**	**1T5344DA**
	EL.	○		**1T5347**
	EL.	●		**1T5344**

LED / 30W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
	Fixture Power	32W	1	0.84	6295
	Source Flux	4141lm	2	1.67	1574
	Fixture Flux	3599lm	3	2.51	699
	Efficacy	113lm/W	4	3.35	393
TS834	Imax=1528cd/klm	Imax	6327cd	5	4.18	252

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4203**	
ENEC	EL.	●	**1T4199**	
	DALI	○	**1T4203DA**	**1T5342DA**
	DALI	●	**1T4199DA**	**1T5339DA**
	EL.	○		**1T5342**
	EL.	●		**1T5339**

RAY

LED / 30W / REFLECTOR / MWFL / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			45°	
Fixture Power	32W	1	0.84	4733
Source Flux	3113lm	2	1.67	1183
Fixture Flux	2705lm	3	2.51	526
Efficacy	85lm/W	4	3.35	296
TS834 Imax=1528cd/klm	Imax 4757cd	5	4.18	189

Certificate	Driver	Colour	3000K	4000K
ENEC	EL.	○	**1T4262**	
ENEC	EL.	●	**1T4259**	
	DALI	○	**1T4262DA**	**1T5348DA**
	DALI	●	**1T4259DA**	**1T5345DA**
	EL.	○		**1T5348**
	EL.	●		**1T5345**

Accessories

Filter



Filter	Ø	Code
Red	70	**1T1712**
Green	70	**1T1713**
Blue	70	**1T1714**
Yellow	70	**1T1715**
Magenta	70	**1T1716**

Flat glass interference chromatic filter.
To be completed with an additional holder ring.



Ø	Code
70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.



Ø	Code
70	**1T1709**

Flat glass wired refractive diffusive filter.
This softens the luminous effect.
To be completed with an additional holder ring.



Filter	Ø	Code
Halogen +	70	**1T6506**
Vivid +	70	**1T6507**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.



Filter	Ø	Code
Meat	70	**1T6508**
Fish	70	**1T6509**
Bread	70	**1T6510**
Vegetables	70	**1T6511**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be completed with an additional holder ring .
1T6508
To be used only with 3000K and Ra80 fixtures.
1T6509
To be used only with 4000K and Ra80 fixtures.
1T6510
To be used only with 3000K and Ra80 fixtures.
1T6511
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	70	**1T6512**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.
To be completed with an additional holder ring.

Screen



Ø	Code
80	**1T6522**

Protective screen.

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring for Cloud, Ray Mini, Store, Label 9 and Keplero Mini HE.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◍	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Ø	H	Driver	Colour	Code
118	38	DALI	○	**9000/BPU-D-W**
118	38	DALI	●	**9000/BPU-D-B**
118	38	DALI	◍	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.

RAY



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Motorvillage

Architect
Juan José Aristegui

Photographer
Cristina Motilla

Country
Lisboa - Portugal

RAY

Micro

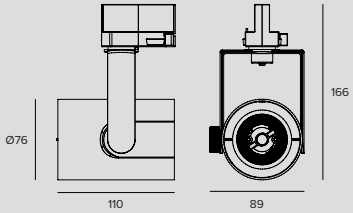

LED / 12W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
	Fixture Power	13W	1	0.30	9777
	Source Flux	1949lm	2	0.59	2444
	Fixture Flux	1501lm	3	0.89	1086
	Efficacy	113lm/W	4	1.19	611
TS989	Imax=5017cd/klm	Imax	9777cd	5	1.48	391

	Driver	Colour	3000K	4000K
	EL.	○	**1T6317**	**1T6319**
	EL.	●	**1T6318**	**1T6320**

LED / 12W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
	Fixture Power	13W	1	0.90	2626
	Source Flux	1949lm	2	1.80	657
	Fixture Flux	1613lm	3	2.69	292
	Efficacy	121lm/W	4	3.59	164
TS990	Imax=1372cd/klm	Imax	2673cd	5	4.49	105

	Driver	Colour	3000K	4000K
	EL.	○	**1T6321**	**1T6323**
	EL.	●	**1T6322**	**1T6324**

Accessories

Filter



	Filter	Ø	Code
	Red	50	**49881**
	Green	50	**49882**
	Blue	50	**49886**
	Yellow	50	**49887**
	Magenta	50	**49959**

Flat glass interference chromatic filter.



	Ø	Code
	50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.



	Filter	Ø	Code
	Halogen +	50	**1T6381**
	Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

	Filter	Ø	Code
	Meat	50	**1T6385**
	Fish	50	**1T6387**
	Bread	50	**1T6389**
	Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Screen



Ø	Code
50	**1T6521**

Protective screen.



Ø	Code
50	**1T4325**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◍	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◍	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.

EUROSTANDARD

Plus

GENERAL INFO
Eurostandard Plus 230V track.
L. 1000mm – 2000mm – 3000mm

POWER SUPPLY
Electronic – DALI

MATERIAL
Electrified track in three lengths in extruded anodized aluminum or in extruded painted aluminium.
Conductors in copper insulated in PVC.

The Eurostandard Plus is a universal 230V track that is compatible with all projectors in the Targetti collection and with all projectors that conform with European standards.

A standard double and recessed version in three different lengths. It has a double fixing systems for ceiling and suspension installations with joints of various sizes and configurations to obtain infinite compositions.

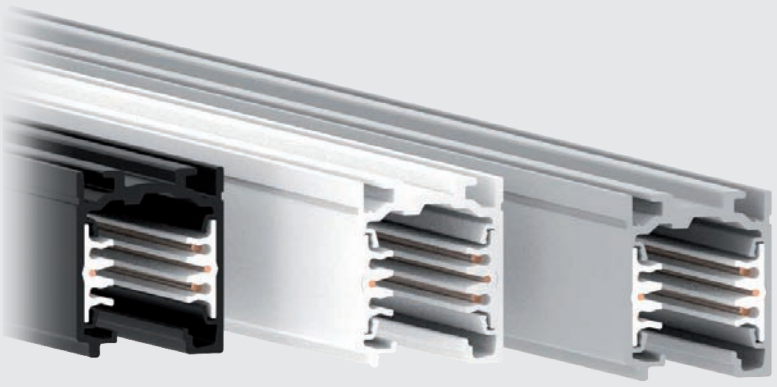

Standard



STANDARD

ENEC

Kg	L	Colour	Code
1.1	1000	○	**9000-1/W-ST**
1.1	1000	●	**9000-1/B-ST**
1.1	1000	◍	**9000-1/G-ST**
2.1	2000	○	**9000-2/W-ST**
2.1	2000	●	**9000-2/B-ST**
2.1	2000	◍	**9000-2/G-ST**
3.1	3000	○	**9000-3/W-ST**
3.1	3000	●	**9000-3/B-ST**
3.1	3000	◍	**9000-3/G-ST**

Recessed



RECESSED

ENEC

Kg	L	Colour	Code
1.1	1000	○	**9000-1/W-R**
1.1	1000	●	**9000-1/B-R**
1.1	1000	◍	**9000-1/G-R**
2.2	2000	○	**9000-2/W-R**
2.2	2000	●	**9000-2/B-R**
2.2	2000	◍	**9000-2/G-R**
3.4	3000	○	**9000-3/W-R**
3.4	3000	●	**9000-3/B-R**
3.4	3000	◍	**9000-3/G-R**

Related codes

End Caps



Colour	Code
○	**9004/W**
●	**9004/B**
◍	**9004/G**

Dead end - Standard.



Colour	Code
○	**9004-R/W**
●	**9004-R/B**
◍	**9004-R/G**

Dead end - recessed.

EUROSTANDARD PLUS

Mounting System



Code
S-9000KIT

Suspension kit.
L=2000mm



Code
S-9000/111

Ceiling mounting bracket.
Galvanized steel.

Power Supply



Colour	Code
○	**9001/W**
●	**9001/B**
●	**9001/G**

Lateral power supply.
Polarity on the right.



Colour	Code
○	**9002/W**
●	**9002/B**
●	**9002/G**

Lateral power supply.
Polarity on the left.

Accessories

End Caps

Colour	Code
○	**S-9001/115-W**
●	**S-9001/115-B**

Seal for lateral power supply.
PVC.
For: 9001/...; 9002/...

Bracket

Colour	Code
●	**S-9000/123**

Rigid support bracket.

Driver	Colour	Code
EL.	○	**1T7007**
EL.	●	**1T7005**
EL.	●	**1T7009**
DALI	○	**1T7006**
DALI	●	**1T7004**
DALI	●	**1T7008**

Straight coupler for stability. For projectors with Eurostandard Plus.

Tool

Code
S-9000/T

Tool for shearing conductors, to be used if necessary to cut the track during installation.

Power Supply

Colour	Code
○	**9010/W**
●	**9010/B**
◌	**9010/G**

Central power supply.

Electrical Connector

Colour	Code
○	**9003/W**
●	**9003/B**
◌	**9003/G**

Linear joint.

Colour	Code
○	**9018/W**
●	**9018/B**
◌	**9018/G**

Flexible joint.

Colour	Code
○	**9011/W**
●	**9011/B**
◌	**9011/G**

L joint.
Internal polarity.

Colour	Code
○	**9012/W**
●	**9012/B**
◌	**9012/G**

L joint.
External polarity.

Colour	Code
○	**9013/W**
●	**9013/B**
◌	**9013/G**

T joint.
External polarity and on the left.

Colour	Code
○	**9014/W**
●	**9014/B**
◌	**9014/G**

T joint.
External polarity and on the right.

Colour	Code
○	**9015/W**
●	**9015/B**
◌	**9015/G**

T joint.
Internal polarity and on the left.

Colour	Code
○	**9016/W**
●	**9016/B**
◌	**9016/G**

T joint.
Internal polarity and on the right.

EUROSTANDARD PLUS

Colour	Code
○	**9017/W**
●	**9017/B**
●	**9017/G**

X joint.

Mounting System



Colour	Code
○	**S-9000/M-W-KIT**
●	**S-9000/M-B-KIT**
●	**S-9000/M-G-KIT**

Adapter for suspension installation.

Adapter

Colour	Code
○	**9009/W**
●	**9009/B**
●	**9009/G**

Adapter for power supply.
Allows for power supply from a Eurostandard Plus track.

Cover Panel

Colour	Code
○	**S-9001-R/6-W**
●	**S-9001-R/6-B**
●	**S-9001-R/6-G**

False ceiling cover for lateral power supply.
Polycarbonate body.
For: 9001/...; 9002/...

Colour	Code
○	**S-9010-R/6-W**
●	**S-9010-R/6-B**
●	**S-9010-R/6-G**

False ceiling cover for central power supply.
Polycarbonate body.
For: 9010/...

Colour	Code
○	**S-9011-R/6-W**
●	**S-9011-R/6-B**
●	**S-9011-R/6-G**

False ceiling cover for L connector.
Polycarbonate body.
For: 9011/...; 9012/...

Colour	Code
○	**S-9013-R/6-W**
●	**S-9013-R/6-B**
●	**S-9013-R/6-G**

False ceiling cover for T connector.
Polycarbonate body.
For: 9013/...; 9014/...; 9015/...; 9016/...

Colour	Code
○	**S-9017-R/6-W**
●	**S-9017-R/6-B**
●	**S-9017-R/6-G**

False ceiling cover for X connector.
Polycarbonate body.
For: 9017.

L	Colour	Code
1000	○	**S-9000/GP-W**
1000	●	**S-9000/GP-B**
1000	●	**S-9000/GP-G**

Cover profile.

ELECTRICAL SCHEME

During the wiring the electrical scheme of picture must be followed.

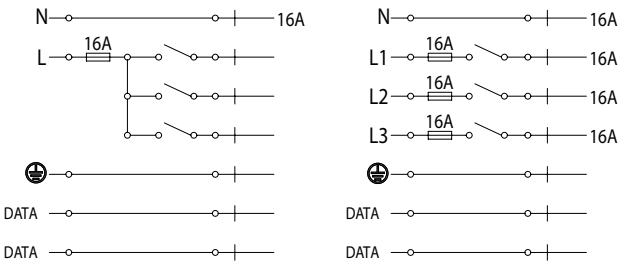

LOAD SCHEME

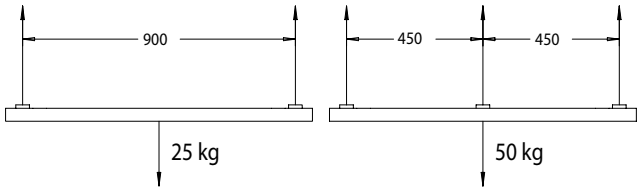

INSTALLATION

There is a polarity on the lighting track to guarantee the right connection of the multiple pieces of the track. Also end-feeds and connection joints have a polarity that must be taken into account in order to choose the right component. In the catalogue sketches of this articles, the position of the polarity is highlighted with a red line.

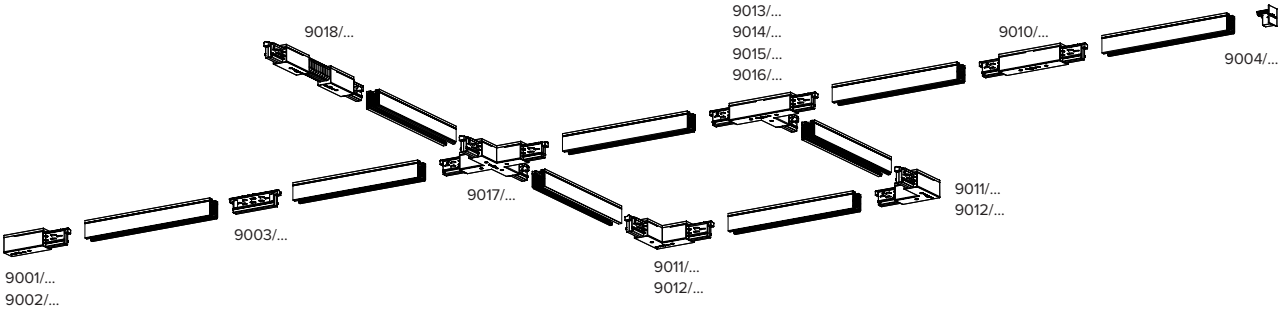

LATERAL POWER SUPPLIES



CENTRAL POWER SUPPLIES



"L" JOINT

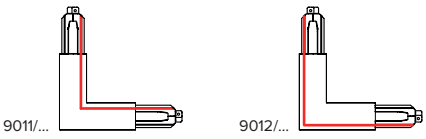

"T" JOINT

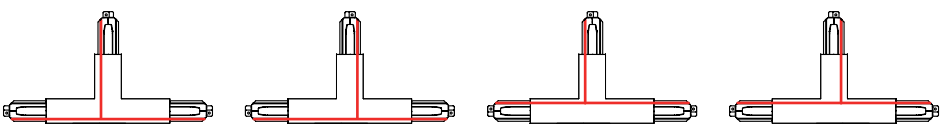

"X" JOINT



JEDI

Compact Indoor

GENERAL INFO
Adjustable linear LEC projector.
41x37,5mm (exluded driver)
41x79mm (included driver)
Lunghezze 300mm – 600mm
900mm – 1200mm

LED
Linear boards
From 1410lm to 6360lm
2700K – 3000K – 3500K – 4000K
Ra90

PRODUCT EFFICACY
Up to 106lm/W

OPTICS
FL – GRAZING – WALL WASHER

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Extruded anodised aluminium 15µ body. 1.8mm thick polycarbonate removable (to insert accessories) flat screen. Removable driver box. The body of the fixture is adjustable and can be installed away from the mounting surface using accessory brackets.

Is the compact, high performance linear LED fixture, suitable for installation in small grooves or on particularly thin frames. Depending on the chosen optic it is suitable for general lighting in pedestrian area, vaulted ceilings and vertical surfaces. It is complete with a remotable driver to be positioned in the event of installation in reduced spaces. The L. 300mm version is also complete with a remote driver.

If equipped with special brackets the projector can be adjusted up to +/-145°.

Also available in an IP67 outdoor version.

Sala Zuccari

Palazzo Giustiniani

Photographer
Alessandro Maurelli

Country
Rome - Italy

01

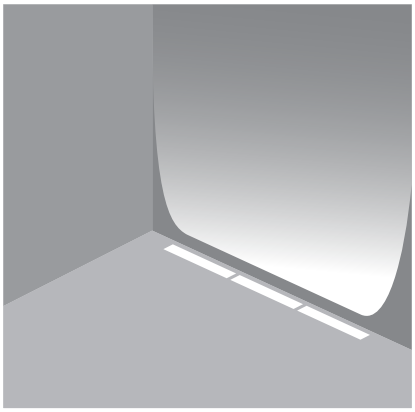

Grazing

Wall washer

The extensive range of optics

Makes it possible to obtain different lighting effects according to needs and installation type. It is also possible to accessorise it with a special grill that in addition to limiting any risk of glare, also makes it possible to modify the beam emission and create other lighting effects.

Flood

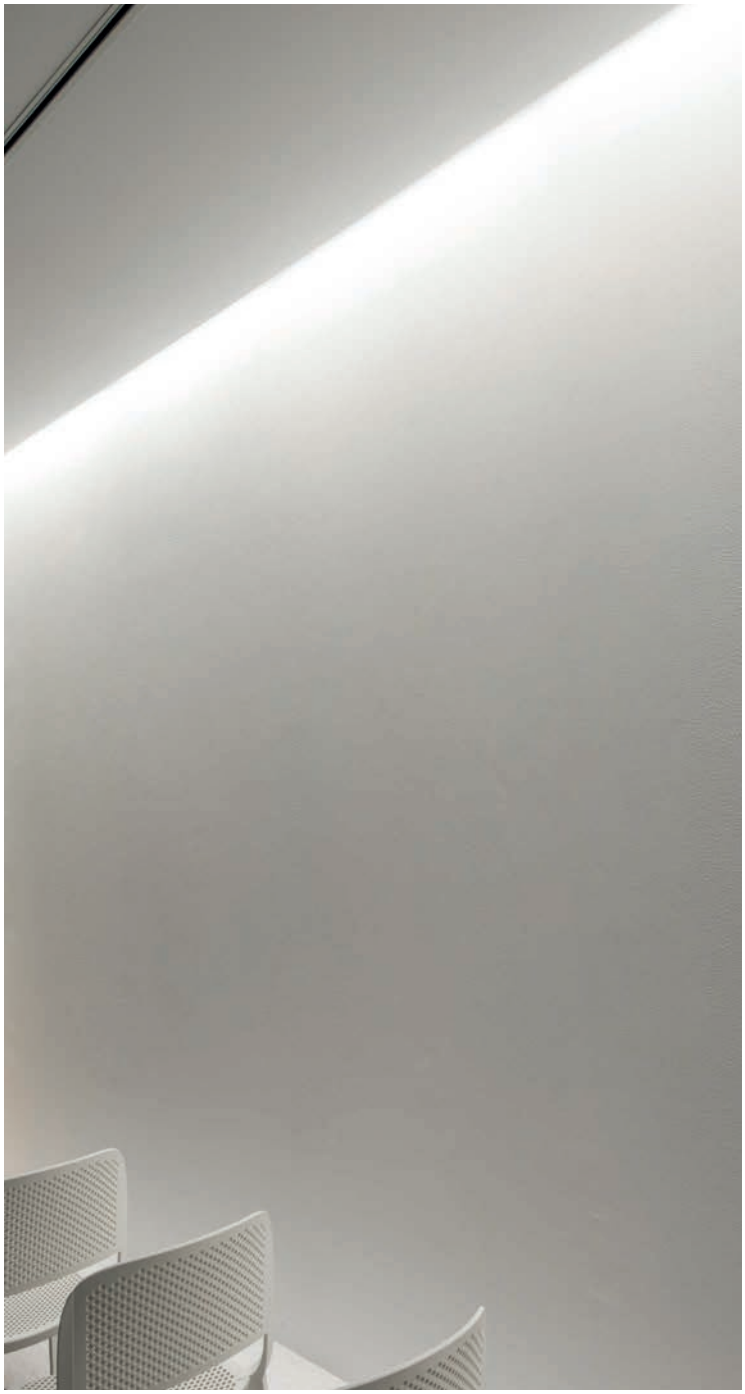

The Grazing optic versions

Is the most suitable solution for lighting vertical surfaces. Installed in continuous rows it makes it possible to obtain seamless uniform lighting.

Wide rotation

If equipped with special brackets the projector can be adjusted up to +/-145°.

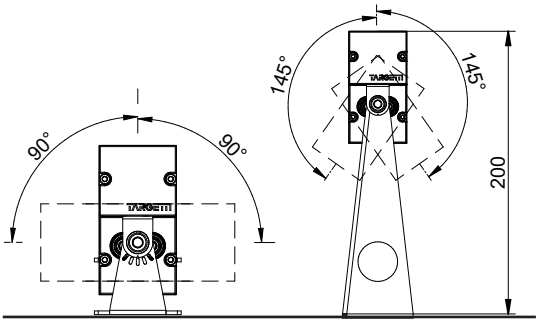

JEDI COMPACT

IP40
Remote driver L. 289mm



LED / 12W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			85°	32°	
	Fixture Power	14W	1	1.84	0.57	1049
	Source Flux	1500lm	2	3.68	1.14	262
	Fixture Flux	1121lm	3	5.52	1.70	117
	Efficacy	80lm/W	4	7.36	2.27	66
TS1078	Imax=700cd/klm	Imax 1049cd	5	9.20	2.84	42

Power Supply	Colour	2700K	3000K	3500K	4000K
500mA		**1T6747**	**1T6748**	**1T6749**	**1T6750**

LED / 12W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			76°	15°	
	Fixture Power	14W	1	1.55	0.26	2403
	Source Flux	1500lm	2	3.10	0.51	601
	Fixture Flux	1247lm	3	4.65	0.77	267
	Efficacy	89lm/W	4	6.21	1.02	150
TS1080	Imax=1602cd/klm	Imax 2403cd	5	7.76	1.28	96

Power Supply	Colour	2700K	3000K	3500K	4000K
500mA		**1T6751**	**1T6752**	**1T6753**	**1T6754**

LED / 12W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			115°	59°	
	Fixture Power	14W	1	3.12	1.34	1009
	Source Flux	1500lm	2	6.23	2.67	252
	Fixture Flux	1128lm	3	9.35	4.01	112
	Efficacy	81lm/W	4	12.47	5.35	63
TS1082	Imax=774cd/klm	Imax 1161cd	5	15.59	6.69	40

Power Supply	Colour	2700K	3000K	3500K	4000K
500mA		**1T6755**	**1T6756**	**1T6757**	**1T6758**

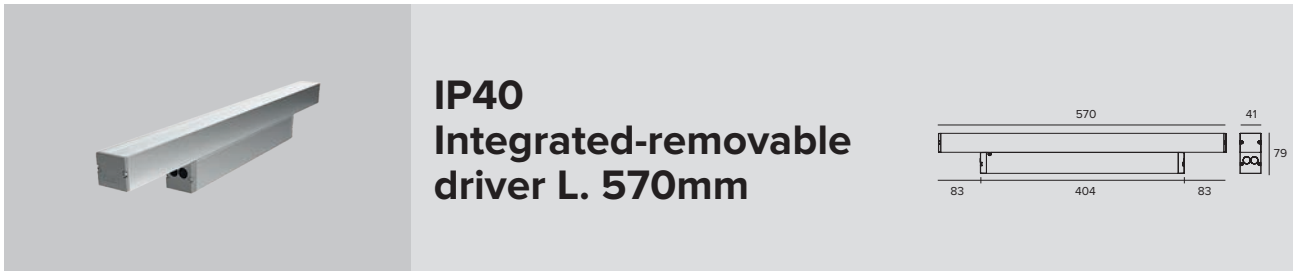

IP40
Integrated-removable driver L. 570mm

LED / 24W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			85°	32°	
	Fixture Power	28W	1	1.84	0.57	2099
	Source Flux	3000lm	2	3.68	1.14	525
	Fixture Flux	2242lm	3	5.52	1.70	233
	Efficacy	80lm/W	4	7.36	2.27	131
TS1078	Imax=700cd/klm	Imax 2099cd	5	9.20	2.84	84

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6759EL**	**1T6760EL**	**1T6761EL**	**1T6762EL**
DALI		**1T6759DA**	**1T6760DA**	**1T6761DA**	**1T6762DA**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			76°	15°	
Fixture Power	28W	1	1.55	0.26	4805
Source Flux	3000lm	2	3.10	0.51	1201
Fixture Flux	2495lm	3	4.65	0.77	534
Efficacy	89lm/W	4	6.21	1.02	300
TS1080 Imax=1602cd/klm	Imax 4805cd	5	7.76	1.28	192

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6763EL**	**1T6764EL**	**1T6765EL**	**1T6766EL**
DALI		**1T6763DA**	**1T6764DA**	**1T6765DA**	**1T6766DA**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			115°	59°	
Fixture Power	28W	1	3.12	1.34	2017
Source Flux	3000lm	2	6.23	2.67	504
Fixture Flux	2256lm	3	9.35	4.01	224
Efficacy	81lm/W	4	12.47	5.35	126
TS1082 Imax=774cd/klm	Imax 2321cd	5	15.59	6.69	81

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6767EL**	**1T6768EL**	**1T6769EL**	**1T6770EL**
DALI		**1T6767DA**	**1T6768DA**	**1T6769DA**	**1T6770DA**

IP40
Integrated-removable driver L. 850mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			85°	32°	
Fixture Power	40W	1	1.84	0.57	3146
Source Flux	4500lm	2	3.68	1.14	787
Fixture Flux	3361lm	3	5.52	1.70	350
Efficacy	84lm/W	4	7.36	2.27	197
TS1079 Imax=699cd/klm	Imax 3146cd	5	9.20	2.84	126

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6771EL**	**1T6772EL**	**1T6773EL**	**1T6774EL**
DALI		**1T6771DA**	**1T6772DA**	**1T6773DA**	**1T6774DA**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			76°	15°	
Fixture Power	40W	1	1.55	0.26	7203
Source Flux	4500lm	2	3.10	0.51	1801
Fixture Flux	3740lm	3	4.65	0.77	800
Efficacy	94lm/W	4	6.21	1.02	450
TS1081 Imax=1601cd/klm	Imax 7203cd	5	7.76	1.28	288

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6775EL**	**1T6776EL**	**1T6777EL**	**1T6778EL**
DALI		**1T6775DA**	**1T6776DA**	**1T6777DA**	**1T6778DA**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			115°	59°	
Fixture Power	40W	1	3.12	1.34	3026
Source Flux	4500lm	2	6.23	2.67	756
Fixture Flux	3384lm	3	9.35	4.01	336
Efficacy	85lm/W	4	12.47	5.35	189
TS1083 Imax=774cd/klm	Imax 3482cd	5	15.59	6.69	121

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6779EL**	**1T6780EL**	**1T6781EL**	**1T6782EL**
DALI		**1T6779DA**	**1T6780DA**	**1T6781DA**	**1T6782DA**

JEDI COMPACT

IP40
Integrated-removable driver L. 1130mm



LED / 48W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			85°	32°	
	Fixture Power	53W	1	1.84	0.57	4195
	Source Flux	6000lm	2	3.68	1.14	1049
	Fixture Flux	4482lm	3	5.52	1.70	466
	Efficacy	85lm/W	4	7.36	2.27	262
TS1079	Imax=699cd/klm	Imax	5	9.20	2.84	168

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6783EL**	**1T6784EL**	**1T6785EL**	**1T6786EL**
DALI		**1T6783DA**	**1T6784DA**	**1T6785DA**	**1T6786DA**

LED / 48W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			76°	15°	
	Fixture Power	53W	1	1.55	0.26	9605
	Source Flux	6000lm	2	3.10	0.51	2401
	Fixture Flux	4987lm	3	4.65	0.77	1067
	Efficacy	94lm/W	4	6.21	1.02	600
TS1081	Imax=1601cd/klm	Imax	5	7.76	1.28	384

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6787EL**	**1T6788EL**	**1T6789EL**	**1T6790EL**
DALI		**1T6787DA**	**1T6788DA**	**1T6789DA**	**1T6790DA**

LED / 48W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra90			115°	59°	
	Fixture Power	53W	1	3.12	1.34	4034
	Source Flux	6000lm	2	6.23	2.67	1009
	Fixture Flux	4512lm	3	9.35	4.01	448
	Efficacy	85lm/W	4	12.47	5.35	252
TS1083	Imax=774cd/klm	Imax	5	15.59	6.69	161

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T6791EL**	**1T6792EL**	**1T6793EL**	**1T6794EL**
DALI		**1T6791DA**	**1T6792DA**	**1T6793DA**	**1T6794DA**

Related codes

Bracket



Code
1T6940

Long bracket kit for surface installation (2 pieces).
Rotation +/-145°.



H	Code
52	**1T6800**

Medium bracket kit for surface installation (2 pieces).
Integrated driver version.
Rotation +/-90°.



H	Code
24	**1T6799**

Short bracket kit for surface installation (2 pieces).
Remote driver version.
Rotation +/-50°.

Power Supply



L	P	H	Driving current	Driver	Code
404	41	47	500mA	EL.	**1T6797EL**
404	41	47	500mA	EL.	**1T6798EL**
404	41	47	500mA	DALI	**1T6797DA**
404	41	47	500mA	DALI	**1T6798DA**

Driver box.
L. 289mm version.
1T6797EL - n° 1 JEDI COMPACT
1T6798EL - n° 2-4 JEDI COMPACT
1T6797DA - n° 1 JEDI COMPACT
1T6798DA - n° 2-4 JEDI COMPACT

Accessories

Grid



L	Code
278	**1T6795**

Symmetrical anti-glare grill.
For Flood and Grazing versions.
To be ordered in the following quantities for every fixture length: 1 for the 289mm version, 2 for the 570mm version, 3 for the 850mm version and 4 for the 1130mm version.



L	Code
278	**1T6796**

Asymmetrical anti-glare grill.
For Wall Washer versions.
To be ordered in the following quantities for every fixture length: 1 for the 289mm version, 2 for the 570mm version, 3 for the 850mm version and 4 for the 1130mm version.

Bracket



Code
1T6806

Bracket kit for surface installation of the driver box (2 pieces).
Snap brackets.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

ZENO

Wall mounted

GENERAL INFO
Asymmetric adjustable projector
MEDIUM Ø134mm
LARGE Ø184mm

LED
Chip on Board
From 2602lm to 5121lm
3000K - 4000K
Ra97

PRODUCT EFFICACY
Up to 54lm/W

OPTICS
WW

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Die-cast painted aluminium optical unit and power supply box.

A range of professional projectors especially for museum lighting, given the quality of the LED sources, the cutting edge optics and installation flexibility.

The wall washer optics is particularly suitable for lighting vaulted ceilings.

The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system. Available in two different sizes.

Also available in the projector and recessed versions.

Merendoni Palace

Photographer
Ivan Rossi

Country
Bologna - Italy

ZENO

Applique Large



LED / 52W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra97			34°	81°	
Fixture Power	56W	1	0.98	1.99	1761
Source Flux	4995lm	2	1.96	3.98	440
Fixture Flux	2413lm	3	2.94	5.96	196
Efficacy	43lm/W	4	3.92	7.95	110
TS985 Imax=520cd/klm	Imax	2599cd	5	4.91	9.94	70

	Driver	Colour	3000K	4000K
	EL.	○	**1T6313EL**	**1T6314EL**
	EL.	●	**1T6315EL**	**1T6316EL**
	DALI	○	**1T6313DA**	**1T6314DA**
	DALI	●	**1T6315DA**	**1T6316DA**

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Applique Medium



LED / 26W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra97			34°	54°	
Fixture Power	28W	1	1.06	1.18	1345
Source Flux	2602lm	2	2.11	2.35	336
Fixture Flux	1473lm	3	3.17	3.53	149
Efficacy	53lm/W	4	4.23	4.71	84
Imax	1939cd	5	5.28	5.89	54

	Driver	Colour	3000K	4000K
	EL.	○	**1T6309EL**	**1T6310EL**
	EL.	●	**1T6311EL**	**1T6312EL**
	DALI	○	**1T6309DA**	**1T6310DA**
	DALI	●	**1T6311DA**	**1T6312DA**

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

VOLTA

GENERAL INFO
Professional adjustable LED projector for wall or cornice installation.
184mmx86,5mm

LED
Elliptical and asymmetrical optic:
LED Chip on board
NSP optic: LED Emitter
From 650lm to 3187lm
3000K
Ra80 – Ra84

PRODUCT EFFICACY
Up to 110lm/W

OPTICS
NSP – ASYM – ELLIPTICAL

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Body in extruded anodized aluminium, optic unit and terminal in die cast powder coated aluminium. Ultra flat protection screen in tempered glass. Bracket in stainless steel predisposed for surface installation.

Professional adjustable LED projector for wall or cornice installation, particularly suitable for lighting historical buildings of great artistic value.

It can be installed on cornices for lighting vaulted ceilings or pedestrian areas. Available in various colour variants that have been carefully studied to insert the fixture into historical architectural contexts.

All versions can be installed indoor as well as outdoor (IP66).

To be completed with remote driver.

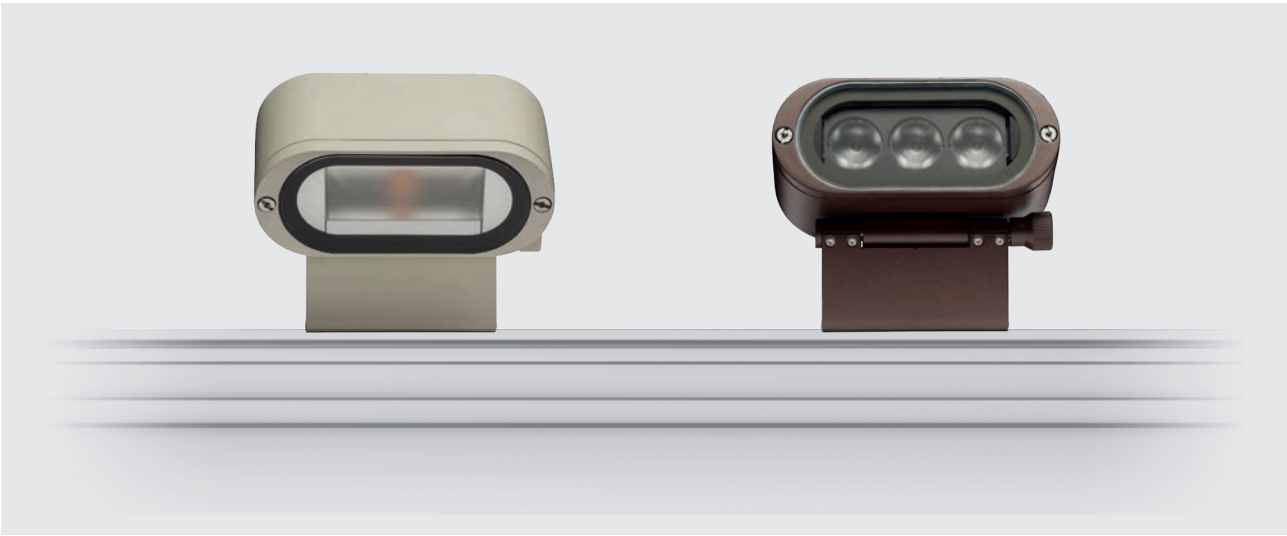

Merendoni Palace

Photographer
Ivan Rossi

Country
Bologna - Italy

VOLTA

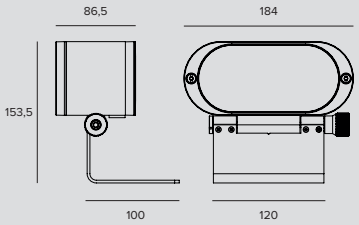

LED / 8W / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power	12W	1		0.16	13011
Source Flux	650lm	2		0.32	3253
Fixture Flux	544lm	3		0.48	1446
Efficacy	47lm/W	4		0.64	813
TS880 Imax=20017cd/klm	Imax	13011cd	5	0.80	520

Power supply	Colour	3000K
900mA		**1T4632**
900mA		**1T4633**
900mA		**1E2565**
900mA		**1E2566**

LED / 21/33W / ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			61°	86°	
Fixture Power	24W	1		1.51	1.98	1356
Source Flux	3187lm	2		3.01	3.96	339
Fixture Flux	2304lm	3		4.52	5.94	151
Efficacy	96lm/W	4		6.02	7.92	85
TS881 Imax=464cd/klm	Imax	1480cd	5	7.53	9.89	54



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			61°	86°	
Fixture Power	37W	1		1.51	1.98	1860
Source Flux	4373lm	2		3.01	3.96	465
Fixture Flux	3162lm	3		4.52	5.94	207
Efficacy	85lm/W	4		6.02	7.92	116
TS881 Imax=464cd/klm	Imax	2031cd	5	7.53	9.89	74

Power supply	Colour	3000K
600/900mA		**1T4634**
600/900mA		**1T4635**
600/900mA		**1E2567**
600/900mA		**1E2568**

LED / 21/33W / ELLIPTICAL



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power	24W	1		0.76	1.66	2266
Source Flux	3187lm	2		1.52	3.31	567
Fixture Flux	2530lm	3		2.28	4.97	252
Efficacy	105lm/W	4		3.04	6.62	142
TS882 Imax=711cd/klm	Imax	2266cd	5	3.80	8.28	91



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power	37W	1		0.76	1.66	3110
Source Flux	4373lm	2		1.52	3.31	777
Fixture Flux	3471lm	3		2.28	4.97	346
Efficacy	94lm/W	4		3.04	6.62	194
TS882 Imax=711cd/klm	Imax	3110cd	5	3.80	8.28	124

Power supply	Colour	3000K
600/900mA		**1T4636**
600/900mA		**1T4637**
600/900mA		**1E2569**
600/900mA		**1E2570**

Related codes

Power Supply



	Code
32W - 110-240V, 600mA - IP20 - 160x35x83mm	**1T3625**
43W - 220-240V, 600mA - IP68 - 150x40x148mm	**1E2571**
50W - 220-240V, 900mA - IP20 - 160x35x83mm	**1T2966**
50W - 220-240V, 900mA - IP68 - 150x40x148mm	**1E2573**

Electronic power supply
LxHxP



	Code
32W - 110-240V, 600mA - IP20 - 160x35x83mm	**1T3627**
43W - 220-240V, 600mA - IP68 - 150x40x148mm	**1E2572**
50W - 110-240V, 900mA - IP20 - 160x35x83mm	**1T2968**
50W - 220-240V, 900mA - IP68 - 150x40x148mm	**1E2574**

DALI electronic power supply
LxHxP

Accessories

Filter

	Colour	Code
		1T4638
		1T4639
		1E2575
		1E2576

Blade of light filter.
PMMA holographic filter for a blade of light effect, CNC machine anodised and powder coated aluminium frame.
For NSP optic.

	Colour	Code
		1T4640
		1T4641
		1E2577
		1E2578

Anti-glare.
PMMA holographic filter to reduce the beam angle, CNC machine anodised and powder coated aluminium frame.
NSP, ASYM, ELLIPTICAL

Screen

	Colour	Code
		1T4642
		1T4643
		1E2579
		1E2580

Asymmetric screen.
Powder coated stainless steel.
NSP

Emergency Kit



	Code
	1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code

1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code

1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Merendoni Palace

Photographer
Ivan Rossi

Country
Bologna - Italy

CORO

GENERAL INFO
Professional adjustable LED projector for wall or cornice installation.
Sistema de disipación pasiva. Posibilidad de orientación del cuerpo óptico de +/- 165° en plano horizontal y de +/-180° en plano vertical, con bloqueo.
Ø82mm – Ø119mm

LED
Chip on board
From 200lm to 7130lm
3000K
Ra80 (only NSP optic) – Ra84 – Ra97

PRODUCT EFFICACY
Up to114lm/W

OPTICS
NSP (only Small version) – SP – FL
MWFL – WFL
DBS - Digital beam opening control

POWER SUPPLY
Electronic – DALI - Casambi on board

MATERIAL
CORO large: Body in die cast aluminium, front ring and joints in aluminium powder coated.
CORO Small: Body, front ring and joints in aluminium powder coated.

A range of cornice, capital and shelf projectors particularly suitable for installation in prestigious architectural environments where it is necessary to light the space without interfering with the architecture in any way.

Available in two different sizes - Large and Small - each with two different length arms and three different fixing systems that increase installation flexibility.

There is also a DBS - Dynamic Beam Shaper- version - for the Coro Large version only.

		CORO Large	CORO Small
		Ø 119mm	Ø 82mm
LED	Flux (lm)	2783-7130	200-2509
	Power	25W-55W	2.7W-18W
OPTICS			
NSP	Lens		•
SP	Lens		•
	Hybrid	•	
	Reflector	•	•
FL	Lens		•
	Hybrid	•	
	Reflector	•	
MWFL	Reflector	•	
WFL	Reflector	•	
DBS	Variable	•	

Saint Germain des Prés

Lighting Design
Armand Zadkian

Photographer
Hugo Hebrard

Country
Paris - France

01

02

Coro available in two different sizes

and two different finishes: sandstone grey and Florentine white, two colours that integrate perfectly in historical contexts.

The flexibility of the fixture is best represented by its fixing system.

Three different solutions for as many types of installation.

Sala Zuccari

Palazzo Giustiniani

Photographer
Alessandro Maurelli

Country
Rome - Italy

CORO

Large long arm



LED / 34W / HYBRID / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			13°	
Fixture Power		37W	1	0.23	41198
Source Flux		4478lm	2	0.46	10299
Fixture Flux		2904lm	3	0.69	4578
Efficacy		78lm/W	4	0.92	2575
TS918	Imax=9200cd/klm	Imax	41198cd	5	1.14	1648

Power supply	Colour	3000K
900mA		**1T4785**
900mA		**1T4787**

LED / 34W / HYBRID / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			13°	
Fixture Power		37W	1	0.23	30351
Source Flux		3299lm	2	0.46	7588
Fixture Flux		2139lm	3	0.69	3372
Efficacy		58lm/W	4	0.92	1897
TS918	Imax=9200cd/klm	Imax	30351cd	5	1.14	1214

Power supply	Colour	3000K
900mA		**1T5312**
900mA		**1T5314**

LED / 34W / HYBRID / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			33°	
Fixture Power		37W	1	0.58	9994
Source Flux		4478lm	2	1.17	2499
Fixture Flux		2733lm	3	1.75	1110
Efficacy		73lm/W	4	2.33	625
TS919	Imax=2232cd/klm	Imax	9994cd	5	2.92	400

Power supply	Colour	3000K
900mA		**1T4786**
900mA		**1T4788**

LED / 34W / HYBRID / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			33°	
Fixture Power		37W	1	0.58	7363
Source Flux		3299lm	2	1.17	1841
Fixture Flux		2014lm	3	1.75	818
Efficacy		54lm/W	4	2.33	460
TS919	Imax=2232cd/klm	Imax	7363cd	5	2.92	295

Power supply	Colour	3000K
900mA		**1T5313**
900mA		**1T5315**

LED / 25W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		28W	1	0.26	24211
Source Flux		3617lm	2	0.52	6053
Fixture Flux		3074lm	3	0.78	2690
Efficacy		110lm/W	4	1.04	1513
TS860	Imax=6694cd/klm	Imax	24211cd	5	1.30	968

Power supply	Colour	3000K
700mA		**1T4560**
700mA		**1T4564**

LED / 25W / REFLECTOR / SP / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			15°	
Fixture Power	28W	1	0.26	18629
Source Flux	2783lm	2	0.52	4657
Fixture Flux	2366lm	3	0.78	2070
Efficacy	84lm/W	4	1.04	1164
TS860 Imax=6694cd/klm	Imax 18629cd	5	1.30	745

Power supply	Colour	3000K
700mA		**1T5302**
700mA		**1T5306**

LED / 25W / REFLECTOR / FL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			31°	
Fixture Power	28W	1	0.55	9064
Source Flux	3617lm	2	1.09	2266
Fixture Flux	3062lm	3	1.64	1007
Efficacy	109lm/W	4	2.19	567
TS861 Imax=2506cd/klm	Imax 9064cd	5	2.73	363

Power supply	Colour	3000K
700mA		**1T4561**
700mA		**1T4565**

LED / 25W / REFLECTOR / FL / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			31°	
Fixture Power	28W	1	0.55	6974
Source Flux	2783lm	2	1.09	1744
Fixture Flux	2356lm	3	1.64	775
Efficacy	84lm/W	4	2.19	436
TS861 Imax=2506cd/klm	Imax 6974cd	5	2.73	279

Power supply	Colour	3000K
700mA		**1T5303**
700mA		**1T5307**

LED / 39W / REFLECTOR / SP / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			15°	
Fixture Power	42W	1	0.26	35380
Source Flux	4980lm	2	0.51	8845
Fixture Flux	4233lm	3	0.77	3931
Efficacy	100lm/W	4	1.02	2211
TS862 Imax=7104cd/klm	Imax 35380cd	5	1.28	1415

Power supply	Colour	3000K
1050mA		**1T4569**
1050mA		**1T4575**

LED / 39W / REFLECTOR / SP / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			15°	
Fixture Power	42W	1	0.26	27210
Source Flux	3830lm	2	0.51	6803
Fixture Flux	3255lm	3	0.77	3023
Efficacy	77lm/W	4	1.02	1701
TS862 Imax=7104cd/klm	Imax 27210cd	5	1.28	1088

Power supply	Colour	3000K
1050mA		**1T4581**
1050mA		**1T4587**

LED / 39W / REFLECTOR / FL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			28°	
Fixture Power	42W	1	0.50	13841
Source Flux	4980lm	2	1.01	3460
Fixture Flux	4216lm	3	1.51	1538
Efficacy	99lm/W	4	2.02	865
TS863 Imax=2779cd/klm	Imax 13841cd	5	2.52	554

Power supply	Colour	3000K
1050mA		**1T4570**
1050mA		**1T4576**

CORO

LED / 39W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
Fixture Power		42W	1	0.50	10645
Source Flux		3830lm	2	1.01	2661
Fixture Flux		3242lm	3	1.51	1183
Efficacy		76lm/W	4	2.02	665
TS863	Imax=2779cd/klm	Imax	5	2.52	426

Power supply	Colour	3000K
1050mA		**1T4582**
1050mA		**1T4588**

LED / 39W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			43°	
Fixture Power		42W	1	0.79	8255
Source Flux		4980lm	2	1.59	2064
Fixture Flux		4328lm	3	2.38	917
Efficacy		102lm/W	4	3.18	516
TS864	Imax=1685cd/klm	Imax	5	3.97	330

Power supply	Colour	3000K
1050mA		**1T4571**
1050mA		**1T4577**

LED / 39W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			43°	
Fixture Power		42W	1	0.79	6349
Source Flux		3830lm	2	1.59	1587
Fixture Flux		3328lm	3	2.38	705
Efficacy		78lm/W	4	3.18	397
TS864	Imax=1685cd/klm	Imax	5	3.97	254

Power supply	Colour	3000K
1050mA		**1T4583**
1050mA		**1T4589**

LED / 45/55W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
Fixture Power		54W	1	0.62	15434
Source Flux		7130lm	2	1.23	3858
Fixture Flux		6035lm	3	1.85	1715
Efficacy		113lm/W	4	2.46	965
TS865	Imax=2165cd/klm	Imax	5	3.08	617

Power supply	Colour	3000K
900/1050mA		**1T4592**
900/1050mA		**1T4596**

LED / 45/55W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		54W	1	0.62	10446
Source Flux		4826lm	2	1.23	2612
Fixture Flux		4085lm	3	1.85	1161
Efficacy		76lm/W	4	2.46	653
TS865	Imax=2165cd/klm	Imax	5	3.08	418

Power supply	Colour	3000K
900/1050mA		**1T4600**
900/1050mA		**1T4604**

LED / 45/55W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			47°	
Fixture Power		54W	1	0.87	10489
Source Flux		7130lm	2	1.75	2622
Fixture Flux		6196lm	3	2.62	1165
Efficacy		116lm/W	4	3.50	656
TS866	Imax=1472cd/klm	Imax	5	4.37	420

Power supply	Colour	3000K
900/1050mA		**1T4593**
900/1050mA		**1T4597**

LED / 45/55W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			47°	
Fixture Power		54W	1	0.87	7100
Source Flux		4826lm	2	1.75	1775
Fixture Flux		4194lm	3	2.62	789
Efficacy		78lm/W	4	3.50	444
TS866	Imax=1472cd/klm	Imax	5	4.37	284

Power supply	Colour	3000K
900/1050mA		**1T4601**
900/1050mA		**1T4605**

Large short arm



LED / 34W / HYBRID / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			13°	
Fixture Power		37W	1	0.23	41198
Source Flux		4478lm	2	0.46	10299
Fixture Flux		2904lm	3	0.69	4578
Efficacy		78lm/W	4	0.92	2575
TS918	Imax=9200cd/klm	Imax	5	1.14	1648

Power supply	Colour	3000K
900mA		**1T4781**
900mA		**1T4783**

LED / 34W / HYBRID / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			13°	
Fixture Power		37W	1	0.23	30351
Source Flux		3299lm	2	0.46	7588
Fixture Flux		2139lm	3	0.69	3372
Efficacy		58lm/W	4	0.92	1897
TS918	Imax=9200cd/klm	Imax	5	1.14	1214

Power supply	Colour	3000K
900mA		**1T5308**
900mA		**1T5310**

LED / 34W / HYBRID / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			33°	
Fixture Power		37W	1	0.58	9994
Source Flux		4478lm	2	1.17	2499
Fixture Flux		2733lm	3	1.75	1110
Efficacy		73lm/W	4	2.33	625
TS919	Imax=2232cd/klm	Imax	5	2.92	400

Power supply	Colour	3000K
900mA		**1T4782**
900mA		**1T4784**

LED / 34W / HYBRID / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			33°	
Fixture Power		37W	1	0.58	7363
Source Flux		3299lm	2	1.17	1841
Fixture Flux		2014lm	3	1.75	818
Efficacy		54lm/W	4	2.33	460
TS919	Imax=2232cd/klm	Imax	5	2.92	295

Power supply	Colour	3000K
900mA		**1T5309**
900mA		**1T5311**

CORO

LED / 25W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		28W	1	0.26	24211
Source Flux		3617lm	2	0.52	6053
Fixture Flux		3074lm	3	0.78	2690
Efficacy		110lm/W	4	1.04	1513
TS860	Imax=6694cd/klm	Imax	24211cd	5	1.30	968

Power supply	Colour	3000K
700mA		**1T4558**
700mA		**1T4562**

LED / 25W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			15°	
Fixture Power		28W	1	0.26	18629
Source Flux		2783lm	2	0.52	4657
Fixture Flux		2366lm	3	0.78	2070
Efficacy		84lm/W	4	1.04	1164
TS860	Imax=6694cd/klm	Imax	18629cd	5	1.30	745

Power supply	Colour	3000K
700mA		**1T5300**
700mA		**1T5304**

LED / 25W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power		28W	1	0.55	9064
Source Flux		3617lm	2	1.09	2266
Fixture Flux		3062lm	3	1.64	1007
Efficacy		109lm/W	4	2.19	567
TS861	Imax=2506cd/klm	Imax	9064cd	5	2.73	363

Power supply	Colour	3000K
700mA		**1T4559**
700mA		**1T4563**

LED / 25W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			31°	
Fixture Power		28W	1	0.55	6974
Source Flux		2783lm	2	1.09	1744
Fixture Flux		2356lm	3	1.64	775
Efficacy		84lm/W	4	2.19	436
TS861	Imax=2506cd/klm	Imax	6974cd	5	2.73	279

Power supply	Colour	3000K
700mA		**1T5301**
700mA		**1T5305**

LED / 39W / REFLECTOR / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		42W	1	0.26	35380
Source Flux		4980lm	2	0.51	8845
Fixture Flux		4233lm	3	0.77	3931
Efficacy		100lm/W	4	1.02	2211
TS862	Imax=7104cd/klm	Imax	35380cd	5	1.28	1415

Power supply	Colour	3000K
1050mA		**1T4566**
1050mA		**1T4572**

LED / 39W / REFLECTOR / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			15°	
Fixture Power		42W	1	0.26	27210
Source Flux		3830lm	2	0.51	6803
Fixture Flux		3255lm	3	0.77	3023
Efficacy		77lm/W	4	1.02	1701
TS862	Imax=7104cd/klm	Imax	27210cd	5	1.28	1088

Power supply	Colour	3000K
1050mA		**1T4578**
1050mA		**1T4584**

LED / 39W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power		42W	1	0.50	13841
Source Flux		4980lm	2	1.01	3460
Fixture Flux		4216lm	3	1.51	1538
Efficacy		99lm/W	4	2.02	865
TS863	Imax=2779cd/klm	Imax	13841cd	5	2.52	554

Power supply	Colour	3000K
1050mA		**1T4567**
1050mA		**1T4573**

LED / 39W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			28°	
Fixture Power		42W	1	0.50	10645
Source Flux		3830lm	2	1.01	2661
Fixture Flux		3242lm	3	1.51	1183
Efficacy		76lm/W	4	2.02	665
TS863	Imax=2779cd/klm	Imax	10645cd	5	2.52	426

Power supply	Colour	3000K
1050mA		**1T4579**
1050mA		**1T4585**

LED / 39W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			43°	
Fixture Power		42W	1	0.79	8255
Source Flux		4980lm	2	1.59	2064
Fixture Flux		4328lm	3	2.38	917
Efficacy		102lm/W	4	3.18	516
TS864	Imax=1685cd/klm	Imax	8390cd	5	3.97	330

Power supply	Colour	3000K
1050mA		**1T4568**
1050mA		**1T4574**

LED / 39W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			43°	
Fixture Power		42W	1	0.79	6349
Source Flux		3830lm	2	1.59	1587
Fixture Flux		3328lm	3	2.38	705
Efficacy		78lm/W	4	3.18	397
TS864	Imax=1685cd/klm	Imax	6453cd	5	3.97	254

Power supply	Colour	3000K
1050mA		**1T4580**
1050mA		**1T4586**

LED / 45/55W / REFLECTOR / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
Fixture Power		54W	1	0.62	15434
Source Flux		7130lm	2	1.23	3858
Fixture Flux		6035lm	3	1.85	1715
Efficacy		113lm/W	4	2.46	965
TS865	Imax=2165cd/klm	Imax	15434cd	5	3.08	617

Power supply	Colour	3000K
900/1050mA		**1T4590**
900/1050mA		**1T4594**

LED / 45/55W / REFLECTOR / FL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			34°	
Fixture Power		54W	1	0.62	10446
Source Flux		4826lm	2	1.23	2612
Fixture Flux		4085lm	3	1.85	1161
Efficacy		76lm/W	4	2.46	653
TS865	Imax=2165cd/klm	Imax	10446cd	5	3.08	418

Power supply	Colour	3000K
900/1050mA		**1T4598**
900/1050mA		**1T4602**

CORO

LED / 45/55W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			47°	
Fixture Power		54W	1	0.87	10489
Source Flux		7130lm	2	1.75	2622
Fixture Flux		6196lm	3	2.62	1165
Efficacy		116lm/W	4	3.50	656
TS866	Imax=1472cd/klm	Imax	5	4.37	420

Power supply	Colour	3000K
900/1050mA		**1T4591**
900/1050mA		**1T4595**

LED / 45/55W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			47°	
Fixture Power		54W	1	0.87	7100
Source Flux		4826lm	2	1.75	1775
Fixture Flux		4194lm	3	2.62	789
Efficacy		78lm/W	4	3.50	444
TS866	Imax=1472cd/klm	Imax	5	4.37	284

Power supply	Colour	3000K
900/1050mA		**1T4599**
900/1050mA		**1T4603**

Large DBS long arm



LED / 34W / DBS / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power		37W	1	0.25	25176
Source Flux		4478lm	2	0.50	6294
Fixture Flux		2140lm	3	0.75	2797
Efficacy		58lm/W	4	1.00	1573
TS1110	Imax=5622cd/klm	Imax	5	1.26	1007



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		37W	1	0.43	8931
Source Flux		4478lm	2	0.86	2233
Fixture Flux		2082lm	3	1.29	992
Efficacy		56lm/W	4	1.72	558
TS1111	Imax=1994cd/klm	Imax	5	2.15	357



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		37W	1	0.83	2585
Source Flux		4478lm	2	1.67	646
Fixture Flux		1769lm	3	2.50	287
Efficacy		48lm/W	4	3.34	162
TS1113	Imax=577cd/klm	Imax	5	4.17	103



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			31°	
Fixture Power		37W	1	0.56	5426
Source Flux		4478lm	2	1.13	1356
Fixture Flux		2016lm	3	1.69	603
Efficacy		54lm/W	4	2.25	339
TS1112	Imax=1212cd/klm	Imax	5	2.82	217

Driver	Colour	3000K
CASAMBI		**1T6945CA**
CASAMBI		**1T6946CA**

LED / 34W / DBS / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			14°	
	Fixture Power	37W	1	0.25	18547
	Source Flux	3299lm	2	0.50	4637
	Fixture Flux	1577lm	3	0.75	2061
	Efficacy	42lm/W	4	1.00	1159
TS1110	Imax=5622cd/klm	Imax	5	1.26	742



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			24°	
	Fixture Power	37W	1	0.43	6580
	Source Flux	3299lm	2	0.86	1645
	Fixture Flux	1534lm	3	1.29	731
	Efficacy	41lm/W	4	1.72	411
TS1111	Imax=1994cd/klm	Imax	5	2.15	263



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			45°	
	Fixture Power	37W	1	0.83	1904
	Source Flux	3299lm	2	1.67	476
	Fixture Flux	1303lm	3	2.50	212
	Efficacy	35lm/W	4	3.34	119
TS1113	Imax=577cd/klm	Imax	5	4.17	76



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			31°	
	Fixture Power	37W	1	0.56	3997
	Source Flux	3299lm	2	1.13	999
	Fixture Flux	1485lm	3	1.69	444
	Efficacy	40lm/W	4	2.25	250
TS1112	Imax=1212cd/klm	Imax	5	2.82	160

	Driver	Colour	4000K
	CASAMBI		**1T6947CA**
	CASAMBI		**1T6948CA**

Related codes

Mounting System



	Colour	Code
		1T4606
		1T4607

White surface mounting base.



	Colour	Code
		1T4628
		1T4629

Surface mounting channel 900mm.
The channel can be cut to length at intervals of 10cm.
With three mounting bases for Coro “Small” and “Big”.



	Power supply	Driving current	Driver	Colour	Code
	220-240Vac 50/60Hz	700mA	EL.		**1T4612**
	220-240Vac 50/60Hz	700mA	DALI		**1T4613**
	220-240Vac 50/60Hz	700mA	DALI (CASAMBI)		**1T4613CA**
	220-240Vac 50/60Hz	900mA	EL.		**1T4614**
	220-240Vac 50/60Hz	900mA	DALI		**1T4615**
	220-240Vac 50/60Hz	900mA	DALI (CASAMBI)		**1T4615CA**
	220-240Vac 50/60Hz	1050mA max 60W	EL.		**1T4616**
	220-240Vac 50/60Hz	1050mA max 60W	DALI		**1T4617**
	220-240Vac 50/60Hz	1050mA max 60W	DALI (CASAMBI)		**1T4617CA**
	220-240Vac 50/60Hz	700mA	EL.		**1T4622**
	220-240Vac 50/60Hz	700mA	DALI		**1T4623**
	220-240Vac 50/60Hz	700mA	DALI (CASAMBI)		**1T4623CA**
	220-240Vac 50/60Hz	900mA	EL.		**1T4624**
	220-240Vac 50/60Hz	900mA	DALI		**1T4625**
	220-240Vac 50/60Hz	900mA	DALI (CASAMBI)		**1T4625CA**
	220-240Vac 50/60Hz	1050mA max 60W	EL.		**1T4626**
	220-240Vac 50/60Hz	1050mA max 60W	DALI		**1T4627**
	220-240Vac 50/60Hz	1050mA max 60W	DALI (CASAMBI)		**1T4627CA**

Surface mounting base with integrated driver.

CORO

Power Supply



	Code
29W - 110-240V, 700mA - IP20 - 160x35x83mm	**1T2963**
50W - 220-240V, 900mA - IP20 - 160x35x83mm	**1T2966**
42W - 110-240V, 1050mA - IP20 - 160x35x83mm	**1T3781**
60W - 220-240V, 1050mA - IP20 - 129x30x76mm	**1T4723**

Electronic power supply
LxHxP

	Code
29W - 110-240V, 700mA - IP20 - 160x35x83mm	**1T2965**
50W - 110-240V, 900mA - IP20 - 160x35x83mm	**1T2968**
42W - 110-240V, 1050mA - IP20 - 160x35x83mm	**1T3783**
60W - 220-240V, 1050mA - IP20 - 129x30x76mm	**1T4725**

DALI electronic power supply
LxHxP

Accessories

Filter



	Filter	Ø	Code
	Red	80	**1T3424**
	Green	80	**1T3425**
	Blue	80	**1T3426**
	Yellow	80	**1T3427**
	Magenta	80	**1T3428**

Flat glass interference chromatic filter.

	Ø	Code
	80	**1T3141**

Flat glass, grooved refractive blade light filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.

	Ø	Code
	80	**1T3140**

Flat glass micro prismatic refractive diffusive filter.
This softens the luminous effect.



	Filter	Ø	Code
	Halogen +	80	**1T6382**
	Vivid +	80	**1T6384**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	80	**1T6386**
Fish	80	**1T6388**
Bread	80	**1T6390**
Vegetables	80	**1T6392**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6386
To be used only with 3000K and Ra80 fixtures.
1T6388
To be used only with 4000K and Ra80 fixtures.
1T6390
To be used only with 3000K and Ra80 fixtures.
1T6392
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	80	**1T6394**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Grid



Ø	Code
80	**1T3423**

Anti-glare louver.
Black painted metal honeycomb structure.

Zoom



Ø	Code
80	**1T3432**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It makes it possible to obtain a variable beam from 15° to 60°.
It can not be used with NSP and hybrid optics; no for DBS version.

Cut-off



Ø	Code
80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.
No for DBS version.

Screen



Ø	Code
80	**1T3143**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

CORO

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Small long arm



LED / 2,7W / LENS / NSP / CRI80



3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	5W	1	0.15	4436
Source Flux	200lm	2	0.30	1109
Fixture Flux	163lm	3	0.45	493
Efficacy	31lm/W	4	0.60	277
Imax	4436cd	5	0.75	177

TS890 Imax=22178cd/klm

Power supply	Colour	3000K
900mA		**1T4724**
900mA		**1T4728**

LED / 11W / LENS / SP / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			15°	
Fixture Power	14W	1	0.27	15975
Source Flux	1686lm	2	0.53	3994
Fixture Flux	1261lm	3	0.80	1775
Efficacy	93lm/W	4	1.07	998
Imax	15975cd	5	1.33	639

TS855 Imax=9475cd/klm

Power supply	Colour	3000K
350mA		**1T4528**
350mA		**1T4532**

LED / 12W / LENS / FL / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			30°	
Fixture Power	14W	1	0.54	4873
Source Flux	1856lm	2	1.09	1218
Fixture Flux	1328lm	3	1.63	541
Efficacy	98lm/W	4	2.17	305
Imax	4873cd	5	2.72	195

TS856 Imax=2625cd/klm

Power supply	Colour	3000K
350mA		**1T4529**
350mA		**1T4533**

LED / 18W / LENS / SP / CRI84



3000K		H(m)	D(m)	Emax(lx)
Ra84			24°	
Fixture Power	20W	1	0.43	8958
Source Flux	2509lm	2	0.87	2239
Fixture Flux	1831lm	3	1.30	995
Efficacy	91lm/W	4	1.73	560
Imax	8958cd	5	2.17	358

TS857 Imax=3570cd/klm

Power supply	Colour	3000K
500mA		**1T4541**
500mA		**1T4547**

LED / 18W / LENS / SP / CRI97



3000K		H(m)	D(m)	Emax(lx)
Ra97			24°	
Fixture Power	20W	1	0.43	6869
Source Flux	1924lm	2	0.87	1717
Fixture Flux	1404lm	3	1.30	763
Efficacy	69lm/W	4	1.73	429
Imax	6869cd	5	2.17	275

TS857 Imax=3570cd/klm

Power supply	Colour	3000K
500mA		**1T5298**
500mA		**1T5299**

CORO

LED / 18W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		20W	1	0.90	3229
Source Flux		2509lm	2	1.80	807
Fixture Flux		1983lm	3	2.69	359
Efficacy		98lm/W	4	3.59	202
TS858	Imax=1310cd/klm	Imax	3287cd	5	4.49	129

Power supply	Colour	3000K
500mA		**1T4542**
500mA		**1T4548**

LED / 18W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			48°	
Fixture Power		20W	1	0.90	2476
Source Flux		1924lm	2	1.80	619
Fixture Flux		1520lm	3	2.69	275
Efficacy		75lm/W	4	3.59	155
TS858	Imax=1310cd/klm	Imax	2521cd	5	4.49	99

Power supply	Colour	3000K
500mA		**1T4552**
500mA		**1T4556**

LED / 18W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
Fixture Power		20W	1	1.16	2447
Source Flux		2509lm	2	2.32	612
Fixture Flux		2013lm	3	3.47	272
Efficacy		100lm/W	4	4.63	153
TS859	Imax=976cd/klm	Imax	2449cd	5	5.79	98

Power supply	Colour	3000K
500mA		**1T4543**
500mA		**1T4549**

LED / 18W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			60°	
Fixture Power		20W	1	1.16	1877
Source Flux		1924lm	2	2.32	469
Fixture Flux		1544lm	3	3.47	209
Efficacy		76lm/W	4	4.63	117
TS859	Imax=976cd/klm	Imax	1878cd	5	5.79	75

Power supply	Colour	3000K
500mA		**1T4553**
500mA		**1T4557**

Small short arm



LED / 2,7W / LENS / NSP / CRI80



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		5W	1	0.15	4436
Source Flux		200lm	2	0.30	1109
Fixture Flux		163lm	3	0.45	493
Efficacy		31lm/W	4	0.60	277
TS890	Imax=22178cd/klm	Imax	4436cd	5	0.75	177

Power supply	Colour	3000K
900mA		**1T4722**
900mA		**1T4726**

LED / 11W / LENS / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			15°	
Fixture Power		14W	1	0.27	15975
Source Flux		1686lm	2	0.53	3994
Fixture Flux		1261lm	3	0.80	1775
Efficacy		93lm/W	4	1.07	998
TS855	Imax=9475cd/klm	Imax	15975cd	5	1.33	639

Power supply	Colour	3000K
350mA		**1T4526**
350mA		**1T4530**

LED / 12W / LENS / FL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		14W	1	0.54	4873
Source Flux		1856lm	2	1.09	1218
Fixture Flux		1328lm	3	1.63	541
Efficacy		98lm/W	4	2.17	305
TS856	Imax=2625cd/klm	Imax	4873cd	5	2.72	195

Power supply	Colour	3000K
350mA		**1T4527**
350mA		**1T4531**

LED / 18W / LENS / SP / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		20W	1	0.43	8958
Source Flux		2509lm	2	0.87	2239
Fixture Flux		1831lm	3	1.30	995
Efficacy		91lm/W	4	1.73	560
TS857	Imax=3570cd/klm	Imax	8958cd	5	2.17	358

Power supply	Colour	3000K
500mA		**1T4538**
500mA		**1T4544**

LED / 18W / LENS / SP / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			24°	
Fixture Power		20W	1	0.43	6869
Source Flux		1924lm	2	0.87	1717
Fixture Flux		1404lm	3	1.30	763
Efficacy		69lm/W	4	1.73	429
TS857	Imax=3570cd/klm	Imax	6869cd	5	2.17	275

Power supply	Colour	3000K
500mA		**1T5296**
500mA		**1T5297**

LED / 18W / REFLECTOR / MWFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power		20W	1	0.90	3229
Source Flux		2509lm	2	1.80	807
Fixture Flux		1983lm	3	2.69	359
Efficacy		98lm/W	4	3.59	202
TS858	Imax=1310cd/klm	Imax	3287cd	5	4.49	129

Power supply	Colour	3000K
500mA		**1T4539**
500mA		**1T4545**

LED / 18W / REFLECTOR / MWFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			48°	
Fixture Power		20W	1	0.90	2476
Source Flux		1924lm	2	1.80	619
Fixture Flux		1520lm	3	2.69	275
Efficacy		75lm/W	4	3.59	155
TS858	Imax=1310cd/klm	Imax	2521cd	5	4.49	99

Power supply	Colour	3000K
500mA		**1T4550**
500mA		**1T4554**

CORO

LED / 18W / REFLECTOR / WFL / CRI84



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
	Fixture Power	20W	1	1.16	2447
	Source Flux	2509lm	2	2.32	612
	Fixture Flux	2013lm	3	3.47	272
	Efficacy	100lm/W	4	4.63	153
TS859	Imax=976cd/klm	Imax	5	5.79	98

Power supply	Colour	3000K
500mA		**1T4540**
500mA		**1T4546**

LED / 18W / REFLECTOR / WFL / CRI97



	3000K		H(m)	D(m)	Emax(lx)
	Ra97			60°	
	Fixture Power	20W	1	1.16	1877
	Source Flux	1924lm	2	2.32	469
	Fixture Flux	1544lm	3	3.47	209
	Efficacy	76lm/W	4	4.63	117
TS859	Imax=976cd/klm	Imax	5	5.79	75

Power supply	Colour	3000K
500mA		**1T4551**
500mA		**1T4555**

Related codes

Mounting System



Colour	Code
	1T4606
	1T4607

White surface mounting base.



Colour	Code
	1T4628
	1T4629

Surface mounting channel 900mm.
The channel can be cut to length at intervals of 10cm.
With three mounting bases for Coro “Small” and “Big”.



Power supply	Driving current	Driver	Colour	Code
220-240Vac 50/60Hz	900mA	EL.		**1T4614**
220-240Vac 50/60Hz	900mA	DALI		**1T4615**
220-240Vac 50/60Hz	900mA	DALI (CASAMBI)		**1T4615CA**
220-240Vac 50/60Hz	900mA	EL.		**1T4624**
220-240Vac 50/60Hz	900mA	DALI		**1T4625**
220-240Vac 50/60Hz	900mA	DALI (CASAMBI)		**1T4625CA**
220-240Vac 50/60Hz	350mA	DALI (CASAMBI)		**1T4609CA**
220-240Vac 50/60Hz	350mA	DALI (CASAMBI)		**1T4619CA**
220-240Vac 50/60Hz	500mA	DALI (CASAMBI)		**1T4611CA**
220-240Vac 50/60Hz	500mA	DALI (CASAMBI)		**1T4621CA**

Surface mounting base with integrated driver.



Power supply	Driving current	Driver	Colour	Code
220-240Vac 50/60Hz	350mA	EL.		**1T4608**
220-240Vac 50/60Hz	350mA	EL.		**1T4618**
220-240Vac 50/60Hz	350mA	DALI		**1T4609**
220-240Vac 50/60Hz	350mA	DALI		**1T4619**
220-240Vac 50/60Hz	500mA	EL.		**1T4610**
220-240Vac 50/60Hz	500mA	EL.		**1T4620**
220-240Vac 50/60Hz	500mA	DALI		**1T4611**
220-240Vac 50/60Hz	500mA	DALI		**1T4621**

Surface mounting base with integrated driver.

Power Supply



	Code
15W - 220-240V, 350mA - IP20 - 119x22x52mm	**1T1757**
max 50W - 220-240V, 900mA - IP20 - 160x35x83mm	**1T2966**
max 22W - 220-240V, 500mA - IP20 - 130x30x42mm	**1T3966**

Electronic power supply
LxHxP



	Code
max 15W - 110-240V, 350mA - IP20 - 119x22x52mm	**1T4630**
20W - 220-240V, 500mA - IP20 - 119x22x52mm	**1T4631**
max 50W - 110-240V, 900mA - IP20 - 160x35x83mm	**1T2968**

DALI electronic power supply
LxHxP

Accessories

Filter



	Filter	Ø	Code
	Red	50	**49881**
	Green	50	**49882**
	Blue	50	**49886**
	Yellow	50	**49887**
	Magenta	50	**49959**

Flat glass interference chromatic filter.



	Ø	Code
	50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.



	Filter	Ø	Code
	Halogen +	50	**1T6381**
	Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



	Filter	Ø	Code
	Meat	50	**1T6385**
	Fish	50	**1T6387**
	Bread	50	**1T6389**
	Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385, 1T6389, 1T6391
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Screen



Ø	Code
50	**1T4325**

Black painted anodized diffusive aluminium asymmetric screen.
Complete with blade light filter.
Ideal for a Wall Washer effect.
To be combined with spot and flood optics.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Zoom



Ø	Code
50	**1T4324**

Zoom.
Optical system consists of an optical glass flat convex lens, an anodized aluminium specular reflector and a diffusive holographic filter.
To be used after removing the existing optic.
It can not be used with a narrow spot optic.
It makes it possible to obtain a variable beam from 15° to 60°.

Emergency Kit



Code
1T3144

Emergency kit.
Inverter + 3h battery pack.
For CCTLED Architectural Mini: no NSP version.
IP20.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Merendoni Palace

Photographer
Ivan Rossi

Country
Bologna - Italy

OTTO

GENERAL INFO
Pole mounted projector.
Adjustable spotlight body from 0°/-90° on the vertical plane and 0/+90°and 0/-90° on the horizontal plane.
Ø30mm

LED
LED Emitter
From 370lm to 397lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 30lm/W

OPTICS
ZOOM: from SP to FL

POWER SUPPLY
Remote electronic

MATERIAL
Painted or anodised aluminium body connected to a painted metal base.

A range of projectors with a minimal footprint with different installation types characterised by manual focus.

Availble with single or multi-optical configuration: 1x, 2x or 3x.

Also available in ceiling mounted versions with the following installations: semi-recessed, recessed extractable and ceiling mounted with a base.

Project 107

Architect
The Ply Architecture

Photographer
Andrey Egorov

Country
Moscow - Russia

01

02

The pole version

Is suitable for lighting shop windows or showcases that require a controlled, modular and adjustable light.

Manual focus

It works exactly like a camera lens, rotating the optical unit extends it and the beam opening changes from 14° to 34°.

Ceiling



LED / 3W / ZOOM / SP-FL

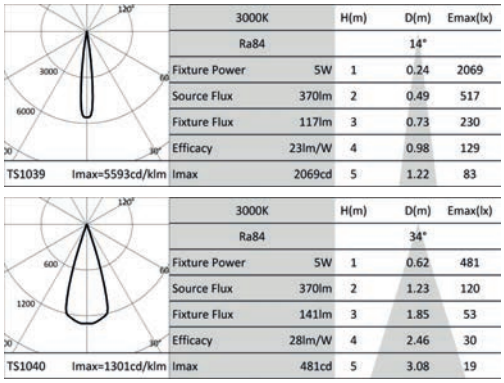

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
	Fixture Power	5W	1	0.24	2069
	Source Flux	370lm	2	0.49	517
	Fixture Flux	117lm	3	0.73	230
	Efficacy	23lm/W	4	0.98	129
	Imax	2069cd	5	1.22	83

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
	Fixture Power	5W	1	0.62	481
	Source Flux	370lm	2	1.23	120
	Fixture Flux	141lm	3	1.85	53
	Efficacy	28lm/W	4	2.46	30
	Imax	481cd	5	3.08	19

	Power supply	Colour	3000K	4000K
	1050mA	○	**1T6331**	**1T6332**
	1050mA	●	**1T6343**	**1T6344**
	1050mA	◌	**1T6355**	**1T6356**

Related codes

Power Supply



	Code
	1T6524

Electronic power supply 42W, LxHxP=129x30x42mm, 220-240V-AC 50-60Hz, 1050mA, IP20.
Can drive up to 12 OTTO 1x simultaneously.
OTTO Semi-Recessed: the driver is bigger than the cutout hole needed by the luminaire.

Accessories

Canopy

	Ø	H	Colour	Code
	40	18	○	**1T6528**
	40	18	●	**1T6529**
	40	18	◌	**1T6530**

Canopy for electrical connection.

OTTO

Multi-Optic 1x



LED / 1x3W / ZOOM / SP-FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	5W		1	0.24	2069
Source Flux	370lm		2	0.49	517
Fixture Flux	117lm		3	0.73	230
Efficacy	23lm/W		4	0.98	129
TS1039	Imax=5593cd/klm	Imax	2069cd	5	1.22	83



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
Fixture Power	5W		1	0.62	481
Source Flux	370lm		2	1.23	120
Fixture Flux	141lm		3	1.85	53
Efficacy	28lm/W		4	2.46	30
TS1040	Imax=1301cd/klm	Imax	481cd	5	3.08	19

	Power supply	Colour	3000K	4000K
	1050mA	○	**1T6325**	**1T6326**
	1050mA	●	**1T6337**	**1T6338**
	1050mA	◌	**1T6349**	**1T6350**

Multi-Optic 2x



LED / 2x3W / ZOOM / SP-FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
Fixture Power	5W		1	0.24	2069
Source Flux	370lm		2	0.49	517
Fixture Flux	117lm		3	0.73	230
Efficacy	23lm/W		4	0.98	129
TS1039	Imax=5593cd/klm	Imax	2069cd	5	1.22	83



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
Fixture Power	5W		1	0.62	481
Source Flux	370lm		2	1.23	120
Fixture Flux	141lm		3	1.85	53
Efficacy	28lm/W		4	2.46	30
TS1040	Imax=1301cd/klm	Imax	481cd	5	3.08	19

	Power supply	Colour	3000K	4000K
	1050mA	○	**1T6327**	**1T6328**
	1050mA	●	**1T6339**	**1T6340**
	1050mA	◌	**1T6351**	**1T6352**

Multi-Optic 3x



LED / 3x3W / ZOOM / SP-FL

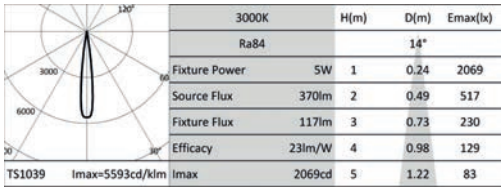

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			14°	
	Fixture Power	5W	1	0.24	2069
	Source Flux	370lm	2	0.49	517
	Fixture Flux	117lm	3	0.73	230
	Efficacy	23lm/W	4	0.98	129
	Imax	2069cd	5	1.22	83

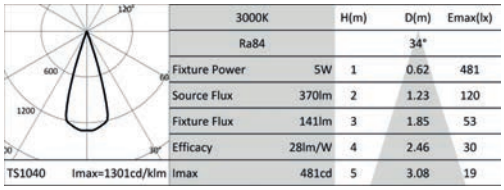

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
	Fixture Power	5W	1	0.62	481
	Source Flux	370lm	2	1.23	120
	Fixture Flux	141lm	3	1.85	53
	Efficacy	28lm/W	4	2.46	30
	Imax	481cd	5	3.08	19

	Power supply	Colour	3000K	4000K
	1050mA	○	**1T6329**	**1T6330**
	1050mA	●	**1T6341**	**1T6342**
	1050mA	◍	**1T6353**	**1T6354**

Related codes

Power Supply



	Code
	1T6524

Electronic power supply 42W, LxHxP=129x30x42mm, 220-240V-AC 50-60Hz, 1050mA, IP20.
Can drive up to 12 OTTO 1x simultaneously.
OTTO Semi-Recessed: the driver is bigger than the cutout hole needed by the luminaire.

Accessories

Base



	Ø	H	Colour	Code
	40	18	○	**1T6525**
	40	18	●	**1T6526**
	40	18	◍	**1T6527**

Base for electrical connection.

Indoor

Systems

Systems 48V

332
OZ

358
FORTYEIGHT

Systems 230V

376
LOGICO
System

OZ

GENERAL INFO
POWER TRACK
Lenghts: 1000mm – 2000mm – 3000mm
L, T and X linear electrical connections.

MAGNETIC LED LIGHT UNIT
SMALL fixed and adjustable
LARGE fixed and adjustable
5x SMALL fixed
3x LARGE fixed

PROFILE
Profile for recessed, ceiling mounted and suspension installation with a double Large and Small section.
Lenghts: 1000mm – 2000mm – 3000mm

LED
Emitter for version SMALL.
Chip on Board for version LARGE.
From 135lm to 2418lm
2700K - 3000K - 3500K - 4000K
Ra90

PRODUCT EFFICACY
Up to 103lm/W

OPTICS
SP – FL – MWFL

POWER SUPPLY
Electronic - Casambi on board

MATERIAL
POWER TRACK
Black or white polycarbonate with 2 conductive stainless steel rails. Black or white polycarbonate cover.

MAGNETIC LED LIGHT UNIT
Black or white painted die-cast aluminium.
Acrylic lens and black polycarbonate screen.

PROFILE
Black or white painted extruded aluminium.

The idea behind OZ came from the desire to create a system that is decisive as well as simple and minimal. A system that designs and illumines the space with its modules and form.

The heart of the system is the power track, an advanced conductive track, 6 mm thick, that unwinds through the space, bringing 48V of power and on which the lighting units, which are available in various beam angles, are hooked using magnets. The system can be left visible for surface installations, highlighting its lightness and technology, or built into the profiles for installation on surfaces, as suspension, or recessed.

Also available in a ceiling mounted or recessed stand-alone 230V version.

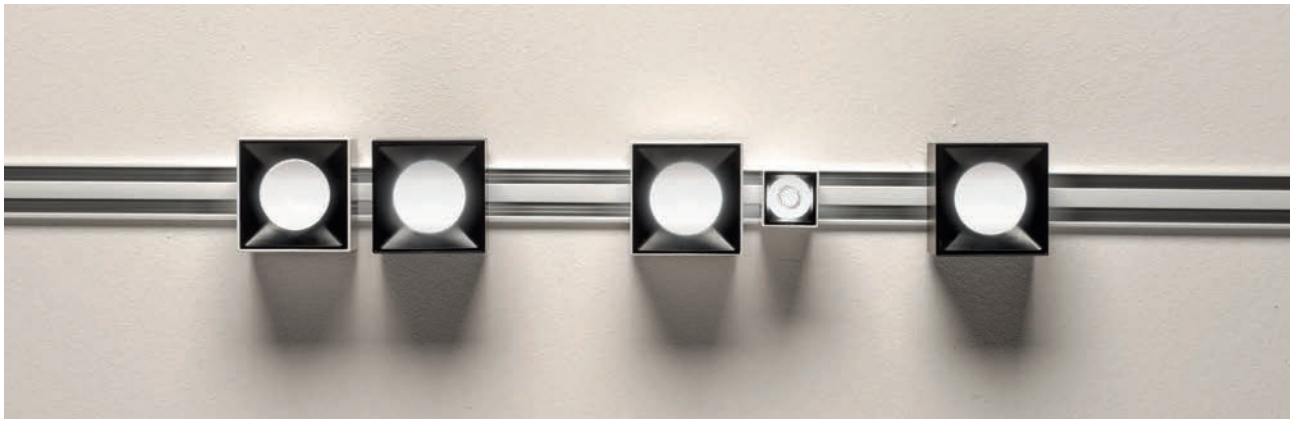

01

02

The power track is the heart of the system

The power track is available in three different lengths, black or white. For an effect of formal simplicity it is possible to accessorise the power-track with the cover that hides the two metal tracks. The cover can be easily cut to size on installation.

The light modules are available in two different sizes

Both extremely compact: 25x25x50 f and 50x50x50 both in fixed and adjustable version. They can have a white body with a black cover or be completely black.

03

04

Innovative 48V magnetic system

Installing modules is really easy, just place them at any point on the system and the magnets will attach them without the need for accessories.

New light modules

New 3x multi-optical light modules for the Large version and 5x for the Small version, available both in an electronic and Casambi version for remote control of light points. This allows for independent autonomous management of light points on the same track to create different scenarios as needed.

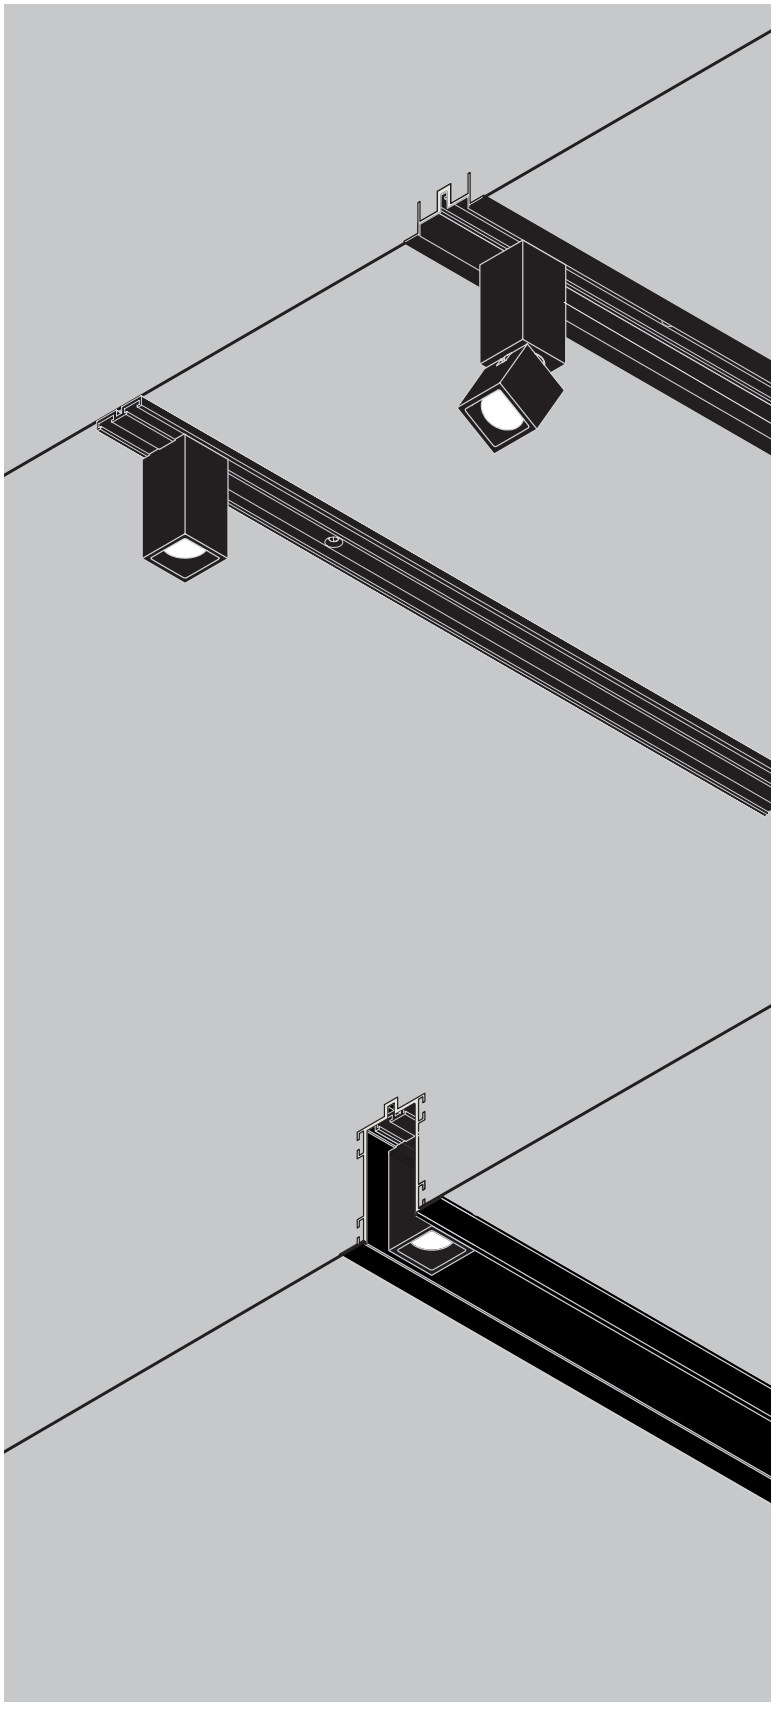

There are five different installation solutions for maximum application flexibility.

OZ can be installed on the wall or ceiling with just one power track. Using the special outer casings it can be recessed on existing false ceilings, or suspended or installed on surface.

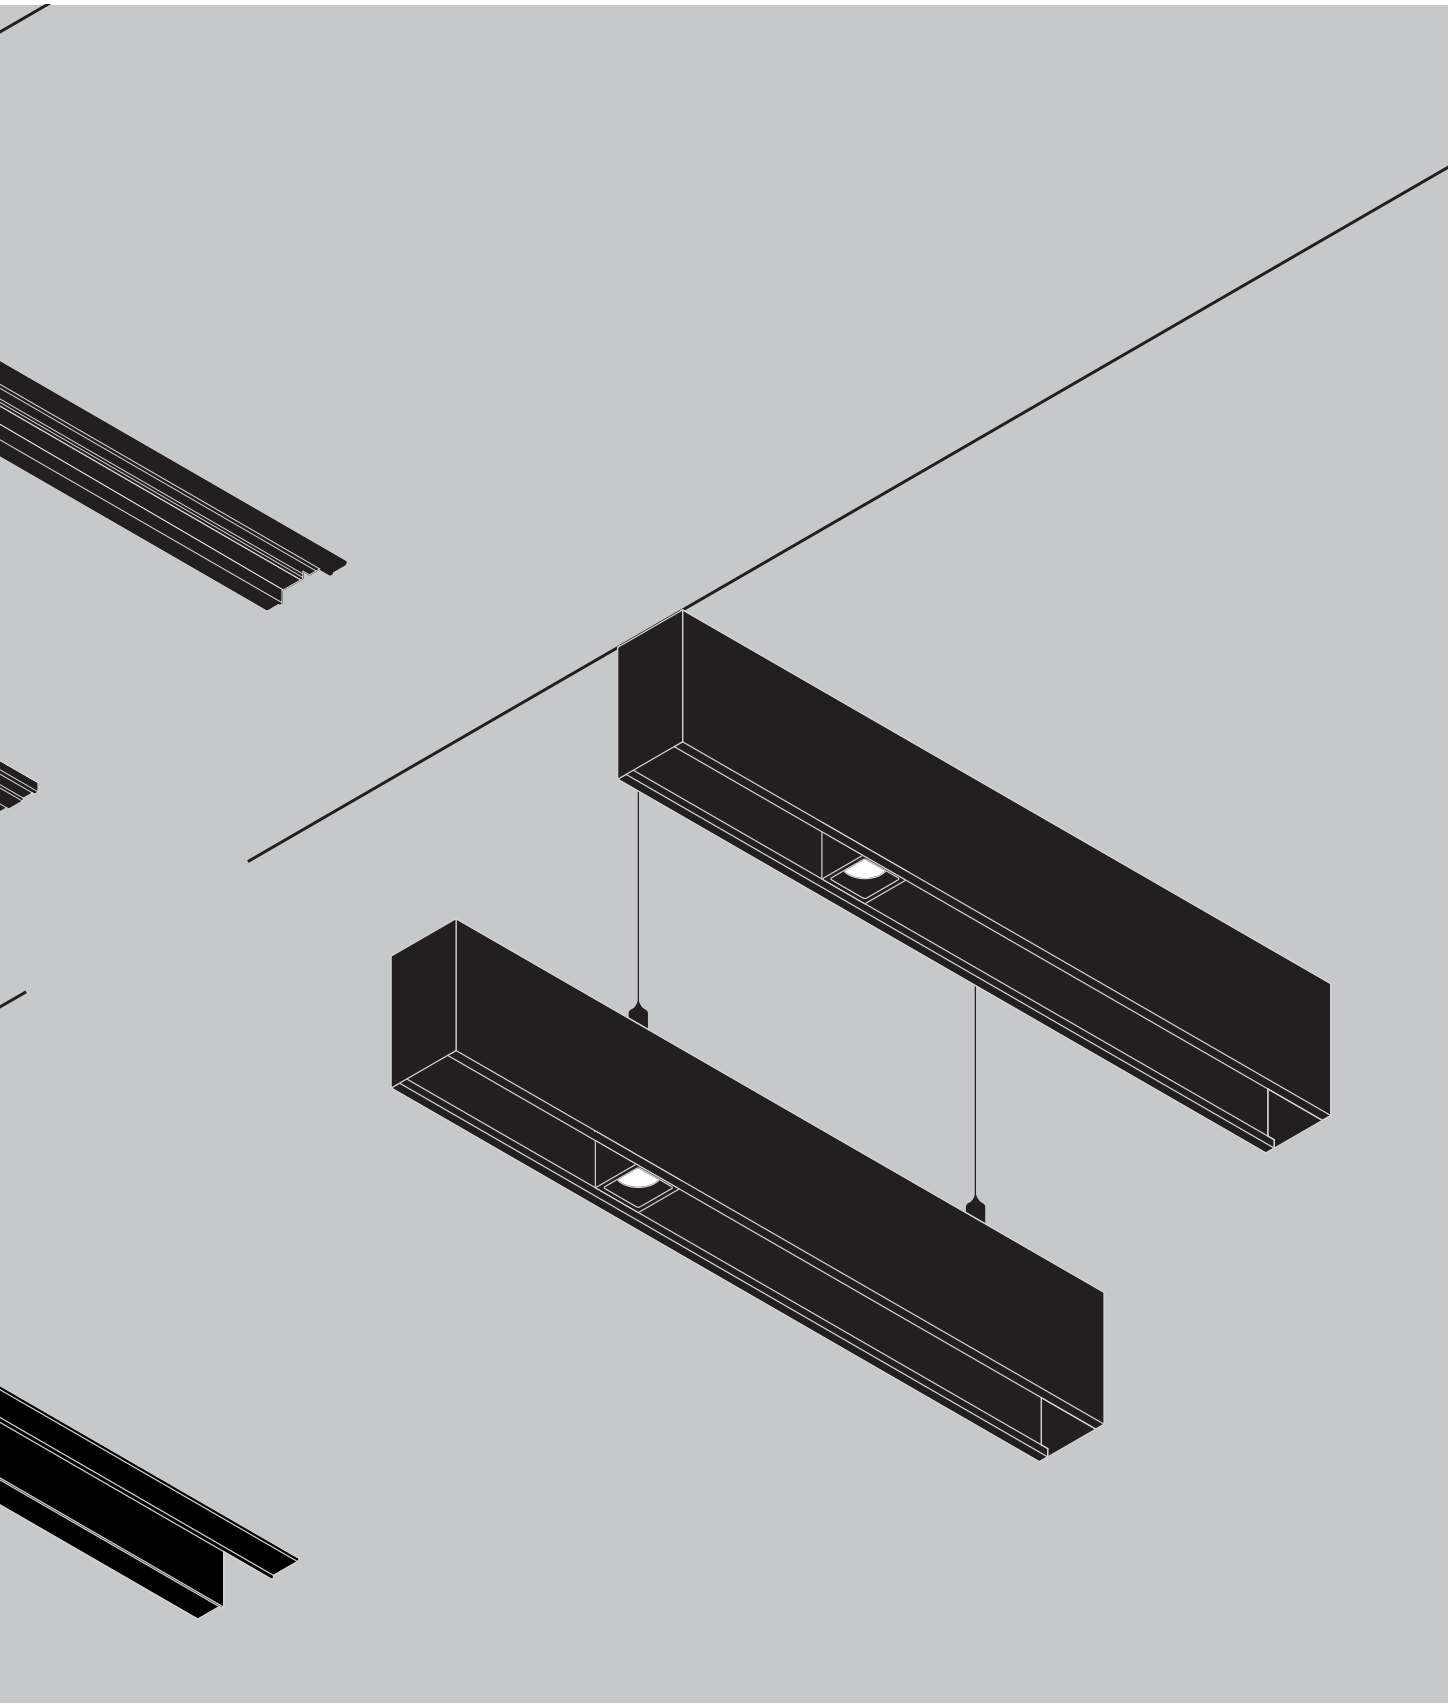

The same profile for recessed installation (with flange or trimless)

Using mechanical joins and the various installation accessories infinite compositions can be created.

The rules of OZ

5

Is the maximum number of connectors that can be used n the same configuration



10

Metres is the maximum length of a configuration connected to the same power supply

0

Are the closed systems that can be created. Only closed systems with 4 L-joints are allowed.

3

Is the maximum number of **Large** light units that can be installed side by side (group).

5

Is the maximum number of **Small** light units that can be installed side by side (group).

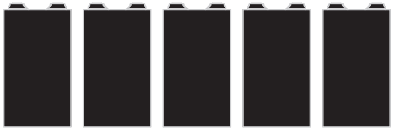

2

Are the number of groups that can be on 1 metre of the system.

3

Is the number of power supplies

- Integrated box driver on board max 90W
- Ceiling-mounted box driver max 90W
- Remote driver max 210W

100

Watt is the maximum power that can be installed per metre. The total power of the configuration varies according to the type of driver used.

∞

Possible solutions

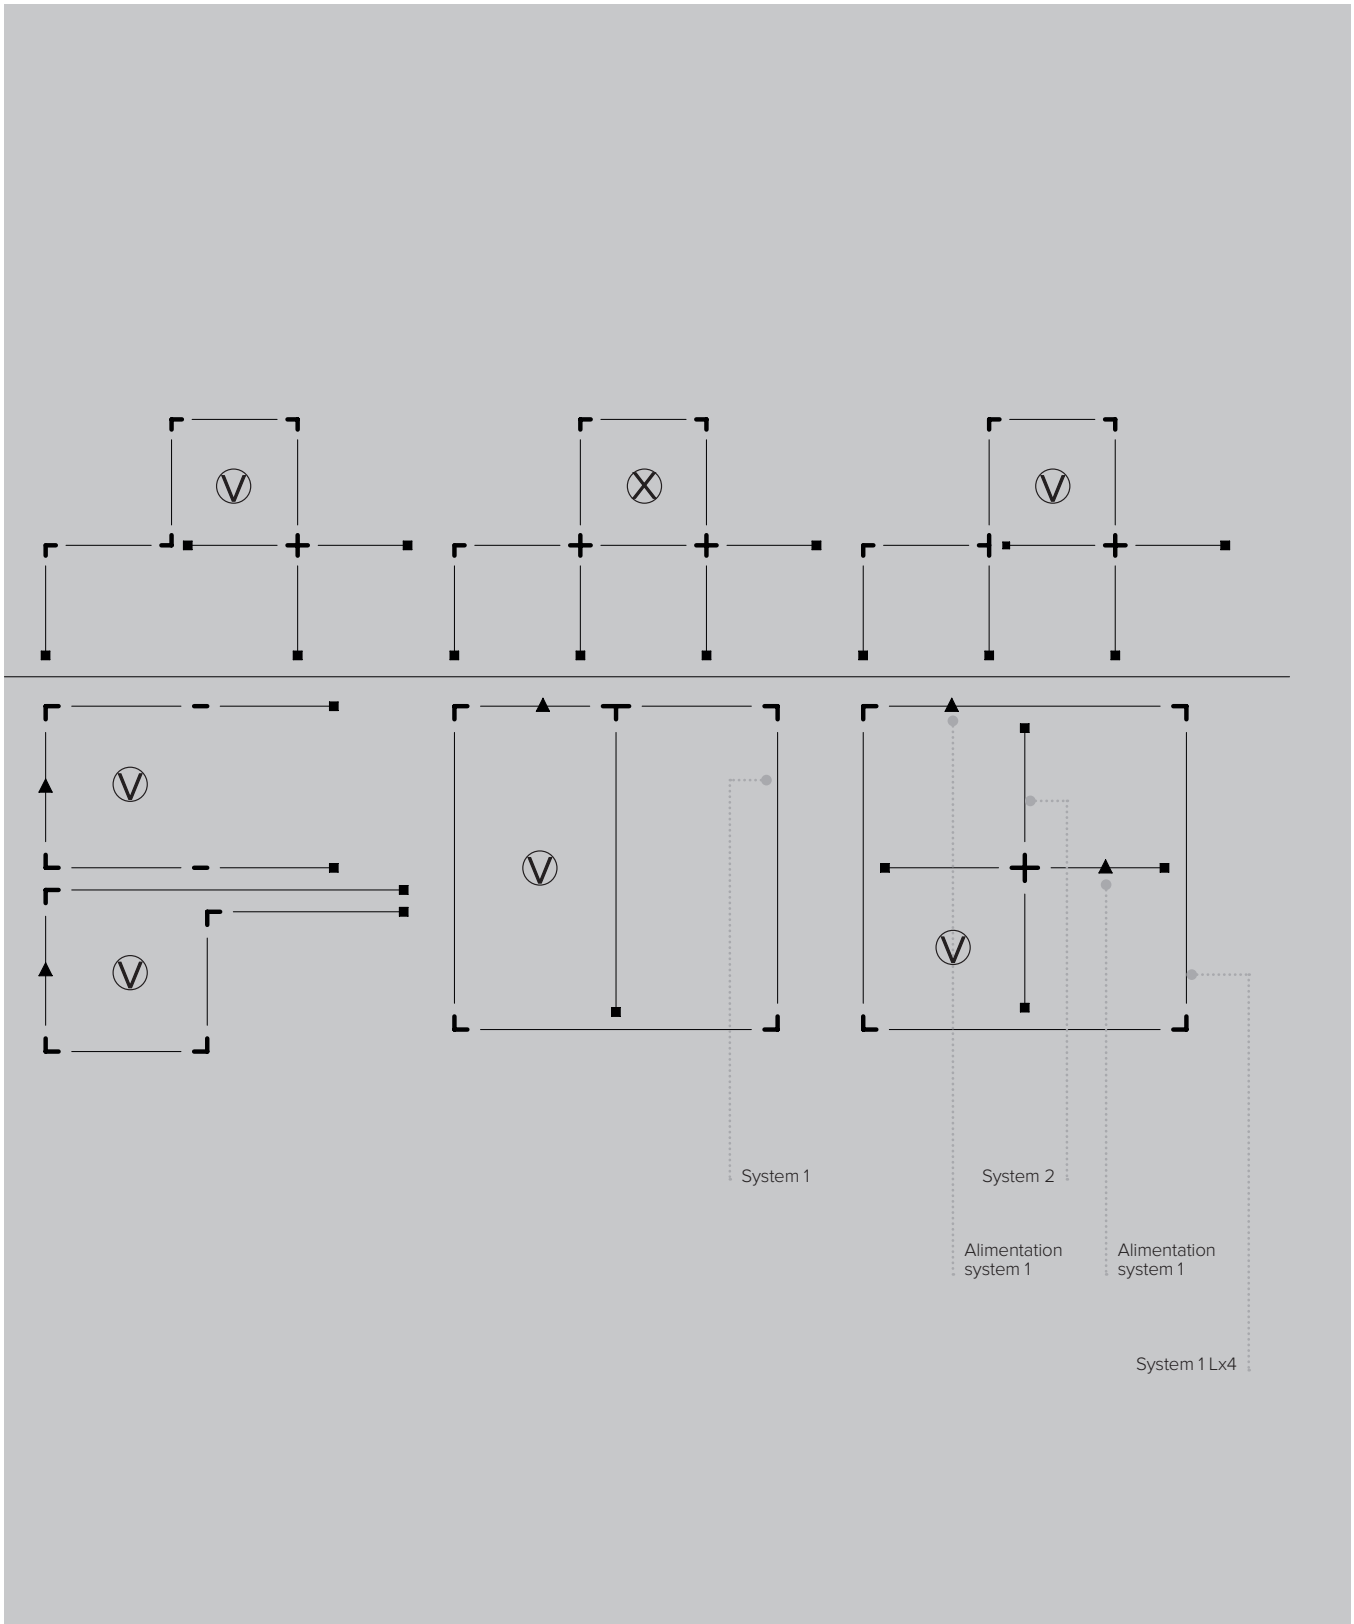
System 1
System 2
Alimentation system 1
Alimentation system 1
System 1 Lx4

07

08

On request

it is possible to have the cover
in the desired RAL colour.

Three power supply options

- Box driver installato come rosone con l'aggiunta della testata di alimentazione nel sistema;

- Box driver remoto con l'aggiunta della testata di alimentazione nel sistema;

- Alimentazione installata direttamente su power track in qualsiasi punto del sistema.

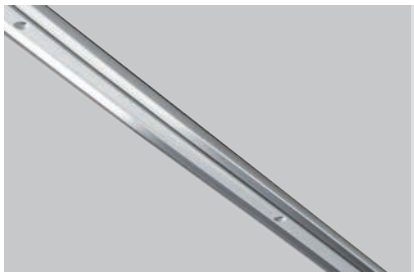

Power Track



POWER TRACK

	Kg	L	Colour	Code
	0.3	1000	○	**1T7431**
	0.59	2000	○	**1T7432**
	0.89	3000	○	**1T7433**
	0.3	1000	●	**1T7434**
	0.59	2000	●	**1T7435**
	0.89	3000	●	**1T7436**

Related codes

End Caps



	Colour	Code
	○	**1T7026**
	●	**1T7027**

Kit containing 2 profile end caps.

Power head



Colour		Code
○	Power head 71x25x27	**1T7024**
●	Power head 71x25x27	**1T7025**

Driver on board



Colour		Code
○	48Vdc driver magnetic box 238x54.2x26mm - 90W	**1T7028EL**
●	48Vdc driver magnetic box 238x54.2x26mm - 90W	**1T7029EL**

Remote power supply

		Code
	Driver IP20 60W - 225x36x60 maximum distance 20m - cable 1,5mmq	**1T6917EL**
	Driver IP20 130W - 240x49x60 maximum distance 10m - cable 1,5mmq	**1T6916EL**
	Driver IP20 210W - 251x90x37 maximum distance 5m - cable 1,5mmq	**1T7403EL**

Universal power supply for Electronic and Casambi systems.

Driver box for ceiling installation



Colour		Code
○	Driver box for ceiling installation 243x58x30mm - 90W	**1T7030EL**
●	Driver box for ceiling installation 243x58x30mm - 90W	**1T7172EL**

Accessories

Electrical Connector

Colour	Code
○	**1T7016**
●	**1T7020**

Linear electrical connector.
5 the maximum joints for each driver source.

Colour	Code
○	**1T7017**
●	**1T7021**

Electrical L connector.
5 the maximum joints for each driver source.



Colour	Code
○	**1T7018**
●	**1T7022**

Electrical T connector.
5 the maximum joints for each driver source.



Colour	Code
○	**1T7019**
●	**1T7023**

Electrical X connector.
5 the maximum joints for each driver source.

Colour	Code
○	**1T7439**
●	**1T7440**

L-angle electrical coupling.
5 the maximum joints for each driver source.

Cover Panel

L	Colour	Code
1000	○	**1T7938**
1000	●	**1T7941**
2000	○	**1T7939**
2000	●	**1T7942**
3000	○	**1T7940**
3000	●	**1T7943**

Cover for Power Track (5 pieces).

Mounting System



Code
1T7098

BI-ADHESIVE TAPE 10 meters for Power Track installation.

Lighting module - Single fixed 25x25mm



LED / 2,1W / LENS / SP

3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	3W	1	0.20	2505
Source Flux	197lm	2	0.40	626
Fixture Flux	154lm	3	0.60	278
Efficacy	45lm/W	4	0.79	157
Imax	2505cd	5	0.99	100

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7506	1T7507	1T7508	1T7509
EL	●	1T7518	1T7519	1T7520	1T7521
CASAMBI	○	1T7099CA	1T7100CA	1T7101CA	1T7102CA
CASAMBI	●	1T7111CA	1T7112CA	1T7113CA	1T7114CA

LED / 2,1W / LENS / FL

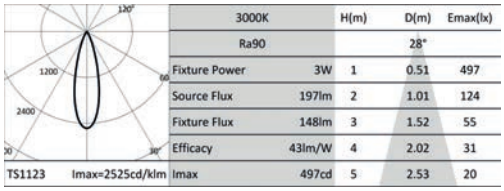

3000K		H(m)	D(m)	Emax(lx)
Ra90			28°	
Fixture Power	3W	1	0.51	497
Source Flux	197lm	2	1.01	124
Fixture Flux	148lm	3	1.52	55
Efficacy	43lm/W	4	2.02	31
Imax	497cd	5	2.53	20

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7510	1T7511	1T7512	1T7513
EL	●	1T7522	1T7523	1T7524	1T7525
CASAMBI	○	1T7103CA	1T7104CA	1T7105CA	1T7106CA
CASAMBI	●	1T7115CA	1T7116CA	1T7117CA	1T7118CA

LED / 2,1W / LENS / MWFL

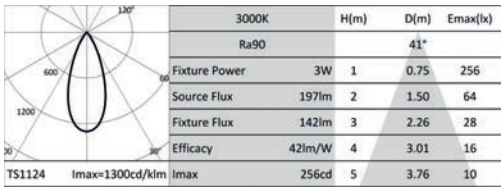

3000K		H(m)	D(m)	Emax(lx)
Ra90			41°	
Fixture Power	3W	1	0.75	256
Source Flux	197lm	2	1.50	64
Fixture Flux	142lm	3	2.26	28
Efficacy	42lm/W	4	3.01	16
Imax	256cd	5	3.76	10

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7514	1T7515	1T7516	1T7517
EL	●	1T7526	1T7527	1T7528	1T7529
CASAMBI	○	1T7107CA	1T7108CA	1T7109CA	1T7110CA
CASAMBI	●	1T7119CA	1T7120CA	1T7121CA	1T7122CA

LED / 2,6W / LENS / SP

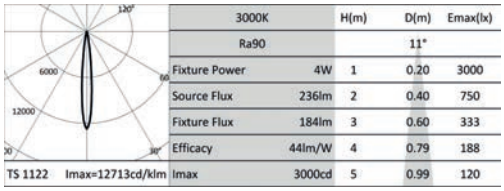

3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	4W	1	0.20	3000
Source Flux	236lm	2	0.40	750
Fixture Flux	184lm	3	0.60	333
Efficacy	44lm/W	4	0.79	188
Imax	3000cd	5	0.99	120

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7099	1T7100	1T7101	1T7102
EL	●	1T7111	1T7112	1T7113	1T7114

LED / 2,6W / LENS / FL

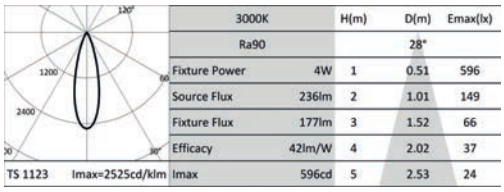

3000K		H(m)	D(m)	Emax(lx)
Ra90			28°	
Fixture Power	4W	1	0.51	596
Source Flux	236lm	2	1.01	149
Fixture Flux	177lm	3	1.52	66
Efficacy	42lm/W	4	2.02	37
Imax	596cd	5	2.53	24

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7103	1T7104	1T7105	1T7106
EL	●	1T7115	1T7116	1T7117	1T7118

OZ

LED / 2,6W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			41°	
Fixture Power		4W	1	0.75	307
Source Flux		236lm	2	1.50	77
Fixture Flux		170lm	3	2.26	34
Efficacy		41lm/W	4	3.01	19
TS 1124	Imax=1300cd/klm	Imax	307cd	5	3.76	12

Version	Colour	2700K	3000K	3500K	4000K
FIXED	○	**1T7107**	**1T7108**	**1T7109**	**1T7110**
FIXED	●	**1T7119**	**1T7120**	**1T7121**	**1T7122**

Lighting module - Single adjustable 25x25mm



LED / 2,1W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
Fixture Power		3W	1	0.20	2505
Source Flux		197lm	2	0.40	626
Fixture Flux		154lm	3	0.60	278
Efficacy		45lm/W	4	0.79	157
TS1122	Imax=12713cd/klm	Imax	2505cd	5	0.99	100

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7530**	**1T7531**	**1T7532**	**1T7533**
EL	●	**1T7542**	**1T7543**	**1T7544**	**1T7545**
CASAMBI	○	**1T7123CA**	**1T7124CA**	**1T7125CA**	**1T7126CA**
CASAMBI	●	**1T7135CA**	**1T7136CA**	**1T7137CA**	**1T7138CA**

LED / 2,1W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			28°	
Fixture Power		3W	1	0.51	497
Source Flux		197lm	2	1.01	124
Fixture Flux		148lm	3	1.52	55
Efficacy		43lm/W	4	2.02	31
TS1123	Imax=2525cd/klm	Imax	497cd	5	2.53	20

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7534**	**1T7535**	**1T7536**	**1T7537**
EL	●	**1T7546**	**1T7547**	**1T7548**	**1T7549**
CASAMBI	○	**1T7127CA**	**1T7128CA**	**1T7129CA**	**1T7130CA**
CASAMBI	●	**1T7139CA**	**1T7140CA**	**1T7141CA**	**1T7142CA**

LED / 2,1W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			41°	
Fixture Power		3W	1	0.75	256
Source Flux		197lm	2	1.50	64
Fixture Flux		142lm	3	2.26	28
Efficacy		42lm/W	4	3.01	16
TS1124	Imax=1300cd/klm	Imax	256cd	5	3.76	10

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7538**	**1T7539**	**1T7540**	**1T7541**
EL	●	**1T7550**	**1T7551**	**1T7552**	**1T7553**
CASAMBI	○	**1T7131CA**	**1T7132CA**	**1T7133CA**	**1T7134CA**
CASAMBI	●	**1T7143CA**	**1T7144CA**	**1T7145CA**	**1T7146CA**

LED / 2,6W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
Fixture Power		4W	1	0.20	3000
Source Flux		236lm	2	0.40	750
Fixture Flux		184lm	3	0.60	333
Efficacy		44lm/W	4	0.79	188
TS 1122	Imax=12713cd/klm	Imax	3000cd	5	0.99	120

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7123**	**1T7124**	**1T7125**	**1T7126**
EL	●	**1T7135**	**1T7136**	**1T7137**	**1T7138**

LED / 2,6W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			28°	
Fixture Power		4W	1	0.51	596
Source Flux		236lm	2	1.01	149
Fixture Flux		177lm	3	1.52	66
Efficacy		42lm/W	4	2.02	37
TS 1123	Imax=2525cd/klm	Imax	596cd	5	2.53	24

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7127	1T7128	1T7129	1T7130
EL	●	1T7139	1T7140	1T7141	1T7142

LED / 2,6W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			41°	
Fixture Power		4W	1	0.75	307
Source Flux		236lm	2	1.50	77
Fixture Flux		170lm	3	2.26	34
Efficacy		41lm/W	4	3.01	19
TS 1124	Imax=1300cd/klm	Imax	307cd	5	3.76	12

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7131	1T7132	1T7133	1T7134
EL	●	1T7143	1T7144	1T7145	1T7146

Lighting module - Single fixed 50x50mm



LED / 6,8W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power		8W	1	0.34	3911
Source Flux		846lm	2	0.68	978
Fixture Flux		691lm	3	1.02	435
Efficacy		87lm/W	4	1.36	244
TS1125	Imax=4623cd/klm	Imax	3911cd	5	1.70	156

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7554	1T7555	1T7556	1T7557
EL	●	1T7566	1T7567	1T7568	1T7569
CASAMBI	○	1T7147CA	1T7148CA	1T7149CA	1T7150CA
CASAMBI	●	1T7159CA	1T7160CA	1T7161CA	1T7162CA

LED / 7,6W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power		9W	1	0.49	2359
Source Flux		963lm	2	0.98	590
Fixture Flux		720lm	3	1.47	262
Efficacy		82lm/W	4	1.95	147
TS1126	Imax=2450cd/klm	Imax	2359cd	5	2.44	94

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7558	1T7559	1T7560	1T7561
EL	●	1T7570	1T7571	1T7572	1T7573
CASAMBI	○	1T7151CA	1T7152CA	1T7153CA	1T7154CA
CASAMBI	●	1T7163CA	1T7164CA	1T7165CA	1T7166CA

LED / 7,6W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			37°	
Fixture Power		9W	1	0.66	1826
Source Flux		963lm	2	1.32	457
Fixture Flux		794lm	3	1.98	203
Efficacy		90lm/W	4	2.64	114
TS1127	Imax=1896cd/klm	Imax	1826cd	5	3.31	73

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7562	1T7563	1T7564	1T7565
EL	●	1T7574	1T7575	1T7576	1T7577
CASAMBI	○	1T7155CA	1T7156CA	1T7157CA	1T7158CA
CASAMBI	●	1T7167CA	1T7168CA	1T7169CA	1T7170CA

OZ

LED / 7,5W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power		9W	1	0.34	4752
Source Flux		1028lm	2	0.68	1188
Fixture Flux		840lm	3	1.02	528
Efficacy		97lm/W	4	1.36	297
TS 1125	Imax=4623cd/klm	Imax	4752cd	5	1.70	190

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7147**	**1T7148**	**1T7149**	**1T7150**
EL	●	**1T7159**	**1T7160**	**1T7161**	**1T7162**

LED / 8,3W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power		10W	1	0.49	2896
Source Flux		1182lm	2	0.98	724
Fixture Flux		884lm	3	1.47	322
Efficacy		92lm/W	4	1.95	181
TS 1126	Imax=2450cd/klm	Imax	2896cd	5	2.44	116

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7151**	**1T7152**	**1T7153**	**1T7154**
EL	●	**1T7163**	**1T7164**	**1T7165**	**1T7166**

LED / 8,3W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			37°	
Fixture Power		10W	1	0.66	2241
Source Flux		1182lm	2	1.32	560
Fixture Flux		974lm	3	1.98	249
Efficacy		101lm/W	4	2.64	140
TS 1127	Imax=1896cd/klm	Imax	2241cd	5	3.31	90

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7155**	**1T7156**	**1T7157**	**1T7158**
EL	●	**1T7167**	**1T7168**	**1T7169**	**1T7170**

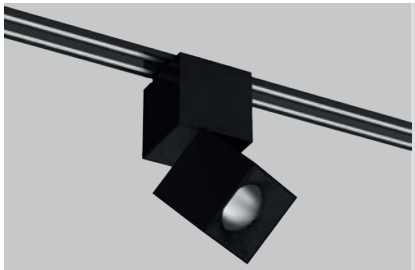

Lighting module - Single adjustable 50x50mm



LED / 6,8W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power		8W	1	0.34	3911
Source Flux		846lm	2	0.68	978
Fixture Flux		691lm	3	1.02	435
Efficacy		87lm/W	4	1.36	244
TS1125	Imax=4623cd/klm	Imax	3911cd	5	1.70	156

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7578**	**1T7579**	**1T7580**	**1T7581**
EL	●	**1T7590**	**1T7591**	**1T7592**	**1T7593**
CASAMBI	○	**1T7407CA**	**1T7408CA**	**1T7409CA**	**1T7410CA**
CASAMBI	●	**1T7419CA**	**1T7420CA**	**1T7421CA**	**1T7422CA**

LED / 7,6W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power		9W	1	0.49	2359
Source Flux		963lm	2	0.98	590
Fixture Flux		720lm	3	1.47	262
Efficacy		82lm/W	4	1.95	147
TS1126	Imax=2450cd/klm	Imax	2359cd	5	2.44	94

Version	Colour	2700K	3000K	3500K	4000K
EL	○	**1T7582**	**1T7583**	**1T7584**	**1T7585**
EL	●	**1T7594**	**1T7595**	**1T7596**	**1T7597**
CASAMBI	○	**1T7411CA**	**1T7412CA**	**1T7413CA**	**1T7414CA**
CASAMBI	●	**1T7423CA**	**1T7424CA**	**1T7425CA**	**1T7426CA**

LED / 7,6W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			37°	
Fixture Power	9W	1	0.66	1826
Source Flux	963lm	2	1.32	457
Fixture Flux	794lm	3	1.98	203
Efficacy	90lm/W	4	2.64	114
TS1127 Imax=1896cd/klm	Imax	1826cd	5	3.31	73

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7586	1T7587	1T7588	1T7589
EL	●	1T7598	1T7599	1T7600	1T7601
CASAMBI	○	1T7415CA	1T7416CA	1T7417CA	1T7418CA
CASAMBI	●	1T7427CA	1T7428CA	1T7429CA	1T7430CA

LED / 7,5W / REFLECTOR / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			19°	
Fixture Power	9W	1	0.34	4752
Source Flux	1028lm	2	0.68	1188
Fixture Flux	840lm	3	1.02	528
Efficacy	97lm/W	4	1.36	297
TS1171 Imax=4623cd/klm	Imax	4752cd	5	1.70	190

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7407	1T7408	1T7409	1T7410
EL	●	1T7419	1T7420	1T7421	1T7422

LED / 8,3W / REFLECTOR / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			27°	
Fixture Power	10W	1	0.49	2896
Source Flux	1182lm	2	0.98	724
Fixture Flux	884lm	3	1.47	322
Efficacy	92lm/W	4	1.95	181
TS1172 Imax=2450cd/klm	Imax	2896cd	5	2.44	116

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7411	1T7412	1T7413	1T7414
EL	●	1T7423	1T7424	1T7425	1T7426

LED / 8,3W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			37°	
Fixture Power	10W	1	0.66	2241
Source Flux	1182lm	2	1.32	560
Fixture Flux	974lm	3	1.98	249
Efficacy	101lm/W	4	2.64	140
TS1173 Imax=1896cd/klm	Imax	2241cd	5	3.31	90

Version	Colour	2700K	3000K	3500K	4000K
EL	○	1T7415	1T7416	1T7417	1T7418
EL	●	1T7427	1T7428	1T7429	1T7430

Lighting module - Multiple Piccolo 5X (25x125mm)



8,7W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
	Fixture Power	9W	1	0.20	10018
	Source Flux	788lm	2	0.40	2505
	Fixture Flux	615lm	3	0.60	1113
	Efficacy	68lm/W	4	0.79	626
TS1122	Imax=12713cd/klm	Imax	10018cd	5	0.99	401

Version	Colour	2700K	3000K	3500K	4000K
5X	○	**1T7441**	**1T7442**	**1T7443**	**1T7444**
5X	●	**1T7453**	**1T7454**	**1T7455**	**1T7456**

8,7W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
	Fixture Power	11W	1	0.20	10018
	Source Flux	788lm	2	0.40	2505
	Fixture Flux	615lm	3	0.60	1113
	Efficacy	55lm/W	4	0.79	626
TS1122	Imax=12713cd/klm	Imax	10018cd	5	0.99	401

Version	Colour	2700K	3000K	3500K	4000K
5X CASAMBI	○	**1T7441CA**	**1T7442CA**	**1T7443CA**	**1T7444CA**
5X CASAMBI	●	**1T7453CA**	**1T7454CA**	**1T7455CA**	**1T7456CA**

8,7W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			28°	
	Fixture Power	9W	1	0.51	1990
	Source Flux	788lm	2	1.01	497
	Fixture Flux	590lm	3	1.52	221
	Efficacy	65lm/W	4	2.02	124
TS1123	Imax=2525cd/klm	Imax	1990cd	5	2.53	80

Version	Colour	2700K	3000K	3500K	4000K
5X	○	**1T7445**	**1T7446**	**1T7447**	**1T7448**
5X	●	**1T7457**	**1T7458**	**1T7459**	**1T7460**

8,7W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			28°	
	Fixture Power	11W	1	0.51	1990
	Source Flux	788lm	2	1.01	497
	Fixture Flux	590lm	3	1.52	221
	Efficacy	53lm/W	4	2.02	124
TS1123	Imax=2525cd/klm	Imax	1990cd	5	2.53	80

Version	Colour	2700K	3000K	3500K	4000K
5X CASAMBI	○	**1T7445CA**	**1T7446CA**	**1T7447CA**	**1T7448CA**
5X CASAMBI	●	**1T7457CA**	**1T7458CA**	**1T7459CA**	**1T7460CA**

8,7W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			41°	
	Fixture Power	9W	1	0.75	1024
	Source Flux	788lm	2	1.50	256
	Fixture Flux	569lm	3	2.26	114
	Efficacy	63lm/W	4	3.01	64
TS1124	Imax=1300cd/klm	Imax	1024cd	5	3.76	41

Version	Colour	2700K	3000K	3500K	4000K
5X	○	**1T7449**	**1T7450**	**1T7451**	**1T7452**
5X	●	**1T7461**	**1T7462**	**1T7463**	**1T7464**

8,7W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			41°	
	Fixture Power	11W	1	0.75	1024
	Source Flux	788lm	2	1.50	256
	Fixture Flux	569lm	3	2.26	114
	Efficacy	51lm/W	4	3.01	64
TS1124	Imax=1300cd/klm	Imax	1024cd	5	3.76	41

Version	Colour	2700K	3000K	3500K	4000K
5X CASAMBI	○	**1T7449CA**	**1T7450CA**	**1T7451CA**	**1T7452CA**
5X CASAMBI	●	**1T7461CA**	**1T7462CA**	**1T7463CA**	**1T7464CA**

Lighting module - Multiple Grande 3X (50x150mm)



21W / REFLECTOR / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			19°	
Fixture Power	21W	1	0.34	11732
Source Flux	2538lm	2	0.68	2933
Fixture Flux	2074lm	3	1.02	1304
Efficacy	97lm/W	4	1.36	733
TS1125 Imax=4623cd/klm	Imax	11732cd	5	1.70	469

Version	Colour	2700K	3000K	3500K	4000K
3X	○	**1T7465**	**1T7466**	**1T7467**	**1T7468**
3X	●	**1T7477**	**1T7478**	**1T7479**	**1T7480**

21W / REFLECTOR / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			19°	
Fixture Power	23W	1	0.34	11732
Source Flux	2538lm	2	0.68	2933
Fixture Flux	2074lm	3	1.02	1304
Efficacy	91lm/W	4	1.36	733
TS1125 Imax=4623cd/klm	Imax	11732cd	5	1.70	469

Version	Colour	2700K	3000K	3500K	4000K
3X CASAMBI	○	**1T7465CA**	**1T7466CA**	**1T7467CA**	**1T7468CA**
3X CASAMBI	●	**1T7477CA**	**1T7478CA**	**1T7479CA**	**1T7480CA**

23W / REFLECTOR / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			27°	
Fixture Power	24W	1	0.49	7077
Source Flux	2889lm	2	0.98	1769
Fixture Flux	2161lm	3	1.47	786
Efficacy	91lm/W	4	1.95	442
TS1126 Imax=2450cd/klm	Imax	7077cd	5	2.44	283

Version	Colour	2700K	3000K	3500K	4000K
3X	○	**1T7469**	**1T7470**	**1T7471**	**1T7472**
3X	●	**1T7481**	**1T7482**	**1T7483**	**1T7484**

23W / REFLECTOR / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			27°	
Fixture Power	25W	1	0.49	7077
Source Flux	2889lm	2	0.98	1769
Fixture Flux	2161lm	3	1.47	786
Efficacy	85lm/W	4	1.95	442
TS1126 Imax=2450cd/klm	Imax	7077cd	5	2.44	283

Version	Colour	2700K	3000K	3500K	4000K
3X CASAMBI	○	**1T7469CA**	**1T7470CA**	**1T7471CA**	**1T7472CA**
3X CASAMBI	●	**1T7481CA**	**1T7482CA**	**1T7483CA**	**1T7484CA**

23W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			37°	
Fixture Power	24W	1	0.66	5478
Source Flux	2889lm	2	1.32	1370
Fixture Flux	2381lm	3	1.98	609
Efficacy	100lm/W	4	2.64	342
TS1127 Imax=1896cd/klm	Imax	5478cd	5	3.31	219

Version	Colour	2700K	3000K	3500K	4000K
3X	○	**1T7473**	**1T7474**	**1T7475**	**1T7476**
3X	●	**1T7485**	**1T7486**	**1T7487**	**1T7488**

22,8W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			37°	
Fixture Power	25W	1	0.66	5478
Source Flux	2889lm	2	1.32	1370
Fixture Flux	2381lm	3	1.98	609
Efficacy	94lm/W	4	2.64	342
TS1127 Imax=1896cd/klm	Imax	5478cd	5	3.31	219

Version	Colour	2700K	3000K	3500K	4000K
3X CASAMBI	○	**1T7473CA**	**1T7474CA**	**1T7475CA**	**1T7476CA**
3X CASAMBI	●	**1T7485CA**	**1T7486CA**	**1T7487CA**	**1T7488CA**

Recessed profile small



PROFILO

Recessed profile for 25x25mm light modules.
Extruded painted aluminium profile.
For trimless installation or with a flange.
To be completed with Power Track.

	Kg	L	Colour	Code
	1.1	1000	○	**1T7031**
	2.2	2000	○	**1T7032**
	3.3	3000	○	**1T7033**
	1.1	1000	●	**1T7034**
	2.2	2000	●	**1T7035**
	3.3	3000	●	**1T7036**

Recessed profile large



PROFILE

Recessed profile for 25x25mm and 50x50mm light modules.
Extruded painted aluminium profile.
For trimless installation or with a flange.
To be completed with Power Track.

	Kg	L	Colour	Code
	1.2	1000	○	**1T7067**
	2.5	2000	○	**1T7068**
	3.7	3000	○	**1T7069**
	1.2	1000	●	**1T7070**
	2.5	2000	●	**1T7071**
	3.7	3000	●	**1T7072**

Related codes

Mounting System

Code
1T7043

Steel bracket for recessed installation of the small profile.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.

Code
1T7076

Steel bracket for recessed installation of the large profile.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.

End Caps



Colour	Code
○	**1T7039**
●	**1T7040**

Kit containing 2 profile end caps.
For small recessed profiles.



Colour	Code
○	**1T7073**
●	**1T7074**

Kit containing 2 profile end caps.
For large recessed profiles.

Accessories

Mechanical connector

Code
1T7041

Kit composed of 2 mechanical linear joints and 4 thrust screws.
For trimless installation profile.

Colour	Code
○	**1T7037**
●	**1T7038**

Mechanical L connector.
For small recessed profiles.



Colour	Code
○	**1T7437**
●	**1T7438**

Mechanical L connector.
For large recessed profiles.

Ceiling/Suspension installation profile small



HEAD MODULE

Ceiling/suspension installation profile for 25x25mm light modules.
Extruded painted aluminium profile.
For stand-alone installation only used head modules.
For system installation it is necessary to start the configuration with a head module.
For closed configurations, you need to order two head modules to be installed opposite.
To be completed with Power Track.

Kg	L	Colour	Code
0.8	1015	○	**1T7050**
1.7	2015	○	**1T7051**
2.6	3015	○	**1T7052**
0.8	1015	●	**1T7053**
1.7	2015	●	**1T7054**
2.6	3015	●	**1T7055**

CENTRAL/END MODULE

Ceiling/suspension installation profile for 25x25mm light modules.
Extruded painted aluminium profile.
For stand-alone installation only used head modules.
For system installation it is necessary to start the configuration with a head module.
For closed configurations, you need to order two head modules to be installed opposite.
To be completed with Power Track.

Kg	L	Colour	Code
0.8	1000	○	**1T7044**
1.7	2000	○	**1T7045**
2.6	3000	○	**1T7046**
0.8	1000	●	**1T7047**
1.7	2000	●	**1T7048**
2.6	3000	●	**1T7049**

Ceiling/Suspension installation profile large



HEAD MODULE

Ceiling/suspension installation profile for 25x25mm and 50x50mm light modules.
Extruded painted aluminium profile.
For stand-alone installation only used head modules.
For system installation it is necessary to start the configuration with a head module.
For closed configurations, you need to order two head modules to be installed opposite.
To be completed with Power Track.

Kg	L	Colour	Code
1	1015	○	**1T7083**
2.1	2015	○	**1T7084**
3.1	3015	○	**1T7085**
1	1015	●	**1T7086**
2.1	2015	●	**1T7087**
3.1	3015	●	**1T7088**

CENTRAL/END MODULE

Ceiling/suspension installation profile for 25x25mm and 50x50mm light modules.
Extruded painted aluminium profile.
For stand-alone installation only used head modules.
For system installation it is necessary to start the configuration with a head module.
For closed configurations, you need to order two head modules to be installed opposite.
To be completed with Power Track.

Kg	L	Colour	Code
1	1000	○	**1T7077**
2.1	2000	○	**1T7078**
3.1	3000	○	**1T7079**
1	1000	●	**1T7080**
2.1	2000	●	**1T7081**
3.1	3000	●	**1T7082**

Related codes

End Caps

Colour	Code
○	**1T7062**
●	**1T7063**

Kit containing 2 profile end caps.
For small ceiling/suspension mounted profiles.

Colour	Code
○	**1T7095**
●	**1T7096**

Kit containing 2 profile end caps.
For large ceiling/suspension mounted profiles.

Mounting System

Code
1T7065

Ceiling installation kit.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.



Code
1T7066

Suspension installation kit.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.

Accessories

Mechanical connector





Colour	Code
○	**1T7056**
●	**1T7059**

Mechanical L connector.
For small ceiling/suspension mounted profiles.





Colour	Code
○	**1T7089**
●	**1T7092**

Mechanical L connector.
For large ceiling/suspension mounted profiles.

OZ





Colour	Code
○	**1T7057**
●	**1T7060**

Mechanical T connector.
For small ceiling/suspension mounted profiles.





Colour	Code
○	**1T7090**
●	**1T7093**

Mechanical T connector.
For large ceiling/suspension mounted profiles.





Colour	Code
○	**1T7058**
●	**1T7061**

Mechanical X connector.
For small ceiling/suspension mounted profiles.





Colour	Code
○	**1T7091**
●	**1T7094**

Mechanical X connector.
For large ceiling/suspension mounted profiles.





Colour	Code
○	**1T7064**
●	**1T7097**

Kit composed of 2 mechanical linear joints and 8 thrust screws.
For ceiling/suspension installation profile.

Recessed profile for Power Track



HEAD MODULE

Recessed profile for Power Track.
Extruded painted aluminium profile.
For trimless installation or with a flange.
To be completed with Power Track.

Kg	L	Colour	Code
0.4	1015	○	**1T7495**
0.8	2015	○	**1T7496**
1.2	3015	○	**1T7497**
0.4	1015	●	**1T7498**
0.8	2015	●	**1T7499**
1.2	3015	●	**1T7500**

CENTRAL/END MODULE

Recessed profile for Power Track.
Extruded painted aluminium profile.
For trimless installation or with a flange.
To be completed with Power Track.

Kg	L	Colour	Code
0.4	1000	○	**1T7489**
0.8	2000	○	**1T7490**
1.2	3000	○	**1T7491**
0.4	1000	●	**1T7492**
0.8	2000	●	**1T7493**
1.2	3000	●	**1T7494**

Related codes

Mounting System

Code
1T7501

Steel bracket for Power Track built-in installation.
2 pieces to be ordered for 1m long modules, 3 pieces for 2m long modules and 4 pieces for 3m long modules.

FORTYEIGHT

GENERAL INFO
TRACK
A modular system with variable lengths to be equipped with projectors and linear light fixtures. The track version varies depending on the type of installation.

LABEL
Projectors for track installation available in a double version with a short and long bracket depending on the type of installation selected.
The optical unit can be adjusted from 0° a 90° on the vertical plane and 360° on the horizontal plane with friction blocking system.
Ø40mm – Ø60mm

LOGICO 30
Low voltage linear LED fixture for track installation.
Lenghts: 294mm – 573mm – 1132mm – 1970mm
L Module: 310mm

LED
LABEL4 and 6: Chip on board Ra90
LABEL 2: LED emitter Ra90
From 124lm to 1821lm
2700K – 3000K – 4000K
LOGICO 30: Linear boards Ra90
From 750lm to 5600lm
3000K – 4000K

PRODUCT EFFICACY
LABEL: up to 107lm/W
LOGICO 30: up to 77 lm/W

OPTICS
LABEL: SP – FL – MWFL
LOGICO 30: OPAL

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
LABEL: Painted extruded aluminium body.
LOGICO 30: Painted extruded aluminium body

A 48V system that can be recessed or deep recessed both with a trimless finish, ceiling or wall and suspension mounted. It can be fitted at any point with linear lighting fixtures due to its simple mechanical fixing system.

It is very small in size 27mm in width by 21mm - 25mm or 53mm in height.

The deep recessed version must be equipped with LABEL projectors with long brackets.

Bally

Lighting design
Ing. Angelo Iorio,
U&Me Consulting

Country
Milan - Italy

01

There are two recessed versions both with a trimless finish:

- Simple recessed with a flush system and protruding fixtures
- Deep recessed completely hidden in the ceiling with linear light elements. For this version the projectors have a longer bracket to allow for maximum extraction and adjustability.

Wall mounted installation

For effective easy lighting for example in retail spaces such as shop windows.

03
Logico 30

Linear modules complete with opaline screens

For a soft and diffused lighting effect equipped with LED 3000K and 4000K sources with Ra90.

The system can be configured in various ways

Thanks to the use of linear joints and the new corner joints that make it possible to create closed and open loops. Available a new corner light module for lines of seamless light.

04
Label 48V

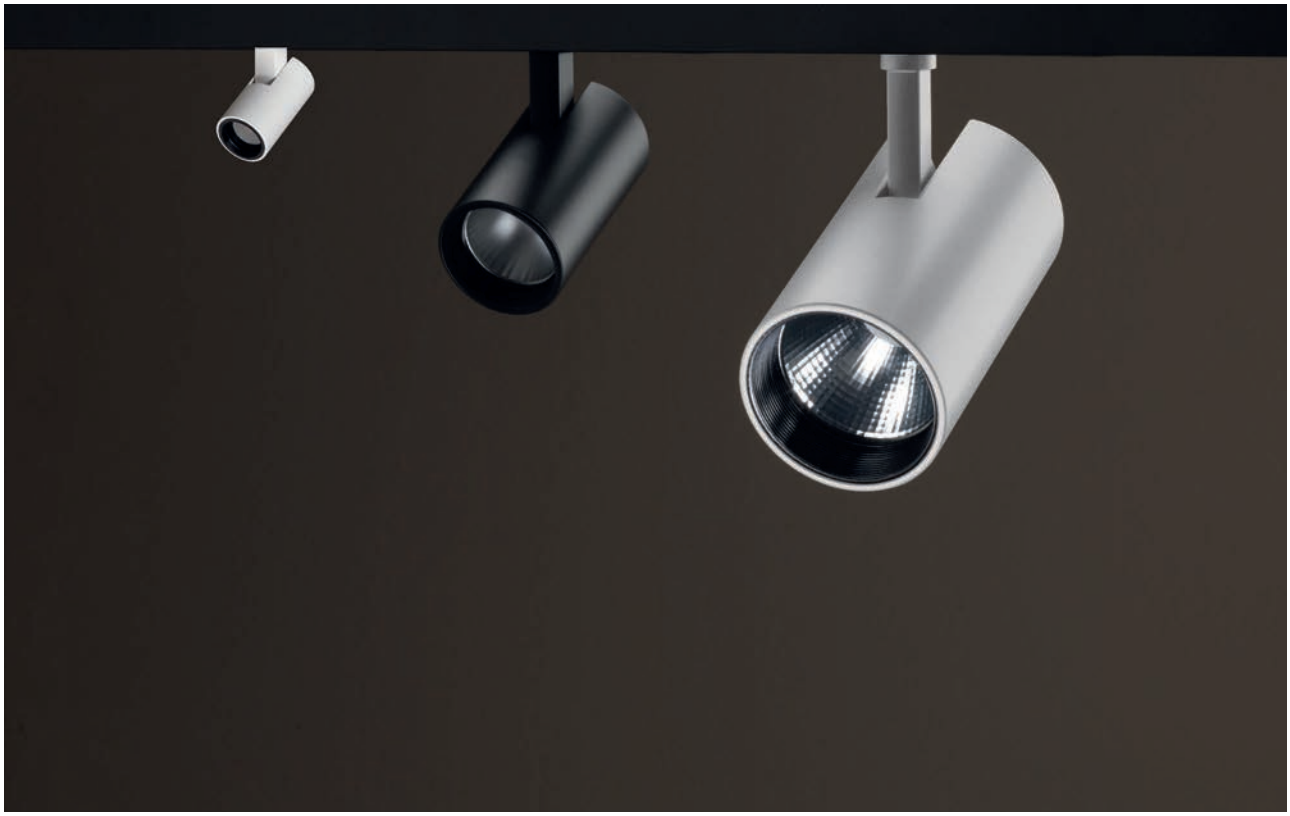

48V projectors available in three sizes

Specially designed for applications in the retail, interior and hotel sectors with a simple, minimal shape and small dimensions. All versions have a remote power supply to minimise any visual impact. The new LABEL 2 (Ø20 mm), LABEL 4 (Ø40 mm) and LABEL 6 (Ø59 mm) are all equipped with Ra90 LED sources with 2700K, 3000K and 4000K colour temperatures.

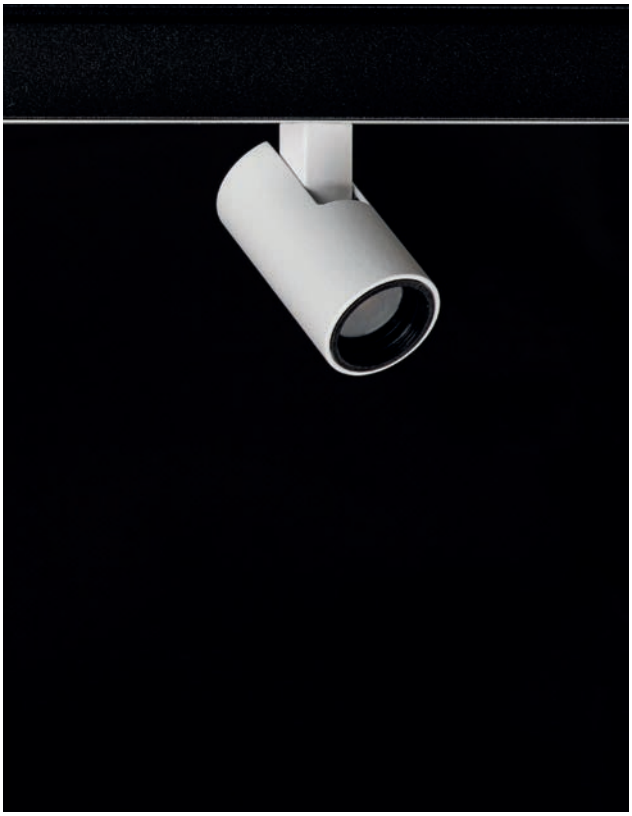

New LABEL 2

The new miniaturised projector enhances the LABEL range. Just 20 mm in diameter for a 4W projector with a professional performance. Available with three different optics equipped with lenses for the SP - FL – MWFL versions.

Track standard



STANDARD

Kg	L	Colour	Code
0.7	1000	○	**9500-1/W2-ST1**
1.4	2000	○	**9500-2/W2-ST1**
2.1	3000	○	**9500-3/W2-ST1**
0.7	1000	●	**9500-1/B-ST1**
1.4	2000	●	**9500-2/B-ST1**
2.1	3000	●	**9500-3/B-ST1**

Track trimless



TRIMLESS

Kg	L	Colour	Code
1.1	1000	○	**9500-1/W2-ST3**
2.2	2000	○	**9500-2/W2-ST3**
3.4	3000	○	**9500-3/W2-ST3**
1.1	1000	●	**9500-1/B-ST3**
2.2	2000	●	**9500-2/B-ST3**
3.4	3000	●	**9500-3/B-ST3**

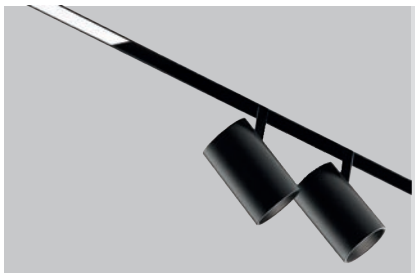

Track trimless deep



TRIMLESS DEEP

Kg	L	Colour	Code
1.6	1000	○	**9500-1/W2-TA1**
3.2	2000	○	**9500-2/W2-TA1**
4.8	3000	○	**9500-3/W2-TA1**
1.6	1000	●	**9500-1/B-TA1**
3.2	2000	●	**9500-2/B-TA1**
4.8	3000	●	**9500-3/B-TA1**

FORTYEIGHT

Related codes

End Caps

Colour	Code
○	**9504/ST1-W2**
●	**9504/ST1-B**

End cap for Standard track.
1X

Colour	Code
○	**9504/ST3-W2**
●	**9504/ST3-B**

End cap for Trimless track.
1X

Colour	Code
○	**1T7171**
●	**1T6801**

End cap for Trimless Deep track.
2X

Colour	Code
○	**9504/ST1-W2-F**
●	**9504/ST1-B-F**

End cap for Standard track with a cable feedthrough hole.
1X

Mounting System



Colour	Code
○	**1T6802**
●	**1T6804**

Suspension kit with ABS control over the fixture.

Colour	Code
◌	**S-9500/315**

Bracket for trimless applications.
For every metre of track 4 brackets must be used, 2 for each side.



Colour	Code
○	**1T6803**
●	**1T6805**

Suspension kit with ceiling adjustment.

Power Supply

Code
1T6917EL

Driver 48Vdc 60W EL.
LxHxP=225x36x60mm - maximum distance 20m - cable 1.5mm².
IP20.
Universal power supply for Electronic, DALI and Casambi systems.

Code
1T6916EL

Driver 48Vdc 130W EL.
LxHxP=240x49x60mm - maximum distance 10m - cable 1.5mm².
IP20.
Universal power supply for Electronic, DALI and Casambi systems.

Colour	Code
○	**9501-S/W**
●	**9501-S/B**

Power head unpolarised.

Accessories

Mechanical connector

Colour	Code
○	**S-9500/314-W2**
●	**S-9500/314-B**

Reinforcement bracket for direct coupling for trimless applications.

Tool

Code
S-9000/T

Tool for shearing conductors, to be used if necessary to cut the track during installation.

Electrical Connector

Colour	Code
○	**9511/W2**
●	**9511/B**

Unpolarised L joint.
Only for recessed installation.
For L joints the tracks must first be cut to 45°.

Colour	Code
○	**9503-S/W**
●	**9503-S/B**

Unpolarised through joint.

Control systems

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

FORTYEIGHT

Logico 30
L. 294mm



LED / 6W / OPAL

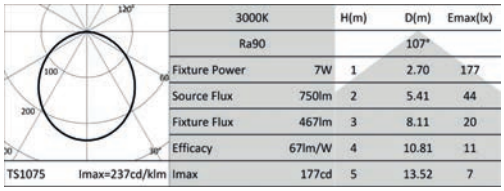

3000K		H(m)	D(m)	Emax(lx)
Ra90			107°	
Fixture Power	7W	1	2.70	177
Source Flux	750lm	2	5.41	44
Fixture Flux	467lm	3	8.11	20
Efficacy	67lm/W	4	10.81	11
Imax	177cd	5	13.52	7

Power supply	Version	Colour	3000K	4000K
48Vdc	EL.	○	**1T6619EL**	**1T6620EL**
48Vdc	EL.	●	**1T6621EL**	**1T6622EL**
48Vdc	DALI	○	**1T6619DA**	**1T6620DA**
48Vdc	DALI	●	**1T6621DA**	**1T6622DA**

Logico 30
L. 573mm

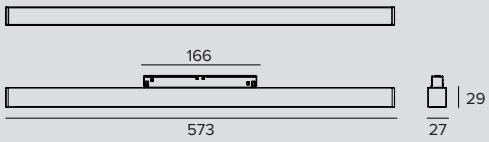

LED / 12W / OPAL

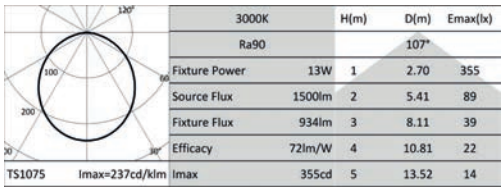

3000K		H(m)	D(m)	Emax(lx)
Ra90			107°	
Fixture Power	13W	1	2.70	355
Source Flux	1500lm	2	5.41	89
Fixture Flux	934lm	3	8.11	39
Efficacy	72lm/W	4	10.81	22
Imax	355cd	5	13.52	14

Power supply	Version	Colour	3000K	4000K
48Vdc	EL.	○	**1T6623EL**	**1T6624EL**
48Vdc	EL.	●	**1T6625EL**	**1T6626EL**
48Vdc	DALI	○	**1T6623DA**	**1T6624DA**
48Vdc	DALI	●	**1T6625DA**	**1T6626DA**

Logico 30
L. 1132mm

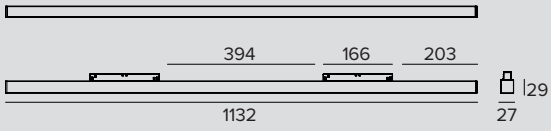

LED / 24W / OPAL

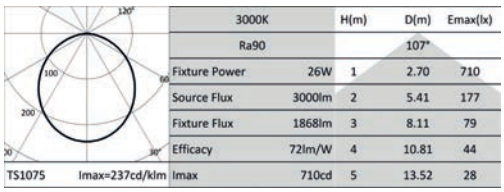

3000K		H(m)	D(m)	Emax(lx)
Ra90			107°	
Fixture Power	26W	1	2.70	710
Source Flux	3000lm	2	5.41	177
Fixture Flux	1868lm	3	8.11	79
Efficacy	72lm/W	4	10.81	44
Imax	710cd	5	13.52	28

Power supply	Version	Colour	3000K	4000K
48Vdc	EL.	○	**1T6627EL**	**1T6628EL**
48Vdc	EL.	●	**1T6629EL**	**1T6630EL**
48Vdc	DALI	○	**1T6627DA**	**1T6628DA**
48Vdc	DALI	●	**1T6629DA**	**1T6630DA**

Logico 30
L. 1970mm



LED / 42W / OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			107°	
Fixture Power		46W	1	2.70	1242
Source Flux		5250lm	2	5.41	311
Fixture Flux		3269lm	3	8.11	138
Efficacy		71lm/W	4	10.81	78
TS1075	Imax=237cd/klm	Imax	1242cd	5	13.52	50

	Power supply	Version	Colour	3000K	4000K
	48Vdc	EL.	○	**1T6631EL**	**1T6632EL**
	48Vdc	EL.	●	**1T6633EL**	**1T6634EL**
	48Vdc	DALI	○	**1T6631DA**	**1T6632DA**
	48Vdc	DALI	●	**1T6633DA**	**1T6634DA**

Logico 30 L



LED / 12W / OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			107°	
Fixture Power		13W	1	2.70	355
Source Flux		1500lm	2	5.41	89
Fixture Flux		934lm	3	8.11	39
Efficacy		72lm/W	4	10.81	22
TS1075	Imax=237cd/klm	Imax	355cd	5	13.52	14

	Power supply	Version	Colour	3000K	4000K
	48Vdc	EL.	○	**1T6635EL**	**1T6636EL**
	48Vdc	EL.	●	**1T6637EL**	**1T6638EL**
	48Vdc	DALI	○	**1T6635DA**	**1T6636DA**
	48Vdc	DALI	●	**1T6637DA**	**1T6638DA**

FORTYEIGHT

Label 2 short arm



LED / 2,6W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			13°	
Fixture Power	4W	1	0.23	1419
Source Flux	180lm	2	0.45	355
Fixture Flux	152lm	3	0.68	158
Efficacy	40lm/W	4	0.90	89
TS1157 Imax=7873cd/klm	Imax	1419cd	5	1.13	57

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6639EL**	**1T6640EL**	**1T6641EL**
48Vdc	EL.	●	**1T6642EL**	**1T6643EL**	**1T6644EL**
48Vdc	DALI	○	**1T6639DA**	**1T6640DA**	**1T6641DA**
48Vdc	DALI	●	**1T6642DA**	**1T6643DA**	**1T6644DA**

LED / 2,6W / LENS / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			31°	
Fixture Power	4W	1	0.55	346
Source Flux	180lm	2	1.10	87
Fixture Flux	136lm	3	1.65	38
Efficacy	36lm/W	4	2.19	22
TS1158 Imax=1920cd/klm	Imax	346cd	5	2.74	14

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6645EL**	**1T6646EL**	**1T6647EL**
48Vdc	EL.	●	**1T6648EL**	**1T6649EL**	**1T6650EL**
48Vdc	DALI	○	**1T6645DA**	**1T6646DA**	**1T6647DA**
48Vdc	DALI	●	**1T6648DA**	**1T6649DA**	**1T6650DA**

LED / 2,6W / LENS / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			49°	
Fixture Power	4W	1	0.90	177
Source Flux	180lm	2	1.81	44
Fixture Flux	131lm	3	2.71	20
Efficacy	34lm/W	4	3.62	11
TS1159 Imax=983cd/klm	Imax	177cd	5	4.52	7

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6651EL**	**1T6652EL**	**1T6653EL**
48Vdc	EL.	●	**1T6654EL**	**1T6655EL**	**1T6656EL**
48Vdc	DALI	○	**1T6651DA**	**1T6652DA**	**1T6653DA**
48Vdc	DALI	●	**1T6654DA**	**1T6655DA**	**1T6656DA**

Label 2 long arm



LED / 2,6W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			13°	
Fixture Power	4W	1	0.23	1419
Source Flux	180lm	2	0.45	355
Fixture Flux	152lm	3	0.68	158
Efficacy	40lm/W	4	0.90	89
TS1157 Imax=7873cd/klm	Imax	1419cd	5	1.13	57

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6693EL**	**1T6694EL**	**1T6695EL**
48Vdc	EL.	●	**1T6696EL**	**1T6697EL**	**1T6698EL**
48Vdc	DALI	○	**1T6693DA**	**1T6694DA**	**1T6695DA**
48Vdc	DALI	●	**1T6696DA**	**1T6697DA**	**1T6698DA**

LED / 2,6W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
Fixture Power	4W	1		0.55	346
Source Flux	180lm	2		1.10	87
Fixture Flux	136lm	3		1.65	38
Efficacy	36lm/W	4		2.19	22
TS1158 Imax=1920cd/klm	Imax	346cd	5	2.74	14

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6699EL**	**1T6700EL**	**1T6701EL**
48Vdc	EL.	●	**1T6702EL**	**1T6703EL**	**1T6704EL**
48Vdc	DALI	○	**1T6699DA**	**1T6700DA**	**1T6701DA**
48Vdc	DALI	●	**1T6702DA**	**1T6703DA**	**1T6704DA**

LED / 2,6W / LENS / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			49°	
Fixture Power	4W	1		0.90	177
Source Flux	180lm	2		1.81	44
Fixture Flux	131lm	3		2.71	20
Efficacy	34lm/W	4		3.62	11
TS1159 Imax=983cd/klm	Imax	177cd	5	4.52	7

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6705EL**	**1T6706EL**	**1T6707EL**
48Vdc	EL.	●	**1T6708EL**	**1T6709EL**	**1T6710EL**
48Vdc	DALI	○	**1T6705DA**	**1T6706DA**	**1T6707DA**
48Vdc	DALI	●	**1T6708DA**	**1T6709DA**	**1T6710DA**

Label 4 short arm



LED / 8W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W	1		0.31	4214
Source Flux	982lm	2		0.62	1053
Fixture Flux	622lm	3		0.93	468
Efficacy	71lm/W	4		1.24	263
TS1072 Imax=4291cd/klm	Imax	4214cd	5	1.55	169

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6657EL**	**1T6658EL**	**1T6659EL**
48Vdc	EL.	●	**1T6660EL**	**1T6661EL**	**1T6662EL**
48Vdc	DALI	○	**1T6657DA**	**1T6658DA**	**1T6659DA**
48Vdc	DALI	●	**1T6660DA**	**1T6661DA**	**1T6662DA**

LED / 8W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power	9W	1		0.48	3199
Source Flux	1129lm	2		0.95	800
Fixture Flux	806lm	3		1.43	355
Efficacy	92lm/W	4		1.91	200
TS1073 Imax=2834cd/klm	Imax	3199cd	5	2.38	128

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6663EL**	**1T6664EL**	**1T6665EL**
48Vdc	EL.	●	**1T6666EL**	**1T6667EL**	**1T6668EL**
48Vdc	DALI	○	**1T6663DA**	**1T6664DA**	**1T6665DA**
48Vdc	DALI	●	**1T6666DA**	**1T6667DA**	**1T6668DA**

LED / 8W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
Fixture Power	9W	1		0.76	1831
Source Flux	1129lm	2		1.52	458
Fixture Flux	835lm	3		2.28	203
Efficacy	95lm/W	4		3.04	114
TS1074 Imax=1622cd/klm	Imax	1831cd	5	3.80	73

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6669EL**	**1T6670EL**	**1T6671EL**
48Vdc	EL.	●	**1T6672EL**	**1T6673EL**	**1T6674EL**
48Vdc	DALI	○	**1T6669DA**	**1T6670DA**	**1T6671DA**
48Vdc	DALI	●	**1T6672DA**	**1T6673DA**	**1T6674DA**

FORTYEIGHT

Label 4 long arm



LED / 8W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W		1	0.31	4214
Source Flux	982lm		2	0.62	1053
Fixture Flux	622lm		3	0.93	468
Efficacy	71lm/W		4	1.24	263
TS1072	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6711EL**	**1T6712EL**	**1T6713EL**
48Vdc	EL.	●	**1T6714EL**	**1T6715EL**	**1T6716EL**
48Vdc	DALI	○	**1T6711DA**	**1T6712DA**	**1T6713DA**
48Vdc	DALI	●	**1T6714DA**	**1T6715DA**	**1T6716DA**

LED / 8W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power	9W		1	0.48	3199
Source Flux	1129lm		2	0.95	800
Fixture Flux	806lm		3	1.43	355
Efficacy	92lm/W		4	1.91	200
TS1073	Imax=2834cd/klm	Imax	3199cd	5	2.38	128

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6717EL**	**1T6718EL**	**1T6719EL**
48Vdc	EL.	●	**1T6720EL**	**1T6721EL**	**1T6722EL**
48Vdc	DALI	○	**1T6717DA**	**1T6718DA**	**1T6719DA**
48Vdc	DALI	●	**1T6720DA**	**1T6721DA**	**1T6722DA**

LED / 8W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
Fixture Power	9W		1	0.76	1831
Source Flux	1129lm		2	1.52	458
Fixture Flux	835lm		3	2.28	203
Efficacy	95lm/W		4	3.04	114
TS1074	Imax=1622cd/klm	Imax	1831cd	5	3.80	73

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6723EL**	**1T6724EL**	**1T6725EL**
48Vdc	EL.	●	**1T6726EL**	**1T6727EL**	**1T6728EL**
48Vdc	DALI	○	**1T6723DA**	**1T6724DA**	**1T6725DA**
48Vdc	DALI	●	**1T6726DA**	**1T6727DA**	**1T6728DA**

Label 6 short arm



LED / 14W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
Fixture Power	15W		1	0.28	10741
Source Flux	1793lm		2	0.55	2685
Fixture Flux	1316lm		3	0.83	1193
Efficacy	91lm/W		4	1.11	671
TS1068	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6675EL**	**1T6676EL**	**1T6677EL**
48Vdc	EL.	●	**1T6678EL**	**1T6679EL**	**1T6680EL**
48Vdc	DALI	○	**1T6675DA**	**1T6676DA**	**1T6677DA**
48Vdc	DALI	●	**1T6678DA**	**1T6679DA**	**1T6680DA**

LED / 14W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
	Fixture Power	15W	1	0.56	4410
	Source Flux	1793lm	2	1.12	1102
	Fixture Flux	1386lm	3	1.67	490
	Efficacy	96lm/W	4	2.23	276
TS1069	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6681EL**	**1T6682EL**	**1T6683EL**
48Vdc	EL.	●	**1T6684EL**	**1T6685EL**	**1T6686EL**
48Vdc	DALI	○	**1T6681DA**	**1T6682DA**	**1T6683DA**
48Vdc	DALI	●	**1T6684DA**	**1T6685DA**	**1T6686DA**

LED / 14W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
	Fixture Power	15W	1	0.88	2457
	Source Flux	1793lm	2	1.77	614
	Fixture Flux	1373lm	3	2.65	273
	Efficacy	95lm/W	4	3.53	154
TS1070	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6687EL**	**1T6688EL**	**1T6689EL**
48Vdc	EL.	●	**1T6690EL**	**1T6691EL**	**1T6692EL**
48Vdc	DALI	○	**1T6687DA**	**1T6688DA**	**1T6689DA**
48Vdc	DALI	●	**1T6690DA**	**1T6691DA**	**1T6692DA**

Label 6 long arm



LED / 14W / REFLECTOR / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
	Fixture Power	15W	1	0.28	10741
	Source Flux	1793lm	2	0.55	2685
	Fixture Flux	1316lm	3	0.83	1193
	Efficacy	91lm/W	4	1.11	671
TS1068	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6729EL**	**1T6730EL**	**1T6731EL**
48Vdc	EL.	●	**1T6732EL**	**1T6733EL**	**1T6734EL**
48Vdc	DALI	○	**1T6729DA**	**1T6730DA**	**1T6731DA**
48Vdc	DALI	●	**1T6732DA**	**1T6733DA**	**1T6734DA**

LED / 14W / REFLECTOR / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
	Fixture Power	15W	1	0.56	4410
	Source Flux	1793lm	2	1.12	1102
	Fixture Flux	1386lm	3	1.67	490
	Efficacy	96lm/W	4	2.23	276
TS1069	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6735EL**	**1T6736EL**	**1T6737EL**
48Vdc	EL.	●	**1T6738EL**	**1T6739EL**	**1T6740EL**
48Vdc	DALI	○	**1T6735DA**	**1T6736DA**	**1T6737DA**
48Vdc	DALI	●	**1T6738DA**	**1T6739DA**	**1T6740DA**

LED / 14W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
	Fixture Power	15W	1	0.88	2457
	Source Flux	1793lm	2	1.77	614
	Fixture Flux	1373lm	3	2.65	273
	Efficacy	95lm/W	4	3.53	154
TS1070	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Power supply	Version	Colour	2700K	3000K	4000K
48Vdc	EL.	○	**1T6741EL**	**1T6742EL**	**1T6743EL**
48Vdc	EL.	●	**1T6744EL**	**1T6745EL**	**1T6746EL**
48Vdc	DALI	○	**1T6741DA**	**1T6742DA**	**1T6743DA**
48Vdc	DALI	●	**1T6744DA**	**1T6745DA**	**1T6746DA**

FORTYEIGHT

Accessories Label 2

Filter

Filter	Ø	Code
Halogen +	17	**1T6936**
Vivid +	17	**1T6937**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Filter	Ø	Code
Meat	17	**1T6932**
Fish	17	**1T6933**
Bread	17	**1T6934**
Vegetables	17	**1T6935**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.

Filter	Ø	Code
Beauty	17	**1T6938**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Ø	Code
17	**1T6939**

Holographic PMMA filter with blade of light effect.
Allows the beam to be made oval; combined with spot and flood optics the effect appears more pronounced.

Accessories Label 4



Filter	Ø	Code
Halogen +	34	**1T6926**
Vivid +	34	**1T6927**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	34	**1T6922**
Fish	34	**1T6923**
Bread	34	**1T6924**
Vegetables	34	**1T6925**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6922
To be used only with 3000K and Ra80 fixtures.
1T6923
To be used only with 4000K and Ra80 fixtures.
1T6924
To be used only with 3000K and Ra80 fixtures.
1T6925
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	34	**1T6928**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.

Ø	Code
34	**1T6931**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.

Grid



Ø	Code
34	**1T6930**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

Accessories Label 6

Filter



Filter	Ø	Code
Halogen +	50	**1T6381**
Vivid +	50	**1T6383**

Art filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Meat	50	**1T6385**
Fish	50	**1T6387**
Bread	50	**1T6389**
Vegetables	50	**1T6391**

Food filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
1T6385
To be used only with 3000K and Ra80 fixtures.
1T6387
To be used only with 4000K and Ra80 fixtures.
1T6389
To be used only with 3000K and Ra80 fixtures.
1T6391
To be used only with 3000K and Ra80 fixtures.



Filter	Ø	Code
Beauty	50	**1T6393**

Beauty filter.
Flat glass interference filter that can vary the colour parameters of the emission of the fixtures it is applied to.
To be used only with 3000K and Ra80 fixtures.



Ø	Code
50	**1T4721**

PMMA holographic filter with blade effect to ovalize the light beam; more evident when combined with spot and flood optics.

Screen



Ø	Code
50	**1T6521**

Protective screen.

Grid



Ø	Code
50	**1T4322**

Anti-glare louver.
Black painted metal honeycomb structure.
Complete with holographic diffusion filter.

LOGICO

System

GENERAL INFO
Modules of variable lengths for ceiling, suspension, recessed and semi-recessed installations.
Recessed versions with a flange or trimless.
Lenghts:
281mm - 562mm – 1122mm – 1682mm – 3364mm

LED
Linear Board LED Engine for linear and SPOT versions
LED COB for LABEL versions
From 982lm to 28960lmlm
3000K – 4000K
OPAL, UGR, WW versions: Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code
SPOT, LABEL versions: Ra90

PRODUCT EFFICACY
Up to 109lm/W

OPTICS
OPAL – UGR – WW - SP - FL - MWFL

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is equipped with special accessories.
Emergency on request.

MATERIAL
Powder coated, extruded, calendered aluminium.

Modular lighting system with which it is possible to create luminous shapes and numerous lighting scenes given the different lengths available and T, L, and X light connectors and high-power or low-power lumen on modules of the same length.

It is made up of many lighting units: diffused light, UGR<19 controlled light suitable for the workplace, wall washer and the new spotlight modules with LABEL 4 and LABEL 6 projectors.
The accessories allow it to be installed on the ceiling, suspended, recessed, or semi-recessed (with or without flange).

Also available in a stand alone version.

Zonamerica

Architect
Estudio Dovat Arquitectos

Lighting Design
Estudio Hofstadter

Photographer
Ferrés - Cánepa

Country
Montevideo, Uruguay

01

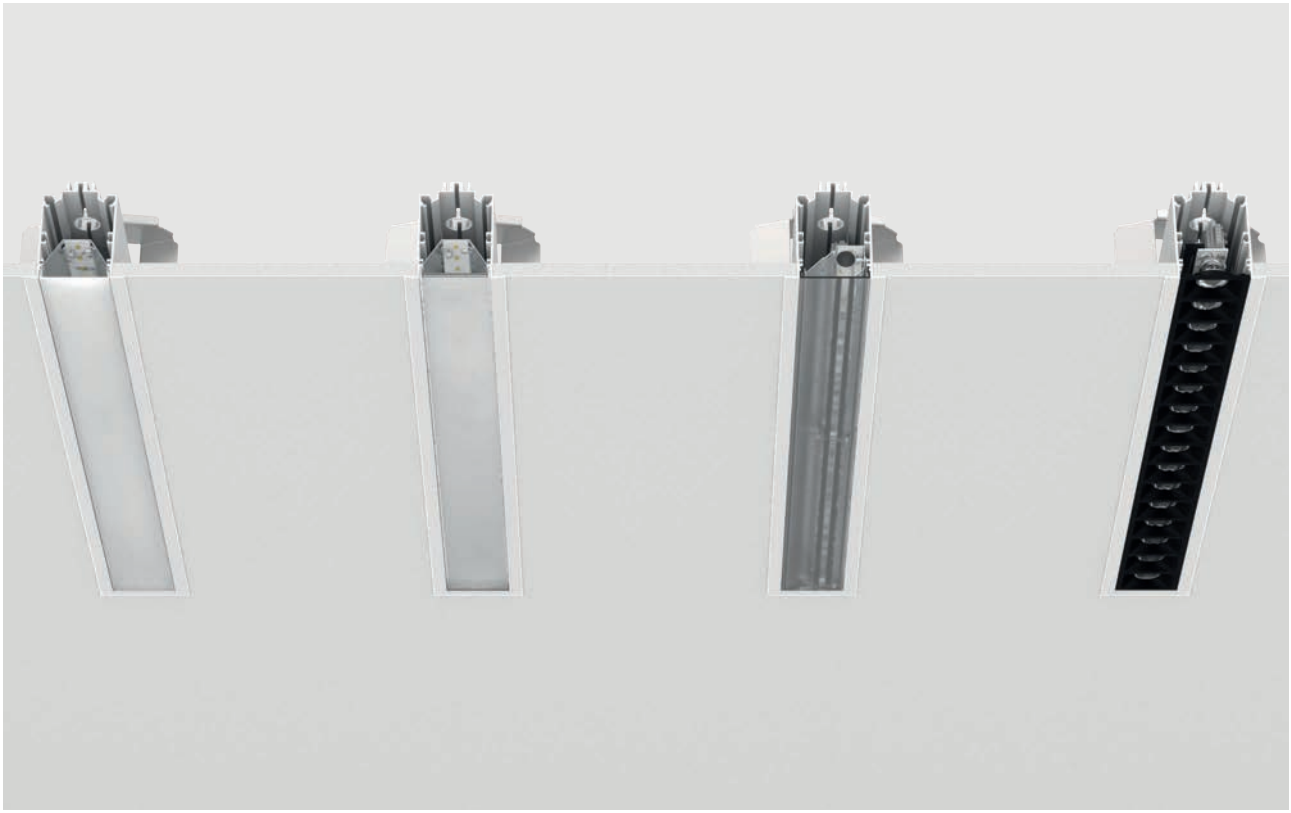



OPAL



UGR<19



WALL WASHER



SPOT UGR<7

Four different optical systems

- **Diffused light** with an opal screen: a soft, wide light emission particularly suitable for receptions and communal areas, corridors, etc...
- **Controlled light** UGR<19 with a prismatic screen (only for the direct component): ideal for open space offices, schools or meeting rooms where glare must be reduced to a minimum.
- **Directed light** with a Wall Washer optical system: ideal for lighting vertical surfaces like walls or works of art.
- **Precise light** where a system composed of micro lenses produces precise and focused SPOT effects with UGR<7, ideal for lighting commercial and hotel environments.

02

03

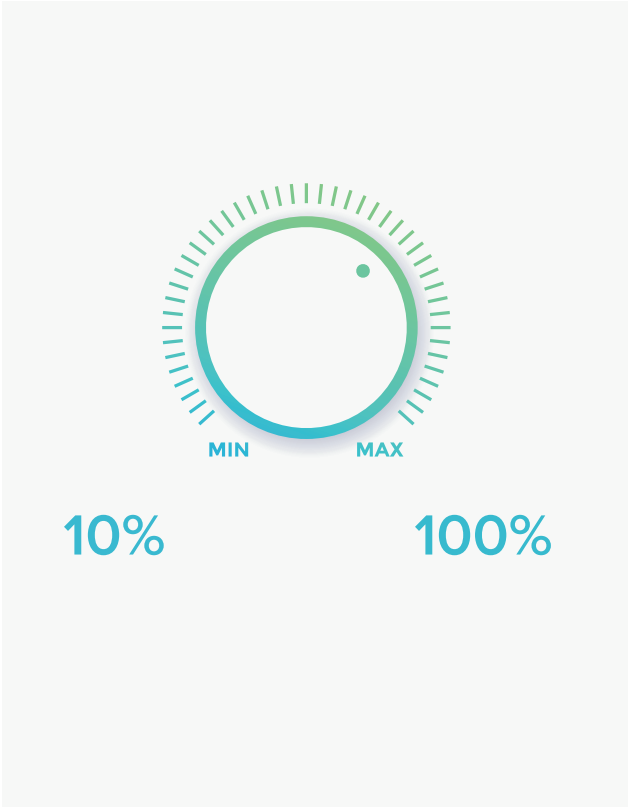

Easy to assemble

Each module is already complete with the lighting unit. Modules with linear light snap together or use magnets, so no tools are needed. The new modules with spotlights already have built-in projectors or lighting elements.

Dimmer light

The LOGIC modules (opal, ugr, asy, Label) equipped with DALI driver can be dimmed from 10% to 100% with AM modulation amplitude.
Dimming is done by modifying the piloting current and not by turning the LEDs on and off. This prevents flickering and makes it suitable for installation even where videos are recorded.

04

05

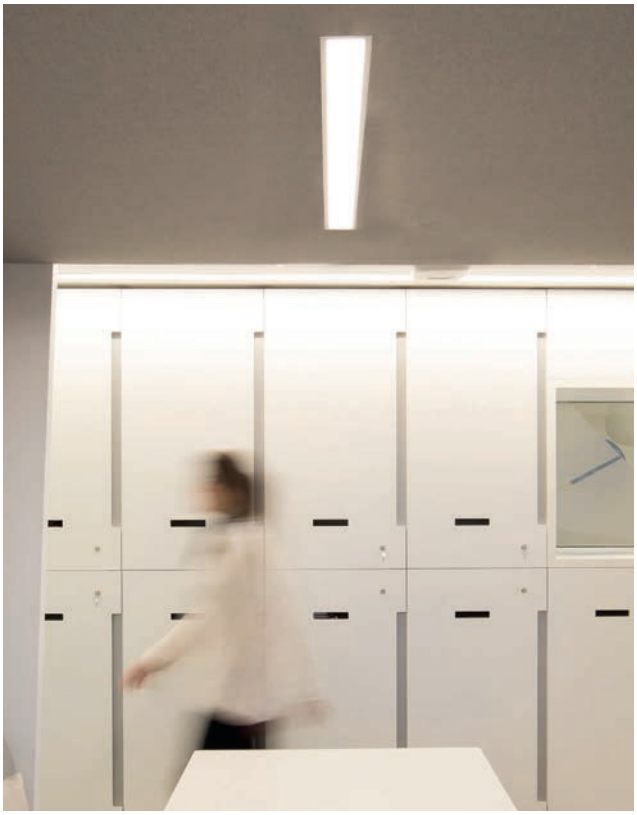

LOGICO trimless recessed

It can be installed recessed or semi-recessed using the same recessing box that can be left with the flange visible or grouted for a trimless effect.

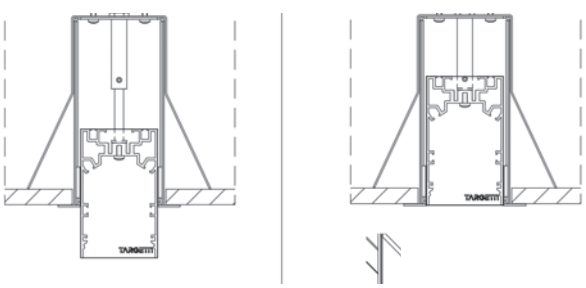

LOGICO recessed with flange

It can be installed without a recessing box, using the bracket accessories. Semi-recessed installation is not available.



06

Ceiling installation

The modules must be fixed to the ceiling with the special accessory brackets. The springs are attached to the modules in a “click” by applying pressure.



07

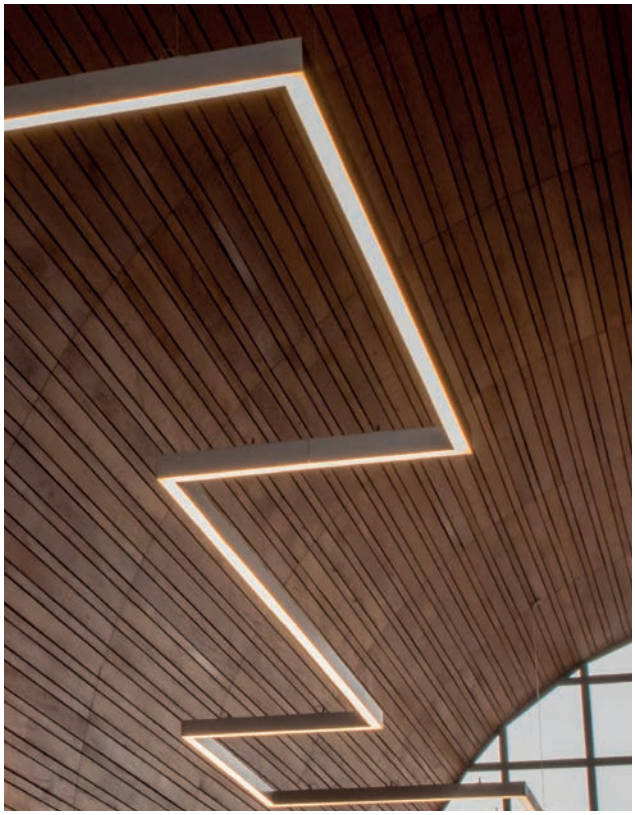

Suspended also on sloping ceilings

The suspension kit allows installation even on tilted ceilings or on vertical elements.



08

New LABEL modules

New linear modules equipped with LABEL 4 or LABEL 6 projectors, available with spotlights, floodlights, and medium wide floodlights.

09

New SPOT modules

As of today, LOGICO is also available with the new SPOT modules with LED Lineare High Power card and optical system made up of TIR lenses in optical methacrylate, holographic filter and black polycarbonate frame (the profile finish also comes in white). The result is a highly concentrated and controlled light for scenic effects UGR<7 (EN-12464)

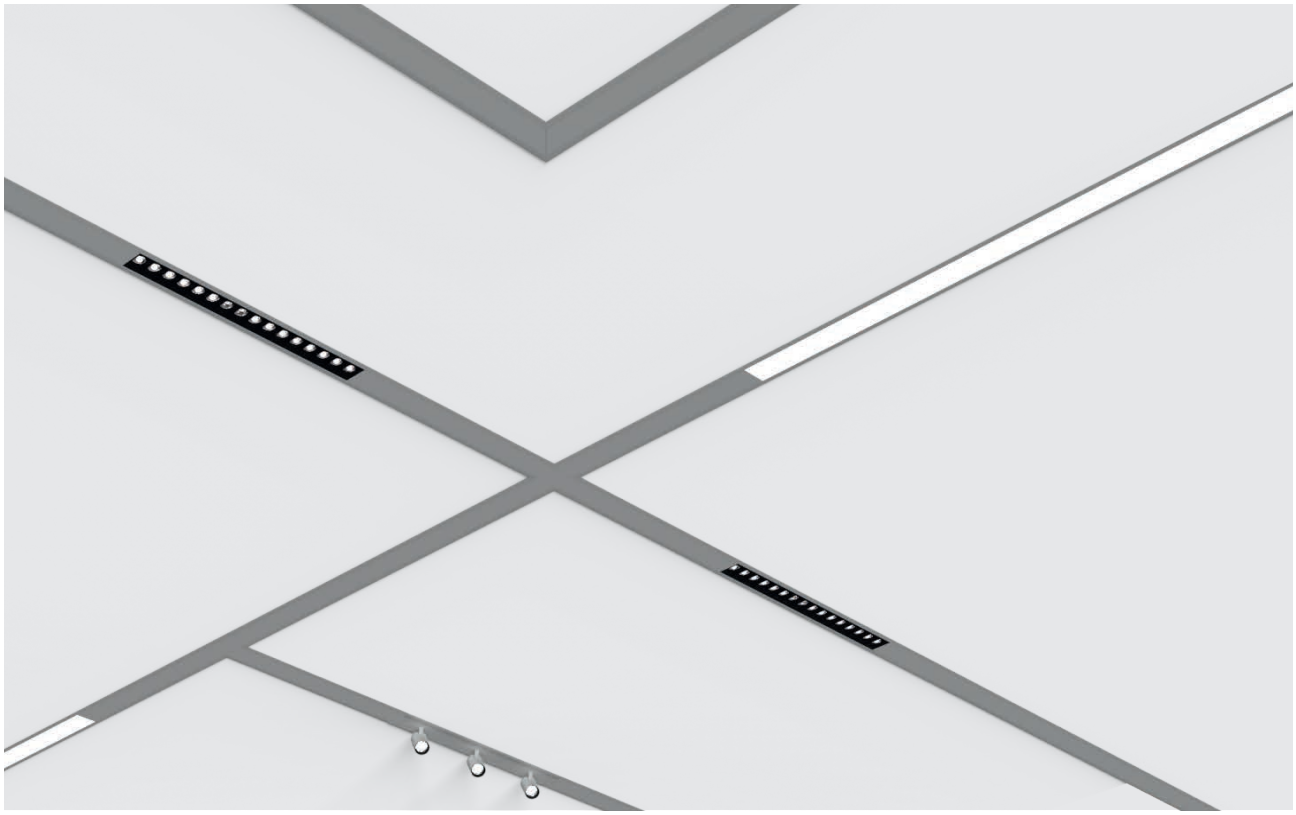

New blind modules

New blind modules to create a continuous system that connects the spaces between them without interruption. Joints without a light unit are also available to guarantee infinite compositional solutions.

System Ceiling/ Suspension - continuous light module L. 562mm



LED / 12W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	14W	1	2.66	451
Source Flux	1740lm	2	5.33	113
Fixture Flux	1185lm	3	7.99	50
Efficacy	85lm/W	4	10.65	28
TS991 Imax=259cd/klm	Imax 451cd	5	13.32	18

Driver	Colour	3000K	4000K
EL.	○	**1T6027EL**	**1T6028EL**
EL.	●	**1T6031EL**	**1T6032EL**
EL.	◍	**1T6035EL**	**1T6036EL**
DALI	○	**1T6027DA**	**1T6028DA**
DALI	●	**1T6031DA**	**1T6032DA**
DALI	◍	**1T6035DA**	**1T6036DA**

LED / 24W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	27W	1	2.66	892
Source Flux	3440lm	2	5.33	223
Fixture Flux	2343lm	3	7.99	99
Efficacy	87lm/W	4	10.65	56
TS996 Imax=259cd/klm	Imax 892cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T6029EL**	**1T6030EL**
EL.	●	**1T6033EL**	**1T6034EL**
EL.	◍	**1T6037EL**	**1T6038EL**
DALI	○	**1T6029DA**	**1T6030DA**
DALI	●	**1T6033DA**	**1T6034DA**
DALI	◍	**1T6037DA**	**1T6038DA**

LED / 8W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	9W	1	1.51	556
Source Flux	1260lm	2	3.02	139
Fixture Flux	816lm	3	4.52	62
Efficacy	91lm/W	4	6.03	35
TS992 Imax=442cd/klm	Imax 556cd	5	7.54	22

Driver	Colour	3000K	4000K
EL.	○	**1T6825EL**	**1T6826EL**
EL.	●	**1T6827EL**	**1T6828EL**
EL.	◍	**1T6829EL**	**1T6830EL**
DALI	○	**1T6825DA**	**1T6826DA**
DALI	●	**1T6827DA**	**1T6828DA**
DALI	◍	**1T6829DA**	**1T6830DA**

LED / 12W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	14W	1	2.28	2.55	1400
Source Flux	1740lm	2	4.56	5.10	350
Fixture Flux	1369lm	3	6.84	7.64	156
Efficacy	98lm/W	4	9.12	10.19	88
TS993 Imax=1001cd/klm	Imax 1743cd	5	11.40	12.74	56

Driver	Colour	3000K	4000K
EL.	○	**1T6837EL**	**1T6838EL**
EL.	●	**1T6839EL**	**1T6840EL**
EL.	◍	**1T6841EL**	**1T6842EL**
DALI	○	**1T6837DA**	**1T6838DA**
DALI	●	**1T6839DA**	**1T6840DA**
DALI	◍	**1T6841DA**	**1T6842DA**

LED / 24W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55	2768
Source Flux	3440lm	2	4.56	5.10	692
Fixture Flux	2707lm	3	6.84	7.64	308
Efficacy	100lm/W	4	9.12	10.19	173
TS997 Imax=1001cd/klm	Imax 3445cd	5	11.40	12.74	111

Driver	Colour	3000K	4000K
EL.	○	**1T6843EL**	**1T6844EL**
EL.	●	**1T6845EL**	**1T6846EL**
EL.	◍	**1T6847EL**	**1T6848EL**
DALI	○	**1T6843DA**	**1T6844DA**
DALI	●	**1T6845DA**	**1T6846DA**
DALI	◍	**1T6847DA**	**1T6848DA**

LED / 18W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		20W	1	2.66	387
Source Flux		2610lm	2	5.33	97
Fixture Flux		1773lm	3	7.99	43
Efficacy		89lm/W	4	10.65	24
TS994	Imax=148cd/klm	Imax	387cd	5	13.32	15

Driver	Colour	3000K	4000K
EL.	○	**1T6039EL**	**1T6040EL**
EL.	●	**1T6043EL**	**1T6044EL**
EL.	◌	**1T6047EL**	**1T6048EL**
DALI	○	**1T6039DA**	**1T6040DA**
DALI	●	**1T6043DA**	**1T6044DA**
DALI	◌	**1T6047DA**	**1T6048DA**

LED / 30W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		34W	1	2.66	810
Source Flux		4310lm	2	5.33	203
Fixture Flux		2930lm	3	7.99	90
Efficacy		86lm/W	4	10.65	51
TS998	Imax=188cd/klm	Imax	810cd	5	13.32	32

Driver	Colour	3000K	4000K
EL.	○	**1T6041EL**	**1T6042EL**
EL.	●	**1T6045EL**	**1T6046EL**
EL.	◌	**1T6049EL**	**1T6050EL**
DALI	○	**1T6041DA**	**1T6042DA**
DALI	●	**1T6045DA**	**1T6046DA**
DALI	◌	**1T6049DA**	**1T6050DA**

LED / 12W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		14W	1	1.51	477
Source Flux		1890lm	2	3.02	119
Fixture Flux		1248lm	3	4.52	53
Efficacy		89lm/W	4	6.03	30
TS995	Imax=252cd/klm	Imax	477cd	5	7.54	19

Driver	Colour	3000K	4000K
EL.	○	**1T6831EL**	**1T6832EL**
EL.	●	**1T6833EL**	**1T6834EL**
EL.	◌	**1T6835EL**	**1T6836EL**
DALI	○	**1T6831DA**	**1T6832DA**
DALI	●	**1T6833DA**	**1T6834DA**
DALI	◌	**1T6835DA**	**1T6836DA**

System Ceiling/ Suspension - continuous light module L. 1122mm

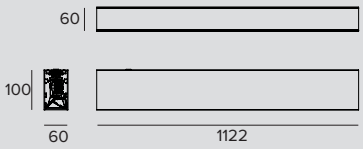

LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		27W	1	2.66	903
Source Flux		3480lm	2	5.33	226
Fixture Flux		2370lm	3	7.99	100
Efficacy		88lm/W	4	10.65	56
TS991	Imax=259cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5635EL**	**1T5636EL**
EL.	●	**1T5639EL**	**1T5640EL**
EL.	◌	**1T5637EL**	**1T5638EL**
DALI	○	**1T5635DA**	**1T5636DA**
DALI	●	**1T5639DA**	**1T5640DA**
DALI	◌	**1T5637DA**	**1T5638DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		54W	1	2.66	1785
Source Flux		6880lm	2	5.33	446
Fixture Flux		4685lm	3	7.99	198
Efficacy		87lm/W	4	10.65	112
TS996	Imax=259cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5641EL**	**1T5642EL**
EL.	●	**1T5645EL**	**1T5646EL**
EL.	◌	**1T5643EL**	**1T5644EL**
DALI	○	**1T5641DA**	**1T5642DA**
DALI	●	**1T5645DA**	**1T5646DA**
DALI	◌	**1T5643DA**	**1T5644DA**

LOGICO

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		18W	1	1.51	1113
Source Flux		2520lm	2	3.02	278
Fixture Flux		1631lm	3	4.52	124
Efficacy		91lm/W	4	6.03	70
TS992	Imax=442cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5659EL**	**1T5660EL**
EL.	●	**1T5663EL**	**1T5664EL**
EL.	◌	**1T5661EL**	**1T5662EL**
DALI	○	**1T5659DA**	**1T5660DA**
DALI	●	**1T5663DA**	**1T5664DA**
DALI	◌	**1T5661DA**	**1T5662DA**

LED / 24W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		27W	1	2.28	2.55	2801
Source Flux		3480lm	2	4.56	5.10	700
Fixture Flux		2739lm	3	6.84	7.64	311
Efficacy		101lm/W	4	9.12	10.19	175
TS993	Imax=1001cd/klm	Imax	3485cd	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	○	**1T5671EL**	**1T5672EL**
EL.	●	**1T5675EL**	**1T5676EL**
EL.	◌	**1T5673EL**	**1T5674EL**
DALI	○	**1T5671DA**	**1T5672DA**
DALI	●	**1T5675DA**	**1T5676DA**
DALI	◌	**1T5673DA**	**1T5674DA**

LED / 48W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		54W	1	2.28	2.55	5537
Source Flux		6880lm	2	4.56	5.10	1384
Fixture Flux		5415lm	3	6.84	7.64	615
Efficacy		100lm/W	4	9.12	10.19	346
TS997	Imax=1001cd/klm	Imax	6890cd	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	○	**1T5677EL**	**1T5678EL**
EL.	●	**1T5681EL**	**1T5682EL**
EL.	◌	**1T5679EL**	**1T5680EL**
DALI	○	**1T5677DA**	**1T5678DA**
DALI	●	**1T5681DA**	**1T5682DA**
DALI	◌	**1T5679DA**	**1T5680DA**

LED / 42W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		47W	1	2.66	903
Source Flux		6090lm	2	5.33	226
Fixture Flux		4136lm	3	7.99	100
Efficacy		88lm/W	4	10.65	56
TS994	Imax=148cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5647EL**	**1T5648EL**
EL.	●	**1T5651EL**	**1T5652EL**
EL.	◌	**1T5649EL**	**1T5650EL**
DALI	○	**1T5647DA**	**1T5648DA**
DALI	●	**1T5651DA**	**1T5652DA**
DALI	◌	**1T5649DA**	**1T5650DA**

LED / 66W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		74W	1	2.66	1785
Source Flux		9490lm	2	5.33	446
Fixture Flux		6452lm	3	7.99	198
Efficacy		87lm/W	4	10.65	112
TS998	Imax=188cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5653EL**	**1T5654EL**
EL.	●	**1T5657EL**	**1T5658EL**
EL.	◌	**1T5655EL**	**1T5656EL**
DALI	○	**1T5653DA**	**1T5654DA**
DALI	●	**1T5657DA**	**1T5658DA**
DALI	◌	**1T5655DA**	**1T5656DA**

LED / 28W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		32W	1	1.51	1113
Source Flux		4410lm	2	3.02	278
Fixture Flux		2912lm	3	4.52	124
Efficacy		91lm/W	4	6.03	70
TS995	Imax=252cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5665EL**	**1T5666EL**
EL.	●	**1T5669EL**	**1T5670EL**
EL.	◌	**1T5667EL**	**1T5668EL**
DALI	○	**1T5665DA**	**1T5666DA**
DALI	●	**1T5669DA**	**1T5670DA**
DALI	◌	**1T5667DA**	**1T5668DA**

System Ceiling/ Suspension continuous light module L. 1682mm

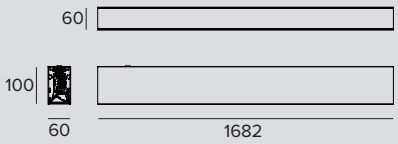

LED / 36W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		40W	1	2.66	1354
Source Flux		5220lm	2	5.33	338
Fixture Flux		3555lm	3	7.99	150
Efficacy		89lm/W	4	10.65	85
TS991	Imax=259cd/klm	Imax	1354cd	5 13.32	54

Driver	Colour	3000K	4000K
EL.	○	**1T5683EL**	**1T5684EL**
EL.	●	**1T5687EL**	**1T5688EL**
EL.	◌	**1T5685EL**	**1T5686EL**
DALI	○	**1T5683DA**	**1T5684DA**
DALI	●	**1T5687DA**	**1T5688DA**
DALI	◌	**1T5685DA**	**1T5686DA**

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2677
Source Flux		10320lm	2	5.33	669
Fixture Flux		7028lm	3	7.99	297
Efficacy		87lm/W	4	10.65	167
TS996	Imax=259cd/klm	Imax	2677cd	5 13.32	107

Driver	Colour	3000K	4000K
EL.	○	**1T5689EL**	**1T5690EL**
EL.	●	**1T5693EL**	**1T5694EL**
EL.	◌	**1T5691EL**	**1T5692EL**
DALI	○	**1T5689DA**	**1T5690DA**
DALI	●	**1T5693DA**	**1T5694DA**
DALI	◌	**1T5691DA**	**1T5692DA**

LED / 24W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		27W	1	1.51	1669
Source Flux		3780lm	2	3.02	417
Fixture Flux		2447lm	3	4.52	185
Efficacy		91lm/W	4	6.03	104
TS992	Imax=442cd/klm	Imax	1669cd	5 7.54	67

Driver	Colour	3000K	4000K
EL.	○	**1T5707EL**	**1T5708EL**
EL.	●	**1T5711EL**	**1T5712EL**
EL.	◌	**1T5709EL**	**1T5710EL**
DALI	○	**1T5707DA**	**1T5708DA**
DALI	●	**1T5711DA**	**1T5712DA**
DALI	◌	**1T5709DA**	**1T5710DA**

LED / 36W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		40W	1	2.28	2.55	4201
Source Flux		5220lm	2	4.56	5.10	1050
Fixture Flux		4108lm	3	6.84	7.64	467
Efficacy		103lm/W	4	9.12	10.19	263
TS993	Imax=1001cd/klm	Imax	5228cd	5 11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	○	**1T5719EL**	**1T5720EL**
EL.	●	**1T5723EL**	**1T5724EL**
EL.	◌	**1T5721EL**	**1T5722EL**
DALI	○	**1T5719DA**	**1T5720DA**
DALI	●	**1T5723DA**	**1T5724DA**
DALI	◌	**1T5721DA**	**1T5722DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		81W	1	2.28	2.55	8305
Source Flux		10320lm	2	4.56	5.10	2076
Fixture Flux		8122lm	3	6.84	7.64	923
Efficacy		100lm/W	4	9.12	10.19	519
TS997	Imax=1001cd/klm	Imax	10335cd	5 11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	○	**1T5725EL**	**1T5726EL**
EL.	●	**1T5729EL**	**1T5730EL**
EL.	◌	**1T5727EL**	**1T5728EL**
DALI	○	**1T5725DA**	**1T5726DA**
DALI	●	**1T5729DA**	**1T5730DA**
DALI	◌	**1T5727DA**	**1T5728DA**

LOGICO

LED / 60W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		68W	1	2.66	1290
Source Flux		8700lm	2	5.33	322
Fixture Flux		5909lm	3	7.99	143
Efficacy		87lm/W	4	10.65	81
TS994	Imax=148cd/klm	Imax	5	13.32	52

Driver	Colour	3000K	4000K
EL.	○	**1T5695EL**	**1T5696EL**
EL.	●	**1T5699EL**	**1T5700EL**
EL.	◌	**1T5697EL**	**1T5698EL**
DALI	○	**1T5695DA**	**1T5696DA**
DALI	●	**1T5699DA**	**1T5700DA**
DALI	◌	**1T5697DA**	**1T5698DA**

LED / 96W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		107W	1	2.66	2595
Source Flux		13800lm	2	5.33	649
Fixture Flux		9382lm	3	7.99	288
Efficacy		88lm/W	4	10.65	162
TS998	Imax=188cd/klm	Imax	5	13.32	104

Driver	Colour	3000K	4000K
EL.	○	**1T5701EL**	**1T5702EL**
EL.	●	**1T5705EL**	**1T5706EL**
EL.	◌	**1T5703EL**	**1T5704EL**
DALI	○	**1T5701DA**	**1T5702DA**
DALI	●	**1T5705DA**	**1T5706DA**
DALI	◌	**1T5703DA**	**1T5704DA**

LED / 40W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		45W	1	1.51	1590
Source Flux		6300lm	2	3.02	398
Fixture Flux		4160lm	3	4.52	177
Efficacy		92lm/W	4	6.03	99
TS995	Imax=252cd/klm	Imax	5	7.54	64

Driver	Colour	3000K	4000K
EL.	○	**1T5713EL**	**1T5714EL**
EL.	●	**1T5717EL**	**1T5718EL**
EL.	◌	**1T5715EL**	**1T5716EL**
DALI	○	**1T5713DA**	**1T5714DA**
DALI	●	**1T5717DA**	**1T5718DA**
DALI	◌	**1T5715DA**	**1T5716DA**

System Ceiling/ Suspension continuous light module L. 3364mm

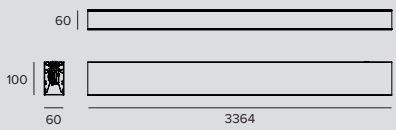

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2708
Source Flux		10440lm	2	5.33	677
Fixture Flux		7110lm	3	7.99	301
Efficacy		88lm/W	4	10.65	169
TS991	Imax=259cd/klm	Imax	5	13.32	108

Driver	Colour	3000K	4000K
EL.	○	**1T5731EL**	**1T5732EL**
EL.	●	**1T5735EL**	**1T5736EL**
EL.	◌	**1T5733EL**	**1T5734EL**
DALI	○	**1T5731DA**	**1T5732DA**
DALI	●	**1T5735DA**	**1T5736DA**
DALI	◌	**1T5733DA**	**1T5734DA**

LED / 144W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		163W	1	2.66	5354
Source Flux		20640lm	2	5.33	1338
Fixture Flux		14056lm	3	7.99	595
Efficacy		86lm/W	4	10.65	335
TS996	Imax=259cd/klm	Imax	5	13.32	214

Driver	Colour	3000K	4000K
EL.	○	**1T5737EL**	**1T5738EL**
EL.	●	**1T5741EL**	**1T5742EL**
EL.	◌	**1T5739EL**	**1T5740EL**
DALI	○	**1T5737DA**	**1T5738DA**
DALI	●	**1T5741DA**	**1T5742DA**
DALI	◌	**1T5739DA**	**1T5740DA**

LED / 48W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	54W		1	1.51	3338
Source Flux	7560lm		2	3.02	834
Fixture Flux	4894lm		3	4.52	371
Efficacy	91lm/W		4	6.03	209
TS992	Imax=442cd/klm	Imax	5	7.54	134

Driver	Colour	3000K	4000K
EL.	○	**1T5755EL**	**1T5756EL**
EL.	●	**1T5759EL**	**1T5760EL**
EL.	◌	**1T5757EL**	**1T5758EL**
DALI	○	**1T5755DA**	**1T5756DA**
DALI	●	**1T5759DA**	**1T5760DA**
DALI	◌	**1T5757DA**	**1T5758DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	81W		1	2.28	2.55	8402
Source Flux	10440lm		2	4.56	5.10	2101
Fixture Flux	8216lm		3	6.84	7.64	934
Efficacy	101lm/W		4	9.12	10.19	525
TS993	Imax=1001cd/klm	Imax	5	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	○	**1T5767EL**	**1T5768EL**
EL.	●	**1T5771EL**	**1T5772EL**
EL.	◌	**1T5769EL**	**1T5770EL**
DALI	○	**1T5767DA**	**1T5768DA**
DALI	●	**1T5771DA**	**1T5772DA**
DALI	◌	**1T5769DA**	**1T5770DA**

LED / 144W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	163W		1	2.28	2.55	16611
Source Flux	20640lm		2	4.56	5.10	4153
Fixture Flux	16244lm		3	6.84	7.64	1846
Efficacy	100lm/W		4	9.12	10.19	1038
TS997	Imax=1001cd/klm	Imax	5	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	○	**1T5773EL**	**1T5774EL**
EL.	●	**1T5777EL**	**1T5778EL**
EL.	◌	**1T5775EL**	**1T5776EL**
DALI	○	**1T5773DA**	**1T5774DA**
DALI	●	**1T5777DA**	**1T5778DA**
DALI	◌	**1T5775DA**	**1T5776DA**

LED / 120W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	136W		1	2.66	2579
Source Flux	17400lm		2	5.33	645
Fixture Flux	11818lm		3	7.99	287
Efficacy	87lm/W		4	10.65	161
TS994	Imax=148cd/klm	Imax	5	13.32	103

Driver	Colour	3000K	4000K
EL.	○	**1T5743EL**	**1T5744EL**
EL.	●	**1T5747EL**	**1T5748EL**
EL.	◌	**1T5745EL**	**1T5746EL**
DALI	○	**1T5743DA**	**1T5744DA**
DALI	●	**1T5747DA**	**1T5748DA**
DALI	◌	**1T5745DA**	**1T5746DA**

LED / 192W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	218W		1	2.66	5183
Source Flux	27560lm		2	5.33	1296
Fixture Flux	18736lm		3	7.99	576
Efficacy	86lm/W		4	10.65	324
TS998	Imax=188cd/klm	Imax	5	13.32	207

Driver	Colour	3000K	4000K
EL.	○	**1T5749EL**	**1T5750EL**
EL.	●	**1T5753EL**	**1T5754EL**
EL.	◌	**1T5751EL**	**1T5752EL**
DALI	○	**1T5749DA**	**1T5750DA**
DALI	●	**1T5753DA**	**1T5754DA**
DALI	◌	**1T5751DA**	**1T5752DA**

LED / 80W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	91W		1	1.51	3181
Source Flux	12600lm		2	3.02	795
Fixture Flux	8320lm		3	4.52	353
Efficacy	91lm/W		4	6.03	199
TS995	Imax=252cd/klm	Imax	5	7.54	127

Driver	Colour	3000K	4000K
EL.	○	**1T5761EL**	**1T5762EL**
EL.	●	**1T5765EL**	**1T5766EL**
EL.	◌	**1T5763EL**	**1T5764EL**
DALI	○	**1T5761DA**	**1T5762DA**
DALI	●	**1T5765DA**	**1T5766DA**
DALI	◌	**1T5763DA**	**1T5764DA**

LOGICO

System Ceiling/ Suspension - continuous light module L connector



LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	27W		1	2.66	903
Source Flux	3480lm		2	5.33	226
Fixture Flux	2370lm		3	7.99	100
Efficacy	88lm/W		4	10.65	56
TS991	Imax=259cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5976EL**	**1T5977EL**
EL.	●	**1T5980EL**	**1T5981EL**
EL.	◍	**1T5984EL**	**1T5985EL**
DALI	○	**1T5976DA**	**1T5977DA**
DALI	●	**1T5980DA**	**1T5981DA**
DALI	◍	**1T5984DA**	**1T5985DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	54W		1	2.66	1785
Source Flux	6880lm		2	5.33	446
Fixture Flux	4685lm		3	7.99	198
Efficacy	87lm/W		4	10.65	112
TS996	Imax=259cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5978EL**	**1T5979EL**
EL.	●	**1T5982EL**	**1T5983EL**
EL.	◍	**1T5986EL**	**1T5987EL**
DALI	○	**1T5978DA**	**1T5979DA**
DALI	●	**1T5982DA**	**1T5983DA**
DALI	◍	**1T5986DA**	**1T5987DA**

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	18W		1	1.51	1113
Source Flux	2520lm		2	3.02	278
Fixture Flux	1631lm		3	4.52	124
Efficacy	91lm/W		4	6.03	70
TS992	Imax=442cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T6855EL**	**1T6856EL**
EL.	●	**1T6857EL**	**1T6858EL**
EL.	◍	**1T6859EL**	**1T6860EL**
DALI	○	**1T6855DA**	**1T6856DA**
DALI	●	**1T6857DA**	**1T6858DA**
DALI	◍	**1T6859DA**	**1T6860DA**

LED / 36W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	40W		1	2.66	774
Source Flux	5220lm		2	5.33	193
Fixture Flux	3545lm		3	7.99	86
Efficacy	89lm/W		4	10.65	48
TS994	Imax=148cd/klm	Imax	774cd	5	13.32	31

Driver	Colour	3000K	4000K
EL.	○	**1T6891EL**	**1T6892EL**
EL.	●	**1T6893EL**	**1T6894EL**
EL.	◍	**1T6895EL**	**1T6896EL**
DALI	○	**1T6891DA**	**1T6892DA**
DALI	●	**1T6893DA**	**1T6894DA**
DALI	◍	**1T6895DA**	**1T6896DA**

LED / 24W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	27W		1	1.51	954
Source Flux	3780lm		2	3.02	239
Fixture Flux	2496lm		3	4.52	106
Efficacy	92lm/W		4	6.03	60
TS995	Imax=252cd/klm	Imax	954cd	5	7.54	38

Driver	Colour	3000K	4000K
EL.	○	**1T6873EL**	**1T6874EL**
EL.	●	**1T6875EL**	**1T6876EL**
EL.	◍	**1T6877EL**	**1T6878EL**
DALI	○	**1T6873DA**	**1T6874DA**
DALI	●	**1T6875DA**	**1T6876DA**
DALI	◍	**1T6877DA**	**1T6878DA**

System Ceiling/ Suspension - continuous light module T connector



LED / 36W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	40W	1	2.66	1354
Source Flux	5220lm	2	5.33	338
Fixture Flux	3555lm	3	7.99	150
Efficacy	89lm/W	4	10.65	85
Imax	1354cd	5	13.32	54

TS991 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T5988EL**	**1T5989EL**
EL.	●	**1T5992EL**	**1T5993EL**
EL.	◍	**1T5996EL**	**1T5997EL**
DALI	○	**1T5988DA**	**1T5989DA**
DALI	●	**1T5992DA**	**1T5993DA**
DALI	◍	**1T5996DA**	**1T5997DA**

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2677
Source Flux	10320lm	2	5.33	669
Fixture Flux	7028lm	3	7.99	297
Efficacy	87lm/W	4	10.65	167
Imax	2677cd	5	13.32	107

TS996 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T5990EL**	**1T5991EL**
EL.	●	**1T5994EL**	**1T5995EL**
EL.	◍	**1T5998EL**	**1T5999EL**
DALI	○	**1T5990DA**	**1T5991DA**
DALI	●	**1T5994DA**	**1T5995DA**
DALI	◍	**1T5998DA**	**1T5999DA**

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
Imax	1669cd	5	7.54	67

TS992 Imax=442cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6861EL**	**1T6862EL**
EL.	●	**1T6863EL**	**1T6864EL**
EL.	◍	**1T6865EL**	**1T6866EL**
DALI	○	**1T6861DA**	**1T6862DA**
DALI	●	**1T6863DA**	**1T6864DA**
DALI	◍	**1T6865DA**	**1T6866DA**

LED / 54W / UP-DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	60W	1	2.66	1161
Source Flux	7830lm	2	5.33	290
Fixture Flux	5318lm	3	7.99	129
Efficacy	89lm/W	4	10.65	73
Imax	1161cd	5	13.32	46

TS994 Imax=148cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6897EL**	**1T6898EL**
EL.	●	**1T6899EL**	**1T6900EL**
EL.	◍	**1T6901EL**	**1T6902EL**
DALI	○	**1T6897DA**	**1T6898DA**
DALI	●	**1T6899DA**	**1T6900DA**
DALI	◍	**1T6901DA**	**1T6902DA**

LED / 36W / UP-DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	40W	1	1.51	1431
Source Flux	5670lm	2	3.02	358
Fixture Flux	3744lm	3	4.52	159
Efficacy	94lm/W	4	6.03	89
Imax	1431cd	5	7.54	57

TS995 Imax=252cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6879EL**	**1T6880EL**
EL.	●	**1T6881EL**	**1T6882EL**
EL.	◍	**1T6883EL**	**1T6884EL**
DALI	○	**1T6879DA**	**1T6880DA**
DALI	●	**1T6881DA**	**1T6882DA**
DALI	◍	**1T6883DA**	**1T6884DA**

LOGICO

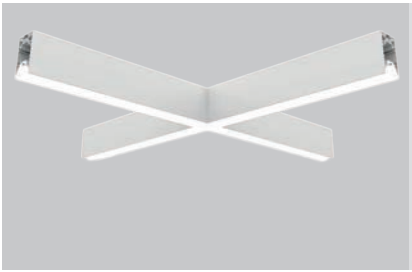

System Ceiling/ Suspension - continuous light module X connector



LED / 48W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	54W	1	2.66	1805
Source Flux	6960lm	2	5.33	451
Fixture Flux	4740lm	3	7.99	201
Efficacy	88lm/W	4	10.65	113
Imax	1805cd	5	13.32	72

TS991 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6000EL**	**1T6001EL**
EL.	●	**1T6004EL**	**1T6005EL**
EL.	◍	**1T6008EL**	**1T6009EL**
DALI	○	**1T6000DA**	**1T6001DA**
DALI	●	**1T6004DA**	**1T6005DA**
DALI	◍	**1T6008DA**	**1T6009DA**

LED / 96W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	108W	1	2.66	3569
Source Flux	13760lm	2	5.33	892
Fixture Flux	9371lm	3	7.99	397
Efficacy	87lm/W	4	10.65	223
Imax	3569cd	5	13.32	143

TS996 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6002EL**	**1T6003EL**
EL.	●	**1T6006EL**	**1T6007EL**
EL.	◍	**1T6010EL**	**1T6011EL**
DALI	○	**1T6002DA**	**1T6003DA**
DALI	●	**1T6006DA**	**1T6007DA**
DALI	◍	**1T6010DA**	**1T6011DA**

LED / 36W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	40W	1	1.51	2225
Source Flux	5040lm	2	3.02	556
Fixture Flux	3263lm	3	4.52	247
Efficacy	82lm/W	4	6.03	139
Imax	2225cd	5	7.54	89

TS992 Imax=442cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6867EL**	**1T6868EL**
EL.	●	**1T6869EL**	**1T6870EL**
EL.	◍	**1T6871EL**	**1T6872EL**
DALI	○	**1T6867DA**	**1T6868DA**
DALI	●	**1T6869DA**	**1T6870DA**
DALI	◍	**1T6871DA**	**1T6872DA**

LED / 72W / UP-DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	1547
Source Flux	10440lm	2	5.33	387
Fixture Flux	7091lm	3	7.99	172
Efficacy	88lm/W	4	10.65	97
Imax	1547cd	5	13.32	62

TS994 Imax=148cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6903EL**	**1T6904EL**
EL.	●	**1T6905EL**	**1T6906EL**
EL.	◍	**1T6907EL**	**1T6908EL**
DALI	○	**1T6903DA**	**1T6904DA**
DALI	●	**1T6905DA**	**1T6906DA**
DALI	◍	**1T6907DA**	**1T6908DA**

LED / 48W / UP-DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	54W	1	1.51	1908
Source Flux	7560lm	2	3.02	477
Fixture Flux	4992lm	3	4.52	212
Efficacy	92lm/W	4	6.03	119
Imax	1908cd	5	7.54	76

TS995 Imax=252cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6885EL**	**1T6886EL**
EL.	●	**1T6887EL**	**1T6888EL**
EL.	◍	**1T6889EL**	**1T6890EL**
DALI	○	**1T6885DA**	**1T6886DA**
DALI	●	**1T6887DA**	**1T6888DA**
DALI	◍	**1T6889DA**	**1T6890DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps



Colour	Code
○	**1T5937**
●	**1T5938**
◌	**1T5939**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Mounting System



Colour	Code
○	**1T5912**
●	**1T5913**
◌	**1T5914**

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
○	**1T6919**
●	**1T6920**
◌	**1T6921**

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length: 1 for the 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version and 3 for the 3364 / 3377mm version.

Suspension

L	Colour	Code
2000	○	**1T5899**
2000	●	**1T5900**
2000	◌	**1T5901**
4000	○	**1T5902**
4000	●	**1T5903**
4000	◌	**1T5904**

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Power Supply Kit



L	Driver	Colour	Code
4000	EL.	○	**1T5905EL**
4000	EL.	●	**1T5906EL**
4000	EL.	◌	**1T5907EL**
4000	DALI	○	**1T5905DA**
4000	DALI	●	**1T5906DA**
4000	DALI	◌	**1T5907DA**

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.

Accessories

Screen



Code
1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 2 for the 562mm version, 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

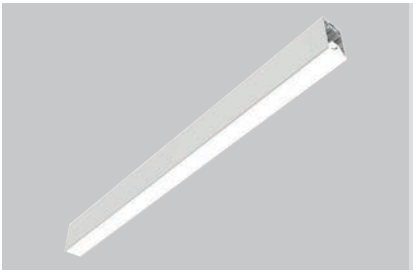

System
Trimless Recessed light module
L. 562mm



LED / 12W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	14W	1	2.66	451
Source Flux	1740lm	2	5.33	113
Fixture Flux	1185lm	3	7.99	50
Efficacy	85lm/W	4	10.65	28
Imax	451cd	5	13.32	18

TS991 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6019EL**	**1T6020EL**
EL.	●	**1T6023EL**	**1T6024EL**
DALI	○	**1T6019DA**	**1T6020DA**
DALI	●	**1T6023DA**	**1T6024DA**

LED / 24W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	27W	1	2.66	892
Source Flux	3440lm	2	5.33	223
Fixture Flux	2343lm	3	7.99	99
Efficacy	87lm/W	4	10.65	56
Imax	892cd	5	13.32	36

TS996 Imax=259cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6021EL**	**1T6022EL**
EL.	●	**1T6025EL**	**1T6026EL**
DALI	○	**1T6021DA**	**1T6022DA**
DALI	●	**1T6025DA**	**1T6026DA**

LED / 8W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	9W	1	1.51	556
Source Flux	1260lm	2	3.02	139
Fixture Flux	816lm	3	4.52	62
Efficacy	91lm/W	4	6.03	35
Imax	556cd	5	7.54	22

TS992 Imax=442cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6813EL**	**1T6814EL**
EL.	●	**1T6815EL**	**1T6816EL**
DALI	○	**1T6813DA**	**1T6814DA**
DALI	●	**1T6815DA**	**1T6816DA**

LED / 12W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	14W	1	2.28	2.55	1400
Source Flux	1740lm	2	4.56	5.10	350
Fixture Flux	1369lm	3	6.84	7.64	156
Efficacy	98lm/W	4	9.12	10.19	88
Imax	1743cd	5	11.40	12.74	56

TS993 Imax=1001cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6817EL**	**1T6818EL**
EL.	●	**1T6819EL**	**1T6820EL**
DALI	○	**1T6817DA**	**1T6818DA**
DALI	●	**1T6819DA**	**1T6820DA**

LED / 24W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55	2768
Source Flux	3440lm	2	4.56	5.10	692
Fixture Flux	2707lm	3	6.84	7.64	308
Efficacy	100lm/W	4	9.12	10.19	173
Imax	3445cd	5	11.40	12.74	111

TS997 Imax=1001cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T6821EL**	**1T6822EL**
EL.	●	**1T6823EL**	**1T6824EL**
DALI	○	**1T6821DA**	**1T6822DA**
DALI	●	**1T6823DA**	**1T6824DA**

LOGICO

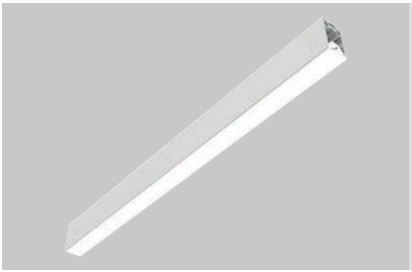

System
Trimless Recessed light module
L. 1122mm



LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	27W	1		2.66	903
Source Flux	3480lm	2		5.33	226
Fixture Flux	2370lm	3		7.99	100
Efficacy	88lm/W	4		10.65	56
TS991 Imax=259cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5839EL**	**1T5840EL**
EL.	●	**1T5841EL**	**1T5842EL**
DALI	○	**1T5839DA**	**1T5840DA**
DALI	●	**1T5841DA**	**1T5842DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	54W	1		2.66	1785
Source Flux	6880lm	2		5.33	446
Fixture Flux	4685lm	3		7.99	198
Efficacy	87lm/W	4		10.65	112
TS996 Imax=259cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5843EL**	**1T5844EL**
EL.	●	**1T5845EL**	**1T5846EL**
DALI	○	**1T5843DA**	**1T5844DA**
DALI	●	**1T5845DA**	**1T5846DA**

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	18W	1		1.51	1113
Source Flux	2520lm	2		3.02	278
Fixture Flux	1631lm	3		4.52	124
Efficacy	91lm/W	4		6.03	70
TS992 Imax=442cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5847EL**	**1T5848EL**
EL.	●	**1T5849EL**	**1T5850EL**
DALI	○	**1T5847DA**	**1T5848DA**
DALI	●	**1T5849DA**	**1T5850DA**

LED / 24W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	27W	1		2.28	2.55	2801
Source Flux	3480lm	2		4.56	5.10	700
Fixture Flux	2739lm	3		6.84	7.64	311
Efficacy	101lm/W	4		9.12	10.19	175
TS993 Imax=1001cd/klm	Imax	3485cd	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	○	**1T5851EL**	**1T5852EL**
EL.	●	**1T5853EL**	**1T5854EL**
DALI	○	**1T5851DA**	**1T5852DA**
DALI	●	**1T5853DA**	**1T5854DA**

LED / 48W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	54W	1		2.28	2.55	5537
Source Flux	6880lm	2		4.56	5.10	1384
Fixture Flux	5415lm	3		6.84	7.64	615
Efficacy	100lm/W	4		9.12	10.19	346
TS997 Imax=1001cd/klm	Imax	6890cd	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	○	**1T5855EL**	**1T5856EL**
EL.	●	**1T5857EL**	**1T5858EL**
DALI	○	**1T5855DA**	**1T5856DA**
DALI	●	**1T5857DA**	**1T5858DA**

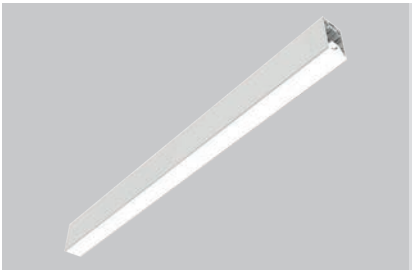

System
Trimless Recessed light module
L. 1682mm



LED / 36W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	40W	1	2.66	1354
Source Flux	5220lm	2	5.33	338
Fixture Flux	3555lm	3	7.99	150
Efficacy	89lm/W	4	10.65	85
TS991 Imax=259cd/klm	Imax 1354cd	5	13.32	54

Driver	Colour	3000K	4000K
EL.	○	**1T5859EL**	**1T5860EL**
EL.	●	**1T5861EL**	**1T5862EL**
DALI	○	**1T5859DA**	**1T5860DA**
DALI	●	**1T5861DA**	**1T5862DA**

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2677
Source Flux	10320lm	2	5.33	669
Fixture Flux	7028lm	3	7.99	297
Efficacy	87lm/W	4	10.65	167
TS996 Imax=259cd/klm	Imax 2677cd	5	13.32	107

Driver	Colour	3000K	4000K
EL.	○	**1T5863EL**	**1T5864EL**
EL.	●	**1T5865EL**	**1T5866EL**
DALI	○	**1T5863DA**	**1T5864DA**
DALI	●	**1T5865DA**	**1T5866DA**

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
TS992 Imax=442cd/klm	Imax 1669cd	5	7.54	67

Driver	Colour	3000K	4000K
EL.	○	**1T5867EL**	**1T5868EL**
EL.	●	**1T5869EL**	**1T5870EL**
DALI	○	**1T5867DA**	**1T5868DA**
DALI	●	**1T5869DA**	**1T5870DA**

LED / 36W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	40W	1	2.28	2.55	4201
Source Flux	5220lm	2	4.56	5.10	1050
Fixture Flux	4108lm	3	6.84	7.64	467
Efficacy	103lm/W	4	9.12	10.19	263
TS993 Imax=1001cd/klm	Imax 5228cd	5	11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	○	**1T5871EL**	**1T5872EL**
EL.	●	**1T5873EL**	**1T5874EL**
DALI	○	**1T5871DA**	**1T5872DA**
DALI	●	**1T5873DA**	**1T5874DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8305
Source Flux	10320lm	2	4.56	5.10	2076
Fixture Flux	8122lm	3	6.84	7.64	923
Efficacy	100lm/W	4	9.12	10.19	519
TS997 Imax=1001cd/klm	Imax 10335cd	5	11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	○	**1T5875EL**	**1T5876EL**
EL.	●	**1T5877EL**	**1T5878EL**
DALI	○	**1T5875DA**	**1T5876DA**
DALI	●	**1T5877DA**	**1T5878DA**

LOGICO

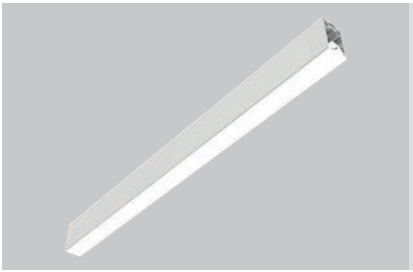

System
Trimless Recessed light module
L. 3364mm

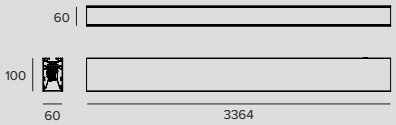

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2708
Source Flux		10440lm	2	5.33	677
Fixture Flux		7110lm	3	7.99	301
Efficacy		88lm/W	4	10.65	169
TS991	Imax=259cd/klm	Imax	5	13.32	108

Driver	Colour	3000K	4000K
EL.	○	**1T5879EL**	**1T5880EL**
EL.	●	**1T5881EL**	**1T5882EL**
DALI	○	**1T5879DA**	**1T5880DA**
DALI	●	**1T5881DA**	**1T5882DA**

LED / 144W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		163W	1	2.66	5354
Source Flux		20640lm	2	5.33	1338
Fixture Flux		14056lm	3	7.99	595
Efficacy		86lm/W	4	10.65	335
TS996	Imax=259cd/klm	Imax	5	13.32	214

Driver	Colour	3000K	4000K
EL.	○	**1T5883EL**	**1T5884EL**
EL.	●	**1T5885EL**	**1T5886EL**
DALI	○	**1T5883DA**	**1T5884DA**
DALI	●	**1T5885DA**	**1T5886DA**

LED / 48W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		54W	1	1.51	3338
Source Flux		7560lm	2	3.02	834
Fixture Flux		4894lm	3	4.52	371
Efficacy		91lm/W	4	6.03	209
TS992	Imax=442cd/klm	Imax	5	7.54	134

Driver	Colour	3000K	4000K
EL.	○	**1T5887EL**	**1T5888EL**
EL.	●	**1T5889EL**	**1T5890EL**
DALI	○	**1T5887DA**	**1T5888DA**
DALI	●	**1T5889DA**	**1T5890DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		81W	1	2.28	2.55	8402
Source Flux		10440lm	2	4.56	5.10	2101
Fixture Flux		8216lm	3	6.84	7.64	934
Efficacy		101lm/W	4	9.12	10.19	525
TS993	Imax=1001cd/klm	Imax	5	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	○	**1T5891EL**	**1T5892EL**
EL.	●	**1T5893EL**	**1T5894EL**
DALI	○	**1T5891DA**	**1T5892DA**
DALI	●	**1T5893DA**	**1T5894DA**

LED / 144W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		163W	1	2.28	2.55	16611
Source Flux		20640lm	2	4.56	5.10	4153
Fixture Flux		16244lm	3	6.84	7.64	1846
Efficacy		100lm/W	4	9.12	10.19	1038
TS997	Imax=1001cd/klm	Imax	5	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	○	**1T5895EL**	**1T5896EL**
EL.	●	**1T5897EL**	**1T5898EL**
DALI	○	**1T5895DA**	**1T5896DA**
DALI	●	**1T5897DA**	**1T5898DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

Insertion Box



Kg	Cutout hole	L	Code
1.25	80x281	281	**1T7369**
1.8	80x562	562	**1T6051**
3.2	80x1122	1122	**1T5915**
3.8	80x1682	1682	**1T5916**

Outer casing for trimless installation.



Kg	Cutout hole	L	Code
1.3	80x291	306	**1T7370**
1.9	80x572	587	**1T6052**
3.2	80x1132	1147	**1T5917**
3.8	80x1692	1707	**1T5921**

Terminal outer casing for trimless installation.

End Caps



Colour	Code
○	**1T5937**
●	**1T5938**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Accessories

Screen



Code
1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 2 for the 562mm version, 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

LOGICO

System Recessed with flange - continuous light module L. 562mm



LED / 12W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	14W	1	2.66	451
Source Flux	1740lm	2	5.33	113
Fixture Flux	1185lm	3	7.99	50
Efficacy	85lm/W	4	10.65	28
TS991 Imax=259cd/klm	Imax 451cd	5	13.32	18

Driver	Colour	3000K	4000K
EL.	◯	**1T6015EL**	**1T6016EL**
DALI	◯	**1T6015DA**	**1T6016DA**

LED / 24W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	27W	1	2.66	892
Source Flux	3440lm	2	5.33	223
Fixture Flux	2343lm	3	7.99	99
Efficacy	87lm/W	4	10.65	56
TS996 Imax=259cd/klm	Imax 892cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	◯	**1T6017EL**	**1T6018EL**
DALI	◯	**1T6017DA**	**1T6018DA**

LED / 8W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	9W	1	1.51	556
Source Flux	1260lm	2	3.02	139
Fixture Flux	816lm	3	4.52	62
Efficacy	91lm/W	4	6.03	35
TS992 Imax=442cd/klm	Imax 556cd	5	7.54	22

Driver	Colour	3000K	4000K
EL.	◯	**1T6807EL**	**1T6808EL**
DALI	◯	**1T6807DA**	**1T6808DA**

LED / 12W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	14W	1	2.28	2.55	1400
Source Flux	1740lm	2	4.56	5.10	350
Fixture Flux	1369lm	3	6.84	7.64	156
Efficacy	98lm/W	4	9.12	10.19	88
TS993 Imax=1001cd/klm	Imax 1743cd	5	11.40	12.74	56

Driver	Colour	3000K	4000K
EL.	◯	**1T6809EL**	**1T6810EL**
DALI	◯	**1T6809DA**	**1T6810DA**

LED / 24W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55	2768
Source Flux	3440lm	2	4.56	5.10	692
Fixture Flux	2707lm	3	6.84	7.64	308
Efficacy	100lm/W	4	9.12	10.19	173
TS997 Imax=1001cd/klm	Imax 3445cd	5	11.40	12.74	111

Driver	Colour	3000K	4000K
EL.	◯	**1T6811EL**	**1T6812EL**
DALI	◯	**1T6811DA**	**1T6812DA**

LOGICO

System Recessed with flange - continuous light module L. 1122mm



LED / 24W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	27W	1	2.66	903	
Source Flux	3480lm	2	5.33	226	
Fixture Flux	2370lm	3	7.99	100	
Efficacy	88lm/W	4	10.65	56	
TS991	Imax=259cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	◯	**1T5461EL**	**1T5462EL**
DALI	◯	**1T5461DA**	**1T5462DA**

LED / 48W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power	54W	1	2.66	1785	
Source Flux	6880lm	2	5.33	446	
Fixture Flux	4685lm	3	7.99	198	
Efficacy	87lm/W	4	10.65	112	
TS996	Imax=259cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	◯	**1T5463EL**	**1T5464EL**
DALI	◯	**1T5463DA**	**1T5464DA**

LED / 16W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power	18W	1	1.51	1113	
Source Flux	2520lm	2	3.02	278	
Fixture Flux	1631lm	3	4.52	124	
Efficacy	91lm/W	4	6.03	70	
TS992	Imax=442cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	◯	**1T5465EL**	**1T5466EL**
DALI	◯	**1T5465DA**	**1T5466DA**

LED / 24W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55	2801	
Source Flux	3480lm	2	4.56	5.10	700	
Fixture Flux	2739lm	3	6.84	7.64	311	
Efficacy	101lm/W	4	9.12	10.19	175	
TS993	Imax=1001cd/klm	Imax	3485cd	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	◯	**1T5467EL**	**1T5468EL**
DALI	◯	**1T5467DA**	**1T5468DA**

LED / 48W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power	54W	1	2.28	2.55	5537	
Source Flux	6880lm	2	4.56	5.10	1384	
Fixture Flux	5415lm	3	6.84	7.64	615	
Efficacy	100lm/W	4	9.12	10.19	346	
TS997	Imax=1001cd/klm	Imax	6890cd	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	◯	**1T5469EL**	**1T5470EL**
DALI	◯	**1T5469DA**	**1T5470DA**

System Recessed with flange - continuous light module L. 1682mm

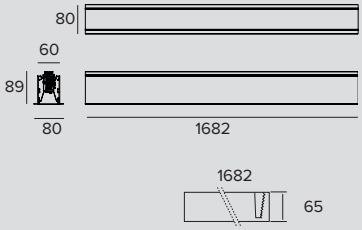

LED / 36W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	40W	1	2.66	1354
Source Flux	5220lm	2	5.33	338
Fixture Flux	3555lm	3	7.99	150
Efficacy	89lm/W	4	10.65	85
TS991 Imax=259cd/klm	Imax 1354cd	5	13.32	54

Driver	Colour	3000K	4000K
EL.	◯	**1T5471EL**	**1T5472EL**
DALI	◯	**1T5471DA**	**1T5472DA**

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2677
Source Flux	10320lm	2	5.33	669
Fixture Flux	7028lm	3	7.99	297
Efficacy	87lm/W	4	10.65	167
TS996 Imax=259cd/klm	Imax 2677cd	5	13.32	107

Driver	Colour	3000K	4000K
EL.	◯	**1T5473EL**	**1T5474EL**
DALI	◯	**1T5473DA**	**1T5474DA**

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
TS992 Imax=442cd/klm	Imax 1669cd	5	7.54	67

Driver	Colour	3000K	4000K
EL.	◯	**1T5475EL**	**1T5476EL**
DALI	◯	**1T5475DA**	**1T5476DA**

LED / 36W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	40W	1	2.28	2.55	4201
Source Flux	5220lm	2	4.56	5.10	1050
Fixture Flux	4108lm	3	6.84	7.64	467
Efficacy	103lm/W	4	9.12	10.19	263
TS993 Imax=1001cd/klm	Imax 5228cd	5	11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	◯	**1T5477EL**	**1T5478EL**
DALI	◯	**1T5477DA**	**1T5478DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8305
Source Flux	10320lm	2	4.56	5.10	2076
Fixture Flux	8122lm	3	6.84	7.64	923
Efficacy	100lm/W	4	9.12	10.19	519
TS997 Imax=1001cd/klm	Imax 10335cd	5	11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	◯	**1T5479EL**	**1T5480EL**
DALI	◯	**1T5479DA**	**1T5480DA**

System Recessed with flange - continuous light module L. 3364mm

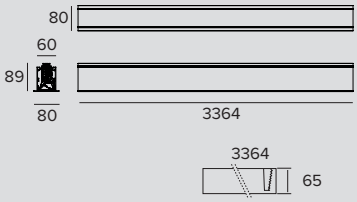

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2708
Source Flux	10440lm	2	5.33	677
Fixture Flux	7110lm	3	7.99	301
Efficacy	88lm/W	4	10.65	169
TS991 Imax=259cd/klm	Imax 2708cd	5	13.32	108

Driver	Colour	3000K	4000K
EL.	◯	**1T5481EL**	**1T5482EL**
DALI	◯	**1T5481DA**	**1T5482DA**

LED / 144W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	163W	1	2.66	5354
Source Flux	20640lm	2	5.33	1338
Fixture Flux	14056lm	3	7.99	595
Efficacy	86lm/W	4	10.65	335
TS996 Imax=259cd/klm	Imax 5354cd	5	13.32	214

Driver	Colour	3000K	4000K
EL.	◯	**1T5483EL**	**1T5484EL**
DALI	◯	**1T5483DA**	**1T5484DA**

LED / 48W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	54W	1	1.51	3338
Source Flux	7560lm	2	3.02	834
Fixture Flux	4894lm	3	4.52	371
Efficacy	91lm/W	4	6.03	209
TS992 Imax=442cd/klm	Imax 3338cd	5	7.54	134

Driver	Colour	3000K	4000K
EL.	◯	**1T5485EL**	**1T5486EL**
DALI	◯	**1T5485DA**	**1T5486DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8402
Source Flux	10440lm	2	4.56	5.10	2101
Fixture Flux	8216lm	3	6.84	7.64	934
Efficacy	101lm/W	4	9.12	10.19	525
TS993 Imax=1001cd/klm	Imax 10455cd	5	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	◯	**1T5487EL**	**1T5488EL**
DALI	◯	**1T5487DA**	**1T5488DA**

LED / 144W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	163W	1	2.28	2.55	16611
Source Flux	20640lm	2	4.56	5.10	4153
Fixture Flux	16244lm	3	6.84	7.64	1846
Efficacy	100lm/W	4	9.12	10.19	1038
TS997 Imax=1001cd/klm	Imax 20670cd	5	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	◯	**1T5489EL**	**1T5490EL**
DALI	◯	**1T5489DA**	**1T5490DA**

System Recessed with flange - continuous light module L connector



LED / 24W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	27W	1	2.66	903
Source Flux	3480lm	2	5.33	226
Fixture Flux	2370lm	3	7.99	100
Efficacy	88lm/W	4	10.65	56
TS991 Imax=259cd/klm	Imax 903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	◯	**1T5940EL**	**1T5941EL**
DALI	◯	**1T5940DA**	**1T5941DA**

LED / 48W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	54W	1	2.66	1785
Source Flux	6880lm	2	5.33	446
Fixture Flux	4685lm	3	7.99	198
Efficacy	87lm/W	4	10.65	112
TS996 Imax=259cd/klm	Imax 1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	◯	**1T5942EL**	**1T5943EL**
DALI	◯	**1T5942DA**	**1T5943DA**

LED / 16W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	18W	1	1.51	1113
Source Flux	2520lm	2	3.02	278
Fixture Flux	1631lm	3	4.52	124
Efficacy	91lm/W	4	6.03	70
TS992 Imax=442cd/klm	Imax 1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	◯	**1T6849EL**	**1T6850EL**
DALI	◯	**1T6849DA**	**1T6850DA**

System Recessed with flange - continuous light module T connector



LED / 36W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	40W	1	2.66	1354
Source Flux	5220lm	2	5.33	338
Fixture Flux	3555lm	3	7.99	150
Efficacy	89lm/W	4	10.65	85
TS991 Imax=259cd/klm	Imax 1354cd	5	13.32	54

Driver	Colour	3000K	4000K
EL.	◯	**1T5944EL**	**1T5945EL**
DALI	◯	**1T5944DA**	**1T5945DA**

LOGICO

LED / 72W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	81W	1	2.66	2677
Source Flux	10320lm	2	5.33	669
Fixture Flux	7028lm	3	7.99	297
Efficacy	87lm/W	4	10.65	167
TS996 Imax=259cd/klm	Imax 2677cd	5	13.32	107

Driver	Colour	3000K	4000K
EL.	◯	**1T5946EL**	**1T5947EL**
DALI	◯	**1T5946DA**	**1T5947DA**

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
TS992 Imax=442cd/klm	Imax 1669cd	5	7.54	67

Driver	Colour	3000K	4000K
EL.	◯	**1T6851EL**	**1T6852EL**
DALI	◯	**1T6851DA**	**1T6852DA**

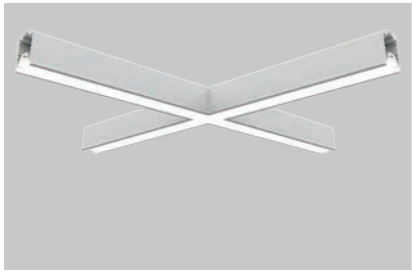

System Recessed with flange - continuous light module X connector



LED / 48W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	54W	1	2.66	1805
Source Flux	6960lm	2	5.33	451
Fixture Flux	4740lm	3	7.99	201
Efficacy	88lm/W	4	10.65	113
TS991 Imax=259cd/klm	Imax 1805cd	5	13.32	72

Driver	Colour	3000K	4000K
EL.	◯	**1T5948EL**	**1T5949EL**
DALI	◯	**1T5948DA**	**1T5949DA**

LED / 96W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	108W	1	2.66	3569
Source Flux	13760lm	2	5.33	892
Fixture Flux	9371lm	3	7.99	397
Efficacy	87lm/W	4	10.65	223
TS996 Imax=259cd/klm	Imax 3569cd	5	13.32	143

Driver	Colour	3000K	4000K
EL.	◯	**1T5950EL**	**1T5951EL**
DALI	◯	**1T5950DA**	**1T5951DA**

LED / 36W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	40W	1	1.51	2225
Source Flux	5040lm	2	3.02	556
Fixture Flux	3263lm	3	4.52	247
Efficacy	82lm/W	4	6.03	139
TS992 Imax=442cd/klm	Imax 2225cd	5	7.54	89

Driver	Colour	3000K	4000K
EL.	◯	**1T6853EL**	**1T6854EL**
DALI	◯	**1T6853DA**	**1T6854DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps



Code
1T5908

End caps for the recessed version with a flange.
White.
2X

Accessories

Screen



Code
1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 2 for the 562mm version, 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

System Ceiling/ Suspension - projector module Label 4



LED / 1x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W	1	0.31	4214	
Source Flux	982lm	2	0.62	1053	
Fixture Flux	622lm	3	0.93	468	
Efficacy	71lm/W	4	1.24	263	
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

Driver	Colour	3000K	4000K
EL.	○	**1T7221EL**	**1T7224EL**
EL.	●	**1T7227EL**	**1T7230EL**
EL.	◍	**1T7233EL**	**1T7236EL**
DALI	○	**1T7221DA**	**1T7224DA**
DALI	●	**1T7227DA**	**1T7230DA**
DALI	◍	**1T7233DA**	**1T7236DA**

LED / 1x8W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power	9W	1	0.48	3199	
Source Flux	1129lm	2	0.95	800	
Fixture Flux	806lm	3	1.43	355	
Efficacy	92lm/W	4	1.91	200	
TS1166	Imax=2834cd/klm	Imax	3199cd	5	2.38	128

Driver	Colour	3000K	4000K
EL.	○	**1T7222EL**	**1T7225EL**
EL.	●	**1T7228EL**	**1T7231EL**
EL.	◍	**1T7234EL**	**1T7237EL**
DALI	○	**1T7222DA**	**1T7225DA**
DALI	●	**1T7228DA**	**1T7231DA**
DALI	◍	**1T7234DA**	**1T7237DA**

LED / 1x8W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
Fixture Power	9W	1	0.76	1831	
Source Flux	1129lm	2	1.52	458	
Fixture Flux	835lm	3	2.28	203	
Efficacy	95lm/W	4	3.04	114	
TS1167	Imax=1622cd/klm	Imax	1831cd	5	3.80	73

Driver	Colour	3000K	4000K
EL.	○	**1T7223EL**	**1T7226EL**
EL.	●	**1T7229EL**	**1T7232EL**
EL.	◍	**1T7235EL**	**1T7238EL**
DALI	○	**1T7223DA**	**1T7226DA**
DALI	●	**1T7229DA**	**1T7232DA**
DALI	◍	**1T7235DA**	**1T7238DA**

System Ceiling/ Suspension - projector module Label 4

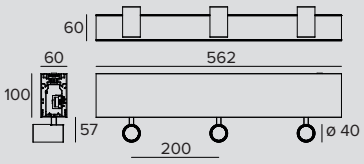

LED / 3x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W	1	0.31	4214	
Source Flux	982lm	2	0.62	1053	
Fixture Flux	622lm	3	0.93	468	
Efficacy	71lm/W	4	1.24	263	
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

Driver	Colour	3000K	4000K
EL.	○	**1T7239EL**	**1T7242EL**
EL.	●	**1T7245EL**	**1T7248EL**
EL.	◍	**1T7251EL**	**1T7254EL**
DALI	○	**1T7239DA**	**1T7242DA**
DALI	●	**1T7245DA**	**1T7248DA**
DALI	◍	**1T7251DA**	**1T7254DA**

LED / 3x8W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
	Fixture Power	9W	1	0.48	3199
	Source Flux	1129lm	2	0.95	800
	Fixture Flux	806lm	3	1.43	355
	Efficacy	92lm/W	4	1.91	200
TS1166	Imax=2834cd/klm	Imax	5	2.38	128

Driver	Colour	3000K	4000K
EL.	○	**1T7240EL**	**1T7243EL**
EL.	●	**1T7246EL**	**1T7249EL**
EL.	◌	**1T7252EL**	**1T7255EL**
DALI	○	**1T7240DA**	**1T7243DA**
DALI	●	**1T7246DA**	**1T7249DA**
DALI	◌	**1T7252DA**	**1T7255DA**

LED / 3x8W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
	Fixture Power	9W	1	0.76	1831
	Source Flux	1129lm	2	1.52	458
	Fixture Flux	835lm	3	2.28	203
	Efficacy	95lm/W	4	3.04	114
TS1167	Imax=1622cd/klm	Imax	5	3.80	73

Driver	Colour	3000K	4000K
EL.	○	**1T7241EL**	**1T7244EL**
EL.	●	**1T7247EL**	**1T7250EL**
EL.	◌	**1T7253EL**	**1T7256EL**
DALI	○	**1T7241DA**	**1T7244DA**
DALI	●	**1T7247DA**	**1T7250DA**
DALI	◌	**1T7253DA**	**1T7256DA**

System Ceiling/ Suspension - projector module Label 6



LED / 1x14W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
	Fixture Power	15W	1	0.28	10741
	Source Flux	1793lm	2	0.55	2685
	Fixture Flux	1316lm	3	0.83	1193
	Efficacy	91lm/W	4	1.11	671
TS1168	Imax=5990cd/klm	Imax	5	1.39	430

Driver	Colour	3000K	4000K
EL.	○	**1T7305EL**	**1T7308EL**
EL.	●	**1T7311EL**	**1T7314EL**
EL.	◌	**1T7317EL**	**1T7320EL**
DALI	○	**1T7305DA**	**1T7308DA**
DALI	●	**1T7311DA**	**1T7314DA**
DALI	◌	**1T7317DA**	**1T7320DA**

LED / 1x14W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
	Fixture Power	15W	1	0.56	4410
	Source Flux	1793lm	2	1.12	1102
	Fixture Flux	1386lm	3	1.67	490
	Efficacy	96lm/W	4	2.23	276
TS813	Imax=2460cd/klm	Imax	5	2.79	176

Driver	Colour	3000K	4000K
EL.	○	**1T7306EL**	**1T7309EL**
EL.	●	**1T7312EL**	**1T7315EL**
EL.	◌	**1T7318EL**	**1T7321EL**
DALI	○	**1T7306DA**	**1T7309DA**
DALI	●	**1T7312DA**	**1T7315DA**
DALI	◌	**1T7318DA**	**1T7321DA**

LED / 1x14W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
	Fixture Power	15W	1	0.88	2457
	Source Flux	1793lm	2	1.77	614
	Fixture Flux	1373lm	3	2.65	273
	Efficacy	95lm/W	4	3.53	154
TS1170	Imax=1378cd/klm	Imax	5	4.41	98

Driver	Colour	3000K	4000K
EL.	○	**1T7307EL**	**1T7310EL**
EL.	●	**1T7313EL**	**1T7316EL**
EL.	◌	**1T7319EL**	**1T7322EL**
DALI	○	**1T7307DA**	**1T7310DA**
DALI	●	**1T7313DA**	**1T7316DA**
DALI	◌	**1T7319DA**	**1T7322DA**

System Ceiling/ Suspension - projector module Label 6



LED / 3x14W / SP



		3000K	H(m)	D(m)	Emax(lx)
		Ra90		16°	
	Fixture Power	15W	1	0.28	10741
	Source Flux	1793lm	2	0.55	2685
	Fixture Flux	1316lm	3	0.83	1193
	Efficacy	91lm/W	4	1.11	671
TS1168	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Driver	Colour	3000K	4000K
EL.	○	**1T7323EL**	**1T7326EL**
EL.	●	**1T7329EL**	**1T7332EL**
EL.	◌	**1T7335EL**	**1T7338EL**
DALI	○	**1T7323DA**	**1T7326DA**
DALI	●	**1T7329DA**	**1T7332DA**
DALI	◌	**1T7335DA**	**1T7338DA**

LED / 3x14W / FL



		3000K	H(m)	D(m)	Emax(lx)
		Ra90		31°	
	Fixture Power	15W	1	0.56	4410
	Source Flux	1793lm	2	1.12	1102
	Fixture Flux	1386lm	3	1.67	490
	Efficacy	96lm/W	4	2.23	276
TS813	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Driver	Colour	3000K	4000K
EL.	○	**1T7324EL**	**1T7327EL**
EL.	●	**1T7330EL**	**1T7333EL**
EL.	◌	**1T7336EL**	**1T7339EL**
DALI	○	**1T7324DA**	**1T7327DA**
DALI	●	**1T7330DA**	**1T7333DA**
DALI	◌	**1T7336DA**	**1T7339DA**

LED / 3x14W / MWFL



		3000K	H(m)	D(m)	Emax(lx)
		Ra90		48°	
	Fixture Power	15W	1	0.88	2457
	Source Flux	1793lm	2	1.77	614
	Fixture Flux	1373lm	3	2.65	273
	Efficacy	95lm/W	4	3.53	154
TS1170	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Driver	Colour	3000K	4000K
EL.	○	**1T7325EL**	**1T7328EL**
EL.	●	**1T7331EL**	**1T7334EL**
EL.	◌	**1T7337EL**	**1T7340EL**
DALI	○	**1T7325DA**	**1T7328DA**
DALI	●	**1T7331DA**	**1T7334DA**
DALI	◌	**1T7337DA**	**1T7340DA**

Related codes

End Caps

Colour	Code
○	**1T5937**
●	**1T5938**
◌	**1T5939**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Mounting System



Colour	Code
○	**1T5912**
●	**1T5913**
◌	**1T5914**

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
○	**1T6919**
●	**1T6920**
◌	**1T6921**

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length: 1 for the 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version and 3 for the 3364 / 3377mm version.

Suspension

L	Colour	Code
2000	○	**1T5899**
2000	●	**1T5900**
2000	◌	**1T5901**
4000	○	**1T5902**
4000	●	**1T5903**
4000	◌	**1T5904**

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Power Supply Kit



L	Driver	Colour	Code
4000	EL.	○	**1T5905EL**
4000	EL.	●	**1T5906EL**
4000	EL.	◌	**1T5907EL**
4000	DALI	○	**1T5905DA**
4000	DALI	●	**1T5906DA**
4000	DALI	◌	**1T5907DA**

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.

LOGICO

Accessories

Electrical Connector

	Code
	1T5911

Linear electrical connector.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

System Trimless Recessed - projector module Label 4



LED / 1x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W		1	0.31	4214
Source Flux	982lm		2	0.62	1053
Fixture Flux	622lm		3	0.93	468
Efficacy	71lm/W		4	1.24	263
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

	Driver	Colour	3000K	4000K
	EL.	○	**1T7197EL**	**1T7200EL**
	EL.	●	**1T7203EL**	**1T7206EL**
	DALI	○	**1T7197DA**	**1T7200DA**
	DALI	●	**1T7203DA**	**1T7206DA**

LED / 1x8W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power	9W		1	0.48	3199
Source Flux	1129lm		2	0.95	800
Fixture Flux	806lm		3	1.43	355
Efficacy	92lm/W		4	1.91	200
TS1166	Imax=2834cd/klm	Imax	3199cd	5	2.38	128

	Driver	Colour	3000K	4000K
	EL.	○	**1T7198EL**	**1T7201EL**
	EL.	●	**1T7204EL**	**1T7207EL**
	DALI	○	**1T7198DA**	**1T7201DA**
	DALI	●	**1T7204DA**	**1T7207DA**

LED / 1x8W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
Fixture Power	9W		1	0.76	1831
Source Flux	1129lm		2	1.52	458
Fixture Flux	835lm		3	2.28	203
Efficacy	95lm/W		4	3.04	114
TS1167	Imax=1622cd/klm	Imax	1831cd	5	3.80	73

	Driver	Colour	3000K	4000K
	EL.	○	**1T7199EL**	**1T7202EL**
	EL.	●	**1T7205EL**	**1T7208EL**
	DALI	○	**1T7199DA**	**1T7202DA**
	DALI	●	**1T7205DA**	**1T7208DA**

System Trimless Recessed - projector module Label 4



LED / 3x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
Fixture Power	9W		1	0.31	4214
Source Flux	982lm		2	0.62	1053
Fixture Flux	622lm		3	0.93	468
Efficacy	71lm/W		4	1.24	263
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

	Driver	Colour	3000K	4000K
	EL.	○	**1T7209EL**	**1T7212EL**
	EL.	●	**1T7215EL**	**1T7218EL**
	DALI	○	**1T7209DA**	**1T7212DA**
	DALI	●	**1T7215DA**	**1T7218DA**

LOGICO

LED / 3x8W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			27°	
Fixture Power	9W	1	0.48	3199
Source Flux	1129lm	2	0.95	800
Fixture Flux	806lm	3	1.43	355
Efficacy	92lm/W	4	1.91	200
Imax	3199cd	5	2.38	128

TS1166 Imax=2834cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T7210EL**	**1T7213EL**
EL.	●	**1T7216EL**	**1T7219EL**
DALI	○	**1T7210DA**	**1T7213DA**
DALI	●	**1T7216DA**	**1T7219DA**

LED / 3x8W / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			42°	
Fixture Power	9W	1	0.76	1831
Source Flux	1129lm	2	1.52	458
Fixture Flux	835lm	3	2.28	203
Efficacy	95lm/W	4	3.04	114
Imax	1831cd	5	3.80	73

TS1167 Imax=1622cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T7211EL**	**1T7214EL**
EL.	●	**1T7217EL**	**1T7220EL**
DALI	○	**1T7211DA**	**1T7214DA**
DALI	●	**1T7217DA**	**1T7220DA**

System Trimless Recessed - projector module Label 6



LED / 1x14W / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			16°	
Fixture Power	15W	1	0.28	10741
Source Flux	1793lm	2	0.55	2685
Fixture Flux	1316lm	3	0.83	1193
Efficacy	91lm/W	4	1.11	671
Imax	10741cd	5	1.39	430

TS1168 Imax=5990cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T7281EL**	**1T7284EL**
EL.	●	**1T7287EL**	**1T7290EL**
DALI	○	**1T7281DA**	**1T7284DA**
DALI	●	**1T7287DA**	**1T7290DA**

LED / 1x14W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra90			31°	
Fixture Power	15W	1	0.56	4410
Source Flux	1793lm	2	1.12	1102
Fixture Flux	1386lm	3	1.67	490
Efficacy	96lm/W	4	2.23	276
Imax	4410cd	5	2.79	176

TS813 Imax=2460cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T7282EL**	**1T7285EL**
EL.	●	**1T7288EL**	**1T7291EL**
DALI	○	**1T7282DA**	**1T7285DA**
DALI	●	**1T7288DA**	**1T7291DA**

LED / 1x14W / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra90			48°	
Fixture Power	15W	1	0.88	2457
Source Flux	1793lm	2	1.77	614
Fixture Flux	1373lm	3	2.65	273
Efficacy	95lm/W	4	3.53	154
Imax	2471cd	5	4.41	98

TS1170 Imax=1378cd/klm

Driver	Colour	3000K	4000K
EL.	○	**1T7283EL**	**1T7286EL**
EL.	●	**1T7289EL**	**1T7292EL**
DALI	○	**1T7283DA**	**1T7286DA**
DALI	●	**1T7289DA**	**1T7292DA**

System Trimless Recessed - projector module Label 6



LED / 3x14W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
	Fixture Power	15W	1	0.28	10741
	Source Flux	1793lm	2	0.55	2685
	Fixture Flux	1316lm	3	0.83	1193
	Efficacy	91lm/W	4	1.11	671
TS1168	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Driver	Colour	3000K	4000K
EL.	○	**1T7293EL**	**1T7296EL**
EL.	●	**1T7299EL**	**1T7302EL**
DALI	○	**1T7293DA**	**1T7296DA**
DALI	●	**1T7299DA**	**1T7302DA**

LED / 3x14W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
	Fixture Power	15W	1	0.56	4410
	Source Flux	1793lm	2	1.12	1102
	Fixture Flux	1386lm	3	1.67	490
	Efficacy	96lm/W	4	2.23	276
TS813	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Driver	Colour	3000K	4000K
EL.	○	**1T7294EL**	**1T7297EL**
EL.	●	**1T7300EL**	**1T7303EL**
DALI	○	**1T7294DA**	**1T7297DA**
DALI	●	**1T7300DA**	**1T7303DA**

LED / 3x14W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
	Fixture Power	15W	1	0.88	2457
	Source Flux	1793lm	2	1.77	614
	Fixture Flux	1373lm	3	2.65	273
	Efficacy	95lm/W	4	3.53	154
TS1170	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Driver	Colour	3000K	4000K
EL.	○	**1T7295EL**	**1T7298EL**
EL.	●	**1T7301EL**	**1T7304EL**
DALI	○	**1T7295DA**	**1T7298DA**
DALI	●	**1T7301DA**	**1T7304DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps

Colour	Code
○	**1T5937**
●	**1T5938**
◌	**1T5939**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Insertion Box



Kg	Cutout hole	L	Code
1.25	80x281	281	**1T7369**
1.8	80x562	562	**1T6051**
3.2	80x1122	1122	**1T5915**
3.8	80x1682	1682	**1T5916**

Outer casing for trimless installation.



Kg	Cutout hole	L	Code
1.3	80x291	306	**1T7370**
1.9	80x572	587	**1T6052**
3.2	80x1132	1147	**1T5917**
3.8	80x1692	1707	**1T5921**

Terminal outer casing for trimless installation.

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

System Recessed with flange - projector module Label 4



LED / 1x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
	Fixture Power	9W	1	0.31	4214
	Source Flux	982lm	2	0.62	1053
	Fixture Flux	622lm	3	0.93	468
	Efficacy	71lm/W	4	1.24	263
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7173EL**	**1T7176EL**
	DALI	◯	**1T7173DA**	**1T7176DA**

LED / 1x8W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
	Fixture Power	9W	1	0.48	3199
	Source Flux	1129lm	2	0.95	800
	Fixture Flux	806lm	3	1.43	355
	Efficacy	92lm/W	4	1.91	200
TS1166	Imax=2834cd/klm	Imax	3199cd	5	2.38	128

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7174EL**	**1T7177EL**
	DALI	◯	**1T7174DA**	**1T7177DA**

LED / 1x8W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
	Fixture Power	9W	1	0.76	1831
	Source Flux	1129lm	2	1.52	458
	Fixture Flux	835lm	3	2.28	203
	Efficacy	95lm/W	4	3.04	114
TS1167	Imax=1622cd/klm	Imax	1831cd	5	3.80	73

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7175EL**	**1T7178EL**
	DALI	◯	**1T7175DA**	**1T7178DA**

System Recessed with flange - projector module Label 4

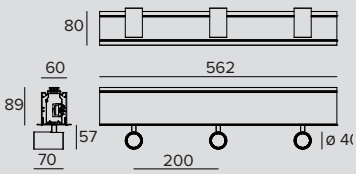

LED / 3x8W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			18°	
	Fixture Power	9W	1	0.31	4214
	Source Flux	982lm	2	0.62	1053
	Fixture Flux	622lm	3	0.93	468
	Efficacy	71lm/W	4	1.24	263
TS1165	Imax=4291cd/klm	Imax	4214cd	5	1.55	169

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7185EL**	**1T7188EL**
	DALI	◯	**1T7185DA**	**1T7188DA**

LOGICO

LED / 3x8W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			27°	
Fixture Power	9W		1	0.48	3199
Source Flux	1129lm		2	0.95	800
Fixture Flux	806lm		3	1.43	355
Efficacy	92lm/W		4	1.91	200
TS1166	Imax=2834cd/klm	Imax	3199cd	5	2.38	128

Driver	Colour	3000K	4000K
EL.	◯	**1T7186EL**	**1T7189EL**
DALI	◯	**1T7186DA**	**1T7189DA**

LED / 3x8W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			42°	
Fixture Power	9W		1	0.76	1831
Source Flux	1129lm		2	1.52	458
Fixture Flux	835lm		3	2.28	203
Efficacy	95lm/W		4	3.04	114
TS1167	Imax=1622cd/klm	Imax	1831cd	5	3.80	73

Driver	Colour	3000K	4000K
EL.	◯	**1T7187EL**	**1T7190EL**
DALI	◯	**1T7187DA**	**1T7190DA**

System Recessed with flange - projector module Label 6



LED / 1x14W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
Fixture Power	15W		1	0.28	10741
Source Flux	1793lm		2	0.55	2685
Fixture Flux	1316lm		3	0.83	1193
Efficacy	91lm/W		4	1.11	671
TS1168	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Driver	Colour	3000K	4000K
EL.	◯	**1T7257EL**	**1T7260EL**
DALI	◯	**1T7257DA**	**1T7260DA**

LED / 1x14W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
Fixture Power	15W		1	0.56	4410
Source Flux	1793lm		2	1.12	1102
Fixture Flux	1386lm		3	1.67	490
Efficacy	96lm/W		4	2.23	276
TS813	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Driver	Colour	3000K	4000K
EL.	◯	**1T7258EL**	**1T7261EL**
DALI	◯	**1T7258DA**	**1T7261DA**

LED / 1x14W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
Fixture Power	15W		1	0.88	2457
Source Flux	1793lm		2	1.77	614
Fixture Flux	1373lm		3	2.65	273
Efficacy	95lm/W		4	3.53	154
TS1170	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Driver	Colour	3000K	4000K
EL.	◯	**1T7259EL**	**1T7262EL**
DALI	◯	**1T7259DA**	**1T7262DA**

System Recessed with flange - projector module Label 6

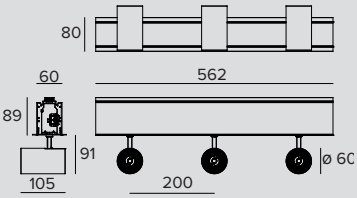

LED / 3x14W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			16°	
Fixture Power		15W	1	0.28	10741
Source Flux		1793lm	2	0.55	2685
Fixture Flux		1316lm	3	0.83	1193
Efficacy		91lm/W	4	1.11	671
TS1168	Imax=5990cd/klm	Imax	10741cd	5	1.39	430

Driver	Colour	3000K	4000K
EL.	◯	**1T7269EL**	**1T7272EL**
DALI	◯	**1T7269DA**	**1T7272DA**

LED / 3x14W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			31°	
Fixture Power		15W	1	0.56	4410
Source Flux		1793lm	2	1.12	1102
Fixture Flux		1386lm	3	1.67	490
Efficacy		96lm/W	4	2.23	276
TS813	Imax=2460cd/klm	Imax	4410cd	5	2.79	176

Driver	Colour	3000K	4000K
EL.	◯	**1T7270EL**	**1T7273EL**
DALI	◯	**1T7270DA**	**1T7273DA**

LED / 3x14W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			48°	
Fixture Power		15W	1	0.88	2457
Source Flux		1793lm	2	1.77	614
Fixture Flux		1373lm	3	2.65	273
Efficacy		95lm/W	4	3.53	154
TS1170	Imax=1378cd/klm	Imax	2471cd	5	4.41	98

Driver	Colour	3000K	4000K
EL.	◯	**1T7271EL**	**1T7274EL**
DALI	◯	**1T7271DA**	**1T7274DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps



Code
1T5908

End caps for the recessed version with a flange.
White.
2X

LOGICO

Accessories

Electrical Connector

	Code
	1T5911

Linear electrical connector.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

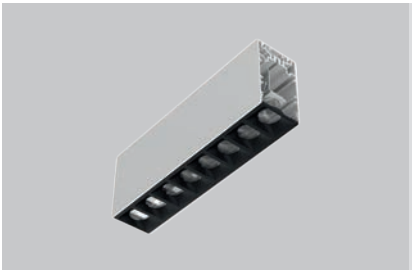

System Ceiling/ Suspension - spot module L. 281mm



LED / 11,5W / LENSES / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
	Fixture Power	13W	1	0.20	18466
	Source Flux	1487lm	2	0.40	4617
	Fixture Flux	1107lm	3	0.60	2052
	Efficacy	84lm/W	4	0.79	1154
TS1178	Imax=12421cd/klm	Imax	18466cd	5	0.99	739

	Driver	Colour	3000K	4000K
	EL.	○	**1T7349EL**	**1T7350EL**
	EL.	●	**1T7351EL**	**1T7352EL**
	EL.	◍	**1T7353EL**	**1T7354EL**
	DALI	○	**1T7349DA**	**1T7350DA**
	DALI	●	**1T7351DA**	**1T7352DA**
	DALI	◍	**1T7353DA**	**1T7354DA**

System Ceiling/ Suspension - spot module L. 562mm



LED / 23W / LENSES / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			11°	
	Fixture Power	26W	1	0.20	36933
	Source Flux	2973lm	2	0.40	9233
	Fixture Flux	2214lm	3	0.60	4104
	Efficacy	85lm/W	4	0.79	2308
TS1178	Imax=12421cd/klm	Imax	36933cd	5	0.99	1477

	Driver	Colour	3000K	4000K
	EL.	○	**1T7363EL**	**1T7364EL**
	EL.	●	**1T7365EL**	**1T7366EL**
	EL.	◍	**1T7367EL**	**1T7368EL**
	DALI	○	**1T7363DA**	**1T7364DA**
	DALI	●	**1T7365DA**	**1T7366DA**
	DALI	◍	**1T7367DA**	**1T7368DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps



	Colour	Code
	○	**1T5937**
	●	**1T5938**
	◍	**1T5939**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

LOGICO

Mounting System



Colour	Code
○	**1T5912**
●	**1T5913**
●	**1T5914**

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
○	**1T6919**
●	**1T6920**
●	**1T6921**

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length: 1 for the 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version and 3 for the 3364 / 3377mm version.

Suspension

L	Colour	Code
2000	○	**1T5899**
2000	●	**1T5900**
2000	●	**1T5901**
4000	○	**1T5902**
4000	●	**1T5903**
4000	●	**1T5904**

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Power Supply Kit



L	Driver	Colour	Code
4000	EL.	○	**1T5905EL**
4000	EL.	●	**1T5906EL**
4000	EL.	●	**1T5907EL**
4000	DALI	○	**1T5905DA**
4000	DALI	●	**1T5906DA**
4000	DALI	●	**1T5907DA**

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.



System Trimless Recessed spot module L. 281mm



LED / 11,5W / LENSES / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	13W	1	0.20	18466
Source Flux	1487lm	2	0.40	4617
Fixture Flux	1107lm	3	0.60	2052
Efficacy	84lm/W	4	0.79	1154
Imax	18466cd	5	0.99	739

TS1178 Imax=12421cd/klm

	Driver	Colour	3000K	4000K
	EL.	○	**1T7345EL**	**1T7346EL**
	EL.	●	**1T7347EL**	**1T7348EL**
	DALI	○	**1T7345DA**	**1T7346DA**
	DALI	●	**1T7347DA**	**1T7348DA**

System Trimless Recessed spot module L. 562mm

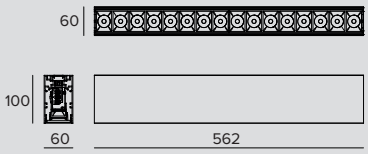

LED / 23W / LENSES / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	26W	1	0.20	36933
Source Flux	2973lm	2	0.40	9233
Fixture Flux	2214lm	3	0.60	4104
Efficacy	85lm/W	4	0.79	2308
Imax	36933cd	5	0.99	1477

TS1178 Imax=12421cd/klm

	Driver	Colour	3000K	4000K
	EL.	○	**1T7359EL**	**1T7360EL**
	EL.	●	**1T7361EL**	**1T7362EL**
	DALI	○	**1T7359DA**	**1T7360DA**
	DALI	●	**1T7361DA**	**1T7362DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps

	Colour	Code
	○	**1T5937**
	●	**1T5938**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

LOGICO

Insertion Box



Kg	Cutout hole	L	Code
1.25	80x281	281	**1T7369**
1.8	80x562	562	**1T6051**

Outer casing for trimless installation.



Kg	Cutout hole	L	Code
1.3	80x291	306	**1T7370**
1.9	80x572	587	**1T6052**

Terminal outer casing for trimless installation.

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

System
Recessed with flange spot module
L. 281mm



LED / 11,5W / LENSES / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	13W	1	0.20	18466
Source Flux	1487lm	2	0.40	4617
Fixture Flux	1107lm	3	0.60	2052
Efficacy	84lm/W	4	0.79	1154
TS1178 Imax=12421cd/klm	Imax	18466cd	5	0.99	739

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7341EL**	**1T7342EL**
	DALI	◯	**1T7341DA**	**1T7342DA**

System
Recessed with flange spot module
L. 562mm

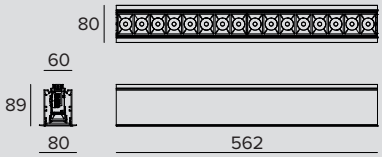

LED / 23W / LENSES / SP



3000K		H(m)	D(m)	Emax(lx)
Ra90			11°	
Fixture Power	26W	1	0.20	36933
Source Flux	2973lm	2	0.40	9233
Fixture Flux	2214lm	3	0.60	4104
Efficacy	85lm/W	4	0.79	2308
TS1178 Imax=12421cd/klm	Imax	36933cd	5	0.99	1477

	Driver	Colour	3000K	4000K
	EL.	◯	**1T7355EL**	**1T7356EL**
	DALI	◯	**1T7355DA**	**1T7356DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

End Caps



	Code
	1T5908

End caps for the recessed version with a flange.
White.
2X

LOGICO

Accessories

Electrical Connector

	Code
	1T5911

Linear electrical connector.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

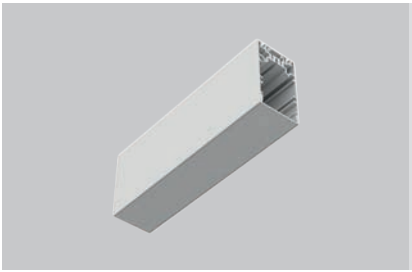

System Ceiling/ Suspension - blind module L. 281mm



LINEAR

Colour	Code
○	**1T7385**
●	**1T7390**
◍	**1T7395**

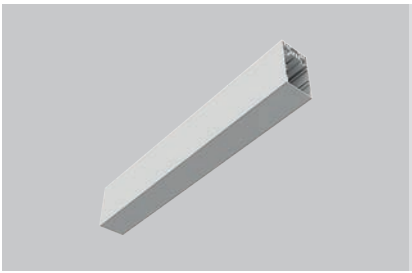

System Ceiling/ Suspension - blind module L. 562mm



LINEAR

Colour	Code
○	**1T7386**
●	**1T7391**
◍	**1T7396**

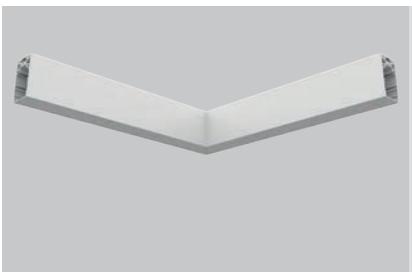

System Ceiling/ Suspension - blind module L connector



L CONNECTOR

Colour	Code
○	**1T7387**
●	**1T7392**
◍	**1T7397**

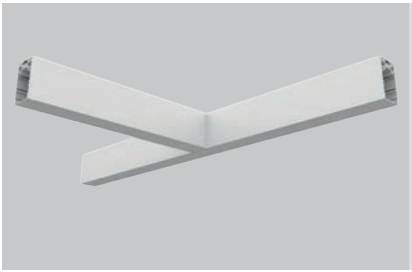

System Ceiling/ Suspension - blind module T connector



T CONNECTOR

	Colour	Code
	○	**1T7388**
	●	**1T7393**
	◌	**1T7398**

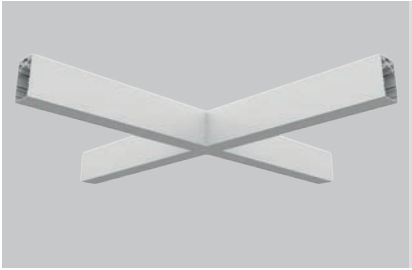

System Ceiling/ Suspension - blind module X connector



X CONNECTOR

	Colour	Code
	○	**1T7389**
	●	**1T7394**
	◌	**1T7399**

Related codes

End Caps



	Colour	Code
	○	**1T5937**
	●	**1T5938**
	◌	**1T5939**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Mounting System



Colour	Code
○	**1T5912**
●	**1T5913**
◍	**1T5914**

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
○	**1T6919**
●	**1T6920**
◍	**1T6921**

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length: 1 for the 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version and 3 for the 3364 / 3377mm version.

Suspension

L	Colour	Code
2000	○	**1T5899**
2000	●	**1T5900**
2000	◍	**1T5901**
4000	○	**1T5902**
4000	●	**1T5903**
4000	◍	**1T5904**

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

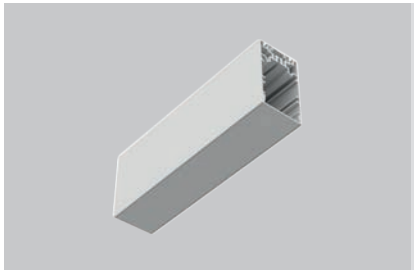

System Trimless Recessed - blind module L. 281mm



LINEAR

Colour	Code
○	**1T7381**
●	**1T7383**

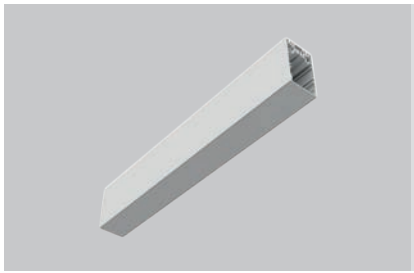

System Trimless Recessed - blind module L. 562mm



LINEAR

Colour	Code
○	**1T7382**
●	**1T7384**

Related codes

End Caps



Colour	Code
○	**1T5937**
●	**1T5938**

End caps for Ceiling Mounted, Suspension and Trimless versions.
2X

Insertion Box



Kg	Cutout hole	L	Code
1.25	80x281	281	**1T7369**
1.8	80x562	562	**1T6051**

Outer casing for trimless installation.



Kg	Cutout hole	L	Code
1.3	80x291	306	**1T7370**
1.9	80x572	587	**1T6052**

Terminal outer casing for trimless installation.

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

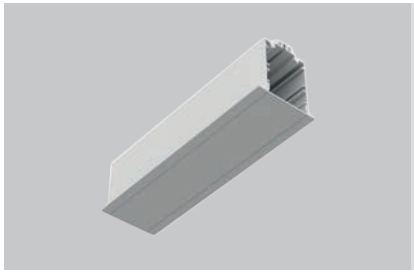

System Recessed with flange - blind module L. 281mm



LINEAR

Colour	Code
◯	**1T7371**

System Recessed with flange - blind module L. 562mm



LINEAR

Colour	Code
◯	**1T7372**

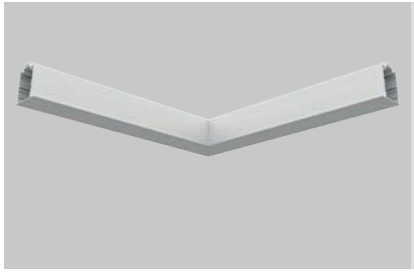

System Recessed with flange - blind module L connector



L CONNECTOR

Colour	Code
◯	**1T7373**

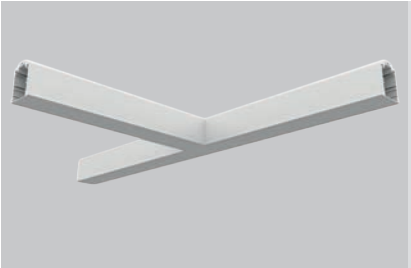

System Recessed with flange - blind module T connector



T CONNECTOR

Colour	Code
◯	**1T7374**

System Recessed with flange - blind module X connector



X CONNECTOR

Colour	Code
◯	**1T7375**

Related codes

End Caps



Code
1T5908

End caps for the recessed version with a flange.
White.
2X

Accessories

Electrical Connector

Code
1T5911

Linear electrical connector.

Indoor

Ceiling and Suspensions luminaires

Linear Ceiling and Suspensions luminaires

436
ISO

442
OMEGA

448
LOGICO
Stand alone

456
CARTESIO



460
DIVA

464
SLIM

468
MINIMINIMA

Ceiling and Suspensions luminaires

470
OZ
Stand alone

476
THREESIXTY

488
PANTHEON

494
CCTLED
Pendant

496
CCTLED
Tube

506
BEBOP

508
GLOBO

510
WASABI

512
DECANTER

514
MONETA

ISO

GENERAL INFO
Stand-alone linear LED fixture for suspension installation.
2144x70x73mm

LED
LED Engine made of linear boards
From 2137 to 4845lm
2700K – 3000K – 3500K – 4000K
Ra90

PRODUCT EFFICACY
Up to 120lm/W

OPTICS
Diffused light with an opal screen - Highly reflective brushed aluminium reflector and an opaline polycarbonate screen.
Controlled light UGR<19 (EN-12464) - Optical system composed of a highly reflective brushed aluminium reflector and a transparent polycarbonate screen coupled with a micro prismatic plate and a spreader lens.

POWER SUPPLY
Electronic – DALI

MATERIAL
Painted extruded aluminium body and a painted aluminium optical unit and terminal. Opaline polycarbonate or UGR screen.

New suspension fixture for office and hospitality environments designed in close collaboration with the American firm Gensler.
Available with direct or direct/indirect emission with two different effects: diffused light and controlled light UGR<19.

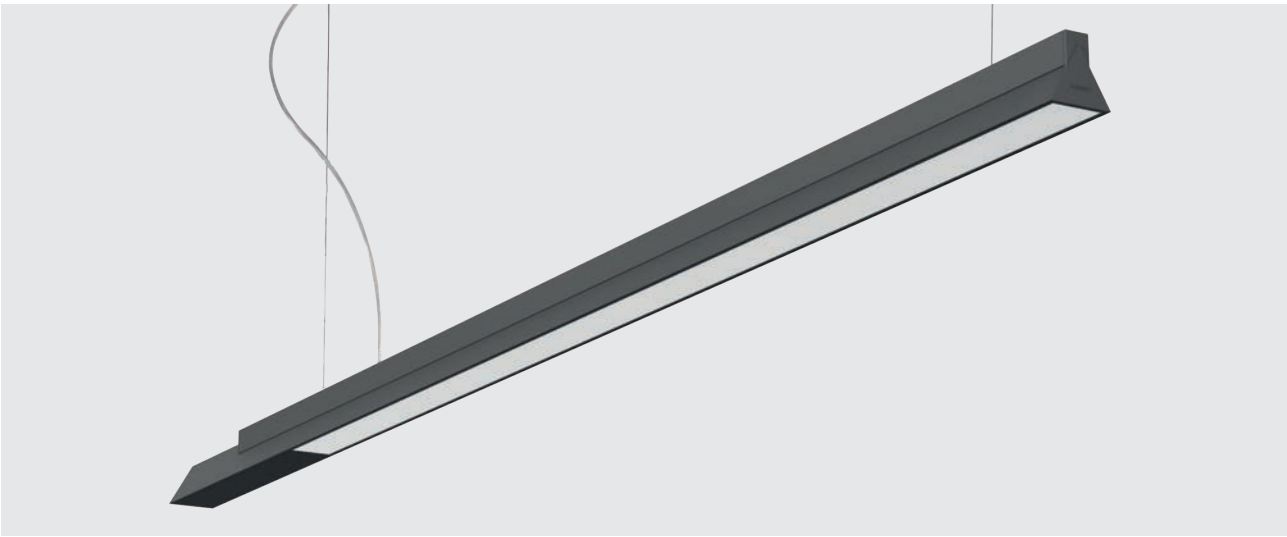

The two different optical systems it can use – OPAL and UGR – make it suitable for installation in OFFICE applications which are increasingly becoming open spaces, and in Hospitality projects which require not only visual comfort, but also attention to design and detail.

01
ISO

Design

The union between two pure forms, the co-penetration of two solids, has led to the creation of a unit that is both recognisable yet discrete, and which sits particularly well in contemporary environments, where the design of lighting plays an active role in the overall effect of each space.

02

03

UGR<19 optic

The UGR version is focused entirely on visual comfort. The colour rendering index of CRI 90 and the perfect UGR screening allows for a pleasant and measured light.
The sophisticated optical system, comprised of a mirrored reflector and a particular prismatic screen, reduces the shadows and reflections that can cause disturbance on work surfaces, allowing for an unrestricted distribution of desks without having to bear in mind the position of the lighting units.

Opal optic

The diffused effect of ISO OPAL is the result of a mirrored reflector with an opal screen. The light emitted appears soft and widespread, particularly suitable for reception areas in offices, hotels and spaces. In the direct/indirect light version, a line of light is present on the upper part, complete with diffusing screen to provide even light on the ceiling.

ISO

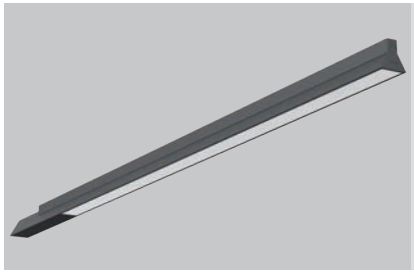

Suspension
L. 2144mm

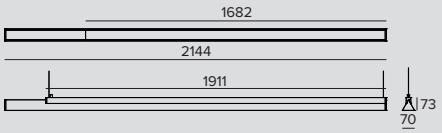

LED / 35W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra90			106°	
Fixture Power	40W	1	2.66	1192
Source Flux	4594lm	2	5.33	298
Fixture Flux	3129lm	3	7.99	132
Efficacy	78lm/W	4	10.65	74
TS1206 Imax=259cd/klm	Imax	1192cd	5	13.32	48

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	**1T7179EL**	**1T7180EL**	**1T7181EL**	**1T7182EL**
DALI	●	**1T7179DA**	**1T7180DA**	**1T7181DA**	**1T7182DA**

LED / 16W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra90			74°	
Fixture Power	18W	1	1.51	1469
Source Flux	3326lm	2	3.02	367
Fixture Flux	2153lm	3	4.52	163
Efficacy	118lm/W	4	6.03	92
TS1208 Imax=442cd/klm	Imax	1469cd	5	7.54	59

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	**1T7193EL**	**1T7194EL**	**1T7195EL**	**1T7196EL**
DALI	●	**1T7193DA**	**1T7194DA**	**1T7195DA**	**1T7196DA**

LED / 54W / UP-DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra90			106°	
Fixture Power	61W	1	2.66	1214
Source Flux	6951lm	2	5.33	304
Fixture Flux	4724lm	3	7.99	135
Efficacy	77lm/W	4	10.66	76
TS1207 Imax=175cd/klm	Imax	1214cd	5	13.32	49

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	**1T7183EL**	**1T7184EL**	**1T7191EL**	**1T7192EL**
DALI	●	**1T7183DA**	**1T7184DA**	**1T7191DA**	**1T7192DA**

LED / 36W / UP-DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra90			72°	
Fixture Power	41W	1	1.45	1484
Source Flux	4995lm	2	2.90	371
Fixture Flux	3283lm	3	4.34	165
Efficacy	80lm/W	4	5.79	93
TS1209 Imax=297cd/klm	Imax	1484cd	5	7.24	59

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	**1T7263EL**	**1T7264EL**	**1T7265EL**	**1T7266EL**
DALI	●	**1T7263DA**	**1T7264DA**	**1T7265DA**	**1T7266DA**

Note: Kit of suspension is included

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

OMEGA

GENERAL INFO
Stand-alone linear LED fixture for surface or suspension installations.
2112x50x80mm
792x50x80mm
472x50x80mm

LED
LED Engine made of linear boards
From 586 to 2432lm
2700K – 3000K – 3500K – 4000K
Ra90

PRODUCT EFFICACY
Up to 120lm/W

OPTICS
Direct emission WFL

POWER SUPPLY
Electronic – DALI

MATERIAL
Anodized and painted extruded aluminium body.
Injection-moulded opal polycarbonate screen.

A new range of units made in close collaboration with the American firm Gensler, available in a range of sizes and forms of application for the coordinated lighting of spaces for hospitality and for common areas. Available in ceiling-mounted, suspension and wall-mounted versions.

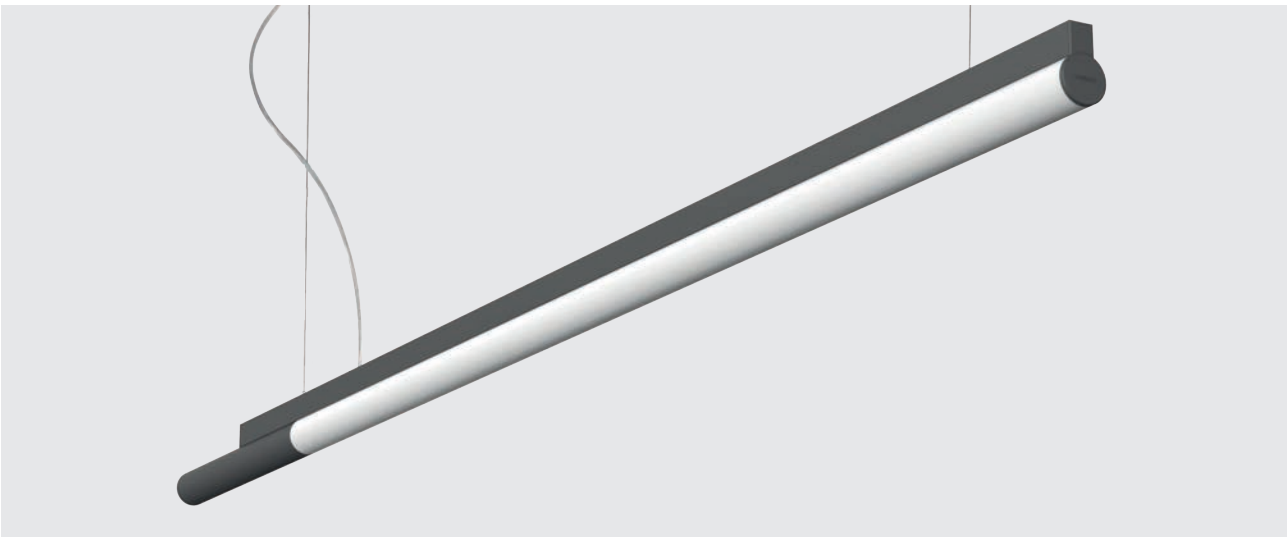

Suspension versions

The suspension versions are 2114 mm in length with a single direct point of emission, supplied complete with suspension kit.

01
OMEGA

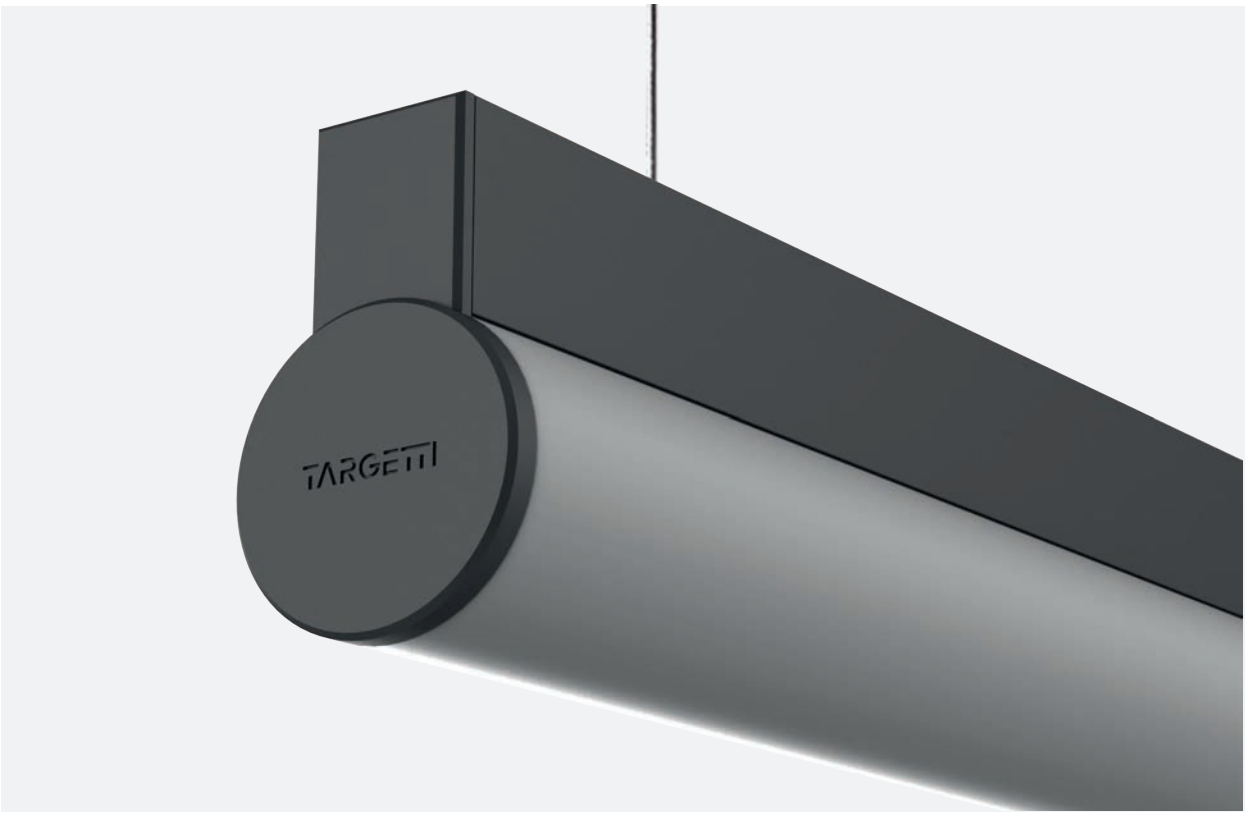

Design

A new 270° light emission that takes advantage of forms and the co-penetration of solids. An opal cylinder slots into a solid parallelepiped, providing a soft light that illuminates the space in all dimensions.

02

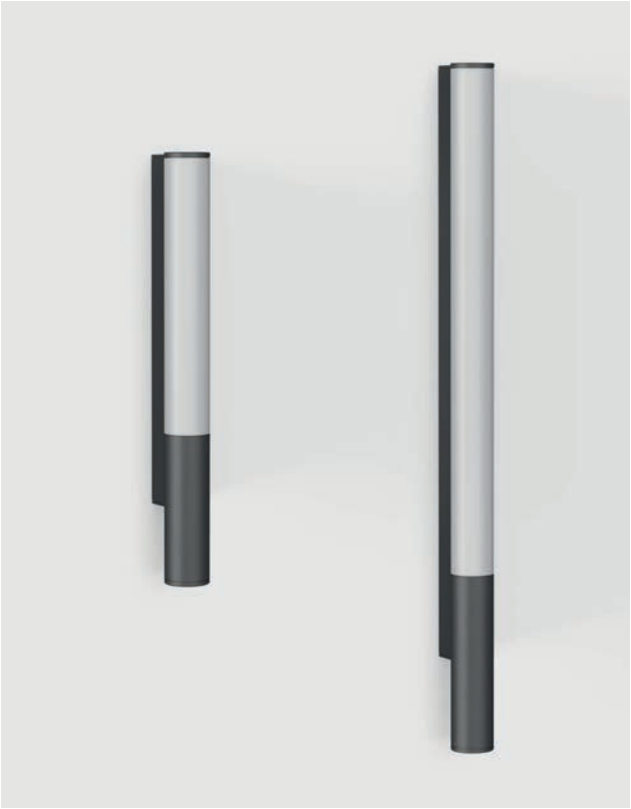

03

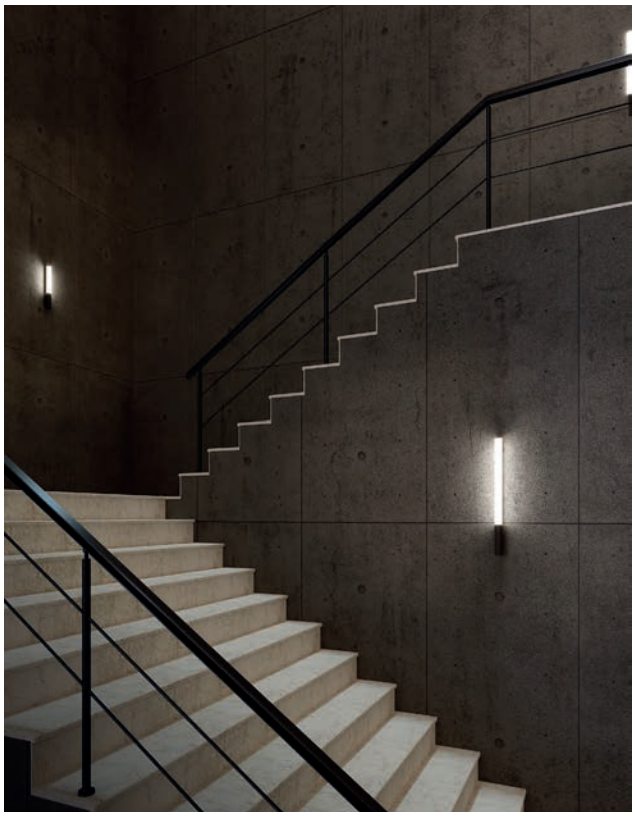

Wall-mounted version

The wall-mounted versions are available in two lengths (470 mm and 790 mm) and can be installed either horizontally or vertically. They are ideal for the lighting of common areas and stair wells, coordinated with the general lighting provided by the longer versions.

OMEGA

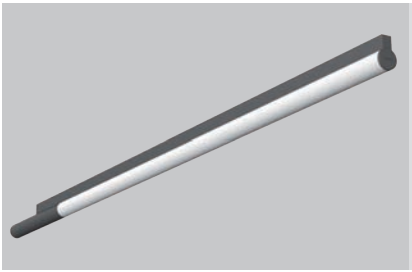

Suspension
L. 2112mm

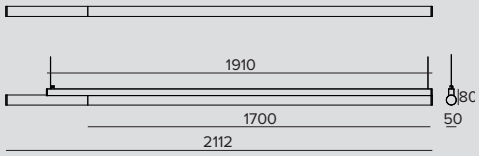

LED / 24W / DOWN OPAL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			102°	164°	
Fixture Power	27W	1	2.45	14.31	526
Source Flux	4347lm	2	4.90	28.63	132
Fixture Flux	2371lm	3	7.35	42.94	58
Efficacy	88lm/W	4	9.80	57.25	33
TS1199 Imax=121cd/klm	Imax 526cd	5	12.25	71.57	21

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T7267EL**	**1T7268EL**	**1T7275EL**	**1T7276EL**
DALI		**1T7267DA**	**1T7268DA**	**1T7275DA**	**1T7276DA**

Applique
L. 472mm

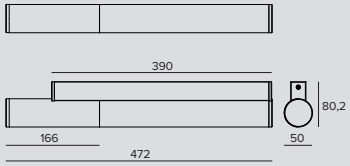

LED / 7,8W / DOWN OPAL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			101°	163°	
Fixture Power	9W	1	2.44	13.57	131
Source Flux	1046lm	2	4.87	27.14	33
Fixture Flux	589lm	3	7.31	40.70	15
Efficacy	66lm/W	4	9.74	54.27	8
TS1197 Imax=126cd/klm	Imax 132cd	5	12.18	67.84	5

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T7277EL**	**1T7278EL**	**1T7279EL**	**1T7280EL**
DALI		**1T7277DA**	**1T7278DA**	**1T7279DA**	**1T7280DA**

Applique
L. 792mm

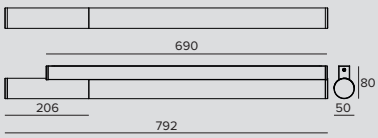

LED / 16W / DOWN OPAL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra90			101°	163°	
Fixture Power	18W	1	2.44	13.57	263
Source Flux	2092lm	2	4.87	27.14	66
Fixture Flux	1178lm	3	7.31	40.70	29
Efficacy	67lm/W	4	9.74	54.27	16
TS1198 Imax=126cd/klm	Imax 263cd	5	12.18	67.84	11

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1T7343EL**	**1T7344EL**	**1T7357EL**	**1T7358EL**
DALI		**1T7343DA**	**1T7344DA**	**1T7357DA**	**1T7358DA**

Note: Kit of Suspension is included.

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

LOGICO

Stand Alone
Ceiling and Suspension luminaire

A versatile fixture available in three different lengths, each with Low- Power and High-Power lumen and different finishes and installation types.

It can be ceiling, wall or suspension installation if equipped with special accessories; is it is available with direct or direct/indirect diffused light, UGR<19 controlled light ideal for lighting workplaces or wall-washer for lighting large vertical surfaces. There are also versions available for recessed installation. In addition there are custom made solutions that are available on request: modules with custom made lengths, emergency modules and Tunable technology.

GENERAL INFO
Modules of variable lengths for ceiling, suspension, recessed and semi-recessed installations.
Lengths: 1135mm – 1695mm – 3377mm

LED
Linear Board LED engine
From 2520lm to 28960lm
3000K – 4000K
Ra84
Ra90 To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 109lm/W

OPTICS
OPAL – UGR – WW

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.
Emergency version available on request.

MATERIAL
Powder coated, extruded, calendered aluminium.

Zonamerica

Architect
Estudio Dovat Arquitectos

Lighting Design
Estudio Hofstadter

Photographer
Ferrés - Cánepa

Country
Montevideo, Uruguay

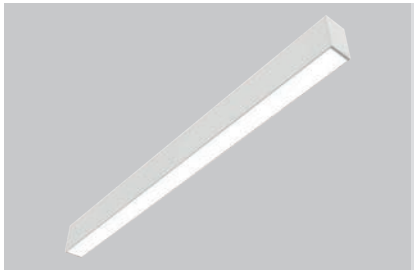

Stand Alone Ceiling/ Suspension L. 1135mm



LED / 24W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	27W	1	2.66	903
Source Flux	3480lm	2	5.33	226
Fixture Flux	2370lm	3	7.99	100
Efficacy	88lm/W	4	10.65	56
TS991 Imax=259cd/klm	Imax 903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5491EL**	**1T5492EL**
EL.	●	**1T5495EL**	**1T5496EL**
EL.	◍	**1T5493EL**	**1T5494EL**
DALI	○	**1T5491DA**	**1T5492DA**
DALI	●	**1T5495DA**	**1T5496DA**
DALI	◍	**1T5493DA**	**1T5494DA**

LED / 48W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	54W	1	2.66	1785
Source Flux	6880lm	2	5.33	446
Fixture Flux	4685lm	3	7.99	198
Efficacy	87lm/W	4	10.65	112
TS996 Imax=259cd/klm	Imax 1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5497EL**	**1T5498EL**
EL.	●	**1T5501EL**	**1T5502EL**
EL.	◍	**1T5499EL**	**1T5500EL**
DALI	○	**1T5497DA**	**1T5498DA**
DALI	●	**1T5501DA**	**1T5502DA**
DALI	◍	**1T5499DA**	**1T5500DA**

LED / 16W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	18W	1	1.51	1113
Source Flux	2520lm	2	3.02	278
Fixture Flux	1631lm	3	4.52	124
Efficacy	91lm/W	4	6.03	70
TS992 Imax=442cd/klm	Imax 1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5515EL**	**1T5516EL**
EL.	●	**1T5519EL**	**1T5520EL**
EL.	◍	**1T5517EL**	**1T5518EL**
DALI	○	**1T5515DA**	**1T5516DA**
DALI	●	**1T5519DA**	**1T5520DA**
DALI	◍	**1T5517DA**	**1T5518DA**

LED / 24W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	27W	1	2.28	2.55	2801
Source Flux	3480lm	2	4.56	5.10	700
Fixture Flux	2739lm	3	6.84	7.64	311
Efficacy	101lm/W	4	9.12	10.19	175
TS993 Imax=1001cd/klm	Imax 3485cd	5	11.40	12.74	112

Driver	Colour	3000K	4000K
EL.	○	**1T5527EL**	**1T5528EL**
EL.	●	**1T5531EL**	**1T5532EL**
EL.	◍	**1T5529EL**	**1T5530EL**
DALI	○	**1T5527DA**	**1T5528DA**
DALI	●	**1T5531DA**	**1T5532DA**
DALI	◍	**1T5529DA**	**1T5530DA**

LED / 48W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	54W	1	2.28	2.55	5537
Source Flux	6880lm	2	4.56	5.10	1384
Fixture Flux	5415lm	3	6.84	7.64	615
Efficacy	100lm/W	4	9.12	10.19	346
TS997 Imax=1001cd/klm	Imax 6890cd	5	11.40	12.74	221

Driver	Colour	3000K	4000K
EL.	○	**1T5533EL**	**1T5534EL**
EL.	●	**1T5537EL**	**1T5538EL**
EL.	◍	**1T5535EL**	**1T5536EL**
DALI	○	**1T5533DA**	**1T5534DA**
DALI	●	**1T5537DA**	**1T5538DA**
DALI	◍	**1T5535DA**	**1T5536DA**

LED / 42W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		47W	1	2.66	903
Source Flux		6090lm	2	5.33	226
Fixture Flux		4136lm	3	7.99	100
Efficacy		88lm/W	4	10.65	56
TS994	Imax=148cd/klm	Imax	903cd	5	13.32	36

Driver	Colour	3000K	4000K
EL.	○	**1T5503EL**	**1T5504EL**
EL.	●	**1T5507EL**	**1T5508EL**
EL.	◌	**1T5505EL**	**1T5506EL**
DALI	○	**1T5503DA**	**1T5504DA**
DALI	●	**1T5507DA**	**1T5508DA**
DALI	◌	**1T5505DA**	**1T5506DA**

LED / 66W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		74W	1	2.66	1785
Source Flux		9490lm	2	5.33	446
Fixture Flux		6452lm	3	7.99	198
Efficacy		87lm/W	4	10.65	112
TS998	Imax=188cd/klm	Imax	1785cd	5	13.32	71

Driver	Colour	3000K	4000K
EL.	○	**1T5509EL**	**1T5510EL**
EL.	●	**1T5513EL**	**1T5514EL**
EL.	◌	**1T5511EL**	**1T5512EL**
DALI	○	**1T5509DA**	**1T5510DA**
DALI	●	**1T5513DA**	**1T5514DA**
DALI	◌	**1T5511DA**	**1T5512DA**

LED / 28W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		32W	1	1.51	1113
Source Flux		4410lm	2	3.02	278
Fixture Flux		2912lm	3	4.52	124
Efficacy		91lm/W	4	6.03	70
TS995	Imax=252cd/klm	Imax	1113cd	5	7.54	45

Driver	Colour	3000K	4000K
EL.	○	**1T5521EL**	**1T5522EL**
EL.	●	**1T5525EL**	**1T5526EL**
EL.	◌	**1T5523EL**	**1T5524EL**
DALI	○	**1T5521DA**	**1T5522DA**
DALI	●	**1T5525DA**	**1T5526DA**
DALI	◌	**1T5523DA**	**1T5524DA**

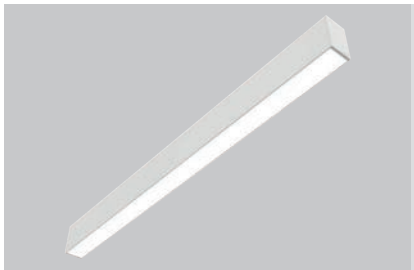

Stand Alone Ceiling/ Suspension L. 1695mm

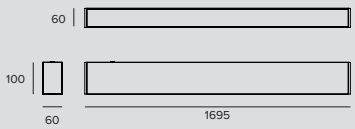

LED / 36W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		40W	1	2.66	1354
Source Flux		5220lm	2	5.33	338
Fixture Flux		3555lm	3	7.99	150
Efficacy		89lm/W	4	10.65	85
TS991	Imax=259cd/klm	Imax	1354cd	5	13.32	54

Driver	Colour	3000K	4000K
EL.	○	**1T5539EL**	**1T5540EL**
EL.	●	**1T5543EL**	**1T5544EL**
EL.	◌	**1T5541EL**	**1T5542EL**
DALI	○	**1T5539DA**	**1T5540DA**
DALI	●	**1T5543DA**	**1T5544DA**
DALI	◌	**1T5541DA**	**1T5542DA**

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2677
Source Flux		10320lm	2	5.33	669
Fixture Flux		7028lm	3	7.99	297
Efficacy		87lm/W	4	10.65	167
TS996	Imax=259cd/klm	Imax	2677cd	5	13.32	107

Driver	Colour	3000K	4000K
EL.	○	**1T5545EL**	**1T5546EL**
EL.	●	**1T5549EL**	**1T5550EL**
EL.	◌	**1T5547EL**	**1T5548EL**
DALI	○	**1T5545DA**	**1T5546DA**
DALI	●	**1T5549DA**	**1T5550DA**
DALI	◌	**1T5547DA**	**1T5548DA**

LOGICO

LED / 24W / DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	27W	1	1.51	1669
Source Flux	3780lm	2	3.02	417
Fixture Flux	2447lm	3	4.52	185
Efficacy	91lm/W	4	6.03	104
TS992 Imax=442cd/klm	Imax 1669cd	5	7.54	67

Driver	Colour	3000K	4000K
EL.	○	**1T5563EL**	**1T5564EL**
EL.	●	**1T5567EL**	**1T5568EL**
EL.	◌	**1T5565EL**	**1T5566EL**
DALI	○	**1T5563DA**	**1T5564DA**
DALI	●	**1T5567DA**	**1T5568DA**
DALI	◌	**1T5565DA**	**1T5566DA**

LED / 36W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	40W	1	2.28	2.55	4201
Source Flux	5220lm	2	4.56	5.10	1050
Fixture Flux	4108lm	3	6.84	7.64	467
Efficacy	103lm/W	4	9.12	10.19	263
TS993 Imax=1001cd/klm	Imax 5228cd	5	11.40	12.74	168

Driver	Colour	3000K	4000K
EL.	○	**1T5575EL**	**1T5576EL**
EL.	●	**1T5579EL**	**1T5580EL**
EL.	◌	**1T5577EL**	**1T5578EL**
DALI	○	**1T5575DA**	**1T5576DA**
DALI	●	**1T5579DA**	**1T5580DA**
DALI	◌	**1T5577DA**	**1T5578DA**

LED / 72W / DOWN WW



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			97°	101°	
Fixture Power	81W	1	2.28	2.55	8305
Source Flux	10320lm	2	4.56	5.10	2076
Fixture Flux	8122lm	3	6.84	7.64	923
Efficacy	100lm/W	4	9.12	10.19	519
TS997 Imax=1001cd/klm	Imax 10335cd	5	11.40	12.74	332

Driver	Colour	3000K	4000K
EL.	○	**1T5581EL**	**1T5582EL**
EL.	●	**1T5585EL**	**1T5586EL**
EL.	◌	**1T5583EL**	**1T5584EL**
DALI	○	**1T5581DA**	**1T5582DA**
DALI	●	**1T5585DA**	**1T5586DA**
DALI	◌	**1T5583DA**	**1T5584DA**

LED / 60W / UP-DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	68W	1	2.66	1290
Source Flux	8700lm	2	5.33	322
Fixture Flux	5909lm	3	7.99	143
Efficacy	87lm/W	4	10.65	81
TS994 Imax=148cd/klm	Imax 1290cd	5	13.32	52

Driver	Colour	3000K	4000K
EL.	○	**1T5551EL**	**1T5552EL**
EL.	●	**1T5555EL**	**1T5556EL**
EL.	◌	**1T5553EL**	**1T5554EL**
DALI	○	**1T5551DA**	**1T5552DA**
DALI	●	**1T5555DA**	**1T5556DA**
DALI	◌	**1T5553DA**	**1T5554DA**

LED / 96W / UP-DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			106°	
Fixture Power	107W	1	2.66	2595
Source Flux	13800lm	2	5.33	649
Fixture Flux	9382lm	3	7.99	288
Efficacy	88lm/W	4	10.65	162
TS998 Imax=188cd/klm	Imax 2595cd	5	13.32	104

Driver	Colour	3000K	4000K
EL.	○	**1T5557EL**	**1T5558EL**
EL.	●	**1T5561EL**	**1T5562EL**
EL.	◌	**1T5559EL**	**1T5560EL**
DALI	○	**1T5557DA**	**1T5558DA**
DALI	●	**1T5561DA**	**1T5562DA**
DALI	◌	**1T5559DA**	**1T5560DA**

LED / 40W / UP-DOWN UGR



3000K		H(m)	D(m)	Emax(lx)
Ra84			74°	
Fixture Power	45W	1	1.51	1590
Source Flux	6300lm	2	3.02	398
Fixture Flux	4160lm	3	4.52	177
Efficacy	92lm/W	4	6.03	99
TS995 Imax=252cd/klm	Imax 1590cd	5	7.54	64

Driver	Colour	3000K	4000K
EL.	○	**1T5569EL**	**1T5570EL**
EL.	●	**1T5573EL**	**1T5574EL**
EL.	◌	**1T5571EL**	**1T5572EL**
DALI	○	**1T5569DA**	**1T5570DA**
DALI	●	**1T5573DA**	**1T5574DA**
DALI	◌	**1T5571DA**	**1T5572DA**

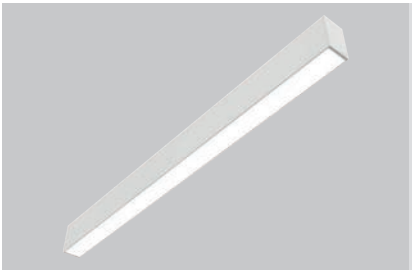

Stand Alone Ceiling/Suspension L. 3377mm

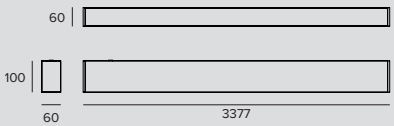

LED / 72W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		81W	1	2.66	2708
Source Flux		10440lm	2	5.33	677
Fixture Flux		7110lm	3	7.99	301
Efficacy		88lm/W	4	10.65	169
TS991	Imax=259cd/klm	Imax	2708cd	13.32	108

Driver	Colour	3000K	4000K
EL.	○	**1T5587EL**	**1T5588EL**
EL.	●	**1T5591EL**	**1T5592EL**
EL.	◍	**1T5589EL**	**1T5590EL**
DALI	○	**1T5587DA**	**1T5588DA**
DALI	●	**1T5591DA**	**1T5592DA**
DALI	◍	**1T5589DA**	**1T5590DA**

LED / 144W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		163W	1	2.66	5354
Source Flux		20640lm	2	5.33	1338
Fixture Flux		14056lm	3	7.99	595
Efficacy		86lm/W	4	10.65	335
TS996	Imax=259cd/klm	Imax	5354cd	13.32	214

Driver	Colour	3000K	4000K
EL.	○	**1T5593EL**	**1T5594EL**
EL.	●	**1T5597EL**	**1T5598EL**
EL.	◍	**1T5595EL**	**1T5596EL**
DALI	○	**1T5593DA**	**1T5594DA**
DALI	●	**1T5597DA**	**1T5598DA**
DALI	◍	**1T5595DA**	**1T5596DA**

LED / 48W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		54W	1	1.51	3338
Source Flux		7560lm	2	3.02	834
Fixture Flux		4894lm	3	4.52	371
Efficacy		91lm/W	4	6.03	209
TS992	Imax=442cd/klm	Imax	3338cd	7.54	134

Driver	Colour	3000K	4000K
EL.	○	**1T5611EL**	**1T5612EL**
EL.	●	**1T5615EL**	**1T5616EL**
EL.	◍	**1T5613EL**	**1T5614EL**
DALI	○	**1T5611DA**	**1T5612DA**
DALI	●	**1T5615DA**	**1T5616DA**
DALI	◍	**1T5613DA**	**1T5614DA**

LED / 72W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		81W	1	2.28	2.55	8402
Source Flux		10440lm	2	4.56	5.10	2101
Fixture Flux		8216lm	3	6.84	7.64	934
Efficacy		101lm/W	4	9.12	10.19	525
TS993	Imax=1001cd/klm	Imax	10455cd	11.40	12.74	336

Driver	Colour	3000K	4000K
EL.	○	**1T5623EL**	**1T5624EL**
EL.	●	**1T5627EL**	**1T5628EL**
EL.	◍	**1T5625EL**	**1T5626EL**
DALI	○	**1T5623DA**	**1T5624DA**
DALI	●	**1T5627DA**	**1T5628DA**
DALI	◍	**1T5625DA**	**1T5626DA**

LED / 144W / DOWN WW



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			97°	101°	
Fixture Power		163W	1	2.28	2.55	16611
Source Flux		20640lm	2	4.56	5.10	4153
Fixture Flux		16244lm	3	6.84	7.64	1846
Efficacy		100lm/W	4	9.12	10.19	1038
TS997	Imax=1001cd/klm	Imax	20670cd	11.40	12.74	664

Driver	Colour	3000K	4000K
EL.	○	**1T5629EL**	**1T5630EL**
EL.	●	**1T5633EL**	**1T5634EL**
EL.	◍	**1T5631EL**	**1T5632EL**
DALI	○	**1T5629DA**	**1T5630DA**
DALI	●	**1T5633DA**	**1T5634DA**
DALI	◍	**1T5631DA**	**1T5632DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

LOGICO

LED / 120W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		136W	1	2.66	2579
Source Flux		17400lm	2	5.33	645
Fixture Flux		11818lm	3	7.99	287
Efficacy		87lm/W	4	10.65	161
TS994	Imax=148cd/klm	Imax	5	13.32	103

Driver	Colour	3000K	4000K
EL.	○	**1T5599EL**	**1T5600EL**
EL.	●	**1T5603EL**	**1T5604EL**
EL.	◌	**1T5601EL**	**1T5602EL**
DALI	○	**1T5599DA**	**1T5600DA**
DALI	●	**1T5603DA**	**1T5604DA**
DALI	◌	**1T5601DA**	**1T5602DA**

LED / 192W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			106°	
Fixture Power		218W	1	2.66	5183
Source Flux		27560lm	2	5.33	1296
Fixture Flux		18736lm	3	7.99	576
Efficacy		86lm/W	4	10.65	324
TS998	Imax=188cd/klm	Imax	5	13.32	207

Driver	Colour	3000K	4000K
EL.	○	**1T5605EL**	**1T5606EL**
EL.	●	**1T5609EL**	**1T5610EL**
EL.	◌	**1T5607EL**	**1T5608EL**
DALI	○	**1T5605DA**	**1T5606DA**
DALI	●	**1T5609DA**	**1T5610DA**
DALI	◌	**1T5607DA**	**1T5608DA**

LED / 80W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			74°	
Fixture Power		91W	1	1.51	3181
Source Flux		12600lm	2	3.02	795
Fixture Flux		8320lm	3	4.52	353
Efficacy		91lm/W	4	6.03	199
TS995	Imax=252cd/klm	Imax	5	7.54	127

Driver	Colour	3000K	4000K
EL.	○	**1T5617EL**	**1T5618EL**
EL.	●	**1T5621EL**	**1T5622EL**
EL.	◌	**1T5619EL**	**1T5620EL**
DALI	○	**1T5617DA**	**1T5618DA**
DALI	●	**1T5621DA**	**1T5622DA**
DALI	◌	**1T5619DA**	**1T5620DA**

Note

Check mounting instructions to verify the quantity of DALI drivers installed.

Related codes

Mounting System



Colour	Code
○	**1T5912**
●	**1T5913**
◌	**1T5914**

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
○	**1T6919**
●	**1T6920**
◌	**1T6921**

Wall installation: painted metal bracket.
To be ordered in the following quantities for every fixture length: 1 for the 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version and 3 for the 3364 / 3377mm version.

Suspension

	L	Colour	Code
	2000	○	**1T5899**
	2000	●	**1T5900**
	2000	◉	**1T5901**
	4000	○	**1T5902**
	4000	●	**1T5903**
	4000	◉	**1T5904**

Suspension cable.
To be ordered in the following quantities for every fixture length:1 for 281mm version, 2 for the 562 / 1122 / 1135 / 1682 / 1695mm version, 3 for the 3364 / 3377mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Power Supply Kit



	L	Driver	Colour	Code
	4000	EL.	○	**1T5905EL**
	4000	EL.	●	**1T5906EL**
	4000	EL.	◉	**1T5907EL**
	4000	DALI	○	**1T5905DA**
	4000	DALI	●	**1T5906DA**
	4000	DALI	◉	**1T5907DA**

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.

Accessories

Screen



	Code
	1T6502

Accessory designed to improve the visual comfort of the Wall Washer version.
To be installed on a standard reflector.
Made of matte black painted aluminium.
280mm in length; to be ordered in the following quantities for every fixture length: 2 for the 562mm version, 4 for the 1122/1135/1146mm versions, 6 for the 1682/1695/1706mm versions and 12 for the 3364/3377/3386mm versions.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CARTESIO

GENERAL INFO
Direct/indirect light suspension, ceiling mounted luminaire.
720x720x42mm
1147x420x42mm

LED
Direct lighting LED boards
Indirect lighting LED COB
Ra84
From 2776lm to 6833lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 116lm/W

OPTICS
UGR

POWER SUPPLY
Electronic – DALI

MATERIAL
Extruded aluminium body with aluminium terminals.
Plaster white finish.

The range of technical suspension fixtures for the office environment with soft lines and professional performance. Square and rectangular solutions for suspension, ceiling mounted and wall mounted installations.

Different light emissions: direct, indirect and combined direct/indirect in just one fixture. Available in a UGR<19 version.

01

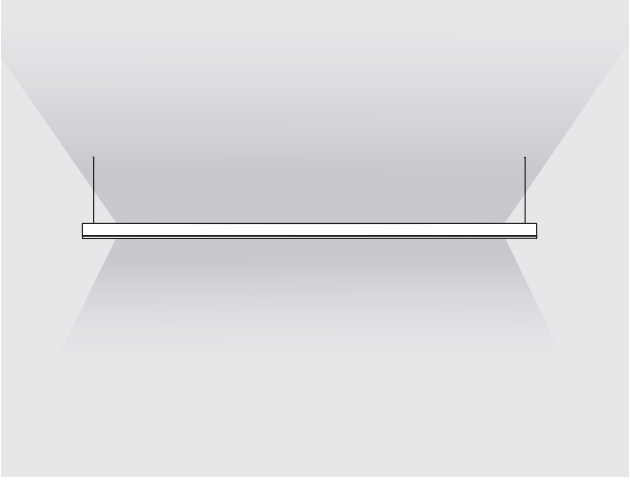

Lighting for the office

The rectangular CARTESIO versions, fitted with the direct emission component guarantee more than 500lux on the work surface, in line with the requirements outlined in the EN12464-1 standard and have a UGR value of 16 which is considerably lower than the limits indicated in the standard (UGR<19), which ensures reliability and maximum freedom when designing spaces. In addition to this there is the indirect component that contributes to softly balancing the luminance to reduce user eyestrain and improve perception of the illuminated space.

CARTESIO

Rectangular Suspension UGR<19



LED / 48W / UGR



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			88°	92°	
Fixture Power	55W	1	1.95	2.08	1441
Source Flux	6402lm	2	3.90	4.15	360
Fixture Flux	6402lm	3	5.84	6.23	160
Efficacy	116lm/W	4	7.79	8.30	90
TS803 Imax=234cd/klm	Imax 1497cd	5	9.74	10.38	58

	Driver	Colour	3000K
	EL.	◯	**1T4063**
	DALI	◯	**1T4067**

LED / 52W / UGR



4000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	82°	
Fixture Power	59W	1	1.67	1.75	2068
Source Flux	6833lm	2	3.34	3.50	517
Fixture Flux	6833lm	3	5.01	5.25	230
Efficacy	116lm/W	4	6.67	7.00	129
TS840 Imax=321cd/klm	Imax 2190cd	5	8.34	8.75	83

	Driver	Colour	4000K
	EL.	◯	**1T4065**
	DALI	◯	**1T4069**

Square Suspension UGR<22



LED / 26W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			119°	
Fixture Power	30W	1	3.37	891
Source Flux	2776lm	2	6.73	223
Fixture Flux	2776lm	3	10.10	99
Efficacy	94lm/W	4	13.47	56
TS843 Imax=321cd/klm	Imax 891cd	5	16.83	36

	Driver	Colour	3000K	4000K
	EL.	◯	**1T4241**	**1T4243**
	DALI	◯	**1T4242**	**1T4244**

Related codes

Canopy

	Driver	Colour	Code
	EL.	◯	**1T4071**
	DALI	◯	**1T4072**

Canopy.

Accessories

Mechanical connector - Rectangular Suspension



	Driver	Code
	EL.	**1T4075**
	DALI	**1T4240**

Linear connector.

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

Square Wall/Ceiling UGR<22



LED / 26W / VWFL

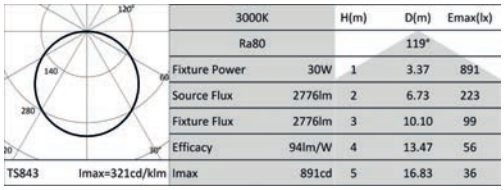

	3000K		H(m)	D(m)	Emax(lx)
	Ra80			119°	
Fixture Power	30W		1	3.37	891
Source Flux	2776lm		2	6.73	223
Fixture Flux	2776lm		3	10.10	99
Efficacy	94lm/W		4	13.47	56
Imax	891cd		5	16.83	36

Driver	Colour	3000K	4000K
EL.	◯	**1T4245**	**1T4247**
DALI	◯	**1T4246**	**1T4248**

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

DIVA

GENERAL INFO
Stand-alone direct or indirect light suspension lamp
1335x435x87mm

LED
Direct lighting LED boards
Indirect lighting LED COB
From 6402lm to 6833lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 116lm/W

OPTICS
UGR

POWER SUPPLY
Electronic – DALI

MATERIAL
White CRISTALPLANT© body.

A high end suspension light fixture for the office made of Cristalplant without the use of visible screws and joins, with soft lines ideal for the office environment; it interacts with the light using different light emissions: direct, indirect and combined direct/indirect in just one fixture.

Controlled low luminance direct light EN12464, UGR<19 and L65<1500/3000. Micrometric adjustment of the suspension cables using an ABS Auto Block System. Can be adjusted vertically by +/-15°.

01

It is made of CristalPlant®

Technologically advanced and unique composite material that is made up of a high percentage of natural extremely pure polyester polymers and acrylics; it is therefore an inert, hypoallergenic and non-toxic material.

02

Diva hides professional technology:

Suitable for office lighting that meets all the regulations specified in the EN 12464-1 standard in terms of luminance, colour rendering and glare.

03

Diva is able to create three different effects:

Direct emission, indirect emission or mixed direct/ indirect emission. The direct component is managed by a textured PMMA screen to control glare while the indirect component is managed by a highly efficient LED COB source that lights the ceiling with a Lambertian ‘matte’ reflectance to balance the luminance.

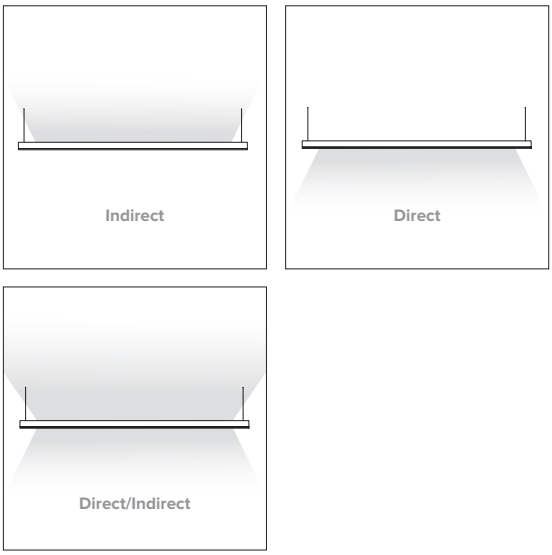

DIVA

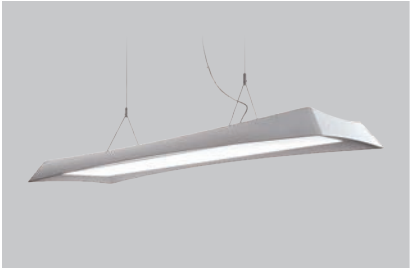



LED / 48W / UGR



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			88°	92°	
Fixture Power	55W	1	1.95	2.08	1441
Source Flux	6402lm	2	3.90	4.15	360
Fixture Flux	6402lm	3	5.84	6.23	160
Efficacy	116lm/W	4	7.79	8.30	90
TS803 Imax=234cd/klm	Imax 1497cd	5	9.74	10.38	58

	Driver	Colour	3000K
	EL.	◯	**1T4522**
	DALI	◯	**1T4523**

LED / 52W / UGR



4000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	82°	
Fixture Power	59W	1	1.67	1.75	2068
Source Flux	6833lm	2	3.34	3.50	517
Fixture Flux	6833lm	3	5.01	5.25	230
Efficacy	116lm/W	4	6.67	7.00	129
TS840 Imax=321cd/klm	Imax 2190cd	5	8.34	8.75	83

	Driver	Colour	4000K
	EL.	◯	**1T4524**
	DALI	◯	**1T4525**

Accessories

Control systems

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

SLIM

Suspension

GENERAL INFO
Indirect or direct/indirect modular suspension for LED sources.

LED
Linear Board LED Low Power High Efficiency
From 2590lm to 13760lm
3000K
Ra84

PRODUCT EFFICACY
Up to 114lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Body made of extruded anodised aluminium. Polycarbonate lateral end caps. Transparent polycarbonate upper safety screen. Lower diffusive screen made of ribbed, extruded opal polycarbonate.

Minimal modular suspension fixture with indirect or direct/indirect light emission with a compact size to disappear into the environment to leave space for just the architecture and the light.

There is also a linear version that can be configured in a system or stand alone, as well as a rectangular version that is particularly suitable for lighting open spaces.

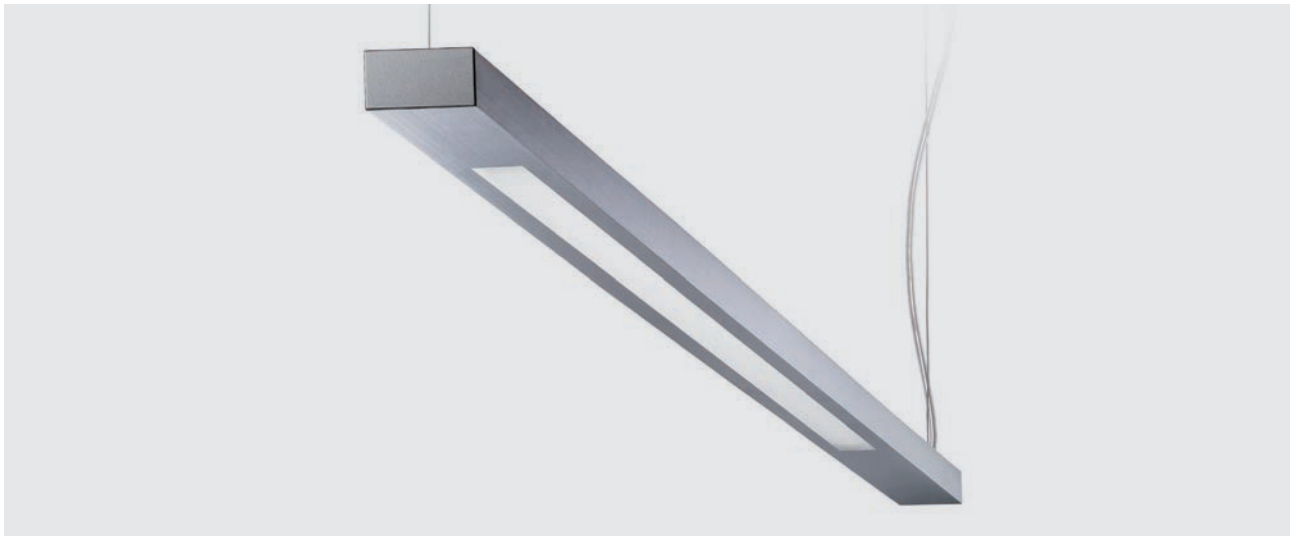

Line L. 1800mm

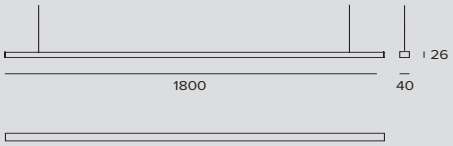

LED / 18W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			115°	
Fixture Power	21W	1	3.13	822
Source Flux	2590lm	2	6.26	206
Fixture Flux	2353lm	3	9.39	91
Efficacy	112lm/W	4	12.52	51
TS751 Imax=318cd/klm	Imax 824cd	5	15.65	33

Driver	Colour	3000K
EL.		**1T4186**

Line L. 3370mm

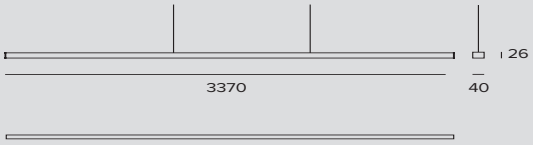

LED / 36W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			115°	
Fixture Power	42W	1	3.13	1645
Source Flux	5180lm	2	6.26	411
Fixture Flux	4705lm	3	9.39	183
Efficacy	112lm/W	4	12.52	103
TS751 Imax=318cd/klm	Imax 1648cd	5	15.65	66

Driver	Colour	3000K
EL.		**1T4188**

Line L. 1800mm

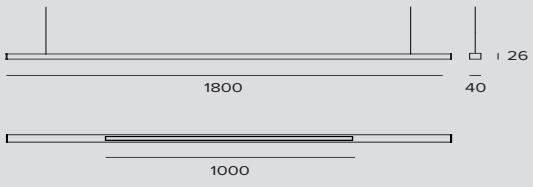

LED / 39W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			95°	
Fixture Power	44W	1	2.19	818
Source Flux	5620lm	2	4.37	205
Fixture Flux	4193lm	3	6.56	91
Efficacy	95lm/W	4	8.75	51
TS752 Imax=147cd/klm	Imax 824cd	5	10.93	33

Driver	Colour	3000K
EL.		**1T4187**

SLIM

Line L. 3370mm

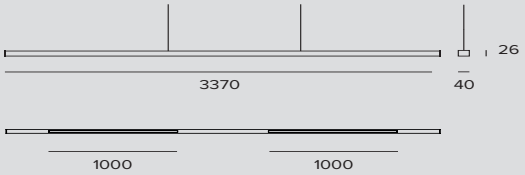

LED / 78W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			95°	
Fixture Power	88W	1	2.19	1636
Source Flux	11240lm	2	4.37	409
Fixture Flux	8386lm	3	6.56	182
Efficacy	95lm/W	4	8.75	102
TS752 Imax=147cd/klm	Imax 1649cd	5	10.93	65

Driver	Colour	3000K
EL.		**1T4189**

Rectangle L. 1800mm

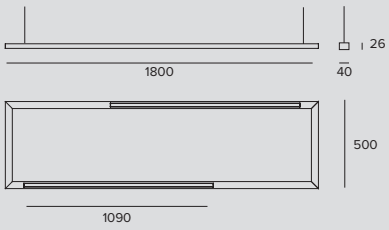

LED / 48W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			115°	
Fixture Power	55W	1	3.13	2185
Source Flux	6880lm	2	6.26	546
Fixture Flux	6249lm	3	9.39	243
Efficacy	114lm/W	4	12.52	137
TS751 Imax=318cd/klm	Imax 2189cd	5	15.65	87

Driver	Colour	3000K
EL.		**1T4190**

LED / 96W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			95°	
Fixture Power	110W	1	2.19	2003
Source Flux	13760lm	2	4.37	501
Fixture Flux	10266lm	3	6.56	223
Efficacy	93lm/W	4	8.75	125
TS752 Imax=147cd/klm	Imax 2019cd	5	10.93	80

Driver	Colour	3000K
EL.		**1T4191**

Related codes

Power Supply Kit

Code
1V7213

Off-centre circular canopy complete with feeding cable L 2000mm.
Maximum power 2kW.
For single switching.

Code
1V7523

Off-centre square canopy complete with feeding cable L 2000mm.
Maximum power 2kW.
For single switching.

Accessories

Suspension

L	Code
10000	**1V7264**

Steel suspension cable.
Accessory to be ordered only for installations higher than 2000mm.

Cable

L	Code
5000	**1V7262**
10000	**1V7263**

Three pole feeding cable.
Accessory to be ordered only for installations higher than 2000mm.

Mechanical connector



Code
1V7344

Joint for connecting two SLIM Line modules in a straight line. For the codes: 1T4186, 1T4187, 1T4188.

Code
1V7345

Joint for connecting two SLIM Line modules at 90°. For the codes: 1T4186, 1T4187, 1T4188.

Code
1V7343

Joint for connecting two SLIM Rectangle modules in a line.

Canopy

Code
1V7524

Canopy without feeding cable.
Square.

Code
1V7213AB

Canopy without feeding cable.
Circular.

MINIMINIMA

Ceiling
Suspension luminaire

A unique, thin linear element designed to remove sharp edges without connecting elements and any visible fastening system.

Available in many types to meet different needs: only indirect or combined direct/ indirect light emission.

Available also in a wall mounted version.

GENERAL INFO
Ceiling and suspension luminaire with direct light emission
600x50x32mm

LED
Linear Board LED Low Power High Efficiency 1720lm
3000K
Ra80
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 62 lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Body made of chromed or painted aluminium with opal polycarbonate diffuser.

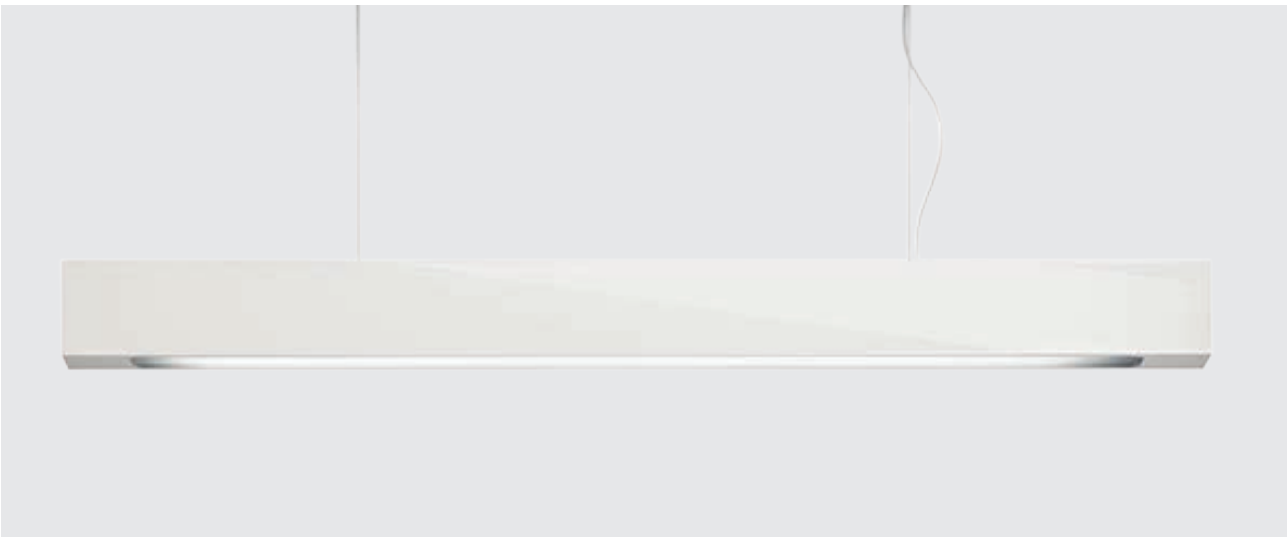

Ceiling



LED / 12W / DIRECT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			113°	
	Fixture Power	14W	1	3.01	326
	Source Flux	1720lm	2	6.02	81
	Fixture Flux	875lm	3	9.02	36
	Efficacy	62lm/W	4	12.03	20
TS748	Imax=190cd/klm	Imax	326cd	5	15.04	13

	Driver	Colour	3000K
	EL.		**1T4178**
	EL.		**1T4179**
	EL.		**1T4180**
	EL.		**1T4181**

Suspension



LED / 12W / DIRECT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			113°	
	Fixture Power	14W	1	3.01	326
	Source Flux	1720lm	2	6.02	81
	Fixture Flux	875lm	3	9.02	36
	Efficacy	62lm/W	4	12.03	20
TS748	Imax=190cd/klm	Imax	326cd	5	15.04	13

	Driver	Colour	3000K
	EL.		**1T4182**
	EL.		**1T4183**
	EL.		**1T4184**
	EL.		**1T4185**

OZ 230V
Stand alone

GENERAL INFO
Fixed multi-optic LED ceiling mounted fixture
Large version: 3x and 5x.
3x: 153x53mm h.100mm
5x: 253x53mm h.100mm

LED
Chip on board
From 1414lm to 3295lm
2700K – 3000K – 3500K – 4000K
Ra90

PRODUCT EFFICACY
Up to 101lm/W

OPTICS
SP – FL - MWFL

POWER SUPPLY
Electronic and DALI driver integrated into the body of the fixture.
Casambi control system available with an accessory (only for DALI version products).

MATERIAL
Black or white painted die-cast aluminium body with black polycarbonate frame.

New ceiling mounted multi-optic fixtures with a new design with miniaturised optics inspired by the OZ 48V version. Only available in the Large version for ceiling installations. Optics SP, FL and MWFL are suitable for installation in work environments - UGR<17 (EN12464-1).

Also available for recessed installation in the Small and Large versions with 1x, 3x or 5x modules.

01
OZ Stand alone

OZ 48V - the same family feeling

The same design, similar performance characteristics with a conceptually different installation philosophy. Small points of light provided by single or multiple elements that are self-sufficient, contrast with the concept of a system which is inspired on the other hand by a continuous line that develops in the space.



Stand Alone Ceiling Luminaire Large 3X (153x53mm)



LED / 18W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power		20W	1	0.33	9415
Source Flux		1968lm	2	0.66	2354
Fixture Flux		1538lm	3	0.99	1046
Efficacy		77lm/W	4	1.32	588
TS1194	Imax=4784cd/klm	Imax	9415cd	5	1.65	377

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7890EL**	**1T7891EL**	**1T7892EL**	**1T7893EL**
EL.	●	**1T7902EL**	**1T7903EL**	**1T7904EL**	**1T7905EL**
DALI	○	**1T7890DA**	**1T7891DA**	**1T7892DA**	**1T7893DA**
DALI	●	**1T7902DA**	**1T7903DA**	**1T7904DA**	**1T7905DA**

LED / 18W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
Fixture Power		20W	1	0.61	5243
Source Flux		2517lm	2	1.22	1311
Fixture Flux		1797lm	3	1.83	583
Efficacy		90lm/W	4	2.43	328
TS1195	Imax=2083cd/klm	Imax	5243cd	5	3.04	210

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7894EL**	**1T7895EL**	**1T7896EL**	**1T7897EL**
EL.	●	**1T7906EL**	**1T7907EL**	**1T7908EL**	**1T7909EL**
DALI	○	**1T7894DA**	**1T7895DA**	**1T7896DA**	**1T7897DA**
DALI	●	**1T7906DA**	**1T7907DA**	**1T7908DA**	**1T7909DA**

LED / 18W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
Fixture Power		20W	1	0.93	3157
Source Flux		2517lm	2	1.85	789
Fixture Flux		1947lm	3	2.78	351
Efficacy		97lm/W	4	3.71	197
TS1196	Imax=1254cd/klm	Imax	3157cd	5	4.64	126

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7898EL**	**1T7899EL**	**1T7900EL**	**1T7901EL**
EL.	●	**1T7910EL**	**1T7911EL**	**1T7912EL**	**1T7913EL**
DALI	○	**1T7898DA**	**1T7899DA**	**1T7900DA**	**1T7901DA**
DALI	●	**1T7910DA**	**1T7911DA**	**1T7912DA**	**1T7913DA**

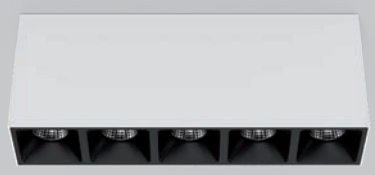

Stand Alone Ceiling Luminaire Large 5X (253x53mm)



LED / 30W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			19°	
Fixture Power		34W	1	0.33	15692
Source Flux		3280lm	2	0.66	3923
Fixture Flux		2563lm	3	0.99	1744
Efficacy		75lm/W	4	1.32	981
TS1194	Imax=4784cd/klm	Imax	15692cd	5	1.65	628

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7914EL**	**1T7915EL**	**1T7916EL**	**1T7917EL**
EL.	●	**1T7926EL**	**1T7927EL**	**1T7928EL**	**1T7929EL**
DALI	○	**1T7914DA**	**1T7915DA**	**1T7916DA**	**1T7917DA**
DALI	●	**1T7926DA**	**1T7927DA**	**1T7928DA**	**1T7929DA**

OZ

LED / 30W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			34°	
Fixture Power		34W	1	0.61	8739
Source Flux		4195lm	2	1.22	2185
Fixture Flux		2996lm	3	1.83	971
Efficacy		88lm/W	4	2.43	546
TS1195	Imax=2083cd/klm	Imax	5	3.04	350

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7918EL**	**1T7919EL**	**1T7920EL**	**1T7921EL**
EL.	●	**1T7930EL**	**1T7931EL**	**1T7932EL**	**1T7933EL**
DALI	○	**1T7918DA**	**1T7919DA**	**1T7920DA**	**1T7921DA**
DALI	●	**1T7930DA**	**1T7931DA**	**1T7932DA**	**1T7933DA**

LED / 30W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra90			50°	
Fixture Power		34W	1	0.93	5262
Source Flux		4195lm	2	1.85	1315
Fixture Flux		3246lm	3	2.78	585
Efficacy		95lm/W	4	3.71	329
TS1196	Imax=1254cd/klm	Imax	5	4.64	210

Driver	Colour	2700K	3000K	3500K	4000K
EL.	○	**1T7922EL**	**1T7923EL**	**1T7924EL**	**1T7925EL**
EL.	●	**1T7934EL**	**1T7935EL**	**1T7936EL**	**1T7937EL**
DALI	○	**1T7922DA**	**1T7923DA**	**1T7924DA**	**1T7925DA**
DALI	●	**1T7934DA**	**1T7935DA**	**1T7936DA**	**1T7937DA**

Accessories

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

THREESIXTY

GENERAL INFO
Circular LED fixture for ceiling mounted, suspension and wall mounted installations.
Ø384mm - Ø590mm - Ø870mm - Ø1150mm

LED
Self-cooling circular boards.
From 2017lm to 44809lm
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 117lm/W

OPTICS
OPAL – UGR – OPAL+HALO – UGR+HALO

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Powder coated, extruded, calendered aluminium.

A fixture with a pure and simple design in four different diameters and five different installation types : recessed, semi-recessed, ceiling mounted, suspension and wall mounted. Any light fixture can be configured in various ways when accessorised with different installation elements.

Available only with direct, direct/indirect light or in a direct light version combined with a slight indirect HALO component. a solution that is particularly suitable for the ceiling mounted, wall mounted or semi-recessed versions to create a soft frame of light. Also available in UGR<19 for the two smaller diameters.

Théàtre De Gennevilliers

Country
Gennevilliers - France

01

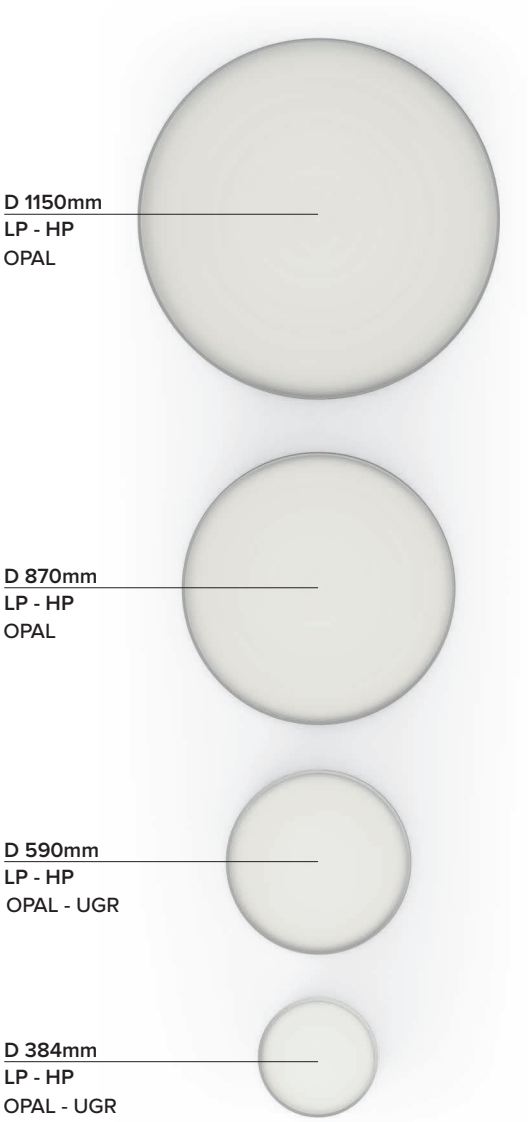

Four different diameters

To light spaces with different characteristics. Compact solutions to light environments with limited heights and large size fixtures to light great heights and showrooms.

02

A wide range of direct or direct/ indirect lighting effects

Diffused light, controlled light UGR<19 and a particular Halo effect

03

04

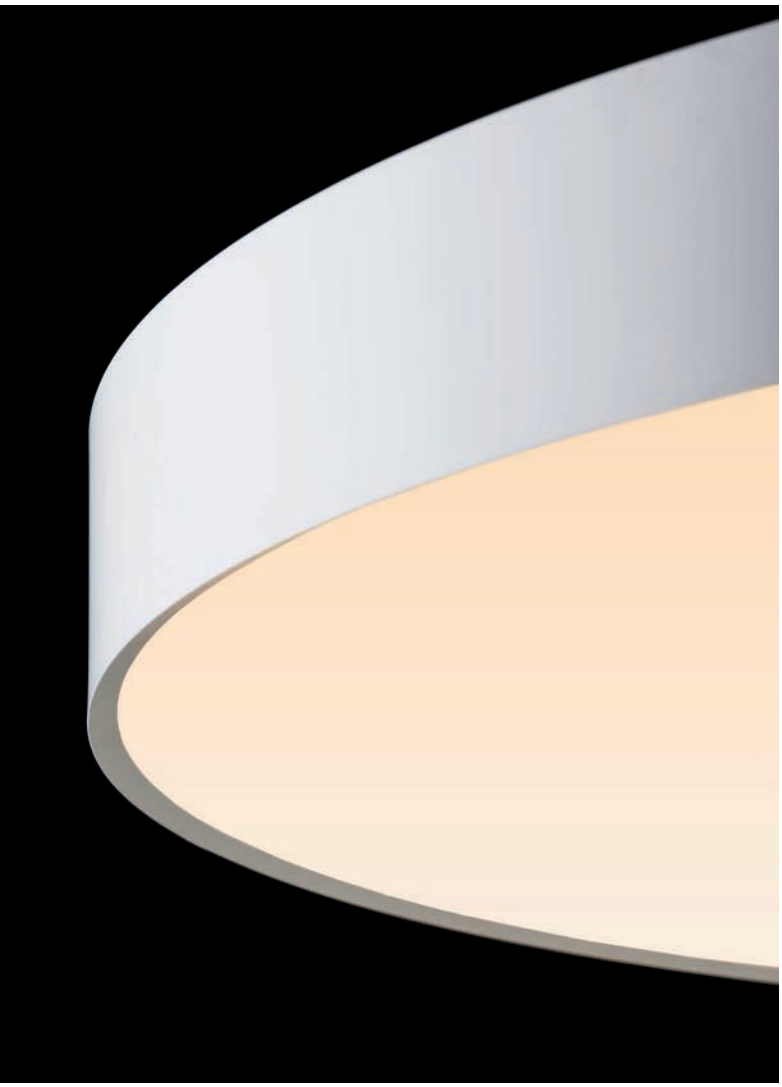

Recessed - Semi recessed

Frame



Adjustable frame



Wall and ceiling mounted





Suspension



Different lumen packages

For every diameter to light spaces with the same design.

One single body for five different installation solutions.

The fixture can be ceiling or wall mounted without the use of any accessories. For suspension installation a special suspension kit must be used.
For recessed or semi-recessed installations it must be completed with special outer casings.
The 384 mm and 590 mm versions are compatible with an accessory standard or HALO version load bearing outer frame that attaches directly to the false ceiling.
The 384 mm, 590 mm, 870 mm and 1150 mm versions are compatible with a recessed non load bearing frame that attaches to the main ceiling.

THREESIXTY

Ø 384mm



LED / 21W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power	24W	1	3.09	636	
Source Flux	3033lm	2	6.17	159	
Fixture Flux	1836lm	3	9.26	71	
Efficacy	76lm/W	4	12.35	40	
TS1002	Imax=210cd/klm	Imax	636cd	5	15.43	25

Driver	Colour	3000K	4000K
EL.	○	**1T6066EL**	**1T6067EL**
EL.	●	**1T6070EL**	**1T6071EL**
EL.	◌	**1T6068EL**	**1T6069EL**
DALI	○	**1T6066DA**	**1T6067DA**
DALI	●	**1T6070DA**	**1T6071DA**
DALI	◌	**1T6068DA**	**1T6069DA**

LED / 29W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power	33W	1	3.09	848	
Source Flux	4044lm	2	6.17	212	
Fixture Flux	2448lm	3	9.26	94	
Efficacy	74lm/W	4	12.35	53	
TS1003	Imax=210cd/klm	Imax	848cd	5	15.43	34

Driver	Colour	3000K	4000K
EL.	○	**1T6072EL**	**1T6073EL**
EL.	●	**1T6076EL**	**1T6077EL**
EL.	◌	**1T6074EL**	**1T6075EL**
DALI	○	**1T6072DA**	**1T6073DA**
DALI	●	**1T6076DA**	**1T6077DA**
DALI	◌	**1T6074DA**	**1T6075DA**

LED / 13W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power	15W	1	2.07	702	
Source Flux	2017lm	2	4.15	176	
Fixture Flux	1458lm	3	6.22	78	
Efficacy	97lm/W	4	8.29	44	
TS1018	Imax=348cd/klm	Imax	702cd	5	10.36	28

Driver	Colour	3000K	4000K
EL.	○	**1T6102EL**	**1T6103EL**
EL.	●	**1T6106EL**	**1T6107EL**
EL.	◌	**1T6104EL**	**1T6105EL**
DALI	○	**1T6102DA**	**1T6103DA**
DALI	●	**1T6106DA**	**1T6107DA**
DALI	◌	**1T6104DA**	**1T6105DA**

LED / 29W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power	33W	1	3.09	636	
Source Flux	4475lm	2	6.17	159	
Fixture Flux	3142lm	3	9.26	71	
Efficacy	95lm/W	4	12.35	40	
TS1004	Imax=142cd/klm	Imax	636cd	5	15.43	25

Driver	Colour	3000K	4000K
EL.	○	**1T6090EL**	**1T6091EL**
EL.	●	**1T6094EL**	**1T6095EL**
EL.	◌	**1T6092EL**	**1T6093EL**
DALI	○	**1T6090DA**	**1T6091DA**
DALI	●	**1T6094DA**	**1T6095DA**
DALI	◌	**1T6092DA**	**1T6093DA**

LED / 37W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power	42W	1	3.09	848	
Source Flux	5486lm	2	6.17	212	
Fixture Flux	3754lm	3	9.26	94	
Efficacy	89lm/W	4	12.35	53	
TS1014	Imax=155cd/klm	Imax	848cd	5	15.43	34

Driver	Colour	3000K	4000K
EL.	○	**1T6096EL**	**1T6097EL**
EL.	●	**1T6100EL**	**1T6101EL**
EL.	◌	**1T6098EL**	**1T6099EL**
DALI	○	**1T6096DA**	**1T6097DA**
DALI	●	**1T6100DA**	**1T6101DA**
DALI	◌	**1T6098DA**	**1T6099DA**

LED / 21W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		24W	1	2.07	711
Source Flux		3484lm	2	4.15	178
Fixture Flux		2783lm	3	6.22	79
Efficacy		116lm/W	4	8.29	44
TS1021	Imax=204cd/klm	Imax	711cd	5	10.36	28

Driver	Colour	3000K	4000K
EL.	○	**1T6126EL**	**1T6127EL**
EL.	●	**1T6130EL**	**1T6131EL**
EL.	◌	**1T6128EL**	**1T6129EL**
DALI	○	**1T6126DA**	**1T6127DA**
DALI	●	**1T6130DA**	**1T6131DA**
DALI	◌	**1T6128DA**	**1T6129DA**

LED / 35W (40,5W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		24W	1	3.09	636
Source Flux		3033lm	2	6.17	159
Fixture Flux		1836lm	3	9.26	71
Efficacy		76lm/W	4	12.35	40
TS1002	Imax=210cd/klm	Imax	636cd	5	15.43	25

Driver	Colour	3000K	4000K
EL.	○	**1T6078EL**	**1T6079EL**
EL.	●	**1T6082EL**	**1T6083EL**
EL.	◌	**1T6080EL**	**1T6081EL**
DALI	○	**1T6078DA**	**1T6079DA**
DALI	●	**1T6082DA**	**1T6083DA**
DALI	◌	**1T6080DA**	**1T6081DA**

LED / 43W (49,5W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		33W	1	3.09	848
Source Flux		4044lm	2	6.17	212
Fixture Flux		2448lm	3	9.26	94
Efficacy		74lm/W	4	12.35	53
TS1003	Imax=210cd/klm	Imax	848cd	5	15.43	34

Driver	Colour	3000K	4000K
EL.	○	**1T6084EL**	**1T6085EL**
EL.	●	**1T6088EL**	**1T6089EL**
EL.	◌	**1T6086EL**	**1T6087EL**
DALI	○	**1T6084DA**	**1T6085DA**
DALI	●	**1T6088DA**	**1T6089DA**
DALI	◌	**1T6086DA**	**1T6087DA**

LED / 27W (31,5W fixture power) / UGR + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		15W	1	2.07	702
Source Flux		2017lm	2	4.15	176
Fixture Flux		1458lm	3	6.22	78
Efficacy		97lm/W	4	8.29	44
TS1018	Imax=348cd/klm	Imax	702cd	5	10.36	28

Driver	Colour	3000K	4000K
EL.	○	**1T6114EL**	**1T6115EL**
EL.	●	**1T6118EL**	**1T6119EL**
EL.	◌	**1T6116EL**	**1T6117EL**
DALI	○	**1T6114DA**	**1T6115DA**
DALI	●	**1T6118DA**	**1T6119DA**
DALI	◌	**1T6116DA**	**1T6117DA**

Ø 590mm

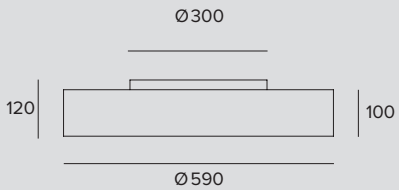

LED / 50W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		57W	1	3.09	1555
Source Flux		7418lm	2	6.17	389
Fixture Flux		4490lm	3	9.26	173
Efficacy		79lm/W	4	12.35	97
TS1002	Imax=210cd/klm	Imax	1555cd	5	15.43	62

Driver	Colour	3000K	4000K
EL.	○	**1T6138EL**	**1T6139EL**
EL.	●	**1T6142EL**	**1T6143EL**
EL.	◌	**1T6140EL**	**1T6141EL**
DALI	○	**1T6138DA**	**1T6139DA**
DALI	●	**1T6142DA**	**1T6143DA**
DALI	◌	**1T6140DA**	**1T6141DA**

THREESIXTY

LED / 67W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		75W	1	3.09	2079
Source Flux		9917lm	2	6.17	520
Fixture Flux		6003lm	3	9.26	231
Efficacy		80lm/W	4	12.35	130
TS1003	Imax=210cd/klm	Imax	2079cd	5	15.43	83

Driver	Colour	3000K	4000K
EL.	○	**1T6144EL**	**1T6145EL**
EL.	●	**1T6148EL**	**1T6149EL**
EL.	◌	**1T6146EL**	**1T6147EL**
DALI	○	**1T6144DA**	**1T6145DA**
DALI	●	**1T6148DA**	**1T6149DA**
DALI	◌	**1T6146DA**	**1T6147DA**

LED / 31W / DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		35W	1	2.07	1722
Source Flux		4944lm	2	4.15	430
Fixture Flux		3575lm	3	6.22	191
Efficacy		102lm/W	4	8.29	108
TS1019	Imax=348cd/klm	Imax	1722cd	5	10.36	69

Driver	Colour	3000K	4000K
EL.	○	**1T6174EL**	**1T6175EL**
EL.	●	**1T6178EL**	**1T6179EL**
EL.	◌	**1T6176EL**	**1T6177EL**
DALI	○	**1T6174DA**	**1T6175DA**
DALI	●	**1T6178DA**	**1T6179DA**
DALI	◌	**1T6176DA**	**1T6177DA**

LED / 67W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		76W	1	3.09	1555
Source Flux		10112lm	2	6.17	389
Fixture Flux		6932lm	3	9.26	173
Efficacy		91lm/W	4	12.35	97
TS1005	Imax=154cd/klm	Imax	1555cd	5	15.43	62

Driver	Colour	3000K	4000K
EL.	○	**1T6162EL**	**1T6163EL**
EL.	●	**1T6166EL**	**1T6167EL**
EL.	◌	**1T6164EL**	**1T6165EL**
DALI	○	**1T6162DA**	**1T6163DA**
DALI	●	**1T6166DA**	**1T6167DA**
DALI	◌	**1T6164DA**	**1T6165DA**

LED / 84W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		94W	1	3.09	2080
Source Flux		12611lm	2	6.17	520
Fixture Flux		8445lm	3	9.26	231
Efficacy		90lm/W	4	12.35	130
TS1015	Imax=165cd/klm	Imax	2080cd	5	15.43	83

Driver	Colour	3000K	4000K
EL.	○	**1T6168EL**	**1T6169EL**
EL.	●	**1T6172EL**	**1T6173EL**
EL.	◌	**1T6170EL**	**1T6171EL**
DALI	○	**1T6168DA**	**1T6169DA**
DALI	●	**1T6172DA**	**1T6173DA**
DALI	◌	**1T6170DA**	**1T6171DA**

LED / 48W / UP-DOWN UGR



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			92°	
Fixture Power		54W	1	2.07	1740
Source Flux		7692lm	2	4.15	435
Fixture Flux		6055lm	3	6.22	193
Efficacy		112lm/W	4	8.29	109
TS1020	Imax=226cd/klm	Imax	1740cd	5	10.36	70

Driver	Colour	3000K	4000K
EL.	○	**1T6198EL**	**1T6199EL**
EL.	●	**1T6202EL**	**1T6203EL**
EL.	◌	**1T6200EL**	**1T6201EL**
DALI	○	**1T6198DA**	**1T6199DA**
DALI	●	**1T6202DA**	**1T6203DA**
DALI	◌	**1T6200DA**	**1T6201DA**

LED / 70W (81W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		57W	1	3.09	1555
Source Flux		7418lm	2	6.17	389
Fixture Flux		4490lm	3	9.26	173
Efficacy		79lm/W	4	12.35	97
TS1002	Imax=210cd/klm	Imax	1555cd	5	15.43	62

Driver	Colour	3000K	4000K
EL.	○	**1T6150EL**	**1T6151EL**
EL.	●	**1T6154EL**	**1T6155EL**
EL.	◌	**1T6152EL**	**1T6153EL**
DALI	○	**1T6150DA**	**1T6151DA**
DALI	●	**1T6154DA**	**1T6155DA**
DALI	◌	**1T6152DA**	**1T6153DA**

LED / 87W (99W fixture power) / OPAL + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	75W	1	3.09	2079
Source Flux	9917lm	2	6.17	520
Fixture Flux	6003lm	3	9.26	231
Efficacy	80lm/W	4	12.35	130
TS1003 Imax=210cd/klm	Imax	5	15.43	83

Driver	Colour	3000K	4000K
EL.	○	**1T6156EL**	**1T6157EL**
EL.	●	**1T6160EL**	**1T6161EL**
EL.	◍	**1T6158EL**	**1T6159EL**
DALI	○	**1T6156DA**	**1T6157DA**
DALI	●	**1T6160DA**	**1T6161DA**
DALI	◍	**1T6158DA**	**1T6159DA**

LED / 51W (59W fixture power) / UGR + HALO



3000K		H(m)	D(m)	Emax(lx)
Ra84			92°	
Fixture Power	35W	1	2.07	1722
Source Flux	4944lm	2	4.15	430
Fixture Flux	3575lm	3	6.22	191
Efficacy	102lm/W	4	8.29	108
TS1019 Imax=348cd/klm	Imax	5	10.36	69

Driver	Colour	3000K	4000K
EL.	○	**1T6186EL**	**1T6187EL**
EL.	●	**1T6190EL**	**1T6191EL**
EL.	◍	**1T6188EL**	**1T6189EL**
DALI	○	**1T6186DA**	**1T6187DA**
DALI	●	**1T6190DA**	**1T6191DA**
DALI	◍	**1T6188DA**	**1T6189DA**

Ø 870mm

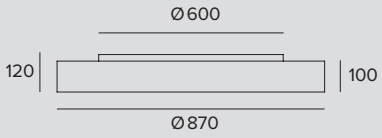

LED / 113W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	127W	1	3.09	3404
Source Flux	16238lm	2	6.17	851
Fixture Flux	9829lm	3	9.26	378
Efficacy	77lm/W	4	12.35	213
TS1002 Imax=210cd/klm	Imax	5	15.43	136

Driver	Colour	3000K	4000K
EL.	○	**1T6210EL**	**1T6211EL**
EL.	●	**1T6214EL**	**1T6215EL**
EL.	◍	**1T6212EL**	**1T6213EL**
DALI	○	**1T6210DA**	**1T6211DA**
DALI	●	**1T6214DA**	**1T6215DA**
DALI	◍	**1T6212DA**	**1T6213DA**

LED / 144W / DOWN OPAL



3000K		H(m)	D(m)	Emax(lx)
Ra84			114°	
Fixture Power	162W	1	3.09	4548
Source Flux	21693lm	2	6.17	1137
Fixture Flux	13131lm	3	9.26	505
Efficacy	81lm/W	4	12.35	284
TS1003 Imax=210cd/klm	Imax	5	15.43	182

Driver	Colour	3000K	4000K
EL.	○	**1T6216EL**	**1T6217EL**
EL.	●	**1T6220EL**	**1T6221EL**
EL.	◍	**1T6218EL**	**1T6219EL**
DALI	○	**1T6216DA**	**1T6217DA**
DALI	●	**1T6220DA**	**1T6221DA**
DALI	◍	**1T6218DA**	**1T6219DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

DIRECT/INDIRECT VERSION: Fitted with separate switches. Three different light effects available: direct light, indirect light and mixed direct/indirect light.

Check mounting instructions to verify the quantity of DALI drivers installed.

THREESIXTY

LED / 146W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		164W	1	3.09	3406
Source Flux		20629lm	2	6.17	852
Fixture Flux		13813lm	3	9.26	378
Efficacy		84lm/W	4	12.35	213
TS1006	Imax=165cd/klm	Imax	3406cd	5	15.43	136

Driver	Colour	3000K	4000K
EL.	○	**1T6234EL**	**1T6235EL**
EL.	●	**1T6238EL**	**1T6239EL**
EL.	◍	**1T6236EL**	**1T6237EL**
DALI	○	**1T6234DA**	**1T6235DA**
DALI	●	**1T6238DA**	**1T6239DA**
DALI	◍	**1T6236DA**	**1T6237DA**

LED / 177W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		199W	1	3.09	4548
Source Flux		26084lm	2	6.17	1137
Fixture Flux		17111lm	3	9.26	505
Efficacy		86lm/W	4	12.35	284
TS1016	Imax=174cd/klm	Imax	4548cd	5	15.43	182

Driver	Colour	3000K	4000K
EL.	○	**1T6240EL**	**1T6241EL**
EL.	●	**1T6244EL**	**1T6245EL**
EL.	◍	**1T6242EL**	**1T6243EL**
DALI	○	**1T6240DA**	**1T6241DA**
DALI	●	**1T6244DA**	**1T6245DA**
DALI	◍	**1T6242DA**	**1T6243DA**

LED / 138W (160W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		127W	1	3.09	3404
Source Flux		16238lm	2	6.17	851
Fixture Flux		9829lm	3	9.26	378
Efficacy		77lm/W	4	12.35	213
TS1002	Imax=210cd/klm	Imax	3404cd	5	15.43	136

Driver	Colour	3000K	4000K
EL.	○	**1T6222EL**	**1T6223EL**
EL.	●	**1T6226EL**	**1T6227EL**
EL.	◍	**1T6224EL**	**1T6225EL**
DALI	○	**1T6222DA**	**1T6223DA**
DALI	●	**1T6226DA**	**1T6227DA**
DALI	◍	**1T6224DA**	**1T6225DA**

LED / 174W (201W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		162W	1	3.09	4548
Source Flux		21693lm	2	6.17	1137
Fixture Flux		13131lm	3	9.26	505
Efficacy		81lm/W	4	12.35	284
TS1003	Imax=210cd/klm	Imax	4548cd	5	15.43	182

Driver	Colour	3000K	4000K
EL.	○	**1T6228EL**	**1T6229EL**
EL.	●	**1T6232EL**	**1T6233EL**
EL.	◍	**1T6230EL**	**1T6231EL**
DALI	○	**1T6228DA**	**1T6229DA**
DALI	●	**1T6232DA**	**1T6233DA**
DALI	◍	**1T6230DA**	**1T6231DA**

Ø 1150mm

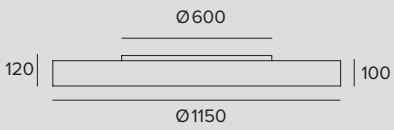

LED / 182W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		204W	1	3.09	5760
Source Flux		27475lm	2	6.17	1440
Fixture Flux		16631lm	3	9.26	640
Efficacy		82lm/W	4	12.35	360
TS1002	Imax=210cd/klm	Imax	5760cd	5	15.43	230

Driver	Colour	3000K	4000K
EL.	○	**1T6246EL**	**1T6247EL**
EL.	●	**1T6250EL**	**1T6251EL**
EL.	◍	**1T6248EL**	**1T6249EL**
DALI	○	**1T6246DA**	**1T6247DA**
DALI	●	**1T6250DA**	**1T6251DA**
DALI	◍	**1T6248DA**	**1T6249DA**

LED / 243W / DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		273W	1	3.09	7695
Source Flux		36705lm	2	6.17	1924
Fixture Flux		22218lm	3	9.26	855
Efficacy		81lm/W	4	12.35	481
TS1003	Imax=210cd/klm	Imax		15.43	308

Driver	Colour	3000K	4000K
EL.	○	**1T6252EL**	**1T6253EL**
EL.	●	**1T6256EL**	**1T6257EL**
EL.	◌	**1T6254EL**	**1T6255EL**
DALI	○	**1T6252DA**	**1T6253DA**
DALI	●	**1T6256DA**	**1T6257DA**
DALI	◌	**1T6254DA**	**1T6255DA**

LED / 233W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		261W	1	3.09	5761
Source Flux		33649lm	2	6.17	1440
Fixture Flux		22227lm	3	9.26	640
Efficacy		85lm/W	4	12.35	360
TS1007	Imax=171cd/klm	Imax		15.43	230

Driver	Colour	3000K	4000K
EL.	○	**1T6270EL**	**1T6271EL**
EL.	●	**1T6274EL**	**1T6275EL**
EL.	◌	**1T6272EL**	**1T6273EL**
DALI	○	**1T6270DA**	**1T6271DA**
DALI	●	**1T6274DA**	**1T6275DA**
DALI	◌	**1T6272DA**	**1T6273DA**

LED / 294W / UP-DOWN OPAL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		330W	1	3.09	7696
Source Flux		42879lm	2	6.17	1924
Fixture Flux		27815lm	3	9.26	855
Efficacy		84lm/W	4	12.35	481
TS1017	Imax=179cd/klm	Imax		15.43	308

Driver	Colour	3000K	4000K
EL.	○	**1T6276EL**	**1T6277EL**
EL.	●	**1T6280EL**	**1T6281EL**
EL.	◌	**1T6278EL**	**1T6279EL**
DALI	○	**1T6276DA**	**1T6277DA**
DALI	●	**1T6280DA**	**1T6281DA**
DALI	◌	**1T6278DA**	**1T6279DA**

LED / 226W (258W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		204W	1	3.09	5760
Source Flux		27475lm	2	6.17	1440
Fixture Flux		16631lm	3	9.26	640
Efficacy		82lm/W	4	12.35	360
TS1002	Imax=210cd/klm	Imax		15.43	230

Driver	Colour	3000K	4000K
EL.	○	**1T6258EL**	**1T6259EL**
EL.	●	**1T6262EL**	**1T6263EL**
EL.	◌	**1T6260EL**	**1T6261EL**
DALI	○	**1T6258DA**	**1T6259DA**
DALI	●	**1T6262DA**	**1T6263DA**
DALI	◌	**1T6260DA**	**1T6261DA**

LED / 286W (325W fixture power) / OPAL + HALO



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			114°	
Fixture Power		273W	1	3.09	7695
Source Flux		36705lm	2	6.17	1924
Fixture Flux		22218lm	3	9.26	855
Efficacy		81lm/W	4	12.35	481
TS1003	Imax=210cd/klm	Imax		15.43	308

Driver	Colour	3000K	4000K
EL.	○	**1T6264EL**	**1T6265EL**
EL.	●	**1T6268EL**	**1T6269EL**
EL.	◌	**1T6266EL**	**1T6267EL**
DALI	○	**1T6264DA**	**1T6265DA**
DALI	●	**1T6268DA**	**1T6269DA**
DALI	◌	**1T6266DA**	**1T6267DA**

Note

HALO Version: for the photometric curve please see the direct version. Indirect emission with the HALO effect is purely decorative and its effect depends on the type of installation.

DIRECT/INDIRECT VERSION: Fitted with separate switches. Three different light effects available: direct light, indirect light and mixed direct/indirect light.

Check mounting instructions to verify the quantity of DALI drivers installed.

THREESIXTY

Related codes

Suspension

	L	Colour	Code
	2000		**1T6282**
	4000		**1T6285**

Suspension kit composed of 3 steel cables with an ABS control system.
Suspension kit compatible with ceiling or wall installations, even inclined.

Power Supply Kit

	Driver	Colour	Code
	EL.		**1T6288EL**
	EL.		**1T6289EL**
	EL.		**1T6290EL**
	DALI		**1T6288DA**
	DALI		**1T6289DA**
	DALI		**1T6290DA**

Accessory for suspension installation composed of a canopy and 3 or 5 poles complete with a 4000mm power cable.

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

PANTHEON

GENERAL INFO
Direct or diffused LED light pendant fixture.
Ceiling only for Ø700 version
Ø400mm – Ø600mm – Ø700mm

LED
LED 230V module
From 708lm to 1865lm
3000K
Ra84

PRODUCT EFFICACY
Up to 93 lm/W

OPTICS
WFL for Pantheon Ø400
VWFL for Pantheon Ø600 and Ø700

POWER SUPPLY
No driver necessary
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
PANTHEON 400
Painted spun aluminium body. Integrated heat dissipator in die-cast aluminium.

PANTHEON 600 AND 700
Body in matt white shockproof PE obtained from rotational moulding. UV protection. 100% recyclable and solution-dyed. Integrated heat dissipator in die-cast aluminium.

This smooth and seemingly weightless suspension fixture combines high impact pure design with efficiency and a quality lighting effect.

It is available in three different sizes and two different materials. There is a small aluminium version, and a medium and large version in 100% recyclable, lightweight polyethylene. PANTHEON 600 and 700 are available with a translucent lens cap for a diffused emission or an opaque lens cap for direct light only.

Zonamerica

Architect
Estudio Dovat Arquitectos

Lighting Design
Estudio Hofstadter

Photographer
Ferrés - Cánepa

Country
Montevideo, Uruguay

PANTHEON

Ø 700mm



LED / 20W / DIRECT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			71°	
Fixture Power		20W	1	1.43	1135
Source Flux		1865lm	2	2.87	284
Fixture Flux		1847lm	3	4.30	126
Efficacy		92lm/W	4	5.74	71
TS806	Imax=608cd/klm	Imax	1135cd	5	7.17	45

Power supply	Colour	3000K
220-240Vac	◯	**1T4049**

LED / 20W / DIFFUSE / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			68°	
Fixture Power		20W	1	1.36	1101
Source Flux		1865lm	2	2.72	275
Fixture Flux		1865lm	3	4.08	122
Efficacy		93lm/W	4	5.43	69
TS805	Imax=590cd/klm	Imax	1101cd	5	6.79	44

Power supply	Colour	3000K
220-240Vac	◯	**1T4050**

Ø 600mm Suspension



LED / 18W / DIRECT / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			98°	
Fixture Power		18W	1	2.28	551
Source Flux		1148lm	2	4.56	138
Fixture Flux		1148lm	3	6.84	61
Efficacy		64lm/W	4	9.12	34
TS810	Imax=480cd/klm	Imax	551cd	5	11.41	22

Power supply	Colour	3000K
220-240Vac	◯	**1T4052**

LED / 18W / DIFFUSE / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			96°	
Fixture Power		18W	1	2.20	586
Source Flux		1295lm	2	4.41	147
Fixture Flux		1295lm	3	6.61	65
Efficacy		72lm/W	4	8.82	37
TS809	Imax=453cd/klm	Imax	586cd	5	11.02	23

Power supply	Colour	3000K
220-240Vac	◯	**1T4051**

Ø 600mm Ceiling mounted



LED / 18W / DIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			101°	
Fixture Power	18W	1	2.41	546
Source Flux	1199lm	2	4.83	137
Fixture Flux	1199lm	3	7.24	61
Efficacy	67lm/W	4	9.65	34
TS808 Imax=456cd/klm	Imax 546cd	5	12.07	22

Power supply	Colour	3000K
220-240Vac	◯	**1T4054**

LED / 18W / DIFFUSE / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			98°	
Fixture Power	18W	1	2.30	555
Source Flux	1249lm	2	4.61	139
Fixture Flux	1249lm	3	6.91	62
Efficacy	69lm/W	4	9.21	35
TS807 Imax=444cd/klm	Imax 555cd	5	11.52	22

Power supply	Colour	3000K
220-240Vac	◯	**1T4053**

Accessories

Canopy

Colour	Code
◯	**1T3978**

Canopy.

Control systems

Code
1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

PANTHEON

Ø 400mm



LED / 10W / WFL



		3000K	H(m)	D(m)	Emax(lx)
		Ra84		59°	
Fixture Power	10W	1	1.14	902	
Source Flux	708lm	2	2.28	225	
Fixture Flux	708lm	3	3.42	100	
Efficacy	71lm/W	4	4.56	56	
TS789	Imax=1274cd/klm	Imax	902cd	5	5.70	36

Power supply	Colour	3000K
220-240Vac	○	**1T4055**
220-240Vac	●	**1T4056**

Accessories

Canopy

Colour	Code
○	**1T3978**
●	**1T5430**

Canopy.

Control systems

Code
1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

Dermalogica

Architect
Limeblue

Lighting Design
Normalite

Photographer
Limeblue

Country
London, UK

CCTLED PENDANT

GENERAL INFO
Suspension with diffused downlight for high output LED lamps.
Ø317mm

LED
Chip on Board
From 2756lm to 3755lm
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.
Ra97 on request

PRODUCT EFFICACY
Up to 80lm/W

OPTICS
FL

POWER SUPPLY
Electronic – DALI - Emergency - DALI Emergency
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Black painted metal canopy and black painted die-cast aluminium heat sink. Microprismatic trasparent polycarbonate dome refractor optic.

A professional suspension fixture from the CCTLED range. Available with a faceted transparent polycarbonate optic for diffused lighting, complete with micro prismatic dome refractor to screen the source and to distribute the light softly.

Used together with the recessed version makes it possible to maintain the same effect and the same family feeling but with different installation types.

Ambient



LED / 18W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			39°	
	Fixture Power	20W	1	0.71	2757
	Source Flux	2756lm	2	1.42	689
	Fixture Flux	1663lm	3	2.12	306
	Efficacy	82lm/W	4	2.83	172
TS721	Imax=1000cd/klm	Imax	2757cd	5	3.54	110

	Kg	Certificate	Driver	3000K	4000K
	2	ENEC	EL.	**1T3274**	**1T3275**
	2	ENEC	DALI	**1T3298**	**1T3299**
	2.7		EL. EM.	**1T3322**	**1T3323**
	2.7		DALI EM.	**1T3346**	**1T3347**

LED / 25W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			39°	
	Fixture Power	29W	1	0.71	3662
	Source Flux	3663lm	2	1.42	916
	Fixture Flux	2210lm	3	2.12	407
	Efficacy	76lm/W	4	2.83	229
TS715	Imax=1000cd/klm	Imax	3662cd	5	3.54	146

	Kg	Certificate	Driver	3000K	4000K
	2	ENEC	EL.	**1T3272**	**1T3273**
	2	ENEC	DALI	**1T3296**	**1T3297**
	2.7		EL. EM.	**1T3320**	**1T3321**
	2.7		DALI EM.	**1T3344**	**1T3345**

Accessories

Decorative Ring

	Colour	Code
	●	**1T4061**
	○	**1T4062**

Dissipator cover.

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

CCTLED TUBE

GENERAL INFO
Ceiling-mounted, pendant, wall-mounted or track-mounted luminaire for high output LED sources.
Ø180mm

LED
Chip on board
From 2269lm to 4462lm
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code
Ra97 on request.

PRODUCT EFFICACY
Up to 118lm/W

OPTICS
SMART HE – TECH – FEEL – DEEP

POWER SUPPLY
Electronic – DALI - Emergency - DALI Emergency
Controllo Casambi: versioni DALI dotate di appositi accessori.

MATERIAL
Painted aluminium body. Painted polycarbonate decorative squared ring. Black painted die-cast aluminium internal frame and heat sink.

Belongs to the CCTLED range with different installation solutions: ceiling, suspension, wall and track. It also comes in the same power supply and optics in order to use the same fixture in an entire project. The same uniform quality effect with different installation solutions.

Basilica of the Sacred Heart

Country
Grenoble - France

01
CCTLED Tube

The same optical solutions in the “downlight” version

SMART, TECH, FEEL as well as a DEEP high performance version. Optics for a variety of environments from retail, hospitality right up to offices with the DEEP optic for heights of more than 6 metres.

Almacruz Hotel

Ligting Design
Katerina Jofre

Photographer
Nicolás Saieh

Country
Santiago - Cile

Project
Mas Fernades arquitectos asociados

CCTLED TUBE

Smart Facetted



LED / 18W / FACETTED / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			82°	
Fixture Power	21W	1	1.73	1466
Source Flux	2756lm	2	3.45	367
Fixture Flux	2360lm	3	5.18	163
Efficacy	111lm/W	4	6.90	92
TS658 Imax=592cd/klm	Imax	1632cd	5	8.63	59

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3162**	**1T3163**
2	ENEC	DALI	○	**1T3182**	**1T3183**
2.5		EL. EM.	○	**1T3202**	**1T3203**
2.5		DALI EM.	○	**1T3222**	**1T3223**

LED / 25W / FACETTED / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			82°	
Fixture Power	29W	1	1.73	1963
Source Flux	3663lm	2	3.45	491
Fixture Flux	3160lm	3	5.18	218
Efficacy	109lm/W	4	6.90	123
TS653 Imax=597cd/klm	Imax	2185cd	5	8.63	79

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3174**	**1T3175**
2	ENEC	DALI	○	**1T3194**	**1T3195**
2.5		EL. EM.	○	**1T3214**	**1T3215**
2.5		DALI EM.	○	**1T3234**	**1T3235**

Smart Matt



LED / 18W / MATT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			72°	
Fixture Power	21W	1	1.46	1904
Source Flux	2756lm	2	2.91	476
Fixture Flux	2337lm	3	4.37	212
Efficacy	110lm/W	4	5.82	119
TS657 Imax=691cd/klm	Imax	1904cd	5	7.28	76

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3164**	**1T3165**
2	ENEC	EL.	◐	**1T4455**	
2	ENEC	DALI	○	**1T3184**	**1T3185**
2	ENEC	DALI	◐	**1T4457**	
2.5		EL. EM.	○	**1T3204**	**1T3205**
2.5		DALI EM.	○	**1T3224**	**1T3225**

LED / 25W / MATT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			72°	
Fixture Power	29W	1	1.46	2527
Source Flux	3663lm	2	2.92	632
Fixture Flux	3106lm	3	4.37	281
Efficacy	107lm/W	4	5.83	158
TS654 Imax=690cd/klm	Imax	2527cd	5	7.29	101

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3176**	**1T3177**
2	ENEC	EL.	◐	**1T4456**	
2	ENEC	DALI	○	**1T3196**	**1T3197**
2	ENEC	DALI	◐	**1T4458**	
2.5		EL. EM.	○	**1T3216**	**1T3217**
2.5		DALI EM.	○	**1T3236**	**1T3237**

Tech Secondary facetted



LED / 15W / FACETTED / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			70°	
Fixture Power	17W	1	1.39	1689
Source Flux	2520lm	2	2.78	422
Fixture Flux	2070lm	3	4.16	188
Efficacy	120lm/W	4	5.55	106
Imax	1817cd	5	6.94	68

TS660 Imax=721cd/klm

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3166**	**1T3167**
2	ENEC	DALI	○	**1T3186**	**1T3187**
2.5		EL. EM.	○	**1T3206**	**1T3207**
2.5		DALI EM.	○	**1T3226**	**1T3227**

LED / 21W / FACETTED / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			70°	
Fixture Power	24W	1	1.39	2172
Source Flux	3240lm	2	2.78	543
Fixture Flux	2662lm	3	4.16	241
Efficacy	111lm/W	4	5.55	136
Imax	2336cd	5	6.94	87

TS655 Imax=721cd/klm

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3178**	**1T3179**
2	ENEC	DALI	○	**1T3198**	**1T3199**
2.5		EL. EM.	○	**1T3218**	**1T3219**
2.5		DALI EM.	○	**1T3238**	**1T3239**

Tech Secondary matt



LED / 15W / MATT / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			69°	
Fixture Power	17W	1	1.38	1679
Source Flux	2520lm	2	2.77	420
Fixture Flux	2070lm	3	4.15	187
Efficacy	120lm/W	4	5.54	105
Imax	1847cd	5	6.92	67

TS659 Imax=733cd/klm

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3168**	**1T3169**
2	ENEC	EL.	◐	**1T4459**	
2	ENEC	DALI	○	**1T3188**	**1T3189**
2	ENEC	DALI	◐	**1T4461**	
2.5		EL. EM.	○	**1T3208**	**1T3209**
2.5		DALI EM.	○	**1T3228**	**1T3229**

LED / 21W / MATT / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			69°	
Fixture Power	24W	1	1.38	2159
Source Flux	3240lm	2	2.77	540
Fixture Flux	2662lm	3	4.15	240
Efficacy	111lm/W	4	5.54	135
Imax	2375cd	5	6.92	86

TS656 Imax=733cd/klm

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3180**	**1T3181**
2	ENEC	EL.	◐	**1T4460**	
2	ENEC	DALI	○	**1T3200**	**1T3201**
2	ENEC	DALI	◐	**1T4462**	
2.5		EL. EM.	○	**1T3220**	**1T3221**
2.5		DALI EM.	○	**1T3240**	**1T3241**

CCTLED TUBE

Feel Facetted



LED / 14W / FACETTED / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			73°	
Fixture Power	15W	1	1.48	967
Source Flux	2269lm	2	2.96	242
Fixture Flux	1423lm	3	4.44	107
Efficacy	93lm/W	4	5.92	60
TS662 Imax=501cd/klm	Imax 1137cd	5	7.40	39

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3170**	**1T3171**
2	ENEC	DALI	○	**1T3190**	**1T3191**
2.5		EL. EM.	○	**1T3210**	**1T3211**
2.5		DALI EM.	○	**1T3230**	**1T3231**

Feel Matt



LED / 14W / MATT / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			70°	
Fixture Power	15W	1	1.41	898
Source Flux	2269lm	2	2.82	225
Fixture Flux	1268lm	3	4.23	100
Efficacy	83lm/W	4	5.64	56
TS663 Imax=415cd/klm	Imax 941cd	5	7.05	36

Kg	Certificate	Driver	Colour	3000K	4000K
2	ENEC	EL.	○	**1T3172**	**1T3173**
2	ENEC	EL.	○	**1T4463**	
2	ENEC	DALI	○	**1T3192**	**1T3193**
2	ENEC	DALI	○	**1T4464**	
2.5		EL. EM.	○	**1T3212**	**1T3213**
2.5		DALI EM.	○	**1T3232**	**1T3233**

Deep

LED / 33W / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			21°	
Fixture Power	36W	1	0.36	24354
Source Flux	4351lm	2	0.72	6089
Fixture Flux	3457lm	3	1.09	2706
Efficacy	97lm/W	4	1.45	1522
Imax	24354cd	5	1.81	974

Kg	Certificate	Driver	Colour	3000K	4000K
2.1	ENEC	EL.	○	**1T3433**	**1T3434**
2.1	ENEC	EL.	○	**1T4451**	
2.1	ENEC	DALI	○	**1T3437**	**1T3438**
2.1	ENEC	DALI	○	**1T4453**	
2.6		EL. EM.	○	**1T3441**	**1T3442**
2.6		DALI EM.	○	**1T3445**	**1T3446**

LED / 33W / FL



3000K		H(m)	D(m)	Emax(lx)
Ra84			33°	
Fixture Power	36W	1	0.59	10995
Source Flux	4351lm	2	1.18	2749
Fixture Flux	3378lm	3	1.78	1222
Efficacy	95lm/W	4	2.37	687
Imax	11039cd	5	2.96	440

Kg	Certificate	Driver	Colour	3000K	4000K
2.1	ENEC	EL.	○	**1T3435**	**1T3436**
2.1	ENEC	EL.	○	**1T4452**	
2.1	ENEC	DALI	○	**1T3439**	**1T3440**
2.1	ENEC	DALI	○	**1T4454**	
2.6		EL. EM.	○	**1T3443**	**1T3444**
2.6		DALI EM.	○	**1T3447**	**1T3448**

Related codes

Mounting System

Driver	Colour	Code
EL./EL. EM.	●	**1T0123**
DALI	●	**1T0123DA**
EL./EL. EM.	○	**1T4466**
DALI	○	**1T4467**
DALI EM.	●	**1T3243**

Ceiling mounting kit.

L	Driver	Colour	Code
1000	EL./EL. EM.	○	**1T0124**
1000	DALI	○	**1T0124DA**
6000	EL./EL. EM.	○	**1T4469**
6000	DALI	○	**1T4470**
1000	DALI EM.	○	**1T3244**

Suspension kit.

L	Driver	Colour	Code
2000	EL./EL. EM.	○	**1T3245**
2000	DALI	○	**1T3246**
6000	EL./EL. EM.	○	**1T4472**
6000	DALI	○	**1T4473**
2000	DALI EM.	○	**1T3247**

Double suspension kit.

Driver	Colour	Code
EL./EL. EM.	○	**1T3449**
DALI	○	**1T3450**
EL./EL. EM.	○	**1T4475**
DALI	○	**1T4476**
DALI EM.	○	**1T3451**

Wall mounting kit.

CCTLED TUBE

	Driver	Colour	Code
	EL./EL. EM.	◯	**1T3452**
	DALI	◯	**1T3453**
	EL./EL. EM.	◯	**1T4478**
	DALI	◯	**1T4479**
	DALI EM.	◯	**1T3454**

Wall mounting kit for double emission.

	Driver	Colour	Code
	EL.	◯	**1T0130**
	DALI	◯	**1T0130DA**
	EL.	◯	**1T4465**

Eurostandard Plus track kit.

	Driver	Colour	Code
	EL.	◯	**1T7402**

Eurostandard Plus track suspension kit.

	Driver	Colour	Code
	DALI	◯	**1T3242DA**

Eurostandard Plus track suspension kit.

Accessories

Decorative Ring



Ø	Colour	Code
180	○	**1T3248**

Round ring.



Ø	Colour	Code
180	○	**1T3249**

Square ring with micro prismatic diffusive screen.



Ø	Colour	Code
180	○	**1T3250**

Square ring with external silk screen printed screen.



Ø	Colour	Code
180	○	**1T3251**

XL ring.
For the TECH version.

Adapter



Ø	H	Driver	Colour	Code
100	32	EL.	○	**1T2221**
100	32	EL.	●	**1T2220**
100	32	EL.	◌	**1T2219**

Ceiling mounting adapter for electrified track type projectors.



Ø	H	Driver	Colour	Code
118	38	DALI	○	**9000/BPU-D-W**
118	38	DALI	●	**9000/BPU-D-B**
118	38	DALI	◌	**9000/BPU-D-G**

Ceiling mounting adapter for electrified track type projectors.



Cutout hole	Ø	H	Driver	Colour	Code
Ø105/125	130	60	EL.	○	**1T2223**
Ø105/125	130	60	EL.	●	**1T2222**
Ø105/125	130	60	EL.	◌	**1T2224**

Recessed mounting adapter for electrified track type projectors.
1T2222 - To be completed with 1T2220.
1T2223 - To be completed with 1T2221.
1T2224 - To be completed with 1T2219.



Cutout hole	Ø	H	Driver	Colour	Code
Ø125/130	144	67	DALI	○	**9000/BRU-W**
Ø125/130	144	67	DALI	●	**9000/BRU-B**
Ø125/130	144	67	DALI	◌	**9000/BRU-G**

Recessed mounting adapter for electrified track type projectors.
9000/BRU-G - To be completed with 9000/BPU-D-G.
9000/BRU-W - To be completed with 9000/BPU-D-W.
9000/BRU-B - To be completed with 9000/BPU-D-B.

Control systems

Code
1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

Code
1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

BEBOP

Ceiling / Suspension

GENERAL INFO
LED pendant and ceiling mounted for direct diffuse lighting.
Ø90mm

LED
Chip on board
From 1706lm to 1750lm
3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 91lm/W

OPTICS
MWFL - WFL

POWER SUPPLY
Electronic – DALI

MATERIAL
Painted aluminium body. Painted polycarbonate front element. Die-cast aluminium finned internal heat sink.

A range of high performance products characterised by simple, soft and rounded lines. Available in three different versions for ceiling mounted, suspension and recessed installation.

In all versions the LED lamps are retracted and hidden from view to ensure optimum visual comfort. The flexible installation makes it possible to use the same type of light in environments with different architectural characteristics.

Suspension



LED / 13W / MWFL

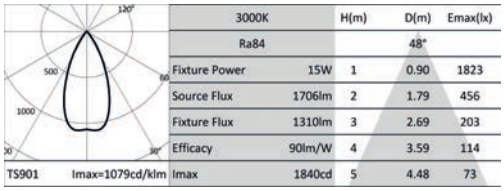

3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	15W	1	0.90	1823
Source Flux	1706lm	2	1.79	456
Fixture Flux	1310lm	3	2.69	203
Efficacy	90lm/W	4	3.59	114
TS901 Imax=1079cd/klm	Imax 1840cd	5	4.48	73

Driver	Colour	3000K	4000K
EL.	○	**1T4764EL**	**1T4765EL**
EL.	●	**1T5418EL**	**1T5419EL**

LED / 13W / WFL

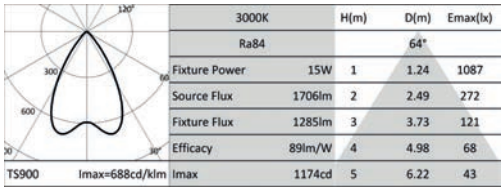

3000K		H(m)	D(m)	Emax(lx)
Ra84			64°	
Fixture Power	15W	1	1.24	1087
Source Flux	1706lm	2	2.49	272
Fixture Flux	1285lm	3	3.73	121
Efficacy	89lm/W	4	4.98	68
TS900 Imax=688cd/klm	Imax 1174cd	5	6.22	43

Driver	Colour	3000K	4000K
EL.	○	**1T4762EL**	**1T4763EL**
EL.	●	**1T5420EL**	**1T5421EL**

Ceiling



LED / 13W / MWFL

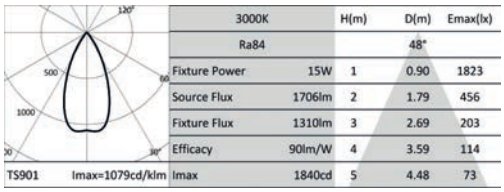

3000K		H(m)	D(m)	Emax(lx)
Ra84			48°	
Fixture Power	15W	1	0.90	1823
Source Flux	1706lm	2	1.79	456
Fixture Flux	1310lm	3	2.69	203
Efficacy	90lm/W	4	3.59	114
TS901 Imax=1079cd/klm	Imax 1840cd	5	4.48	73

Driver	Colour	3000K	4000K
EL.	○	**1T4768EL**	**1T4769EL**
EL.	●	**1T5414EL**	**1T5415EL**

LED / 13W / WFL

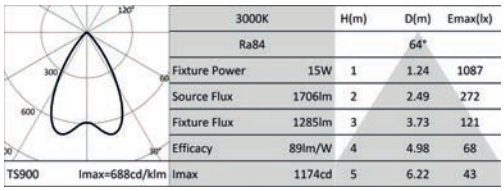

3000K		H(m)	D(m)	Emax(lx)
Ra84			64°	
Fixture Power	15W	1	1.24	1087
Source Flux	1706lm	2	2.49	272
Fixture Flux	1285lm	3	3.73	121
Efficacy	89lm/W	4	4.98	68
TS900 Imax=688cd/klm	Imax 1174cd	5	6.22	43

Driver	Colour	3000K	4000K
EL.	○	**1T4766EL**	**1T4767EL**
EL.	●	**1T5416EL**	**1T5417EL**

GLOBO

GENERAL INFO
Diffused emission suspension fixture for halogen, LED lamp or compact fluorescent lamps with E27 lamp holder.
Ø350mm

LED
Lamp not included

MATERIAL
Metal frame and opaline glass diffuser.

Diffused emission suspension fixture. The high quality opaline glass diffuser ensure maximum light diffusion and perfect distribution over surfaces

It can be fitted with any type of lamp with an E27 adapter including LED.



FLUO/HAL/LED / max 100W



	Power supply	Colour	Code
	220-240Vac		**344540**

Accessories

Control systems

	Code
	1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

WASABI

GENERAL INFO
Diffused LED light suspension fixture.
Ø103mm – Ø125mm – Ø163mm

LED
LED module 230V
From 806lm to 825lm
3000K
Ra80

PRODUCT EFFICACY
Up to 60lm/W

OPTICS
MWFL

POWER SUPPLY
Electronic
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
Satin polished and painted heat dissipator.
Diffuser in glazed opal glass.

A suspension fixture with soft lines inspired by the orient that combines the lightness of glass with the technology in the LED module as well as the particular heatsink with a shape inspired by nature.

No driver necessary thanks to the 230V LED module for maximum installation flexibility. Available in three different sizes.

Ø 163mm



LED / 13W

3000K		H(m)	D(m)	Emax(lx)
Ra80			21°	
Fixture Power	14W	1	0.38	376
Source Flux	808lm	2	0.75	94
Fixture Flux	808lm	3	1.13	42
Efficacy	59lm/W	4	1.50	24
Imax	376cd	5	1.88	15

Power supply	Colour	3000K
220-240Vac	○	**1T3979**
220-240Vac	●	**1T3980**

Ø 125mm



LED / 13W

3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	14W	1	0.17	202
Source Flux	806lm	2	0.33	50
Fixture Flux	806lm	3	0.50	22
Efficacy	59lm/W	4	0.66	13
Imax	202cd	5	0.83	8

Power supply	Colour	3000K
220-240Vac	○	**1T3991**
220-240Vac	●	**1T3992**

Ø 103mm



LED / 13W

3000K		H(m)	D(m)	Emax(lx)
Ra80			14°	
Fixture Power	14W	1	0.25	319
Source Flux	825lm	2	0.49	80
Fixture Flux	825lm	3	0.74	35
Efficacy	60lm/W	4	0.99	20
Imax	319cd	5	1.23	13

Power supply	Colour	3000K
220-240Vac	○	**1T3985**
220-240Vac	●	**1T3986**

Canopy

Colour	Code
○	**1T3978**
●	**1T5430**

Canopy.

DECANTER

GENERAL INFO
LED suspension for direct diffuse lighting.
Ø170mm – Ø320mm – Ø480mm

LED
Circular LED board
From 264lm to 1553lm
3000K
Ra84

PRODUCT EFFICACY
Up to 104lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Disc made of Baydur® (large and medium models) or aluminium (small version). Aluminium stem and decorative canopy matt painted. Microprismatic diffuser in transparent PMMA. Painted decorative canopy.

Its sinuous shape is the result of research into innovative materials and moulding techniques that make it possible to obtain extremely thin thicknesses; the result is a light suspension fixture with excellent mechanical resistance.

The special micro prismatic screen ensures perfect, particularly homogeneous light diffusion that is comfortable to the eye. Available in three different sizes, from extremely small for decorative light up to an excellent light on work surfaces.

Ø 170mm



LED / 4W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			83°	
Fixture Power	6W	1	1.78	140
Source Flux	264lm	2	3.56	35
Fixture Flux	264lm	3	5.34	16
Efficacy	44lm/W	4	7.12	9
TS626 Imax=532cd/klm	Imax 140cd	5	8.90	6

	Driver	Colour	3000K
	EL.	○	**1T4076**
	EL.	●	**1T4077**

Ø 320mm



LED / 9W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			83°	
Fixture Power	10W	1	1.76	295
Source Flux	528lm	2	3.53	74
Fixture Flux	528lm	3	5.29	33
Efficacy	53lm/W	4	7.06	18
TS627 Imax=558cd/klm	Imax 295cd	5	8.82	12

	Driver	Colour	3000K
	EL.	○	**1T4082**
	EL.	●	**1T4083**

Ø 480mm



LED / 13W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			84°	
Fixture Power	15W	1	1.80	851
Source Flux	1553lm	2	3.60	213
Fixture Flux	1553lm	3	5.40	95
Efficacy	104lm/W	4	7.21	53
TS628 Imax=549cd/klm	Imax 853cd	5	9.01	34

	Driver	Colour	3000K
	EL.	○	**1T4088**
	EL.	●	**1T4089**

MONETA

Ceiling and suspension luminaire

GENERAL INFO
Direct emission ceiling and suspension fixture for LED dimmable.
Ø140mm

LED
LED module 230V
871lm
3000K
Ra90

PRODUCT EFFICACY
51lm/W

OPTICS
VWFL

POWER SUPPLY
No driver necessary
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
Matt painted aluminium body complete with opaline polycarbonate diffuser.

A range of products with three different versions for three different installation types: ceiling mounted, suspension and wall mounted.

Just over 3cm thick to exploit the potential of the LED lamp to the full; compact size, excellent performance, low consumption and no driver make this a product where aesthetics and technology combine.

No driver necessary thanks to the 230V LED module for maximum installation flexibility.

Available also in wall mounted version.

Suspension



LED / 17W / VWFL

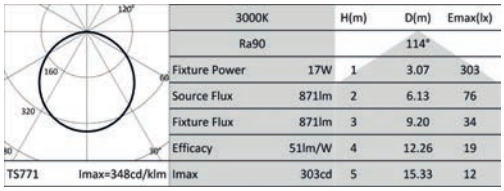

	3000K		H(m)	D(m)	Emax(lx)
	Ra90			114°	
	Fixture Power	17W	1	3.07	303
	Source Flux	871lm	2	6.13	76
	Fixture Flux	871lm	3	9.20	34
	Efficacy	51lm/W	4	12.26	19
	Imax	303cd	5	15.33	12

	Power supply	Colour	3000K
	220-240Vac	○	**1T3768**
	220-240Vac	●	**1T3769**

Ceiling



LED / 17W / VWFL

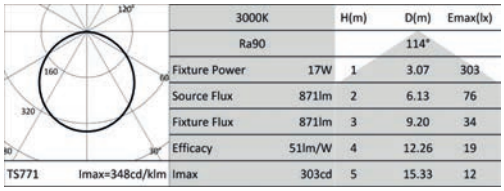

	3000K		H(m)	D(m)	Emax(lx)
	Ra90			114°	
	Fixture Power	17W	1	3.07	303
	Source Flux	871lm	2	6.13	76
	Fixture Flux	871lm	3	9.20	34
	Efficacy	51lm/W	4	12.26	19
	Imax	303cd	5	15.33	12

	Power supply	Colour	3000K
	220-240Vac	○	**1T3765**
	220-240Vac	●	**1T3766**

Accessories

Control systems

	Code
	1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

Indoor

Wall mounted luminaires

Wall mounted luminaires



518
FLOOD

520
HALL



522
SLIM

524
MINIMINIMA

526
MONETA

528
BRAQUE

530
BOTTONE

532
OSIRIDE

538
PROFESSIONAL

FLOOD

GENERAL INFO
Wall mounted fixture with indirect light emission for LED sources.
224x330mm
224x700mm

LED
Linear boards
From 2610lm to 5220lm
3000K
Ra80
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 119lm/W

OPTICS
VWFL

POWER SUPPLY
DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Painted metal body. Transparent protective screen.

Wall mounted fixture with indirect light available in two different lengths with two different power supplies for soft and comfortable indirect light. It is suitable for lighting small and large spaces.

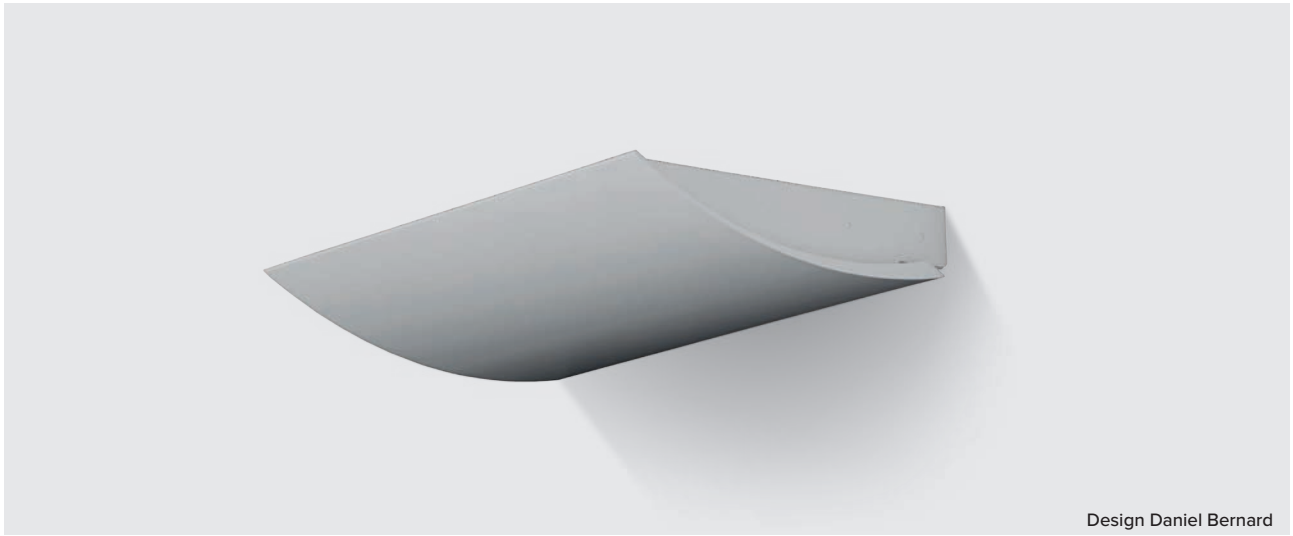

Design Daniel Bernard

L. 330mm



LED / 18W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			117°	
Fixture Power	22W	1	3.29	875
Source Flux	2610lm	2	6.57	219
Fixture Flux	2432lm	3	9.86	97
Efficacy	111lm/W	4	13.14	55
Imax	875cd	5	16.43	35

	Driver	Colour	3000K
	DALI	○	**1T4512**
	DALI	●	**1T4514**

L. 700mm



LED / 36W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			117°	
Fixture Power	41W	1	3.29	1751
Source Flux	5220lm	2	6.57	438
Fixture Flux	4865lm	3	9.86	195
Efficacy	119lm/W	4	13.14	109
Imax	1751cd	5	16.43	70

	Driver	Colour	3000K
	DALI	○	**1T4513**
	DALI	●	**1T4515**

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

HALL

GENERAL INFO
Wall mounted fixture with indirect light emission for LED sources.
297x330x112mm

LED
LED Low Power High Efficiency Linear boards
5160lm
3000K
Ra80
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
111lm/W

OPTICS
ASYM

POWER SUPPLY
DALI - Casambi on board

MATERIAL
Painted metal body. Diffuse protective screen.

Professional applique with indirect light emission with an asymmetrical optic. The strongly asymmetric emission allows for deep indirect lighting of large spaces.

Used on its own it is capable of producing soft and comfortable light: combined with direct lighting on the other hand it balances and improves visual comfort throughout the space.

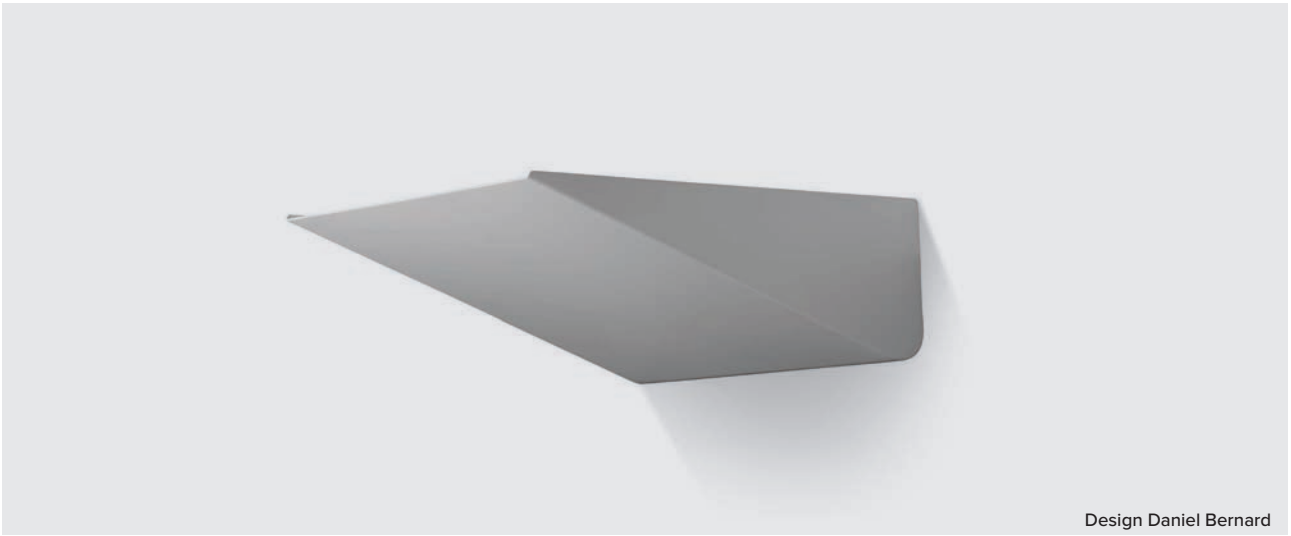

Design Daniel Bernard

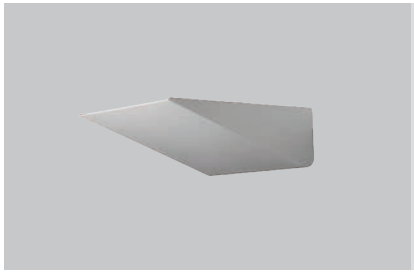



LED / 36W / ASYMMETRICAL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			121°	89°	
Fixture Power	40W	1	3.52	4.23	1670
Source Flux	5160lm	2	7.03	8.46	418
Fixture Flux	4453lm	3	10.55	12.69	186
Efficacy	111lm/W	4	14.07	16.93	104
TS892 Imax=487cd/klm	Imax 2511cd	5	17.59	21.16	67

	Driver	Colour	3000K
	DALI		**1T4499**
	DALI		**1T4506**
	DALI		**1T4507**
	CASAMBI		**1T4499CA**

Accessories

Control systems

	Code
	1T5349

Wireless control unit for DALI fixtures.
It generates a local DALI bus that can control individual fixtures.
The module can be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 4.0 technology.
The devices create a wireless mesh network that can control up to 128 fixtures.
IP20.

	Code
	1T5352

IP20 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in indoor applications.
It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A.

SLIM

Wall mounted

GENERAL INFO
Indirect or direct/indirect modular wall mounted luminaire for LED sources.
638x26x80
1238x26x80

LED
Linear LED boards Low Power High efficiency
From 1720lm to 6880lm
3000K
Ra84

PRODUCT EFFICACY
Up to 112lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Body made of extruded anodised aluminium. Polycarbonate lateral end caps. Lower diffusive screen made of ribbed, extruded opal polycarbonate. Transparent polycarbonate upper safety screen.

Compact size minimal modular applique with indirect/direct light emission that disappears into its surroundings leaving space for the architecture and light only.

Also available in a modular system suspension version or stand-alone, as well as a rectangular version that is particularly suitable for lighting open spaces in the office environment. Coordinates with the indirect or direct/indirect light emission wall mounted solution.

Design Daniel Bernard

Wall L. 638mm



LED / 12W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			115°	
Fixture Power	14W	1	3.13	546
Source Flux	1720lm	2	6.26	137
Fixture Flux	1562lm	3	9.39	61
Efficacy	112lm/W	4	12.52	34
TS751 Imax=318cd/klm	Imax 547cd	5	15.65	22

Driver	Colour	3000K
EL.		**1T4192**

LED / 24W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			95°	
Fixture Power	28W	1	2.19	501
Source Flux	3440lm	2	4.37	125
Fixture Flux	2567lm	3	6.56	56
Efficacy	92lm/W	4	8.75	31
TS752 Imax=147cd/klm	Imax 505cd	5	10.93	20

Driver	Colour	3000K
EL.		**1T4193**

Wall L. 1238mm



LED / 24W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			115°	
Fixture Power	28W	1	3.13	1092
Source Flux	3440lm	2	6.26	273
Fixture Flux	3125lm	3	9.39	121
Efficacy	112lm/W	4	12.52	68
TS751 Imax=318cd/klm	Imax 1095cd	5	15.65	44

Driver	Colour	3000K
EL.		**1T4194**

LED / 48W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			95°	
Fixture Power	56W	1	2.19	1002
Source Flux	6880lm	2	4.37	250
Fixture Flux	5133lm	3	6.56	111
Efficacy	92lm/W	4	8.75	63
TS752 Imax=147cd/klm	Imax 1009cd	5	10.93	40

Driver	Colour	3000K
EL.		**1T4195**

MINIMINIMA

Wall mounted

GENERAL INFO
Wall mounted fixture for LED sources with indirect or direct/indirect light emission.
600x50x32mm

LED
Linear Board LED Low Power High Efficiency
1720lm
3000K
Ra80
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Up to 60lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Body made of chromed or painted aluminium with opal polycarbonate diffuser.

A unique, thin linear element designed to remove sharp edges without connecting elements and any visible fastening system.

Available in different types to meet different needs: only indirect or combined direct/ indirect light emission.

Available in ceiling mounted and suspensions versions.

Wall



LED / 12W / INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			111°	
Fixture Power	14W	1	2.89	321
Source Flux	1720lm	2	5.79	80
Fixture Flux	842lm	3	8.68	36
Efficacy	60lm/W	4	11.58	20
TS749 Imax=187cd/klm	Imax	321cd	5	14.47	13

	Driver	Colour	3000K
	EL.		**1T4170**
	EL.		**1T4171**
	EL.		**1T4172**
	EL.		**1T4173**

LED / 12W / DIRECT/INDIRECT / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra80			114°	
Fixture Power	14W	1	3.08	185
Source Flux	1720lm	2	6.15	46
Fixture Flux	1071lm	3	9.23	21
Efficacy	76lm/W	4	12.31	12
TS750 Imax=112cd/klm	Imax	192cd	5	15.38	7

	Driver	Colour	3000K
	EL.		**1T4174**
	EL.		**1T4175**
	EL.		**1T4176**
	EL.		**1T4177**

MONETA

Wall mounted

GENERAL INFO
Wall mounted mono-emission LED fixture.
Ø140mm

LED
LED module 230V
825lm
3000K
Ra90

PRODUCT EFFICACY
46lm/W

OPTICS
VWFL

POWER SUPPLY
No driver necessary
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
Matt painted aluminium body complete with opaline polycarbonate diffuser.

A range of products with three different versions for three different installation types: ceiling mounted, suspension and wall mounted.

Just over 3cm thick to exploit the potential of the LED lamp to the full; compact size, excellent performance, low consumption and no driver make this a product where aesthetics and technology combine.

Wall



LED / 17W / VWFL

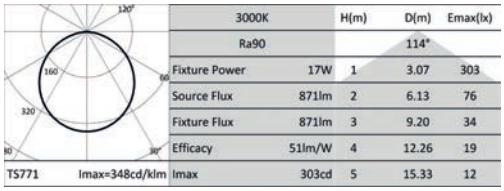

	3000K		H(m)	D(m)	Emax(lx)
	Ra90			114°	
	Fixture Power	17W	1	3.07	303
	Source Flux	871lm	2	6.13	76
	Fixture Flux	871lm	3	9.20	34
	Efficacy	51lm/W	4	12.26	19
	Imax	303cd	5	15.33	12

	Power supply	Colour	3000K
	220-240Vac	○	**1T3771**
	220-240Vac	●	**1T3772**

Accessories

Control systems

	Code
	1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

BRAQUE

GENERAL INFO
Indirect emission wall mounted LED fixture.
200x79x29mm
65x200x29mm

LED
LED module 230V
893lm
3000K
Ra80

PRODUCT EFFICACY
65lm/W

OPTICS
VWFL

POWER SUPPLY
No driver necessary
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
Matt painted aluminium body. Transparent polycarbonate screen.

Metal applique with sharp edges with mains voltage LED lamps. The special type of machining of the piece hollowed out from a solid provides perfect edges without visible joints or screws.

Available in two different sizes and two different installation types.

It doesn’t need to the driver.



Vertical



LED / 13W / VWFL

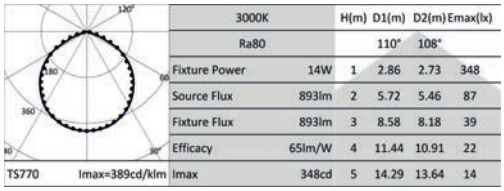

	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			110°	108°	
	Fixture Power	14W	1	2.86	2.73	348
	Source Flux	893lm	2	5.72	5.46	87
	Fixture Flux	893lm	3	8.58	8.18	39
	Efficacy	65lm/W	4	11.44	10.91	22
TS770	Imax=389cd/klm	Imax	348cd	5	14.29	13.64	14

Colour	3000K
○	**1T3762**
●	**1T3763**

Horizontal



LED / 13W / VWFL

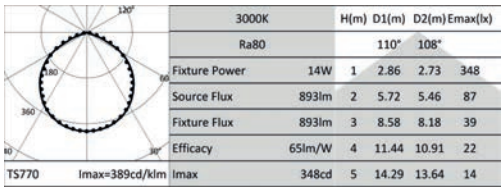

	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			110°	108°	
	Fixture Power	14W	1	2.86	2.73	348
	Source Flux	893lm	2	5.72	5.46	87
	Fixture Flux	893lm	3	8.58	8.18	39
	Efficacy	65lm/W	4	11.44	10.91	22
TS770	Imax=389cd/klm	Imax	348cd	5	14.29	13.64	14

Colour	3000K
○	**1T3759**
●	**1T3760**

Accessories

Control systems

	Code
	1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

BOTTONE

GENERAL INFO
Wall mounted or ceiling mounted LED fixture.
Ø400mm – Ø320mm – Ø260mm

LED
Ø260mm version
LED module 230V
554lm
3000K
Ra80

Ø400mm – Ø320mm
Circular LED board
From 818lm to 826lm
3000K
Ra80

PRODUCT EFFICACY
Up to 83lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
Diffuser in glazed opal glass.
White painted metal mounting plate.

A LED solution for functional yet decorative lighting at the same time.

The combination of mains voltage LED lamps combined with the excellent diffusion of the opal glass, ensures a soft and enveloping emission.

Ø 260mm



LED / 14W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			132°	
Fixture Power	14W	1	4.47	120
Source Flux	554lm	2	8.95	30
Fixture Flux	554lm	3	13.42	13
Efficacy	40lm/W	4	17.89	8
Imax	120cd	5	22.37	5

TS797 Imax=217cd/klm

Colour	3000K
○	**1T3997**

Ø 320mm



LED / 8W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			129°	
Fixture Power	10W	1	4.22	186
Source Flux	826lm	2	8.43	47
Fixture Flux	826lm	3	12.65	21
Efficacy	83lm/W	4	16.86	12
Imax	186cd	5	21.08	7

TS796 Imax=226cd/klm

Driver	Colour	3000K
EL.	○	**1T3998**

Ø 400mm



LED / 8W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			125°	
Fixture Power	10W	1	3.82	204
Source Flux	818lm	2	7.64	51
Fixture Flux	818lm	3	11.45	23
Efficacy	82lm/W	4	15.27	13
Imax	204cd	5	19.09	8

TS795 Imax=250cd/klm

Driver	Colour	3000K
EL.	○	**1T3999**

OSIRIDE

GENERAL INFO
Wall or ceiling mounted fixture for halogen or compact fluorescent lamps or LED version.
Ø200mm – Ø260mm
Ø320mm – Ø400mm – Ø500mm

LED
LED VERSION
Ø260mm
230V LED module

Ø320MM – Ø400MM
Circular boards
From 619lm to 993m
3000K
Ra84

PRODUCT EFFICACY
LED VERSION
Up to 99lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
White painted metal body and satin opaline white glass diffuser.

A range of ceiling/wall mounted fixtures in satin opaline white glass. Two different versions: simple with a white frame or more sophisticated with a chrome frame.

Five different sizes that can be equipped with halogen lamps, compact fluorescent lamps or LED lamps with E27 adapters not included or a 230V LED version with the LED lamp included.

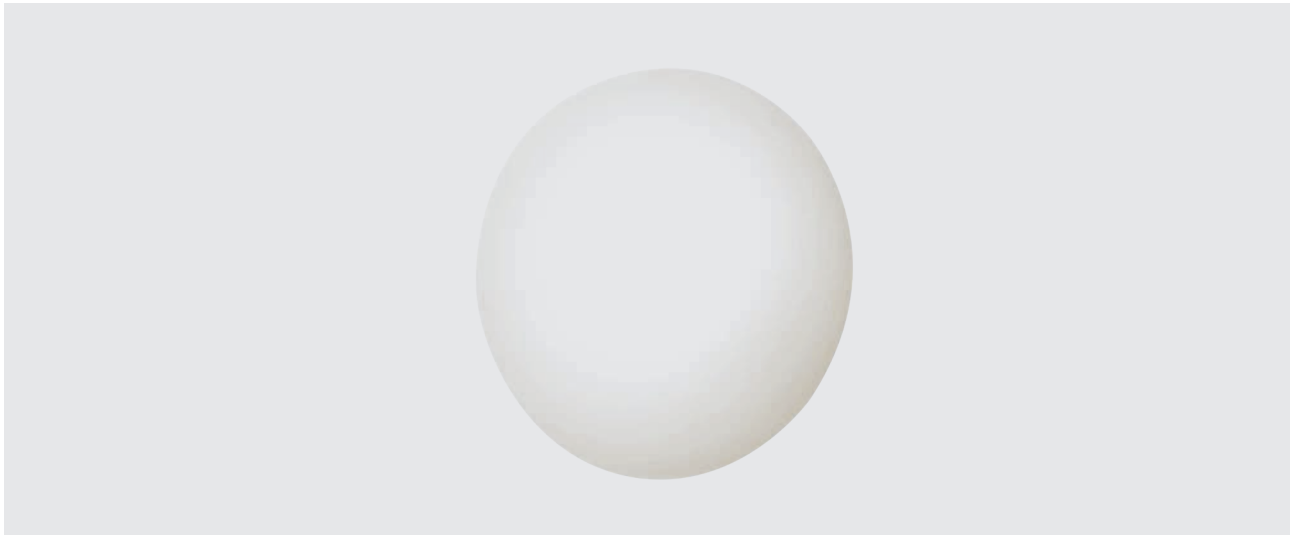

Ø 200mm



Power supply	Colour	Code
220-240Vac		**323494IP**

Ø 260mm



Power supply	Colour	Code
220-240Vac		**323404IP**

Ø 320mm



Power supply	Colour	Code
220-240Vac		**323414IP**

OSIRIDE

Ø 400mm



E27 FLUO/HAL/LED / max 2x42W

Power supply	Colour	Code
220-240Vac		**323424IP**

Ø 500mm



E27 FLUO/HAL/LED / max 2x42W

Power supply	Colour	Code
220-240Vac		**323434IP**

LED Ø 260mm



LED / 14W / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			121°	
Fixture Power		14W	1	3.56	164
Source Flux		619lm	2	7.12	41
Fixture Flux		619lm	3	10.68	18
Efficacy		45lm/W	4	14.25	10
TS801	Imax=265cd/klm	Imax	164cd	5	17.81	7

Power supply	Colour	3000K
220-240Vac		**1T4002**

LED Ø 320mm



LED / 8W / VWFL

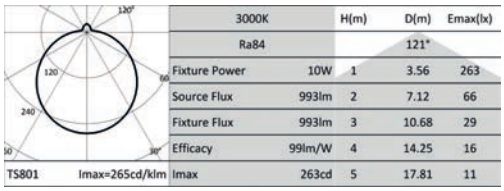

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			121°	
Fixture Power	10W		1	3.56	263
Source Flux	993lm		2	7.12	66
Fixture Flux	993lm		3	10.68	29
Efficacy	99lm/W		4	14.25	16
Imax	263cd		5	17.81	11

Driver	Colour	3000K
EL.		**1T4003**

LED Ø 400mm



LED / 8W / VWFL

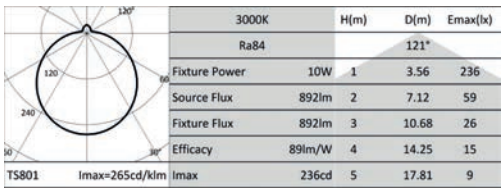

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			121°	
Fixture Power	10W		1	3.56	236
Source Flux	892lm		2	7.12	59
Fixture Flux	892lm		3	10.68	26
Efficacy	89lm/W		4	14.25	15
Imax	236cd		5	17.81	9

Driver	Colour	3000K
EL.		**1T4004**

Accessories

Mounting System

Code
323900

Support for semi-recessed installation.
D=200mm cutout hole 147mm.
D=260mm cutout hole 193mm.
D=320mm cutout hole 244mm.
D=400mm cutout hole 322mm.
D=500mm cutout hole 368mm.

Control systems

Code
1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

OSIRIDE

Chrome Frame Ø 205mm



E27 HAL/LED / max 1x42W

Power supply	Colour	Code
220-240Vac		**349490IP**

Chrome Frame Ø 265mm



E27 FLUO/HAL/LED / max 1x42W

Power supply	Colour	Code
220-240Vac		**349400IP**

Chrome Frame Ø 325mm



E27 FLUO/HAL/LED / max 2x42W

Power supply	Colour	Code
220-240Vac		**349410IP**

Chrome Frame Ø 405mm



E27 FLUO/HAL/LED / max 2x42W

Power supply	Colour	Code
220-240Vac		**349420IP**

Chrome Frame Ø 505mm



E27 FLUO/HAL/LED / max 2x42W

Power supply	Colour	Code
220-240Vac		**349430IP**

PROFESSIONAL

GENERAL INFO
Wall or ceiling mounted fixture for LED, halogen or compact fluorescent lamps or LED 230V integrated version.
120x220mm
235x235mm
275x275mm
350x350mm

LED
LED VERSION 235x235
230V Module
LED VERSION 275x275mm
Circular boards
From 722lm to 936lm
3000K
Ra84

LAMPS
HAL – FLUO – LED 2xmax42W
TC-DEL 2x18W
Not included

PRODUCT EFFICACY
94lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic
Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

MATERIAL
White painted metal body and satin opaline white glass diffuser.
White painted metal fixing plate.

A wall or ceiling mounted fixture with a glazed glass diffuser for soft general lighting.

Available in four different sizes fitted with traditional LED lamps with E27 adapters or compact fluorescent lamps not included.

Available also in a LED 230V version.

120x220mm



Power supply	Colour	Code
220-240Vac		**374604IP**

235x235mm



Power supply	Colour	Code
220-240Vac		**374404IP**

Power supply	Colour	Code
220-240Vac		**374404E**

PROFESSIONAL

275x275mm



E27 FLUO/HAL/LED / max 2x42W

	Driver	Colour	Code
			374414IP

TC-DEL / 2x18W G24q-2

	Driver	Colour	Code
	EL.		**374414E**

350x350mm



E27 FLUO/HAL/LED / max 3x42W

	Power supply	Colour	Code
	220-240Vac		**374424IP**

TC-TEL / 2x42W Gx24q-4

	Driver	Colour	Code
	EL.		**374424E**

LED 235x235mm



LED / 14W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			135°	
Fixture Power	14W	1	4.86	142
Source Flux	722lm	2	9.72	36
Fixture Flux	722lm	3	14.58	16
Efficacy	52lm/W	4	19.44	9
TS802 Imax=197cd/klm	Imax 143cd	5	24.30	6

Driver	Colour	3000K
		1T4005

LED 275x275mm



LED / 8W / VWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			135°	
Fixture Power	10W	1	4.86	184
Source Flux	936lm	2	9.72	46
Fixture Flux	936lm	3	14.58	20
Efficacy	94lm/W	4	19.44	12
TS802 Imax=197cd/klm	Imax 185cd	5	24.30	7

Driver	Colour	3000K
EL.		**1T4006**

Accessories

Control systems

Code
1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology.
It works with LED 230V-AC modules, dimmable LED sources and halogen lamps.
It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies.
It can manage systems with a maximum absorption of 150W.
The module is wireless controlled using a Casambi app for smartphones and tablets or traditional wall switches.
IP20

Outdoor

Inground recessed

Linear inground recessed



544
JEDI

556
JEDI COMPACT



570
MERCURE

574
MINIMERCURE

577
MICROMERCURE

Inground recessed



578
KEPLERO

593
KEPLERO MINI

602
TITANO

604
JUPITER

614
SATURN



620
LED.Y

JEDI

Recessed

GENERAL INFO
Recessed linear projector.
Lenghts 616mm – 916mm – 1216mm

LED
Optics FL, GR, WW - Linear boards
Optic SP - Led Emitter
RGBW version - Led Emitter
From 632lm to 7180m
3000K – 4000K – RGBW
Ra80

PRODUCT EFFICACY
Up to 113lm/W

OPTICS
SP – FL – GRAZING – WALL WASHER

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Extruded anodised aluminium 15µ body. Extra clear 10mm thick glass flat screen. Brushed stainless steel (AISI 316) frame. The body of the fixture can resist a static load up to 20kN and vandalism (IK10). Anti-slip glass available on request.

A coordinated range of linear projectors for lighting large surfaces.

The multiplicity of effects, three different lengths with lumen packages proportioned to each one, maximum load and vandal resistance make it a flexible tool that can always provide solutions to various project needs in the public or private sector.

Completely sealed housing complete with external electrical connection through IP68 connectors.
Continuous line installation using accessories.

Available also in projector and RGBW versions.

5300 McConnell

Architect
Shubin+Donaldson Architects

Lighting Design
Oculus Light Studio

Photographer
©Henri Khodaverdi

Country
Los Angeles, USA

JEDI

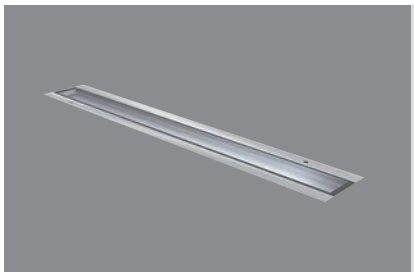

Recessed L. 616mm



LED / 23W / SPOT



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			10°	
Fixture Power		28W	1	0.18	32201
Source Flux		1947lm	2	0.37	8050
Fixture Flux		1591lm	3	0.55	3578
Efficacy		57lm/W	4	0.73	2013
TS889	Imax=16539cd/klm	Imax	5	0.92	1288

Driver	Colour	3000K	4000K
EL.		**1E2737**	**1E2738**
DALI		**1E2739**	**1E2740**

LED / 12W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power		15W	1	1.84	0.57	1203
Source Flux		1720lm	2	3.68	1.14	301
Fixture Flux		1285lm	3	5.53	1.70	134
Efficacy		86lm/W	4	7.37	2.27	75
TS886	Imax=699cd/klm	Imax	5	9.21	2.84	48

Driver	Colour	3000K	4000K
EL.		**1E2689**	**1E2690**
DALI		**1E2691**	**1E2692**

LED / 24W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power		28W	1	1.84	0.57	2392
Source Flux		3420lm	2	3.68	1.14	598
Fixture Flux		2555lm	3	5.53	1.70	266
Efficacy		91lm/W	4	7.37	2.27	149
TS885	Imax=699cd/klm	Imax	5	9.21	2.84	96

Driver	Colour	3000K	4000K
EL.		**1E2693**	**1E2694**
DALI		**1E2695**	**1E2696**

LED / 12W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power		15W	1	1.55	0.26	2753
Source Flux		1720lm	2	3.10	0.51	688
Fixture Flux		1429lm	3	4.65	0.77	306
Efficacy		95lm/W	4	6.20	1.02	172
TS888	Imax=1601cd/klm	Imax	5	7.76	1.28	110

Driver	Colour	3000K	4000K
EL.		**1E2665**	**1E2666**
DALI		**1E2667**	**1E2668**

LED / 24W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power		28W	1	1.55	0.26	5474
Source Flux		3420lm	2	3.10	0.51	1368
Fixture Flux		2842lm	3	4.65	0.77	608
Efficacy		101lm/W	4	6.21	1.02	342
TS887	Imax=1601cd/klm	Imax	5	7.76	1.28	219

Driver	Colour	3000K	4000K
EL.		**1E2669**	**1E2670**
DALI		**1E2671**	**1E2672**

LED / 12W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			115°	59°	
Fixture Power	15W	1	3.12	1.34	1156
Source Flux	1720lm	2	6.23	2.67	289
Fixture Flux	1293lm	3	9.35	4.01	128
Efficacy	86lm/W	4	12.47	5.35	72
TS884 Imax=774cd/klm	Imax 1331cd	5	15.58	6.69	46

Driver	Colour	3000K	4000K
EL.		**1E2713**	**1E2714**
DALI		**1E2715**	**1E2716**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			115°	59°	
Fixture Power	28W	1	3.12	1.34	2299
Source Flux	3420lm	2	6.23	2.67	575
Fixture Flux	2572lm	3	9.35	4.01	255
Efficacy	92lm/W	4	12.47	5.35	144
TS883 Imax=774cd/klm	Imax 2646cd	5	15.59	6.69	92

Driver	Colour	3000K	4000K
EL.		**1E2717**	**1E2718**
DALI		**1E2719**	**1E2720**

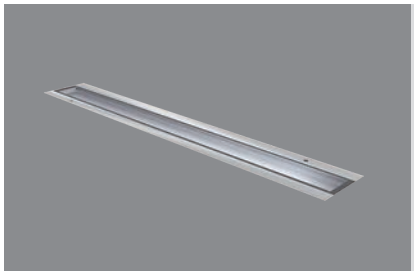

Recessed L. 916mm



LED / 34W / SPOT



3000K		H(m)	D(m)	Emax(lx)
Ra80			10°	
Fixture Power	40W	1	0.18	48326
Source Flux	2922lm	2	0.37	12081
Fixture Flux	2387lm	3	0.55	5370
Efficacy	60lm/W	4	0.73	3020
TS889 Imax=16539cd/klm	Imax 48326cd	5	0.92	1933

Driver	Colour	3000K	4000K
EL.		**1E2741**	**1E2742**
DALI		**1E2743**	**1E2744**

LED / 18W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	22W	1	1.84	0.57	1804
Source Flux	2580lm	2	3.68	1.14	451
Fixture Flux	1927lm	3	5.53	1.70	200
Efficacy	88lm/W	4	7.37	2.27	113
TS886 Imax=699cd/klm	Imax 1804cd	5	9.21	2.84	72

Driver	Colour	3000K	4000K
EL.		**1E2697**	**1E2698**
DALI		**1E2699**	**1E2700**

LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	40W	1	1.84	0.57	3588
Source Flux	5130lm	2	3.68	1.14	897
Fixture Flux	3833lm	3	5.53	1.70	399
Efficacy	96lm/W	4	7.37	2.27	224
TS885 Imax=699cd/klm	Imax 3588cd	5	9.21	2.84	144

Driver	Colour	3000K	4000K
EL.		**1E2701**	**1E2702**
DALI		**1E2703**	**1E2704**

JEDI

LED / 18W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power		22W	1	1.55	0.26	4130
Source Flux		2580lm	2	3.10	0.51	1032
Fixture Flux		2144lm	3	4.65	0.77	459
Efficacy		97lm/W	4	6.20	1.02	258
TS888	Imax=1601cd/klm	Imax 4130cd	5	7.76	1.28	165

Driver	Colour	3000K	4000K
EL.		**1E2673**	**1E2674**
DALI		**1E2675**	**1E2676**

LED / 36W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power		40W	1	1.55	0.26	8211
Source Flux		5130lm	2	3.10	0.51	2053
Fixture Flux		4263lm	3	4.65	0.77	912
Efficacy		107lm/W	4	6.21	1.02	513
TS887	Imax=1601cd/klm	Imax 8211cd	5	7.76	1.28	328

Driver	Colour	3000K	4000K
EL.		**1E2677**	**1E2678**
DALI		**1E2679**	**1E2680**

LED / 18W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power		22W	1	3.12	1.34	1735
Source Flux		2580lm	2	6.23	2.67	434
Fixture Flux		1940lm	3	9.35	4.01	193
Efficacy		88lm/W	4	12.47	5.35	108
TS884	Imax=774cd/klm	Imax 1996cd	5	15.58	6.69	69

Driver	Colour	3000K	4000K
EL.		**1E2721**	**1E2722**
DALI		**1E2723**	**1E2724**

LED / 36W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power		40W	1	3.12	1.34	3449
Source Flux		5130lm	2	6.23	2.67	862
Fixture Flux		3858lm	3	9.35	4.01	383
Efficacy		96lm/W	4	12.47	5.35	216
TS883	Imax=774cd/klm	Imax 3969cd	5	15.59	6.69	138

Driver	Colour	3000K	4000K
EL.		**1E2725**	**1E2726**
DALI		**1E2727**	**1E2728**

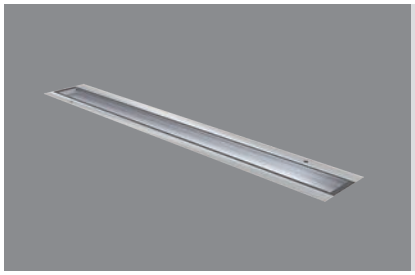

Recessed L. 1216mm



LED / 46W / SPOT



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			10°	
Fixture Power		51W	1	0.18	64401
Source Flux		3894lm	2	0.37	16100
Fixture Flux		3181lm	3	0.55	7156
Efficacy		62lm/W	4	0.73	4025
TS889	Imax=16539cd/klm	Imax 64401cd	5	0.92	2576

Driver	Colour	3000K	4000K
EL.		**1E2745**	**1E2746**
DALI		**1E2747**	**1E2748**

LED / 24W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power	28W		1	1.84	0.57	2405
Source Flux	3440lm		2	3.68	1.14	601
Fixture Flux	2570lm		3	5.53	1.70	267
Efficacy	92lm/W		4	7.37	2.27	150
TS886	Imax=699cd/klm	Imax	5	9.21	2.84	96

Driver	Colour	3000K	4000K
EL.		**1E2705**	**1E2706**
DALI		**1E2707**	**1E2708**

LED / 48W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power	53W		1	1.84	0.57	4784
Source Flux	6840lm		2	3.68	1.14	1196
Fixture Flux	5111lm		3	5.53	1.70	532
Efficacy	96lm/W		4	7.37	2.27	299
TS885	Imax=699cd/klm	Imax	5	9.21	2.84	191

Driver	Colour	3000K	4000K
EL.		**1E2709**	**1E2710**
DALI		**1E2711**	**1E2712**

LED / 24W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power	28W		1	1.55	0.26	5506
Source Flux	3440lm		2	3.10	0.51	1377
Fixture Flux	2859lm		3	4.65	0.77	612
Efficacy	102lm/W		4	6.20	1.02	344
TS888	Imax=1601cd/klm	Imax	5	7.76	1.28	220

Driver	Colour	3000K	4000K
EL.		**1E2681**	**1E2682**
DALI		**1E2683**	**1E2684**

LED / 48W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power	53W		1	1.55	0.26	10948
Source Flux	6840lm		2	3.10	0.51	2737
Fixture Flux	5684lm		3	4.65	0.77	1216
Efficacy	107lm/W		4	6.21	1.02	684
TS887	Imax=1601cd/klm	Imax	5	7.76	1.28	438

Driver	Colour	3000K	4000K
EL.		**1E2685**	**1E2686**
DALI		**1E2687**	**1E2688**

LED / 24W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power	28W		1	3.12	1.34	2313
Source Flux	3440lm		2	6.23	2.67	578
Fixture Flux	2587lm		3	9.35	4.01	257
Efficacy	92lm/W		4	12.47	5.35	145
TS884	Imax=774cd/klm	Imax	5	15.58	6.69	93

Driver	Colour	3000K	4000K
EL.		**1E2729**	**1E2730**
DALI		**1E2731**	**1E2732**

LED / 48W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power	53W		1	3.12	1.34	4599
Source Flux	6840lm		2	6.23	2.67	1150
Fixture Flux	5144lm		3	9.35	4.01	511
Efficacy	97lm/W		4	12.47	5.35	287
TS883	Imax=774cd/klm	Imax	5	15.59	6.69	184

Driver	Colour	3000K	4000K
EL.		**1E2733**	**1E2734**
DALI		**1E2735**	**1E2736**

JEDI

Related codes

Insertion Box

L	Code
618	**1E3507**
918	**1E3508**
1218	**1E3509**

Insertion boxes.

Accessories

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Cable

L	Code
320	**1E2762**
470	**1E2763**
620	**1E2764**
770	**1E2765**

Connection cable.
Complete with 5 pole connectors.
For the electronic and DALI version.
1E2762
For in line adjacent connection of one 600mm projector with one 900mm projector.
1E2763
For in line adjacent connection of one 600mm projector with one 1200mm projector or two 900mm projectors.
1E2764
For in line adjacent connection of one 900mm projector with one 1200mm projector.
1E2765
For in line adjacent connection of two 1200mm projectors.

Tool

Code
1E2495

Features TORX HEAD, TX 30.

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

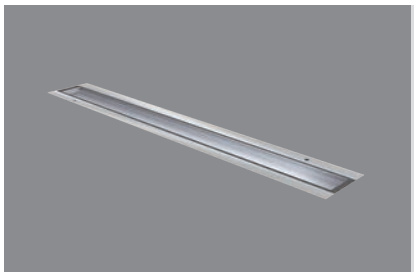

Recessed RGBW
L. 616mm



LED RGBW / 17W 4Ch / SPOT



			H(m)	D(m)	Emax(lx)
	-			11°	
	Fixture Power	9W	1	0.19	2101
	Source Flux	121lm	2	0.38	525
	Fixture Flux	121lm	3	0.56	233
	Efficacy	13lm/W	4	0.75	131
TS1030	Imax=17366cd/klm	Imax	2101cd	5	0.94	84

Driver	Colour	Code
EL. DMX		**1E3100**

LED RGBW / 17W 4Ch / FLOOD



			H(m)	D1(m)	D2(m)	Emax(lx)
	-			85°	29°	
	Fixture Power	9W	1	1.82	0.52	91
	Source Flux	88lm	2	3.65	1.04	23
	Fixture Flux	88lm	3	5.47	1.56	10
	Efficacy	10lm/W	4	7.29	2.08	6
TS1033	Imax=1038cd/klm	Imax	91cd	5	9.11	2.60	4

Driver	Colour	Code
EL. DMX		**1E3101**

LED RGBW / 17W 4Ch / GRAZING



			H(m)	D1(m)	D2(m)	Emax(lx)
	-			73°	11°	
	Fixture Power	9W	1	1.48	0.19	235
	Source Flux	105lm	2	2.97	0.38	59
	Fixture Flux	105lm	3	4.45	0.57	26
	Efficacy	12lm/W	4	5.94	0.76	15
TS1029	Imax=2250cd/klm	Imax	235cd	5	7.42	0.96	9

Driver	Colour	Code
EL. DMX		**1E3099**

LED RGBW / 17W 4Ch / WALL WASHER



			H(m)	D1(m)	D2(m)	Emax(lx)
	-			115°	55°	
	Fixture Power	9W	1	3.17	1.18	95
	Source Flux	96lm	2	6.33	2.36	24
	Fixture Flux	96lm	3	9.50	3.55	11
	Efficacy	11lm/W	4	12.67	4.73	6
TS1036	Imax=1163cd/klm	Imax	111cd	5	15.83	5.91	4

Driver	Colour	Code
EL. DMX		**1E3102**

JEDI

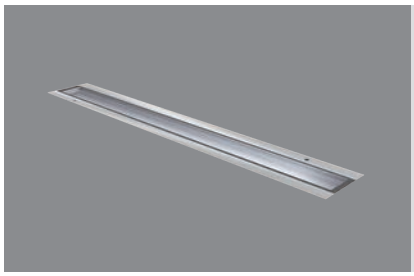

Recessed RGBW
L. 916mm



LED RGBW / 26W 4Ch / SPOT



-		H(m)	D(m)	Emax(lx)
-			11°	
Fixture Power	15W	1	0.19	3152
Source Flux	182lm	2	0.38	788
Fixture Flux	181lm	3	0.56	350
Efficacy	12lm/W	4	0.75	197
Imax	3152cd	5	0.94	126

TS1031 Imax=17366cd/klm

Driver	Colour	Code
EL. DMX		**1E3104**

LED RGBW / 26W 4Ch / FLOOD



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			85°	29°	
Fixture Power	15W	1	1.82	0.52	136
Source Flux	131lm	2	3.65	1.04	34
Fixture Flux	131lm	3	5.47	1.56	15
Efficacy	9lm/W	4	7.29	2.08	9
Imax	136cd	5	9.11	2.60	5

TS1034 Imax=1038cd/klm

Driver	Colour	Code
EL. DMX		**1E3105**

LED RGBW / 26W 4Ch / GRAZING



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			73°	11°	
Fixture Power	15W	1	1.48	0.19	353
Source Flux	157lm	2	2.97	0.38	88
Fixture Flux	157lm	3	4.45	0.57	39
Efficacy	10lm/W	4	5.94	0.76	22
Imax	353cd	5	7.42	0.96	14

TS1028 Imax=2250cd/klm

Driver	Colour	Code
EL. DMX		**1E3103**

LED RGBW / 26W 4Ch / WALL WASHER



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			115°	55°	
Fixture Power	15W	1	3.17	1.18	142
Source Flux	143lm	2	6.33	2.36	35
Fixture Flux	143lm	3	9.50	3.55	16
Efficacy	10lm/W	4	12.67	4.73	9
Imax	167cd	5	15.83	5.91	6

TS1037 Imax=1163cd/klm

Driver	Colour	Code
EL. DMX		**1E3106**

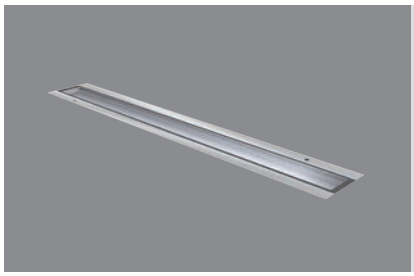

Recessed RGBW
L. 1216mm



LED RGBW / 34W 4Ch / SPOT



			H(m)	D(m)	Emax(lx)
		-		11°	
	Fixture Power	18W	1	0.19	4203
	Source Flux	242lm	2	0.38	1051
	Fixture Flux	242lm	3	0.56	467
	Efficacy	13lm/W	4	0.75	263
TS1032	Imax=17366cd/klm	Imax	4203cd	5	0.94	168

Driver	Colour	Code
EL. DMX		**1E3108**

LED RGBW / 34W 4Ch / FLOOD



			H(m)	D1(m)	D2(m)	Emax(lx)
		-		85°	29°	
	Fixture Power	18W	1	1.82	0.52	182
	Source Flux	175lm	2	3.65	1.04	45
	Fixture Flux	175lm	3	5.47	1.56	20
	Efficacy	10lm/W	4	7.29	2.08	11
TS1035	Imax=1038cd/klm	Imax	182cd	5	9.11	2.60	7

Driver	Colour	Code
EL. DMX		**1E3109**

LED RGBW / 34W 4Ch / GRAZING



			H(m)	D1(m)	D2(m)	Emax(lx)
		-		73°	11°	
	Fixture Power	18W	1	1.48	0.19	471
	Source Flux	209lm	2	2.97	0.38	118
	Fixture Flux	209lm	3	4.45	0.57	52
	Efficacy	12lm/W	4	5.94	0.76	29
TS1027	Imax=2250cd/klm	Imax	471cd	5	7.42	0.96	19

Driver	Colour	Code
EL. DMX		**1E3107**

LED RGBW / 34W 4Ch / WALL WASHER



			H(m)	D1(m)	D2(m)	Emax(lx)
		-		115°	55°	
	Fixture Power	18W	1	3.17	1.18	189
	Source Flux	191lm	2	6.33	2.36	47
	Fixture Flux	191lm	3	9.50	3.55	21
	Efficacy	11lm/W	4	12.67	4.73	12
TS1038	Imax=1163cd/klm	Imax	222cd	5	15.83	5.91	8

Driver	Colour	Code
EL. DMX		**1E3110**

Note

Photometrics show the maximum emission values of fixtures.

JEDI

Related codes

Insertion Box

L	Code
618	**1E3507**
918	**1E3508**
1218	**1E3509**

Insertion boxes.

Accessories

Tool

Code
1E2495

Features TORX HEAD, TX 30.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E3184

DMX connection.

Control systems

Code
1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.

Segerstrom center for the Arts

Lighting Design
HLB, Inc.

Photographer
©SAC Design

Country
Costa Mesa, USA

JEDI

Compact recessed

GENERAL INFO
Ground recessed linear projector
53x43mm (remote driver)
53x80mm (integrated driver)
Length 344mm – 625mm – 905mm – 1185mm

LED
Linear boards
From 1615 to 7200lm
2700K – 3000K – 3500K – 4000K
Ra84

PRODUCT EFFICACY
Up to 113lm/W

OPTICS
SP – FL – GRAZING – WALL WASHER

POWER SUPPLY
Electronic – DALI
Casambi control: DALI versions equipped with special accessories.

MATERIAL
Anodised extruded aluminium frame. Flat screen in extra-clear glass.

LED linear recessed line with high performance and compact dimensions. Available in a double version with remote driver at 344 mm and with integrated driver at 625 mm to be completed with the special recessing box.
Three optics: Flood, Grazing, and Wall Washer available also in the version with integrated LOUVRE that converges the side light emissions, avoiding the risk of blinding.

Also available in a surface-mounted projector version for both outdoor and indoor installations.

Torre Huaycho

Lighting Design
Gerardo Sanchez Sucsa
Pepe Sanchez Sucsa

Photographer
James Aragón Carrasco

Country
Espinar - Perù

JEDI COMPACT

Recessed IP67
Remote driver L. 344mm



LED / 12W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			85°	32°	
	Fixture Power	14W	1	1.84	0.57	1203
	Source Flux	1720lm	2	3.68	1.14	301
	Fixture Flux	1285lm	3	5.52	1.70	134
	Efficacy	92lm/W	4	7.36	2.27	75
TS1084	Imax=699cd/klm	Imax 1203cd	5	9.20	2.84	48

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3561**	**1E3562**	**1E3563**	**1E3564**

LED / 12W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			76°	15°	
	Fixture Power	14W	1	1.55	0.26	2752
	Source Flux	1720lm	2	3.10	0.51	688
	Fixture Flux	1429lm	3	4.65	0.77	306
	Efficacy	102lm/W	4	6.21	1.02	172
TS1088	Imax=1600cd/klm	Imax 2752cd	5	7.76	1.28	110

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3565**	**1E3566**	**1E3567**	**1E3568**

LED / 12W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			115°	59°	
	Fixture Power	14W	1	3.12	1.34	1156
	Source Flux	1720lm	2	6.23	2.67	289
	Fixture Flux	1293lm	3	9.35	4.01	128
	Efficacy	92lm/W	4	12.47	5.35	72
TS1092	Imax=774cd/klm	Imax 1331cd	5	15.59	6.69	46

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3569**	**1E3570**	**1E3571**	**1E3572**

Recessed IP67 Louvre
Remote driver L. 344mm



LED / 12W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			86°	29°	
	Fixture Power	14W	1	1.86	0.52	873
	Source Flux	1720lm	2	3.71	1.05	218
	Fixture Flux	752lm	3	5.57	1.57	97
	Efficacy	54lm/W	4	7.42	2.09	55
TS1086	Imax=508cd/klm	Imax 873cd	5	9.28	2.62	35

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3573**	**1E3574**	**1E3575**	**1E3576**

LED / 12W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	14W	1	1.68	0.23	1903
Source Flux	1720lm	2	3.36	0.46	476
Fixture Flux	912lm	3	5.04	0.68	211
Efficacy	65lm/W	4	6.72	0.91	119
TS1090 Imax=1106cd/klm	Imax 1903cd	5	8.40	1.14	76

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3577**	**1E3578**	**1E3579**	**1E3580**

LED / 12W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	14W	1	3.17	1.49	960
Source Flux	1720lm	2	6.35	2.97	240
Fixture Flux	975lm	3	9.52	4.46	107
Efficacy	70lm/W	4	12.70	5.95	60
TS1094 Imax=671cd/klm	Imax 1153cd	5	15.87	7.43	38

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3581**	**1E3582**	**1E3583**	**1E3584**

Recessed IP67
Remote driver L. 625mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	28W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	92lm/W	4	7.36	2.27	150
TS1084 Imax=699cd/klm	Imax 2406cd	5	9.20	2.84	96

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3585**	**1E3586**	**1E3587**	**1E3588**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	28W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	102lm/W	4	6.21	1.02	344
TS1088 Imax=1600cd/klm	Imax 5505cd	5	7.76	1.28	220

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3589**	**1E3590**	**1E3591**	**1E3592**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	28W	1	3.12	1.34	2312
Source Flux	3440lm	2	6.23	2.67	578
Fixture Flux	2586lm	3	9.35	4.01	257
Efficacy	92lm/W	4	12.47	5.35	145
TS1092 Imax=774cd/klm	Imax 2661cd	5	15.59	6.69	92

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3593**	**1E3594**	**1E3595**	**1E3596**

JEDI COMPACT

Recessed IP67 Louvre
Remote driver L. 625mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	28W	1	1.86	0.52	1747
Source Flux	3440lm	2	3.71	1.05	437
Fixture Flux	1503lm	3	5.57	1.57	194
Efficacy	54lm/W	4	7.42	2.09	109
TS1086 Imax=508cd/klm	Imax 1747cd	5	9.28	2.62	70

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3597**	**1E3598**	**1E3599**	**1E3600**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	28W	1	1.68	0.23	3805
Source Flux	3440lm	2	3.36	0.46	951
Fixture Flux	1824lm	3	5.04	0.68	423
Efficacy	65lm/W	4	6.72	0.91	238
TS1090 Imax=1106cd/klm	Imax 3805cd	5	8.40	1.14	152

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3601**	**1E3602**	**1E3603**	**1E3604**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	28W	1	3.17	1.49	1919
Source Flux	3440lm	2	6.35	2.97	480
Fixture Flux	1950lm	3	9.52	4.46	213
Efficacy	70lm/W	4	12.70	5.95	120
TS1094 Imax=671cd/klm	Imax 2307cd	5	15.87	7.43	77

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3605**	**1E3606**	**1E3607**	**1E3608**

Recessed IP67
Remote driver L. 905mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	40W	1	1.84	0.57	3609
Source Flux	5160lm	2	3.68	1.14	902
Fixture Flux	3856lm	3	5.52	1.70	401
Efficacy	96lm/W	4	7.36	2.27	226
TS1085 Imax=699cd/klm	Imax 3609cd	5	9.20	2.84	144

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3609**	**1E3610**	**1E3611**	**1E3612**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	40W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	107lm/W	4	6.21	1.02	516
TS1089 Imax=1601cd/klm	Imax 8259cd	5	7.76	1.28	330

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3613**	**1E3614**	**1E3615**	**1E3616**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	40W	1	3.12	1.34	3469
Source Flux	5160lm	2	6.23	2.67	867
Fixture Flux	3880lm	3	9.35	4.01	385
Efficacy	97lm/W	4	12.47	5.35	217
TS1093 Imax=774cd/klm	Imax 3992cd	5	15.59	6.69	139

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3617**	**1E3618**	**1E3619**	**1E3620**

Recessed IP67 Louvre Remote driver L. 905mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	40W	1	1.86	0.52	2620
Source Flux	5160lm	2	3.71	1.05	655
Fixture Flux	2255lm	3	5.57	1.57	291
Efficacy	56lm/W	4	7.42	2.09	164
TS1087 Imax=508cd/klm	Imax 2620cd	5	9.28	2.62	105

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3621**	**1E3622**	**1E3623**	**1E3624**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	40W	1	1.68	0.23	5707
Source Flux	5160lm	2	3.36	0.46	1427
Fixture Flux	2735lm	3	5.04	0.68	634
Efficacy	68lm/W	4	6.72	0.91	357
TS1091 Imax=1106cd/klm	Imax 5707cd	5	8.40	1.14	228

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3625**	**1E3626**	**1E3627**	**1E3628**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	40W	1	3.17	1.49	2879
Source Flux	5160lm	2	6.35	2.97	720
Fixture Flux	2926lm	3	9.52	4.46	320
Efficacy	73lm/W	4	12.70	5.95	180
TS1095 Imax=671cd/klm	Imax 3460cd	5	15.87	7.43	115

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3629**	**1E3630**	**1E3631**	**1E3632**

JEDI COMPACT

Recessed IP67
Remote driver L. 1185mm



LED / 48W / FLOOD

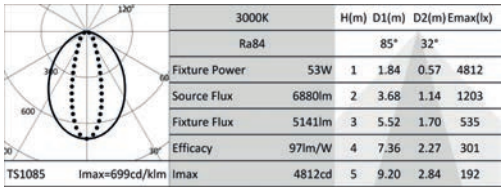

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	53W	1	1.84	0.57	4812
Source Flux	6880lm	2	3.68	1.14	1203
Fixture Flux	5141lm	3	5.52	1.70	535
Efficacy	97lm/W	4	7.36	2.27	301
TS1085 Imax=699cd/klm	Imax 4812cd	5	9.20	2.84	192

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3633**	**1E3634**	**1E3635**	**1E3636**

LED / 48W / GRAZING

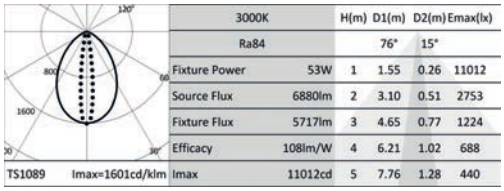

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	53W	1	1.55	0.26	11012
Source Flux	6880lm	2	3.10	0.51	2753
Fixture Flux	5717lm	3	4.65	0.77	1224
Efficacy	108lm/W	4	6.21	1.02	688
TS1089 Imax=1601cd/klm	Imax 11012cd	5	7.76	1.28	440

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3637**	**1E3638**	**1E3639**	**1E3640**

LED / 48W / WALL WASHER

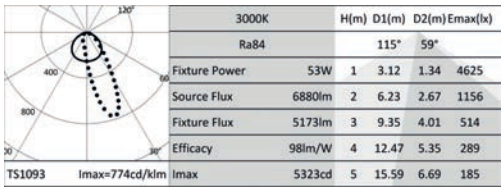

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	53W	1	3.12	1.34	4625
Source Flux	6880lm	2	6.23	2.67	1156
Fixture Flux	5173lm	3	9.35	4.01	514
Efficacy	98lm/W	4	12.47	5.35	289
TS1093 Imax=774cd/klm	Imax 5323cd	5	15.59	6.69	185

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3641**	**1E3642**	**1E3643**	**1E3644**

Recessed IP67 Louvre
Remote driver L. 1185mm



LED / 48W / FLOOD

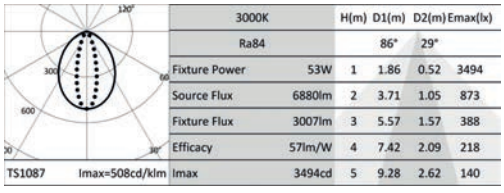

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	53W	1	1.86	0.52	3494
Source Flux	6880lm	2	3.71	1.05	873
Fixture Flux	3007lm	3	5.57	1.57	388
Efficacy	57lm/W	4	7.42	2.09	218
TS1087 Imax=508cd/klm	Imax 3494cd	5	9.28	2.62	140

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3645**	**1E3646**	**1E3647**	**1E3648**

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	53W	1	1.68	0.23	7609
Source Flux	6880lm	2	3.36	0.46	1902
Fixture Flux	3646lm	3	5.04	0.68	845
Efficacy	69lm/W	4	6.72	0.91	476
TS1091 Imax=1106cd/klm	Imax 7609cd	5	8.40	1.14	304

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3649**	**1E3650**	**1E3651**	**1E3652**

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	53W	1	3.17	1.49	3838
Source Flux	6880lm	2	6.35	2.97	960
Fixture Flux	3901lm	3	9.52	4.46	426
Efficacy	74lm/W	4	12.70	5.95	240
TS1095 Imax=671cd/klm	Imax 4613cd	5	15.87	7.43	154

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3653**	**1E3654**	**1E3655**	**1E3656**

Recessed IP67
Integrated driver L. 625mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	28W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	92lm/W	4	7.36	2.27	150
TS1084 Imax=699cd/klm	Imax 2406cd	5	9.20	2.84	96

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3657EL**	**1E3658EL**	**1E3659EL**	**1E3660EL**
DALI		**1E3657DA**	**1E3658DA**	**1E3659DA**	**1E3660DA**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	28W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	102lm/W	4	6.21	1.02	344
TS1088 Imax=1600cd/klm	Imax 5505cd	5	7.76	1.28	220

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3661EL**	**1E3662EL**	**1E3663EL**	**1E3664EL**
DALI		**1E3661DA**	**1E3662DA**	**1E3663DA**	**1E3664DA**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	28W	1	3.12	1.34	2312
Source Flux	3440lm	2	6.23	2.67	578
Fixture Flux	2586lm	3	9.35	4.01	257
Efficacy	92lm/W	4	12.47	5.35	145
TS1092 Imax=774cd/klm	Imax 2661cd	5	15.59	6.69	92

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3665EL**	**1E3666EL**	**1E3667EL**	**1E3668EL**
DALI		**1E3665DA**	**1E3666DA**	**1E3667DA**	**1E3668DA**

JEDI COMPACT

Recessed IP67 Louvre
Integrated driver L. 625mm



LED / 24W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			86°	29°	
	Fixture Power	28W	1	1.86	0.52	1747
	Source Flux	3440lm	2	3.71	1.05	437
	Fixture Flux	1503lm	3	5.57	1.57	194
	Efficacy	54lm/W	4	7.42	2.09	109
TS1086	Imax=508cd/klm	Imax	1747cd	5	9.28	2.62	70

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3669EL**	**1E3670EL**	**1E3671EL**	**1E3672EL**
DALI		**1E3669DA**	**1E3670DA**	**1E3671DA**	**1E3672DA**

LED / 24W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			80°	13°	
	Fixture Power	28W	1	1.68	0.23	3805
	Source Flux	3440lm	2	3.36	0.46	951
	Fixture Flux	1824lm	3	5.04	0.68	423
	Efficacy	65lm/W	4	6.72	0.91	238
TS1090	Imax=1106cd/klm	Imax	3805cd	5	8.40	1.14	152

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3673EL**	**1E3674EL**	**1E3675EL**	**1E3676EL**
DALI		**1E3673DA**	**1E3674DA**	**1E3675DA**	**1E3676DA**

LED / 24W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			116°	62°	
	Fixture Power	28W	1	3.17	1.49	1919
	Source Flux	3440lm	2	6.35	2.97	480
	Fixture Flux	1950lm	3	9.52	4.46	213
	Efficacy	70lm/W	4	12.70	5.95	120
TS1094	Imax=671cd/klm	Imax	2307cd	5	15.87	7.43	77

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3677EL**	**1E3678EL**	**1E3679EL**	**1E3680EL**
DALI		**1E3677DA**	**1E3678DA**	**1E3679DA**	**1E3680DA**

Recessed IP67
Integrated driver L. 905mm



LED / 36W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			85°	32°	
	Fixture Power	40W	1	1.84	0.57	3609
	Source Flux	5160lm	2	3.68	1.14	902
	Fixture Flux	3856lm	3	5.52	1.70	401
	Efficacy	96lm/W	4	7.36	2.27	226
TS1085	Imax=699cd/klm	Imax	3609cd	5	9.20	2.84	144

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3681EL**	**1E3682EL**	**1E3683EL**	**1E3684EL**
DALI		**1E3681DA**	**1E3682DA**	**1E3683DA**	**1E3684DA**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	40W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	107lm/W	4	6.21	1.02	516
TS1089 Imax=1601cd/klm	Imax 8259cd	5	7.76	1.28	330

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3685EL**	**1E3686EL**	**1E3687EL**	**1E3688EL**
DALI		**1E3685DA**	**1E3686DA**	**1E3687DA**	**1E3688DA**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	40W	1	3.12	1.34	3469
Source Flux	5160lm	2	6.23	2.67	867
Fixture Flux	3880lm	3	9.35	4.01	385
Efficacy	97lm/W	4	12.47	5.35	217
TS1093 Imax=774cd/klm	Imax 3992cd	5	15.59	6.69	139

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3689EL**	**1E3690EL**	**1E3691EL**	**1E3692EL**
DALI		**1E3689DA**	**1E3690DA**	**1E3691DA**	**1E3692DA**

Recessed IP67 Louvre Integrated driver L. 905mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	40W	1	1.86	0.52	2620
Source Flux	5160lm	2	3.71	1.05	655
Fixture Flux	2255lm	3	5.57	1.57	291
Efficacy	56lm/W	4	7.42	2.09	164
TS1087 Imax=508cd/klm	Imax 2620cd	5	9.28	2.62	105

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3693EL**	**1E3694EL**	**1E3695EL**	**1E3696EL**
DALI		**1E3693DA**	**1E3694DA**	**1E3695DA**	**1E3696DA**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	40W	1	1.68	0.23	5707
Source Flux	5160lm	2	3.36	0.46	1427
Fixture Flux	2735lm	3	5.04	0.68	634
Efficacy	68lm/W	4	6.72	0.91	357
TS1091 Imax=1106cd/klm	Imax 5707cd	5	8.40	1.14	228

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3697EL**	**1E3698EL**	**1E3699EL**	**1E3700EL**
DALI		**1E3697DA**	**1E3698DA**	**1E3699DA**	**1E3700DA**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	40W	1	3.17	1.49	2879
Source Flux	5160lm	2	6.35	2.97	720
Fixture Flux	2926lm	3	9.52	4.46	320
Efficacy	73lm/W	4	12.70	5.95	180
TS1095 Imax=671cd/klm	Imax 3460cd	5	15.87	7.43	115

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3701EL**	**1E3702EL**	**1E3703EL**	**1E3704EL**
DALI		**1E3701DA**	**1E3702DA**	**1E3703DA**	**1E3704DA**

JEDI COMPACT

Recessed IP67
Integrated driver L. 1185mm



LED / 48W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	53W	1	1.84	0.57	4812
Source Flux	6880lm	2	3.68	1.14	1203
Fixture Flux	5141lm	3	5.52	1.70	535
Efficacy	97lm/W	4	7.36	2.27	301
TS1085 Imax=699cd/klm	Imax 4812cd	5	9.20	2.84	192

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3705EL**	**1E3706EL**	**1E3707EL**	**1E3708EL**
DALI		**1E3705DA**	**1E3706DA**	**1E3707DA**	**1E3708DA**

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	53W	1	1.55	0.26	11012
Source Flux	6880lm	2	3.10	0.51	2753
Fixture Flux	5717lm	3	4.65	0.77	1224
Efficacy	108lm/W	4	6.21	1.02	688
TS1089 Imax=1601cd/klm	Imax 11012cd	5	7.76	1.28	440

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3709EL**	**1E3710EL**	**1E3711EL**	**1E3712EL**
DALI		**1E3709DA**	**1E3710DA**	**1E3711DA**	**1E3712DA**

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	53W	1	3.12	1.34	4625
Source Flux	6880lm	2	6.23	2.67	1156
Fixture Flux	5173lm	3	9.35	4.01	514
Efficacy	98lm/W	4	12.47	5.35	289
TS1093 Imax=774cd/klm	Imax 5323cd	5	15.59	6.69	185

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3713EL**	**1E3714EL**	**1E3715EL**	**1E3716EL**
DALI		**1E3713DA**	**1E3714DA**	**1E3715DA**	**1E3716DA**

Recessed IP67 Louvre
Integrated driver L. 1185mm



LED / 48W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	53W	1	1.86	0.52	3494
Source Flux	6880lm	2	3.71	1.05	873
Fixture Flux	3007lm	3	5.57	1.57	388
Efficacy	57lm/W	4	7.42	2.09	218
TS1087 Imax=508cd/klm	Imax 3494cd	5	9.28	2.62	140

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3717EL**	**1E3718EL**	**1E3719EL**	**1E3720EL**
DALI		**1E3717DA**	**1E3718DA**	**1E3719DA**	**1E3720DA**

Note

To be completed with an anodised aluminium outer casing suitable for in-line installation and external looping.

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	53W	1	1.68	0.23	7609
Source Flux	6880lm	2	3.36	0.46	1902
Fixture Flux	3646lm	3	5.04	0.68	845
Efficacy	69lm/W	4	6.72	0.91	476
TS1091 Imax=1106cd/klm	Imax 7609cd	5	8.40	1.14	304

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3721EL**	**1E3722EL**	**1E3723EL**	**1E3724EL**
DALI		**1E3721DA**	**1E3722DA**	**1E3723DA**	**1E3724DA**

Note

To be completed with an anodised aluminium outer casing suitable for in-line installation and external looping.

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	53W	1	3.17	1.49	3838
Source Flux	6880lm	2	6.35	2.97	960
Fixture Flux	3901lm	3	9.52	4.46	426
Efficacy	74lm/W	4	12.70	5.95	240
TS1095 Imax=671cd/klm	Imax 4613cd	5	15.87	7.43	154

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3725EL**	**1E3726EL**	**1E3727EL**	**1E3728EL**
DALI		**1E3725DA**	**1E3726DA**	**1E3727DA**	**1E3728DA**

Note

To be completed with an anodised aluminium outer casing suitable for in-line installation and external looping.

Related codes

Insertion Box



L	Code
348	**1E3729**
629	**1E3730**
909	**1E3731**
1189	**1E3732**

Outer casing for Jedi Compact with remote driver.



L	Code
629	**1E3733**
909	**1E3734**
1189	**1E3735**

Outer casing for Jedi Compact with integrated driver.

Power Supply

Code
1E3557

EL power supply version kit composed of a aluminium watertight box (LxHxP=270x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 3G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 312.5/344mm versions.

Code
1E3558

EL power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 3G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 593.5/625/873.5/905/1153.5/1185mm versions.

JEDI COMPACT

Code

1E3559

DALI power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 5G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 312.5/344/593.5/625mm versions.

Code

1E3560

DALI power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 5G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 873.5/905/1153.5/1185mm versions.

Accessories

Tool

Code

1E3305

(Tightening) wrench for the connector kit.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Control systems

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

MERCURE

GENERAL INFO
Inground linear fixture.
Lenghts: 300mm - 600mm

LED
Linear boards
From 74lm to 1750lm
3000K – 4000K – RGB
Ra84 – Ra80

PRODUCT EFFICACY
Up to 59lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Die-cast aluminium housing.
Anti slip, flush, tempered safety glass.

A range of compact inground recessed linear light fixtures with and a flush “all glass” finish” for particularly striking and elegant installation in continuous rows. Mercure comes in three different sizes to light shapes with monochromatic or RGB light.

The larger versions combine elegance and high performance; the smaller version combines a compact size, elegant design and resistance in a unique linear glass fixture that can meet walk-over requirements.

The cataphoresis treatment of MINI MERCURE makes it possible for installations of up to 1 metre away from the sea.

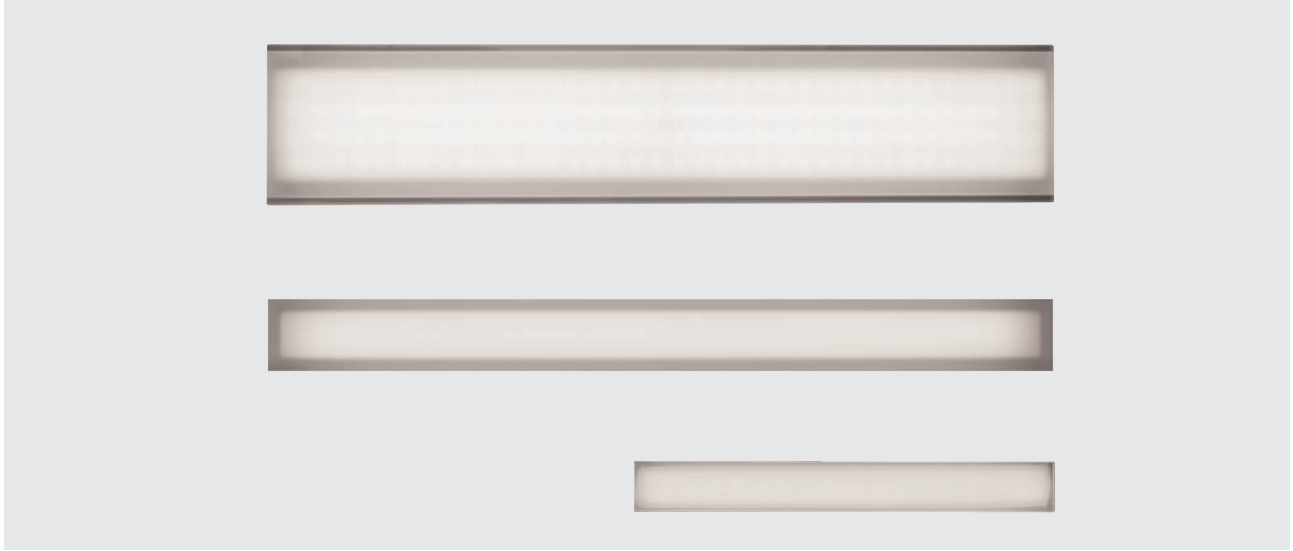

Private Residence

Photographer
©SAC Design

Country
Huntinton Beach,
USA

MERCURE

Light-line

LED / 12W / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			116°	
	Fixture Power	15W	1	3.21	278
	Source Flux	1720lm	2	6.43	69
	Fixture Flux	849lm	3	9.64	31
	Efficacy	57lm/W	4	12.85	17
	Imax	278cd	5	16.07	11

Driver	Colour	3000K	4000K
EL.		**1E2274**	**1E2275**

T16 G5 / 24W / VWFL



	4000K		H(m)	D(m)	Emax(lx)
	Ra80			109°	
	Fixture Power	24W	1	2.83	177
	Source Flux	1750lm	2	5.66	44
	Fixture Flux	493lm	3	8.49	20
	Efficacy	21lm/W	4	11.32	11
	Imax	177cd	5	14.15	7

Driver	Colour	Code
EL.		**1E2272**

Note

Supplied with an IP68 coaxial connection kit.

Related codes

Insertion Box



Code
1E2264

Anodized aluminium insertion box available in three different heights to satisfy any installation need.
Complete with removable end caps for in-line installation.
Low.



Code
1E2265

Anodized aluminium insertion box available in three different heights to satisfy any installation need.
Complete with removable end caps for in-line installation.
Medium.



Code
1E2266

Anodized aluminium insertion box available in three different heights to satisfy any installation need.
Complete with removable end caps for in-line installation.
High.

Accessories

Tool

Code
1E0388

Sucker tool to raise the glass.

MERCURE

MINIMERCURE LED



LED / 8W / VWFL

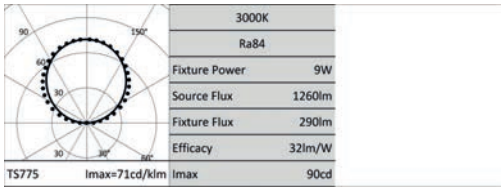

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 3	24Vdc			**1E3406**	**1E3407**
CLASS 2	220-240Vac	EL.		**1E3404**	**1E3405**

Related codes

Insertion Box



Code
1E2382

Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows.
Complete with internal supports for installations in concrete.
Vertical



Code
1E2383

Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows.
Complete with internal supports for installations in concrete.
Horizontal

Power Supply



Code
1T3586

Electronic power supply 75W, LxHxP=130x32x80mm, 220-240V, 24V-DC, IP67.

MINIMERCURE RGB



LED RGB / 8W / VWFL

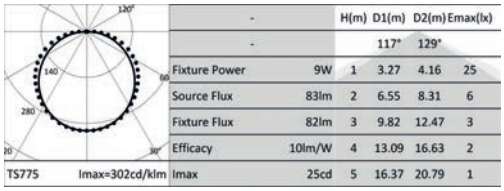

		H(m)	D1(m)	D2(m)	Emax(lx)
-			117°	129°	
Fixture Power	9W	1	3.27	4.16	25
Source Flux	83lm	2	6.55	8.31	6
Fixture Flux	82lm	3	9.82	12.47	3
Efficacy	10lm/W	4	13.09	16.63	2
Imax	25cd	5	16.37	20.79	1

Power supply	Colour	RGB
24Vdc		**1E2381**

Note

Photometrics show the maximum emission values of fixtures.

Related codes

Insertion Box



Code
1E2382

Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows.
Complete with internal supports for installations in concrete.
Vertical



Code
1E2383

Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows.
Complete with internal supports for installations in concrete.
Horizontal

Control systems

Code
1E1401

SECS 75.
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output IP67

Code
1T1827

SECS 75.
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output IP20

MERCURE

Code
1T2245

SECS 36 -IP20
Power supply and Control System SECS Scene Effect Control System.
SECS 36 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
35W output.

Accessories

Cable

Code
1T1932

Standard DMX cable (1 twisted pair + shield, 120Ohm).

Control systems

Code
1T1898

my-SCENARIO Show Store.
Digital devices designed to control dynamic lighting fixtures and programme dynamic light scenarios and sequences.
The system consists of intuitive software, compatible with Windows operating systems, able to control different hardware devices with the following functions: - record colour-changing scenarios set by the operator; - allow selection among the multiple scenarios already recorded; - transmit the control signals to the lighting system.
The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.
The software provides a graphic simulation of the operating keys of a lighting controller; the patching function allows the DMX control channels to be assigned to fixtures by using the internal library.
The Colour Manager function allows for quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times.
The built-in calendar allows full time scheduling of show playback (month, day, hour, minutes, recurring events).
The programmed light shows can be transferred to different control interfaces.

MICROMERCURE



LED / 3W / VWFL

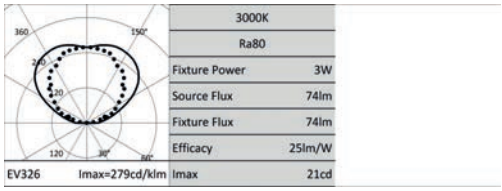

	Power supply	Colour	3000K	4000K
	12Vdc		**1E2267**	**1E2268**

Related codes

Insertion Box



	Code
	1E2269

Galvanized metal insertion box.
Complete with removable end caps for in-line installation.

Power Supply



	Code
	T1585

Electronic power supply for 10/20W LED, LxHxP=145x19x55mm, 110-240V/220-240V-AC, 12V-DC, IP20.
Non-dimmable.
For Micromercure: up to 6 fixtures connected in parallel.



	Code
	T1586

Electronic power supply for 70W LED, LxHxP=225x51x65mm, 220-240V-AC, 12V-DC, IP65.
Non-dimmable.
For Micromercure: up to 22 fixtures connected in parallel.

KEPLERO

GENERAL INFO
Recessed professional projector.
ø280mm - ø161mm

LED
Chip on board for ZOOM – WALL WASHER versions
Emitter for RGBW – GIMBAL versions
From 826lm to 4665lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 106lm/W

OPTICS
SP – FL – MWFL – WFL
WALL WASHER

POWER SUPPLY
Electronic – DALI – 1-10V

MATERIAL
Anodized and black painted die-cast aluminium body.
Brushed stainless steel ultra flat decorative ring with bevelled edge.

A complete range of recessed LED up-lights for outdoor lighting. The two different sizes with a wide range of optics with white LED or RGBW lamps with different lumens are the expression of versatility and performance.

The Pools

Architect
Studio K1

Photographer
©Brad Nelson

Country
Irvine - USA

01
Keplero

ZOOM
Spot, Flood, Medium wide
Flood, Wide flood

GIMBAL
Narrow spot, Flood,
Flood rectangle

GIMBAL HP
Narrow spot, Spot, Flood

A powerful solution

And an ideal and flexible choice for lighting large and small public spaces, building facades and trees given its size and high performance.

WALL WASHER

02
Keplero Mini

ZOOM
Spot, Flood, Medium wide flood, Wide flood

GIMBAL
Spot,Flood

HI-EFFICACY
Spot, Flood, Medium wide flood

A compact version

With only 166mm in diameter and has a maximum installation depth of just 200mm. It takes its technology and flexibility from the large version but given its dimensions and high performance it is also suitable for external lighting such as building facades and small trees.



WALL WASHER

03
Zoom

Versions with remote or driver included

The large versions of KEPLERO are available with an integrated electronic 220-240V driver, while the KEPLERO MINI has a range with both an integrated 110-240V driver and a remote 48V driver making it easier to connect several fixtures to the same driver that is available as an accessory. Cabling is simply through IP68 connectors that are equipped for IN and OUT looping. Available with a DALI on request.

Perfect solidity and stillness of an inground recessed fixture

Contrasts with the dynamism of a unique optical system that gives life the countless luminous effects. The effect can change at any time thanks to its innovative patented optical system.

Beam orientation is guided transfering the optical chamber towards the surface to be lit with a beam orientation of up to 20°. In just a few simple steps the fixture can change the width of the beam emission from spot to wide flood: Extraction for focusing, transfer and rotation are the three different possible movements the KEPLERO optical chamber can perform. Graded rings help to identify orientation and thus make replication simple.

04
Keplero Gimbal

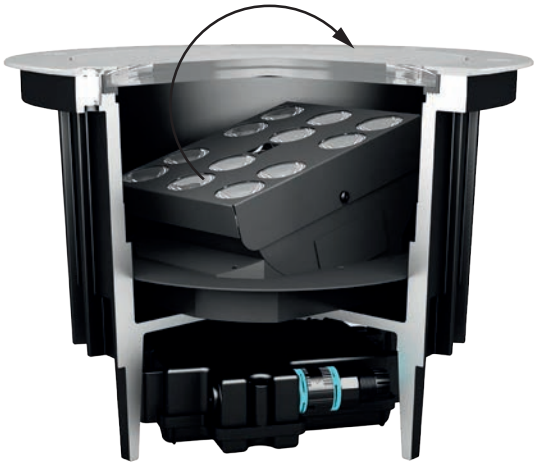

05
Keplero Wall washer

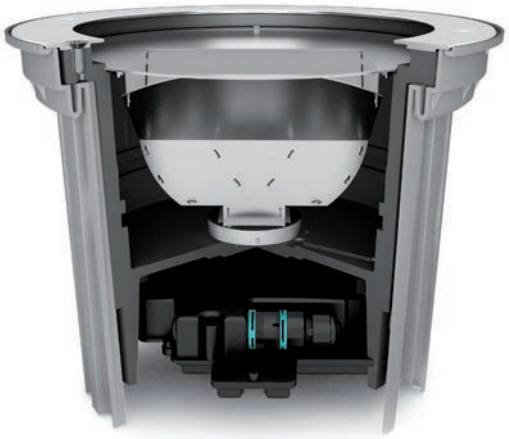

Gimbal optic

For precision lighting. A real projector given its high performance and the adjustability of the optical unit up to 40°.

Wall washer Optical system to light vertical surfaces uniformly

An optical system composed of a reflector and a lens that can not only guarantee complete uniformity on vertical surfaces but also excellent light diffusion from very close to the floor.

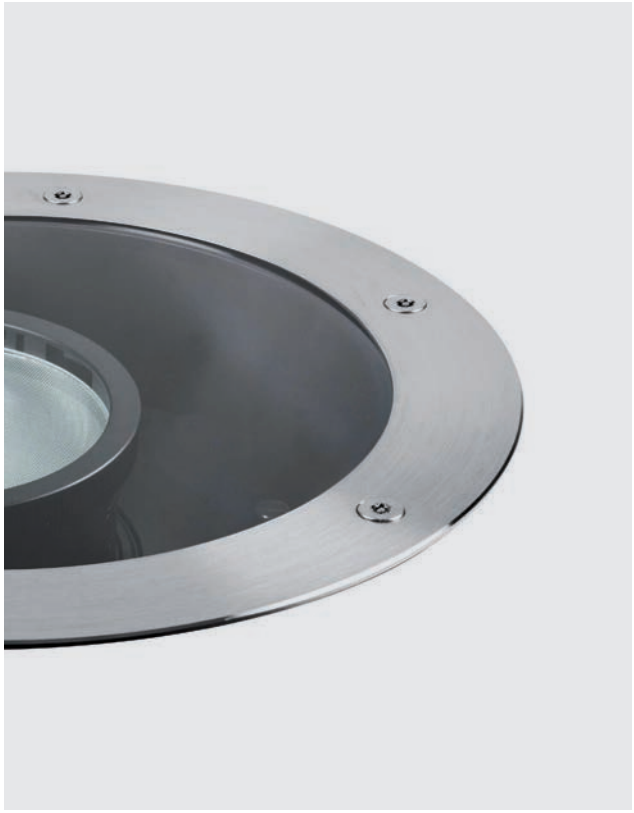

Brushed stainless steel ring finish

Installed flush or protruding by simply removing the frame from the nylon installation sleeve available as an accessory.

The cataphoresis treatment of KEPLERO

range makes it possible for installations of up to 1 metre away from the sea.

Zoom



LED / 33W / SP, FL, MWFL, WFL

Driver	Colour	3000K	4000K
EL.		**1E2386**	**1E2387**



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			19°	
Fixture Power		36W	1	0.34	11460
Source Flux		4550lm	2	0.67	2865
Fixture Flux		1666lm	3	1.01	1273
Efficacy		47lm/W	4	1.34	716
TS782	Imax=2519cd/klm	Imax	11460cd	5	1.68	458



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			26°	
Fixture Power		36W	1	0.46	7939
Source Flux		4550lm	2	0.93	1985
Fixture Flux		2205lm	3	1.39	882
Efficacy		62lm/W	4	1.85	496
TS781	Imax=1745cd/klm	Imax	7939cd	5	2.31	318



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			64°	
Fixture Power		36W	1	1.25	2724
Source Flux		4550lm	2	2.50	681
Fixture Flux		2889lm	3	3.75	303
Efficacy		81lm/W	4	5.00	170
TS779	Imax=599cd/klm	Imax	2724cd	5	6.25	109



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			43°	
Fixture Power		36W	1	0.79	4579
Source Flux		4550lm	2	1.57	1145
Fixture Flux		2756lm	3	2.36	509
Efficacy		77lm/W	4	3.14	286
TS780	Imax=1006cd/klm	Imax	4579cd	5	3.93	183

Note

All lighting fixtures have to be completed with installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. IP69K complies with Standard DIN 40050-9.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Code
1E2394

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

KEPLERO

Zoom RGBW



LED RGBW / 49W / SP, FL, MWFL, WFL

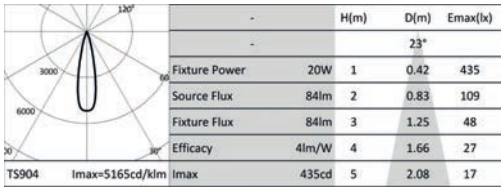

-		H(m)	D(m)	Emax(lx)
-			23°	
Fixture Power	20W	1	0.42	435
Source Flux	84lm	2	0.83	109
Fixture Flux	84lm	3	1.25	48
Efficacy	4lm/W	4	1.66	27
Imax	435cd	5	2.08	17

Driver	Colour	Code
EL. DMX		**1E2768**

Note

Photometrics show the maximum emission values of fixtures.

All lighting fixtures have to be completed with installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. IP69K complies with Standard DIN 40050-9.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Code
1E2394

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

Accessories

Filter



Filter	Ø	Code
Red	101	**1T1700**
Green	101	**1T1701**
Blue	101	**1T1702**
Yellow	101	**1T1703**
Magenta	101	**1T1704**

Flat glass interference chromatic filter.



Ø	Code
101	**1T1696**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.

Shutter

Colour	Code
●	**1E2402**

Half-moon shutter.

Grid



Ø	Code
101	**1T1699**

Anti-glare louver.
Black painted metal honeycomb structure.

Tool

Code
1E2496

Metal handle for fixture removal

Code
1E2495

Features TORX HEAD, TX 30.

Code
1E0388

Sucker tool to raise the glass.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Only for white LED version.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm. IP68
Only for white LED version.

Connector

Code
1E3184

DMX connection.
Only for RGBW LED version.

Control systems

Code
1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.

KEPLERO

Gimbal



LED / 11W / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		15W	1	0.15	20172
Source Flux		878lm	2	0.31	5043
Fixture Flux		718lm	3	0.46	2241
Efficacy		50lm/W	4	0.61	1261
TS776	Imax=22975cd/klm	Imax	20172cd	5	0.76	807

Driver	Colour	3000K	4000K
EL.		**1E2388**	**1E2389**

LED / 11W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			28°	
Fixture Power		15W	1	0.51	2508
Source Flux		878lm	2	1.01	627
Fixture Flux		636lm	3	1.52	279
Efficacy		44lm/W	4	2.02	157
TS777	Imax=2857cd/klm	Imax	2508cd	5	2.53	100

Driver	Colour	3000K	4000K
EL.		**1E2390**	**1E2391**

LED / 11W / FL RECTANGLE



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			43°	30°	
Fixture Power		15W	1	0.79	0.54	1228
Source Flux		878lm	2	1.58	1.08	307
Fixture Flux		582lm	3	2.36	1.62	136
Efficacy		40lm/W	4	3.15	2.15	77
TS778	Imax=1398cd/klm	Imax	1228cd	5	3.94	2.69	49

Driver	Colour	3000K	4000K
EL.		**1E2392**	**1E2393**

Note

All lighting fixtures have to be completed with installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. IP69K complies with Standard DIN 40050-9.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve



Code
1E2394

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

Accessories

Filter



Filter	Ø	Code
Red	101	**1T1700**
Green	101	**1T1701**
Blue	101	**1T1702**
Yellow	101	**1T1703**
Magenta	101	**1T1704**

Flat glass interference chromatic filter.



Ø	Code
101	**1T1696**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.

Grid

Ø	Code
101	**1T1699**

Anti-glare louver.
Black painted metal honeycomb structure.

Shutter

Colour	Code
●	**1E2402**

Half-moon shutter.

Tool

Code
1E2496

Metal handle for fixture removal

Code
1E2495

Features TORX HEAD, TX 30.

Code
1E0388

Sucker tool to raise the glass.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

KEPLERO

Gimbal HP



LED / 33W / NSP

IP66 IP67 IP68 IP69K IK 10



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			8°	
Fixture Power		37W	1	0.14	78598
Source Flux		2791lm	2	0.29	19650
Fixture Flux		2373lm	3	0.43	8733
Efficacy		64lm/W	4	0.57	4912
TS986	Imax=28161cd/klm	Imax	78598cd	5	0.72	3144

Driver	Colour	3000K	4000K
EL.		**1E3050**	**1E3053**

LED / 33W / SP

IP66 IP67 IP68 IP69K IK 10



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			18°	
Fixture Power		37W	1	0.32	18947
Source Flux		2791lm	2	0.63	4737
Fixture Flux		2205lm	3	0.95	2105
Efficacy		60lm/W	4	1.27	1184
TS987	Imax=6789cd/klm	Imax	18947cd	5	1.58	758

Driver	Colour	3000K	4000K
EL.		**1E3051**	**1E3054**

LED / 33W / FL

IP66 IP67 IP68 IP69K IK 10



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
Fixture Power		37W	1	0.53	8160
Source Flux		2791lm	2	1.06	2040
Fixture Flux		2149lm	3	1.59	907
Efficacy		58lm/W	4	2.12	510
TS988	Imax=2924cd/klm	Imax	8160cd	5	2.65	326

Driver	Colour	3000K	4000K
EL.		**1E3052**	**1E3055**

Note

All lighting fixtures have to be completed with installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. IP69K complies with Standard DIN 40050-9.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve



Code
1E2394

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

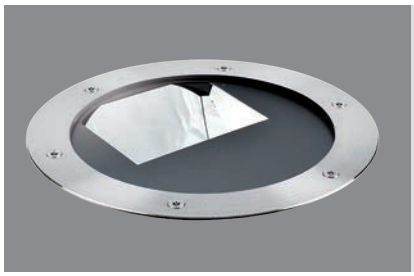

Wall Washer



LED / 33W / WALL WASHER



		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		Ra84		106°	66°	
	Fixture Power	36W	1	2.68	1.61	1355
	Source Flux	4550lm	2	5.36	3.22	339
	Fixture Flux	2318lm	3	8.04	4.84	151
	Efficacy	65lm/W	4	10.71	6.45	85
TS853	Imax=393cd/klm	Imax	1790cd	5	13.39	8.06	54

Driver	Colour	3000K	4000K
EL.		**1E2561**	**1E2562**

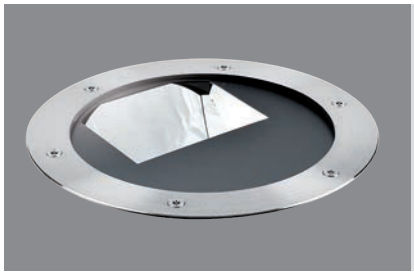

Wall Washer RGBW



LED RGBW / 49W / WALL WASHER



		-	H(m)	D1(m)	D2(m)	Emax(lx)
		-		114°	75°	
	Fixture Power	20W	1	3.10	2.07	47
	Source Flux	113lm	2	6.19	4.14	12
	Fixture Flux	113lm	3	9.29	6.21	5
	Efficacy	6lm/W	4	12.39	8.29	3
TS1026	Imax=550cd/klm	Imax	62cd	5	15.48	10.36	2

Driver	Colour	Code
EL. DMX		**1E3123**

Note

Photometrics show the maximum emission values of fixtures.

All lighting fixtures have to be completed with installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. IP69K complies with Standard DIN 40050-9.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve



Code
1E2394

Grey nylon installation sleeve.
The sleeve is pre-set for both flush or straight edge installation.
Complete with dedicated cover cap for installations in concrete.
Flush ring Ø 286 H.225.
Straight edge ring Ø 271 H. 223.

KEPLERO

Accessories

Tool

Code
1E2496

Metal handle for fixture removal

Code
1E2495

Features TORX HEAD, TX 30.

Code
1E0388

Sucker tool to raise the glass.

Connector

Code
1E3184

DMX connection.

Control systems

Code
1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.

Mini Zoom



LED / 12W / ZOOM / SP, FL, MWFL, WFL

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2497**	**1E2498**
CLASS 3	48Vdc			**1E2499**	**1E2500**



3000K		H(m)	D(m)	Emax(lx)
Ra84			16°	
Fixture Power	14W	1	0.28	5715
Source Flux	1775lm	2	0.55	1429
Fixture Flux	615lm	3	0.83	635
Efficacy	46lm/W	4	1.10	357
Imax	5715cd	5	1.38	229

TS815 Imax=3220cd/klm



3000K		H(m)	D(m)	Emax(lx)
Ra84			33°	
Fixture Power	14W	1	0.58	2608
Source Flux	1775lm	2	1.17	652
Fixture Flux	809lm	3	1.75	290
Efficacy	60lm/W	4	2.33	163
Imax	2608cd	5	2.92	104

TS816 Imax=1469cd/klm



3000K		H(m)	D(m)	Emax(lx)
Ra84			61°	
Fixture Power	14W	1	1.18	1102
Source Flux	1775lm	2	2.37	276
Fixture Flux	1127lm	3	3.55	122
Efficacy	83lm/W	4	4.74	69
Imax	1102cd	5	5.92	44

TS818 Imax=621cd/klm



3000K		H(m)	D(m)	Emax(lx)
Ra84			53°	
Fixture Power	14W	1	0.99	1536
Source Flux	1775lm	2	1.98	384
Fixture Flux	1045lm	3	2.97	171
Efficacy	77lm/W	4	3.95	96
Imax	1536cd	5	4.94	61

TS817 Imax=866cd/klm

Note

All lighting fixtures have to be completed with ring and installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Ø	H	Code
166	200	**1E2521**

Installation sleeve.
Grey Nylon casing.
Round and square ring for semi-flush installation. Only round ring for flush installation.



L	H	Code
168	200	**1E2522**

Installation sleeve.
Grey Nylon casing and stainless steel profile.
Square ring for flush installation.

KEPLERO

Decorative Ring



Code

1E2525

Brushed stainless steel (AISI316L), ultra flat, bevelled edge decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.



Code

1E2526

Brushed stainless steel (AISI316L), ultra flat square decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.

Power Supply



Code

1E2320

Electronic driver 70W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code

1E2321

Electronic driver 150W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code

1E2533

Electronic driver 240W, LxHxP=125x100x125mm, input voltage: 220V-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply.
DIN RAIL power supply.



Code

1E2323

Electronic driver 480W, LxHxP=227x100x125mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply - DIN RAIL power supply.

Mini Gimbal



LED / 8,4W / GIMBAL / SP

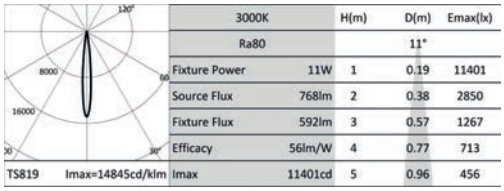

3000K		H(m)	D(m)	Emax(lx)
Ra80			11°	
Fixture Power	11W	1	0.19	11401
Source Flux	768lm	2	0.38	2850
Fixture Flux	592lm	3	0.57	1267
Efficacy	56lm/W	4	0.77	713
Imax	11401cd	5	0.96	456

TS819 Imax=14845cd/klm

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2501**	**1E2502**
CLASS 3	48Vdc			**1E2505**	**1E2506**

LED / 8,4W / GIMBAL / FL

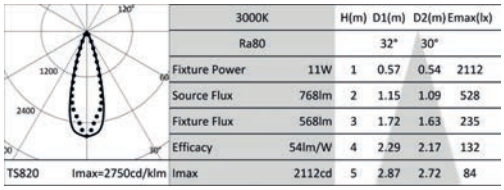

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			32°	30°	
Fixture Power	11W	1	0.57	0.54	2112
Source Flux	768lm	2	1.15	1.09	528
Fixture Flux	568lm	3	1.72	1.63	235
Efficacy	54lm/W	4	2.29	2.17	132
Imax	2112cd	5	2.87	2.72	84

TS820 Imax=2750cd/klm

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2503**	**1E2504**
CLASS 3	48Vdc			**1E2507**	**1E2508**

Note

All lighting fixtures have to be completed with ring and installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation. All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Ø	H	Code
166	200	**1E2521**

Installation sleeve.
Grey Nylon casing.
Round and square ring for semi-flush installation. Only round ring for flush installation.



L	H	Code
168	200	**1E2522**

Installation sleeve.
Grey Nylon casing and stainless steel profile.
Square ring for flush installation.

KEPLERO

Decorative Ring



Code
1E2525

Brushed stainless steel (AISI316L), ultra flat, bevelled edge decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.



Code
1E2526

Brushed stainless steel (AISI316L), ultra flat square decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.

Power Supply



Code
1E2320

Electronic driver 70W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code
1E2321

Electronic driver 150W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code
1E2323

Electronic driver 480W, LxHxP=227x100x125mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply - DIN RAIL power supply.



Code
1E2533

Electronic driver 240W, LxHxP=125x100x125mm, input voltage: 220V-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply.
DIN RAIL power supply.

Mini High Efficacy



LED / 12W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			11°	
Fixture Power	14W		1	0.20	17736
Source Flux	1775lm		2	0.39	4434
Fixture Flux	1403lm		3	0.59	1971
Efficacy	104lm/W		4	0.79	1109
TS821	Imax=9992cd/klm	Imax	17736cd	5	0.99	709

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2509**	**1E2510**
CLASS 3	48Vdc			**1E2515**	**1E2516**

LED / 12W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			18°	
Fixture Power	14W		1	0.31	7969
Source Flux	1775lm		2	0.63	1992
Fixture Flux	1397lm		3	0.94	885
Efficacy	104lm/W		4	1.25	498
TS822	Imax=4490cd/klm	Imax	7969cd	5	1.57	319

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2511**	**1E2512**
CLASS 3	48Vdc			**1E2517**	**1E2518**

LED / 12W / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			40°	
Fixture Power	14W		1	0.73	2861
Source Flux	1775lm		2	1.47	715
Fixture Flux	1384lm		3	2.20	318
Efficacy	102lm/W		4	2.93	179
TS823	Imax=1624cd/klm	Imax	2882cd	5	3.67	114

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E2513**	**1E2514**
CLASS 3	48Vdc			**1E2519**	**1E2520**

Note

All lighting fixtures have to be completed with ring and installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Ø	H	Code
166	200	**1E2521**

Installation sleeve.
Grey Nylon casing.
Round and square ring for semi-flush installation. Only round ring for flush installation.



L	H	Code
168	200	**1E2522**

Installation sleeve.
Grey Nylon casing and stainless steel profile.
Square ring for flush installation.

KEPLERO

Decorative Ring



Code
1E2525

Brushed stainless steel (AISI316L), ultra flat, bevelled edge decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.



Code
1E2526

Brushed stainless steel (AISI316L), ultra flat square decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.

Power Supply



Code
1E2320

Electronic driver 70W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code
1E2321

Electronic driver 150W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code
1E2323

Electronic driver 480W, LxHxP=227x100x125mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply - DIN RAIL power supply.



Code
1E2533

Electronic driver 240W, LxHxP=125x100x125mm, input voltage: 220V-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply.
DIN RAIL power supply.

Accessories

Filter

Filter	Ø	Code
Red	70	**1T1712**
Green	70	**1T1713**
Blue	70	**1T1714**
Yellow	70	**1T1715**
Magenta	70	**1T1716**

Flat glass interference chromatic filter.
To be completed with an additional holder ring.

Ø	Code
70	**1T1708**

Flat striped glass blade light refractive filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with an additional holder ring.

Grid



Ø	Code
70	**1T1711**

Anti-glare louver.
Black painted metal honeycomb structure.
To be completed with an additional holder ring.

Shutter

Code
1E2523

Black half-moon shutter.

Holder Ring

Code
1T3727

Transparent polycarbonate accessory holder ring.

Tool

Code
1E2495

Features TORX HEAD, TX 30.

Code
1E2524

Metal handle for fixture removal

Code
1E0388

Sucker tool to raise the glass.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting for the following products: Jupiter, Jupiter Mini, Saturn, Saturn Mini, and Led.Y.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

KEPLERO

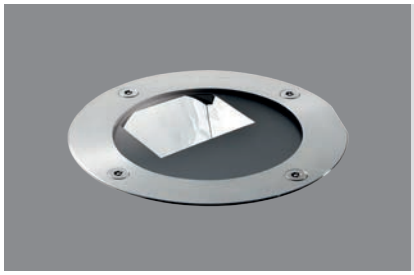

Mini Wall Washer



LED / 12W / WALL WASHER

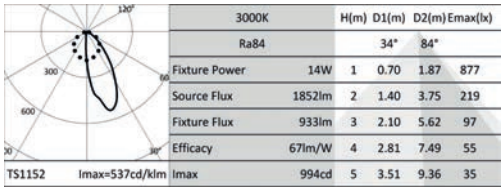

3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			34°	84°	
Fixture Power	14W	1	0.70	1.87	877
Source Flux	1852lm	2	1.40	3.75	219
Fixture Flux	933lm	3	2.10	5.62	97
Efficacy	67lm/W	4	2.81	7.49	55
Imax	994cd	5	3.51	9.36	35

Insulation	Power supply	Driver	Colour	3000K	4000K
CLASS 2	220-240Vac	EL.		**1E3517**	**1E3518**
CLASS 3	48Vdc			**1E3519**	**1E3520**

Note

All lighting fixtures have to be completed with ring and installation sleeves.

The projector can withstand temporary accidental immersion to a depth of 1.3 metres (max.1h) but is unsuitable for permanent underwater installation.

All versions of the KEPLERO family meet all the requirements of EN 60598-2-13 standard regarding drive-over and walk-over performances. Low temperatures on the glass which characterises the LED range of fixtures make them suitable even for installation in “special areas”, such as spaces for children.

Related codes

Sleeve

Ø	H	Code
166	200	**1E2521**

Installation sleeve.
Grey Nylon casing.
Round and square ring for semi-flush installation. Only round ring for flush installation.



L	H	Code
168	200	**1E2522**

Installation sleeve.
Grey Nylon casing and stainless steel profile.
Square ring for flush installation.

Decorative Ring



Code
1E2525

Brushed stainless steel (AISI316L), ultra flat, bevelled edge decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.



Code
1E2526

Brushed stainless steel (AISI316L), ultra flat square decorative ring.
10mm thick extra clear protective glass.
Silicone gasket.
Anti-theft Torx screws.
The ring can be supplied with a special anti-slip protective glass for public pedestrian areas on request for minimum quantities.

Power Supply



Code

1E2320

Electronic driver 70W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code

1E2321

Electronic driver 150W, LxHxP=225x51x65mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP67.
Cable length 1 meter (IN-OUT).



Code

1E2533

Electronic driver 240W, LxHxP=125x100x125mm, input voltage: 220V-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply.
DIN RAIL power supply.



Code

1E2323

Electronic driver 480W, LxHxP=227x100x125mm, input voltage: 220-240V 50/60Hz, 48V-DC, IP20.
Without cable.
Complete with connector.
Electrical panel power supply - DIN RAIL power supply.

Accessories

Tool

Code

1E2495

Features TORX HEAD, TX 30.

Code

1E2524

Metal handle for fixture removal

Code

1E0388

Sucker tool to raise the glass.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

TITANO

GENERAL INFO
Semi-recessed fixture for grazing light effect.
ø169mm

LED
LED Emitter multichip
From 47lm to 181lm
3000K – 4000K
Ra80 – Ra83

PRODUCT EFFICACY
Unitil 106lm/W

OPTICS
One-emission106°
Double-emission 106°+106°
Pluri-emission 4x62°

POWER SUPPLY
Electronic

MATERIAL
Stainless steel body.
Painted anodised aluminium ring and cover.

Grazing light effect inground fixture with a light that can be projected in one, two or more directions. The vertical angle is controlled by the lens to produce a glare-free effect which is highly effective on horizontal surfaces.

They meet all the requirements of standard EN 60598-2-13 regarding vehicle and pedestrian use and are therefore ideal for lighting all the areas provided for by the regulations, such as car parks, pedestrian zones and other designated areas

LED



LED / 5W / MONO-DIRECTIONAL EMISSION



3000K	
Ra83	
Fixture Power	6W
Source Flux	47lm
Fixture Flux	47lm
Efficacy	8lm/W
EV331 Imax=3651cd/klm	Imax 172cd

Driver	Colour	3000K	4000K
EL.		**1E2770**	**1E2771**

LED / 5W / BI-DIRECTIONAL EMISSION



3000K	
Ra83	
Fixture Power	6W
Source Flux	93lm
Fixture Flux	93lm
Efficacy	16lm/W
EV332 Imax=1846cd/klm	Imax 172cd

Driver	Colour	3000K	4000K
EL.		**1E2772**	**1E2773**

LED / 5W / MULTIDIRECTIONAL



3000K	
Ra83	
Fixture Power	6W
Source Flux	158lm
Fixture Flux	158lm
Efficacy	27lm/W
EV333 Imax=1020cd/klm	Imax 162cd

Driver	Colour	3000K	4000K
EL.		**1E2774**	**1E2775**

Accessories

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

JUPITER

GENERAL INFO
Miniaturised recessed fixture
ø80mm - ø50mm

LED
Chip on board
From 353lm to 1251lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 101lm/W

OPTICS
SP – FL – WFL

POWER SUPPLY
Electronic – DALI – 1-10V
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Anodised polished aluminium body. Polished stainless steel front ring.

This fixture has a lenticular type optic that makes it possible to obtain defined, precise beams.

It has no visible screws, the ring is flared and it connects smoothly to the floor avoiding treacherous steps especially when installed in environments such as SPAs or around swimming pools, ensured by the 24V power supply system. It is easy to install and has a minimal installation depth.

There are various versions available: drive over and walk over in both diameters.
The drive over versions also have solutions equipped with anti-glare grills or asymmetrical screens.

Also available in a projector version.

Studio Ceri

Architect
Studio Ceri

Photographer
Officine Fotografiche

Country
Prato - Italy

JUPITER

Walk-over



LED / 9W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			18°	
Fixture Power		10W	1	0.32	5028
Source Flux		1213lm	2	0.65	1257
Fixture Flux		958lm	3	0.97	559
Efficacy		96lm/W	4	1.30	314
TS1045	Imax=4145cd/klm	Imax	5	1.62	201

Power supply	Colour	3000K	4000K
24Vdc		**1E3128**	**1E3129**

LED / 9W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			34°	
Fixture Power		10W	1	0.62	2069
Source Flux		1213lm	2	1.23	517
Fixture Flux		979lm	3	1.85	230
Efficacy		98lm/W	4	2.47	129
TS1046	Imax=1705cd/klm	Imax	5	3.08	83

Power supply	Colour	3000K	4000K
24Vdc		**1E3130**	**1E3131**

LED / 9W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			57°	
Fixture Power		10W	1	1.08	981
Source Flux		1213lm	2	2.16	245
Fixture Flux		961lm	3	3.25	109
Efficacy		96lm/W	4	4.33	61
TS1047	Imax=808cd/klm	Imax	5	5.41	39

Power supply	Colour	3000K	4000K
24Vdc		**1E3132**	**1E3133**

Driver-over



LED / 5.5W / SP



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			19°	19°	
Fixture Power		6W	1	0.34	0.34	2850
Source Flux		853lm	2	0.68	0.68	713
Fixture Flux		579lm	3	1.01	1.02	317
Efficacy		105lm/W	4	1.35	1.36	178
TS1210	Imax=3341cd/klm	Imax	5	1.69	1.70	114

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3451**	**1E3454**	**1E3457**

LED / 5.5W / FL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			43°	43°	
Fixture Power	6W	1	0.79	0.78	690
Source Flux	927lm	2	1.57	1.56	172
Fixture Flux	466lm	3	2.36	2.35	77
Efficacy	80lm/W	4	3.15	3.13	43
TS1164 Imax=746cd/klm	Imax 691cd	5	3.93	3.91	28

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3452**	**1E3455**	**1E3458**

LED / 5.5W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			57°	
Fixture Power	6W	1	1.08	588
Source Flux	853lm	2	2.15	147
Fixture Flux	581lm	3	3.23	65
Efficacy	106lm/W	4	4.30	37
TS1211 Imax=690cd/klm	Imax 589cd	5	5.38	24

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3453**	**1E3456**	**1E3459**

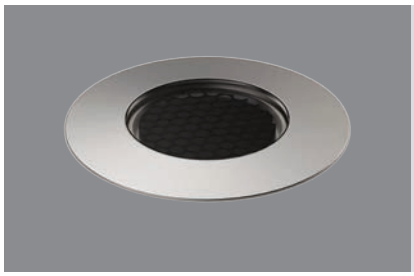

Driver-over with grid



LED / 5.5W / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			21°	
Fixture Power	6W	1	0.37	2042
Source Flux	927lm	2	0.74	511
Fixture Flux	408lm	3	1.11	227
Efficacy	70lm/W	4	1.48	128
TS1154 Imax=2203cd/klm	Imax 2042cd	5	1.85	82

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3471**	**1E3474**	**1E3477**

LED / 5.5W / FL



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			35°	34°	
Fixture Power	6W	1	0.63	0.60	861
Source Flux	927lm	2	1.26	1.21	215
Fixture Flux	376lm	3	1.89	1.81	96
Efficacy	64lm/W	4	2.52	2.41	54
TS1163 Imax=928cd/klm	Imax 861cd	5	3.14	3.02	34

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3472**	**1E3475**	**1E3478**

LED / 5.5W / WFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			44°	
Fixture Power	6W	1	0.80	583
Source Flux	927lm	2	1.61	146
Fixture Flux	355lm	3	2.41	65
Efficacy	61lm/W	4	3.22	36
TS1162 Imax=629cd/klm	Imax 583cd	5	4.02	23

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3473**	**1E3476**	**1E3479**

JUPITER

Driver-over with asymmetric screen



LED / 5.5W / SP



		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		Ra84		21°	22°	
Fixture Power	6W		1	0.38	0.38	313
Source Flux	927lm		2	0.75	0.76	78
Fixture Flux	78lm		3	1.13	1.14	35
Efficacy	13lm/W		4	1.51	1.52	20
TS1161	Imax=340cd/klm	Imax	315cd	5	1.88	1.91	13

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3489**	**1E3492**	**1E3495**

LED / 5.5W / FL



		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		Ra84		37°	44°	
Fixture Power	6W		1	0.70	0.81	262
Source Flux	927lm		2	1.39	1.62	66
Fixture Flux	159lm		3	2.09	2.44	29
Efficacy	27lm/W		4	2.78	3.25	16
TS1160	Imax=294cd/klm	Imax	272cd	5	3.48	4.06	10

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3490**	**1E3493**	**1E3496**

LED / 5.5W / ASY



		3000K
		Ra84
Fixture Power	6W	
Source Flux	946lm	
Fixture Flux	72lm	
Efficacy	12lm/W	
TS1153	Imax=107cd/klm	Imax 102cd

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3491**	**1E3494**	**1E3497**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Sleeve

Ø	H	Code
75	80	**1E3175**

Installation sleeve.

Ø	H	Code
75	80	**1E3460**

Installation sleeve.
For the drive-over version.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

JUPITER

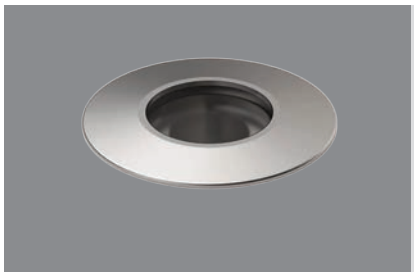

Mini Walk-over



LED / 3W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
	Fixture Power	4W	1	0.31	2037
	Source Flux	353lm	2	0.61	509
	Fixture Flux	295lm	3	0.92	226
	Efficacy	74lm/W	4	1.23	127
TS1048	Imax=5771cd/klm	Imax	2037cd	5	1.53	81

Power supply	Colour	3000K	4000K
24Vdc		**1E3136**	**1E3137**

LED / 3W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
	Fixture Power	4W	1	0.54	1062
	Source Flux	353lm	2	1.09	266
	Fixture Flux	289lm	3	1.63	118
	Efficacy	72lm/W	4	2.17	66
TS1049	Imax=3009cd/klm	Imax	1062cd	5	2.72	42

Power supply	Colour	3000K	4000K
24Vdc		**1E3138**	**1E3139**

LED / 3W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
	Fixture Power	4W	1	1.16	367
	Source Flux	353lm	2	2.32	92
	Fixture Flux	302lm	3	3.47	41
	Efficacy	75lm/W	4	4.63	23
TS1050	Imax=1041cd/klm	Imax	367cd	5	5.79	15

Power supply	Colour	3000K	4000K
24Vdc		**1E3140**	**1E3141**

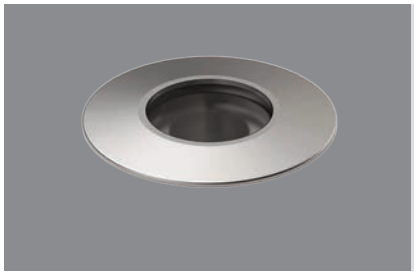

Mini Driver-over



LED / 2.6W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			19°	
	Fixture Power	3W	1	0.34	740
	Source Flux	197lm	2	0.68	185
	Fixture Flux	126lm	3	1.02	82
	Efficacy	49lm/W	4	1.36	46
TS1212	Imax=3750cd/klm	Imax	740cd	5	1.70	30

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3461**	**1E3464**	**1E3467**

LED / 2.6W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		3W	1	0.44	480
Source Flux		197lm	2	0.88	120
Fixture Flux		117lm	3	1.32	53
Efficacy		45lm/W	4	1.75	30
TS1213	Imax=2436cd/klm	Imax	5	2.19	19

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3462**	**1E3465**	**1E3468**

LED / 2.6W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			32°	
Fixture Power		3W	1	0.57	59
Source Flux		197lm	2	1.14	15
Fixture Flux		23lm	3	1.70	7
Efficacy		9lm/W	4	2.27	4
TS1214	Imax=298cd/klm	Imax	5	2.84	2

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3463**	**1E3466**	**1E3469**

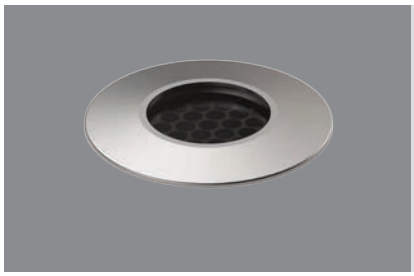

Mini Driver-over with grid



LED / 2.6W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			22°	
Fixture Power		3W	1	0.39	358
Source Flux		197lm	2	0.78	90
Fixture Flux		74lm	3	1.18	40
Efficacy		28lm/W	4	1.57	22
TS1215	Imax=1816cd/klm	Imax	5	1.96	14

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3480**	**1E3483**	**1E3486**

LED / 2.6W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			23°	
Fixture Power		3W	1	0.40	468
Source Flux		197lm	2	0.80	117
Fixture Flux		93lm	3	1.19	52
Efficacy		36lm/W	4	1.59	29
TS1216	Imax=2371cd/klm	Imax	5	1.99	19

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3481**	**1E3484**	**1E3487**

LED / 2.6W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			28°	
Fixture Power		3W	1	0.49	285
Source Flux		197lm	2	0.98	71
Fixture Flux		81lm	3	1.47	32
Efficacy		31lm/W	4	1.97	18
TS1156	Imax=1442cd/klm	Imax	5	2.46	11

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3482**	**1E3485**	**1E3488**

JUPITER

Mini Driver-over with asymmetric screen



LED / 2.6W / SP



	Power supply	Colour	2700K	3000K	4000K
	24Vdc		**1E3498**	**1E3501**	**1E3504**

LED / 2.6W / FL



	Power supply	Colour	2700K	3000K	4000K
	24Vdc		**1E3499**	**1E3502**	**1E3505**

LED / 2.6W / WFL



	Power supply	Colour	2700K	3000K	4000K
	24Vdc		**1E3500**	**1E3503**	**1E3506**

Related codes

Power Supply

	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Sleeve

Ø	H	Code
40	60	**1E3176**

Installation sleeve.

Ø	H	Code
44	60	**1E3470**

Installation sleeve.
For the drive-over version.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

SATURN

GENERAL INFO
Miniaturised recessed fixture.
ø35mm – ø60mm

LED
LED Emitter
From 353lm to 682lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Up to 10lm/W

OPTICS
WFL

POWER SUPPLY
Electronic – DALI – 1-10V
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Anodised polished aluminium body. Front made entirely of screen-printed, opal white glass.

A range of miniature 24V inground fixtures with a glass finishing ring for an elegant glass only effect. It is available in two different sizes, both extremely compact and flush opal glass that screens the lamp to produce a soft light.

The 24V voltage, the absence of visible screws and the “glass only” effect make it particularly suitable for indoor installations in hospitality, SPAs or homes. The glass only finish for Saturn goes perfectly with the same aesthetic solution in the Mercure range, to light environments in different ways using the same family feeling.

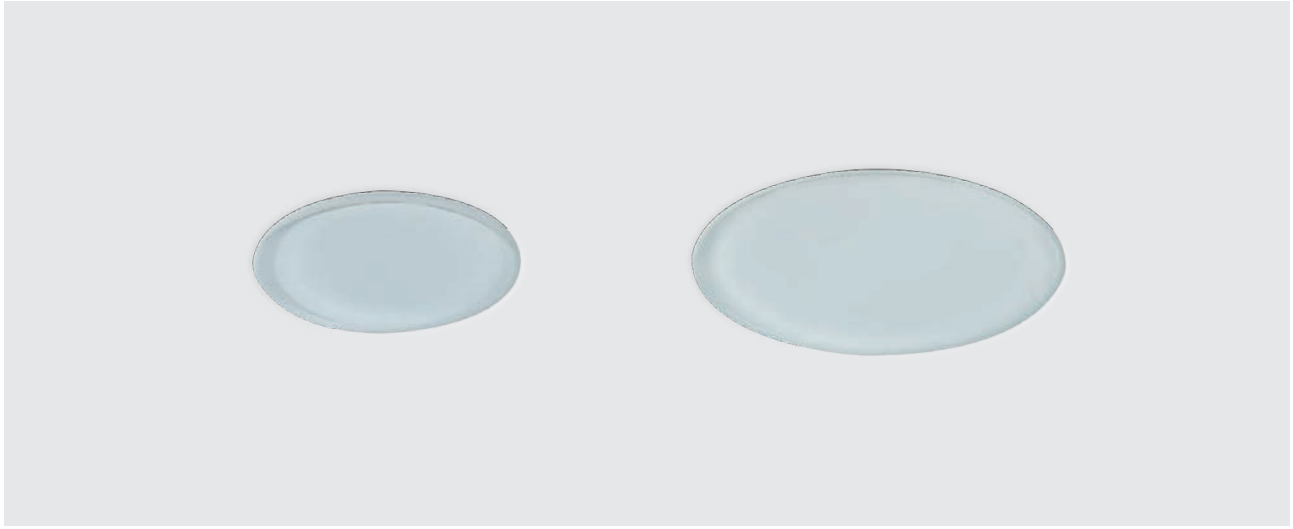

Park Hyatt

Photographer
Gregor Titze

Country
Wien - Austria

SATURN

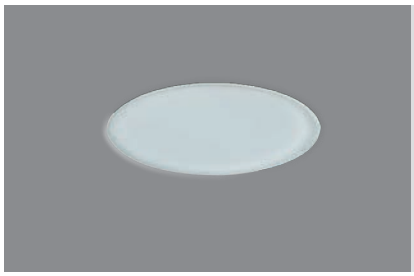



LED / 4W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			115°	
	Fixture Power	5W	1	3.13	16
	Source Flux	638lm	2	6.27	4
	Fixture Flux	48lm	3	9.40	2
	Efficacy	10lm/W	4	12.53	1
	Imax	16cd	5	15.67	1

Power supply	3000K	4000K
24Vdc	**1E3144**	**1E3145**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Sleeve



Code
1E3177

Installation sleeve.
Flush installation h 70, Ø 65mm.
Straight installation h 60, Ø 57mm.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

SATURN

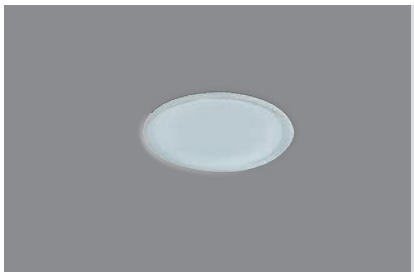

Mini



LED / 2,6W / WFL

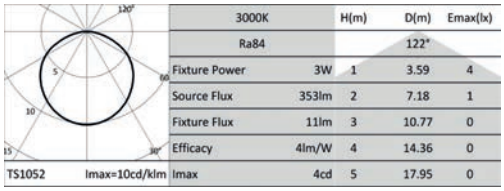

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			122°	
Fixture Power	3W	1	3.59	4	
Source Flux	353lm	2	7.18	1	
Fixture Flux	111m	3	10.77	0	
Efficacy	41m/W	4	14.36	0	
Imax	4cd	5	17.95	0	

	Power supply	3000K	4000K
	24Vdc	**1E3146**	**1E3147**

Related codes

Power Supply



Code **1E3179**

Electronic power supply 10W, LxHxP=79x24.5x38mm, 220/240V-AC, 24V-DC, IP67.

Code **1E0993**

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.
For Led.Y Multiled: up to 16 LED.Y connected in parallel.



Code **1T3726**

Electronic power supply 50W, LxHxP=185x22x63.5mm, 220-240V, 24V-DC, IP20.



Code **1T3586**

Electronic power supply 75W, LxHxP=130x32x80mm, 220-240V, 24V-DC, IP67.



Code **1T3587**

Electronic power supply 100W, LxHxP=230x87x43mm, 220-240V, 24V-DC, IP67.



Code **1T3588**

Electronic power supply 200W, LxHxP=238x42x67mm, 220-240V, 24V-DC, IP67.

Accessories

Sleeve



Code
1E3178

Installation sleeve.
Flush installation h 70, Ø 40mm.
Straight installation h 60, Ø 34mm.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

LED.Y

GENERAL INFO
Recessed fixture
Multiled
ø60mm – ø68mm
Monoled-RGB
ø63mm

LED
Monoled: LED emitter
3000K – 6000K
From 99lm to 143lm
Ra80
Multiled: LED Board
6000K – Blue – Amber
From 1lm toa 7lm
Ra80
RGB: RGB LED Multichip
From 40lm toa 48lm

PRODUCT EFFICACY
Up to 99lm/W

OPTICS
Monoled
SP - FL
Multiled/RGB
VWFL

POWER SUPPLY
Electronic

MATERIAL
Anodised aluminium body and ring.

A series of miniature LED fixtures available in recessed or projector versions with monochromatic LED and RGB technology. The monochromatic versions are both mono and multi-LED.

The recessed version has a flat, flared edge and domed glass for a choreographic effect.

Multiled
flush ring - flat screen



LED / 1W / VWFL

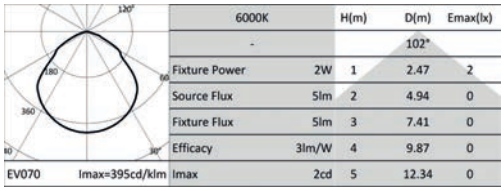

	6000K		H(m)	D(m)	Emax(lx)
	-			102°	
Fixture Power	2W	1		2.47	2
Source Flux	5lm	2		4.94	0
Fixture Flux	5lm	3		7.41	0
Efficacy	3lm/W	4		9.87	0
EV070 Imax=395cd/klm	Imax	2cd	5	12.34	0

Power supply	Colour	6000K	AMBER	BLUE
24Vdc		**1E1022**	**1E1021**	**1E1028**

Multiled
raised ring - flat screen



LED / 1W / VWFL

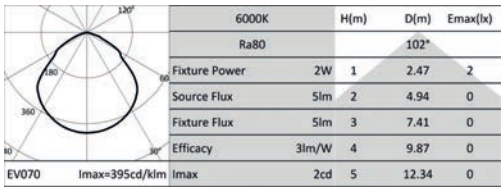

	6000K		H(m)	D(m)	Emax(lx)
	Ra80			102°	
Fixture Power	2W	1		2.47	2
Source Flux	5lm	2		4.94	0
Fixture Flux	5lm	3		7.41	0
Efficacy	3lm/W	4		9.87	0
EV070 Imax=395cd/klm	Imax	2cd	5	12.34	0

Power supply	Colour	6000K	AMBER	BLUE
24Vdc		**1E1012**	**1E1011**	**1E1018**

Multiled raised ring
curved screen



LED / 1W / VWFL

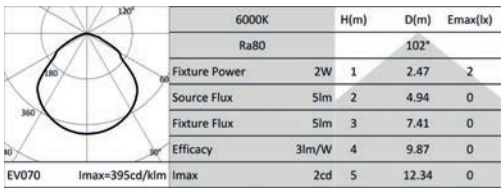

	6000K		H(m)	D(m)	Emax(lx)
	Ra80			102°	
Fixture Power	2W	1		2.47	2
Source Flux	5lm	2		4.94	0
Fixture Flux	5lm	3		7.41	0
Efficacy	3lm/W	4		9.87	0
EV070 Imax=395cd/klm	Imax	2cd	5	12.34	0

Power supply	Colour	6000K	AMBER	BLUE
24Vdc		**1E1002**	**1E1001**	**1E1008**

Note

All LED.Y fixtures meet all the requirements of EN 60598-2-13 standard regarding pedestrian use and are therefore ideal for lighting all the areas provided for by the regulations, such as pedestrian zones and other designated areas.

LED.Y

Related codes

Power Supply

Code
1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.
For Led.Y Multiled: up to 16 LED.Y connected in parallel.

Accessories

Mounting System

Code
1E0994

Installation kit.
Extension for the PVC casing.
A wider space facilitates electrical connections.
Water tight electrical connection system is not included.



Code
1E0996

Steel spring. For ceiling and wall installation.

Tool

Code
1E0990

Mounting key.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Monoled



LED / 2W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		3W	1	0.16	2012
Source Flux		117lm	2	0.32	503
Fixture Flux		116lm	3	0.48	224
Efficacy		39lm/W	4	0.64	126
TS670	Imax=17195cd/klm	Imax	2012cd	5	0.80	80

Power supply	Colour	3000K	6000K
700mA		**1E2367**	**1E2368**

LED / 2W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			34°	
Fixture Power		3W	1	0.60	223
Source Flux		99lm	2	1.21	56
Fixture Flux		99lm	3	1.81	25
Efficacy		33lm/W	4	2.42	14
TS671	Imax=2253cd/klm	Imax	223cd	5	3.02	9

Power supply	Colour	3000K	6000K
700mA		**1E2369**	**1E2370**

Note

All LED.Y fixtures meet all the requirements of EN 60598-2-13 standard regarding pedestrian use and are therefore ideal for lighting all the areas provided for by the regulations, such as pedestrian zones and other designated areas.

Related codes

Power Supply

Code
1E1385

Electronic power supply 17W, Ø105 h74, 220-240V, 700mA - 12W, Ø105 h74, 110-120V, 700mA.
For Led.Y Monoled: it can drive up to 6 LED.Y fixtures simultaneously. Connection in series.

Accessories

Mounting System



Code

1E0994

Installation kit.
Extension for the PVC casing.
A wider space facilitates electrical connections.
Water tight electrical connection system is not included.



Code

1E0996

Steel spring. For ceiling and wall installation.

Tool

Code

1E0990

Mounting key.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Monoled RGB



LED RGB / 3,5W / SP

Power supply	Colour	RGB
3x350mA		**1E1854**



-	
-	
Fixture Power	4W
Source Flux	8lm
Fixture Flux	6lm
Efficacy	2lm/W
EV293 Imax=8417cd/klm	Imax 67cd



-	
-	
Fixture Power	5W
Source Flux	48lm
Fixture Flux	37lm
Efficacy	7lm/W
EV293 Imax=8417cd/klm	Imax 404cd

LED RGB / 3,5W / FL

Power supply	Colour	RGB
3x350mA		**1E1409**



-	
-	
Fixture Power	4W
Source Flux	3lm
Fixture Flux	3lm
Efficacy	1lm/W
EV149 Imax=3375cd/klm	Imax 10cd



-	
-	
Fixture Power	5W
Source Flux	40lm
Fixture Flux	39lm
Efficacy	8lm/W
EV149 Imax=3375cd/klm	Imax 135cd

Note

Photometrics show the maximum emission values of fixtures.

All LED.Y fixtures meet all the requirements of EN 60598-2-13 standard regarding pedestrian use and are therefore ideal for lighting all the areas provided for by the regulations, such as pedestrian zones and other designated areas.

Related codes

Control systems

Code

1E1401

SECS 75 - IP67
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output

Code

1T1827

SECS 75 - IP20
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output

Code

1T2245

SECS 36 - IP20
Power supply and Control System SECS Scene Effect Control System.
SECS 36 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
35W output

Accessories

Mounting System



Code

1E0994

Installation kit.
Extension for the PVC casing.
A wider space facilitates electrical connections.
Water tight electrical connection system is not included.



Code

1E0996

Steel spring. For ceiling and wall installation.

Tool

Code
1E0990

Mounting key.

Cable

Code
1E1713

6-pole cable for driver output connection to Constant Current LED sources.

Control systems

Code
1T1898

my-SCENARIO Show Store.
Digital devices designed to control dynamic lighting fixtures and programme dynamic light scenarios and sequences.
The system consists of intuitive software, compatible with Windows operating systems, able to control different hardware devices with the following functions: - record colour-changing scenarios set by the operator; - allow selection among the multiple scenarios already recorded; - transmit the control signals to the lighting system.
The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.
The software provides a graphic simulation of the operating keys of a lighting controller; the patching function allows the DMX control channels to be assigned to fixtures by using the internal library.
The Colour Manager function allows for quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times.
The built-in calendar allows full time scheduling of show playback (month, day, hour, minutes, recurring events).
The programmed light shows can be transferred to different control interfaces.

Outdoor

Projectors

Linear projectors

630
JEDI

642
JEDI COMPACT

Projectors



656
DART

662
DART MEDIUM

669
DART MINI

674
PYROS

682
NANO PYROS

687
PICO PYROS

688
JUPITER PRO

699
JUPITER



702
LED.Y

JEDI

Projector

GENERAL INFO
Adjustable linear projector.
Lengths 616mm – 916mm – 1216mm

LED
Optics FL, GR, WW - Linear boards
Optic SP - LED Emitter
Version RGBW - LED Emitter
From 632lm to 7180m
3000K – 4000K – RGBW
Ra80

PRODUCT EFFICACY
Unitil 113lm/W

OTTICHE
SP – FL – GRAZING – WALL WASHER

POWER SUPPLY
Electronic – DALI

MATERIAL
Extruded anodised aluminium body.
Extra clear glass flat screen.
Black polycarbonate driver box.

A coordinated range of linear projectors for lighting large surfaces.

A coordinated range of linear projectors for lighting wide surfaces. The multiplicity of effects, installation flexibility, three different lengths and the possibility to camouflage them into the architecture make them fundamental tools for lighting large surfaces.

The accessory fixing system allows the projector to be adjusted with aim locking.

Completely sealed housing complete - external electrical connection through IP68 connectors.

Also available Inground and RGB versions.

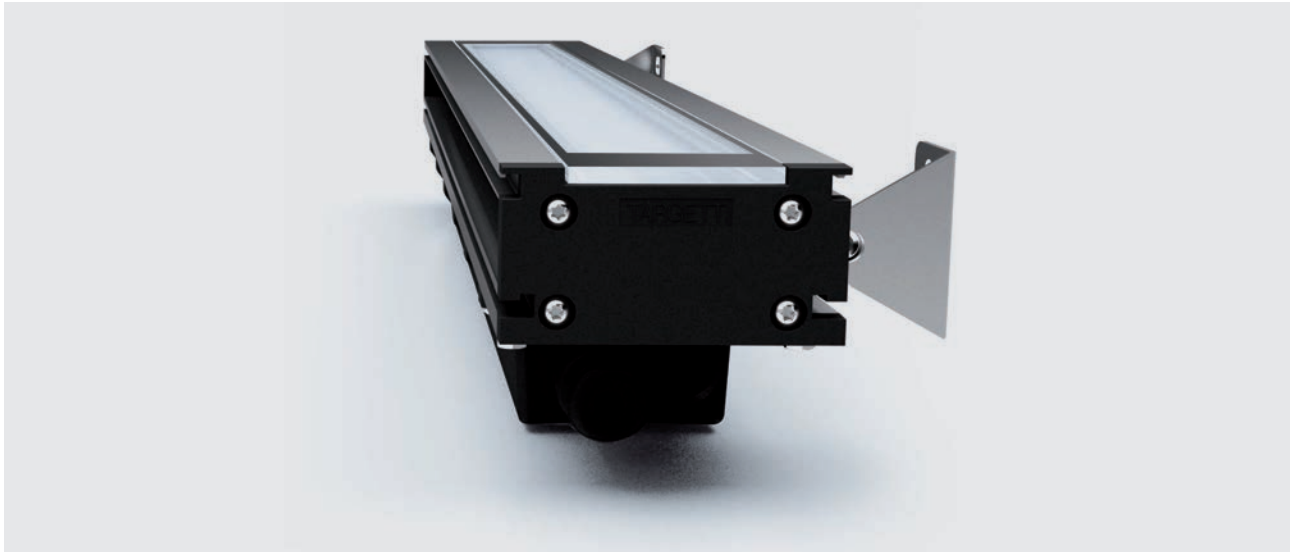

01

Four different effects

Spot and Flood optics to obtein more concentrated, precise lighting.
Grazing Optic for a grazing, uniform light effect for installation near to the wall to be illuminated. Wall Washer Optic for a completely homogeneous effect on the wall, thus avoiding any bright stripes or separate beams that are typical of linear fixtures that are fitted with visible LED strips.

The different lengths have proportioned lumen packets to suit each one

The different lengths have proportioned lumen packets to suit each one. The same quantity of light per linear metre makes it possible to light every surface in a uniform way irrespective of the length of the fixture used.

JEDI

Projector L. 616mm



LED / 23W / SPOT



3000K		H(m)	D(m)	Emax(lx)
Ra80			10°	
Fixture Power	28W	1	0.18	32201
Source Flux	1947lm	2	0.37	8050
Fixture Flux	1591lm	3	0.55	3578
Efficacy	57lm/W	4	0.73	2013
TS889 Imax=16539cd/klm	Imax 32201cd	5	0.92	1288

Driver	Colour	3000K	4000K
EL.		**1E2653**	**1E2654**
DALI		**1E2655**	**1E2656**

LED / 12W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	15W	1	1.84	0.57	1203
Source Flux	1720lm	2	3.68	1.14	301
Fixture Flux	1285lm	3	5.53	1.70	134
Efficacy	86lm/W	4	7.37	2.27	75
TS886 Imax=699cd/klm	Imax 1203cd	5	9.21	2.84	48

Driver	Colour	3000K	4000K
EL.		**1E2605**	**1E2606**
DALI		**1E2607**	**1E2608**

LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	28W	1	1.84	0.57	2392
Source Flux	3420lm	2	3.68	1.14	598
Fixture Flux	2555lm	3	5.53	1.70	266
Efficacy	91lm/W	4	7.37	2.27	149
TS885 Imax=699cd/klm	Imax 2392cd	5	9.21	2.84	96

Driver	Colour	3000K	4000K
EL.		**1E2609**	**1E2610**
DALI		**1E2611**	**1E2612**

LED / 12W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			115°	59°	
Fixture Power	15W	1	3.12	1.34	1156
Source Flux	1720lm	2	6.23	2.67	289
Fixture Flux	1293lm	3	9.35	4.01	128
Efficacy	86lm/W	4	12.47	5.35	72
TS884 Imax=774cd/klm	Imax 1331cd	5	15.58	6.69	46

Driver	Colour	3000K	4000K
EL.		**1E2629**	**1E2630**
DALI		**1E2631**	**1E2632**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			115°	59°	
Fixture Power	28W	1	3.12	1.34	2299
Source Flux	3420lm	2	6.23	2.67	575
Fixture Flux	2572lm	3	9.35	4.01	255
Efficacy	92lm/W	4	12.47	5.35	144
TS883 Imax=774cd/klm	Imax 2646cd	5	15.59	6.69	92

Driver	Colour	3000K	4000K
EL.		**1E2633**	**1E2634**
DALI		**1E2635**	**1E2636**

LED / 12W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			76°	15°	
Fixture Power	15W	1	1.55	0.26	2753
Source Flux	1720lm	2	3.10	0.51	688
Fixture Flux	1429lm	3	4.65	0.77	306
Efficacy	95lm/W	4	6.20	1.02	172
TS888 Imax=1601cd/klm	Imax 2753cd	5	7.76	1.28	110

Driver	Colour	3000K	4000K
EL.		**1E2581**	**1E2582**
DALI		**1E2583**	**1E2584**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			76°	15°	
Fixture Power	28W	1	1.55	0.26	5474
Source Flux	3420lm	2	3.10	0.51	1368
Fixture Flux	2842lm	3	4.65	0.77	608
Efficacy	101lm/W	4	6.21	1.02	342
TS887 Imax=1601cd/klm	Imax 5474cd	5	7.76	1.28	219

Driver	Colour	3000K	4000K
EL.		**1E2585**	**1E2586**
DALI		**1E2587**	**1E2588**

Projector L. 916mm



LED / 34W / SPOT



3000K		H(m)	D(m)	Emax(lx)
Ra80			10°	
Fixture Power	40W	1	0.18	48326
Source Flux	2922lm	2	0.37	12081
Fixture Flux	2387lm	3	0.55	5370
Efficacy	60lm/W	4	0.73	3020
TS889 Imax=16539cd/klm	Imax 48326cd	5	0.92	1933

Driver	Colour	3000K	4000K
EL.		**1E2657**	**1E2658**
DALI		**1E2659**	**1E2660**

LED / 18W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	22W	1	1.84	0.57	1804
Source Flux	2580lm	2	3.68	1.14	451
Fixture Flux	1927lm	3	5.53	1.70	200
Efficacy	88lm/W	4	7.37	2.27	113
TS886 Imax=699cd/klm	Imax 1804cd	5	9.21	2.84	72

Driver	Colour	3000K	4000K
EL.		**1E2613**	**1E2614**
DALI		**1E2615**	**1E2616**

LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	40W	1	1.84	0.57	3588
Source Flux	5130lm	2	3.68	1.14	897
Fixture Flux	3833lm	3	5.53	1.70	399
Efficacy	96lm/W	4	7.37	2.27	224
TS885 Imax=699cd/klm	Imax 3588cd	5	9.21	2.84	144

Driver	Colour	3000K	4000K
EL.		**1E2617**	**1E2618**
DALI		**1E2619**	**1E2620**

JEDI

LED / 18W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
	Fixture Power	22W	1	3.12	1.34	1735
	Source Flux	2580lm	2	6.23	2.67	434
	Fixture Flux	1940lm	3	9.35	4.01	193
	Efficacy	88lm/W	4	12.47	5.35	108
TS884	Imax=774cd/klm	Imax	5	15.58	6.69	69

Driver	Colour	3000K	4000K
EL.		**1E2637**	**1E2638**
DALI		**1E2639**	**1E2640**

LED / 36W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
	Fixture Power	40W	1	3.12	1.34	3449
	Source Flux	5130lm	2	6.23	2.67	862
	Fixture Flux	3858lm	3	9.35	4.01	383
	Efficacy	96lm/W	4	12.47	5.35	216
TS883	Imax=774cd/klm	Imax	5	15.59	6.69	138

Driver	Colour	3000K	4000K
EL.		**1E2641**	**1E2642**
DALI		**1E2643**	**1E2644**

LED / 18W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
	Fixture Power	22W	1	1.55	0.26	4130
	Source Flux	2580lm	2	3.10	0.51	1032
	Fixture Flux	2144lm	3	4.65	0.77	459
	Efficacy	97lm/W	4	6.20	1.02	258
TS888	Imax=1601cd/klm	Imax	5	7.76	1.28	165

Driver	Colour	3000K	4000K
EL.		**1E2589**	**1E2590**
DALI		**1E2591**	**1E2592**

LED / 36W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
	Fixture Power	40W	1	1.55	0.26	8211
	Source Flux	5130lm	2	3.10	0.51	2053
	Fixture Flux	4263lm	3	4.65	0.77	912
	Efficacy	107lm/W	4	6.21	1.02	513
TS887	Imax=1601cd/klm	Imax	5	7.76	1.28	328

Driver	Colour	3000K	4000K
EL.		**1E2593**	**1E2594**
DALI		**1E2595**	**1E2596**

Projector L. 1216mm



LED / 46W / SPOT



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			10°	
	Fixture Power	51W	1	0.18	64401
	Source Flux	3894lm	2	0.37	16100
	Fixture Flux	3181lm	3	0.55	7156
	Efficacy	62lm/W	4	0.73	4025
TS889	Imax=16539cd/klm	Imax	5	0.92	2576

Driver	Colour	3000K	4000K
EL.		**1E2661**	**1E2662**
DALI		**1E2663**	**1E2664**

LED / 24W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power	28W	1	1.84	0.57	2405	
Source Flux	3440lm	2	3.68	1.14	601	
Fixture Flux	2570lm	3	5.53	1.70	267	
Efficacy	92lm/W	4	7.37	2.27	150	
TS886 Imax=699cd/klm	Imax	2405cd	5	9.21	2.84	96

Driver	Colour	3000K	4000K
EL.		**1E2621**	**1E2622**
DALI		**1E2623**	**1E2624**

LED / 48W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			85°	32°	
Fixture Power	53W	1	1.84	0.57	4784	
Source Flux	6840lm	2	3.68	1.14	1196	
Fixture Flux	5111lm	3	5.53	1.70	532	
Efficacy	96lm/W	4	7.37	2.27	299	
TS885 Imax=699cd/klm	Imax	4784cd	5	9.21	2.84	191

Driver	Colour	3000K	4000K
EL.		**1E2625**	**1E2626**
DALI		**1E2627**	**1E2628**

LED / 24W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power	28W	1	3.12	1.34	2313	
Source Flux	3440lm	2	6.23	2.67	578	
Fixture Flux	2587lm	3	9.35	4.01	257	
Efficacy	92lm/W	4	12.47	5.35	145	
TS884 Imax=774cd/klm	Imax	2662cd	5	15.58	6.69	93

Driver	Colour	3000K	4000K
EL.		**1E2645**	**1E2646**
DALI		**1E2647**	**1E2648**

LED / 48W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			115°	59°	
Fixture Power	53W	1	3.12	1.34	4599	
Source Flux	6840lm	2	6.23	2.67	1150	
Fixture Flux	5144lm	3	9.35	4.01	511	
Efficacy	97lm/W	4	12.47	5.35	287	
TS883 Imax=774cd/klm	Imax	5293cd	5	15.59	6.69	184

Driver	Colour	3000K	4000K
EL.		**1E2649**	**1E2650**
DALI		**1E2651**	**1E2652**

LED / 24W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power	28W	1	1.55	0.26	5506	
Source Flux	3440lm	2	3.10	0.51	1377	
Fixture Flux	2859lm	3	4.65	0.77	612	
Efficacy	102lm/W	4	6.20	1.02	344	
TS888 Imax=1601cd/klm	Imax	5506cd	5	7.76	1.28	220

Driver	Colour	3000K	4000K
EL.		**1E2597**	**1E2598**
DALI		**1E2599**	**1E2600**

LED / 48W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra80			76°	15°	
Fixture Power	53W	1	1.55	0.26	10948	
Source Flux	6840lm	2	3.10	0.51	2737	
Fixture Flux	5684lm	3	4.65	0.77	1216	
Efficacy	107lm/W	4	6.21	1.02	684	
TS887 Imax=1601cd/klm	Imax	10948cd	5	7.76	1.28	438

Driver	Colour	3000K	4000K
EL.		**1E2601**	**1E2602**
DALI		**1E2603**	**1E2604**

JEDI

Related codes

Mounting System



Code
1E2752

Short bracket for wall installation (2 pieces).



Code
1E2753

Long bracket for wall installation (2 pieces).



Code
1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps

Code
1E2761

End cap.

Cable



L	Code
320	**1E2762**
470	**1E2763**
620	**1E2764**
770	**1E2765**

Connection cable.
Complete with 5 pole connectors.
For the electronic and DALI version.
1E2762
For in line adjacent connection of one 600mm projector with one 900mm projector.
1E2763
For in line adjacent connection of one 600mm projector with one 1200mm projector or two 900mm projectors.
1E2764
For in line adjacent connection of one 900mm projector with one 1200mm projector.
1E2765
For in line adjacent connection of two 1200mm projectors.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Cover Panel

L	Code
616	**1E3045**
916	**1E3046**
1216	**1E3047**

Side cover for ceiling installation.



L	Code
616	**1E2755**
916	**1E2756**
1216	**1E2757**

Side cover for wall/cornice installation.



L	Code
616	**1E2758**
916	**1E2759**
1216	**1E2760**

Anti-glare side cover.

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

JEDI

Projector RGBW
L. 616mm



LED RGBW / 17W 4Ch / SPOT



-		H(m)	D(m)	Emax(lx)
-			11°	
Fixture Power	9W	1	0.19	2101
Source Flux	121lm	2	0.38	525
Fixture Flux	121lm	3	0.56	233
Efficacy	13lm/W	4	0.75	131
Imax	2101cd	5	0.94	84

TS1030 Imax=17366cd/klm

Driver	Colour	Code
EL. DMX		**1E3112**

LED RGBW / 17W 4Ch / FLOOD



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			85°	29°	
Fixture Power	9W	1	1.82	0.52	91
Source Flux	88lm	2	3.65	1.04	23
Fixture Flux	88lm	3	5.47	1.56	10
Efficacy	10lm/W	4	7.29	2.08	6
Imax	91cd	5	9.11	2.60	4

TS1033 Imax=1038cd/klm

Driver	Colour	Code
EL. DMX		**1E3113**

LED RGBW / 17W 4Ch / WALL WASHER



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			115°	55°	
Fixture Power	9W	1	3.17	1.18	95
Source Flux	96lm	2	6.33	2.36	24
Fixture Flux	96lm	3	9.50	3.55	11
Efficacy	11lm/W	4	12.67	4.73	6
Imax	111cd	5	15.83	5.91	4

TS1036 Imax=1163cd/klm

Driver	Colour	Code
EL. DMX		**1E3114**

LED RGBW / 17W 4Ch / GRAZING



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			73°	11°	
Fixture Power	9W	1	1.48	0.19	235
Source Flux	105lm	2	2.97	0.38	59
Fixture Flux	105lm	3	4.45	0.57	26
Efficacy	12lm/W	4	5.94	0.76	15
Imax	235cd	5	7.42	0.96	9

TS1029 Imax=2250cd/klm

Driver	Colour	Code
EL. DMX		**1E3111**

Note

Photometrics show the maximum emission values of fixtures.

Projector RGBW
L. 916mm



LED RGBW / 26W 4Ch / SPOT



-		H(m)	D(m)	Emax(lx)
-			11°	
Fixture Power	15W	1	0.19	3152
Source Flux	182lm	2	0.38	788
Fixture Flux	181lm	3	0.56	350
Efficacy	12lm/W	4	0.75	197
TS1031 Imax=17366cd/klm	Imax 3152cd	5	0.94	126

Driver	Colour	Code
EL. DMX		**1E3116**

LED RGBW / 26W 4Ch / FLOOD



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			85°	29°	
Fixture Power	15W	1	1.82	0.52	136
Source Flux	131lm	2	3.65	1.04	34
Fixture Flux	131lm	3	5.47	1.56	15
Efficacy	9lm/W	4	7.29	2.08	9
TS1034 Imax=1038cd/klm	Imax 136cd	5	9.11	2.60	5

Driver	Colour	Code
EL. DMX		**1E3117**

LED RGBW / 26W 4Ch / WALL WASHER



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			115°	55°	
Fixture Power	15W	1	3.17	1.18	142
Source Flux	143lm	2	6.33	2.36	35
Fixture Flux	143lm	3	9.50	3.55	16
Efficacy	10lm/W	4	12.67	4.73	9
TS1037 Imax=1163cd/klm	Imax 167cd	5	15.83	5.91	6

Driver	Colour	Code
EL. DMX		**1E3118**

LED RGBW / 26W 4Ch / GRAZING



-		H(m)	D1(m)	D2(m)	Emax(lx)
-			73°	11°	
Fixture Power	15W	1	1.48	0.19	353
Source Flux	157lm	2	2.97	0.38	88
Fixture Flux	157lm	3	4.45	0.57	39
Efficacy	10lm/W	4	5.94	0.76	22
TS1028 Imax=2250cd/klm	Imax 353cd	5	7.42	0.96	14

Driver	Colour	Code
EL. DMX		**1E3115**

Note

Photometrics show the maximum emission values of fixtures.

JEDI

Projector RGBW
L. 1216mm



LED RGBW / 34W 4Ch / SPOT



		H(m)	D(m)	Emax(lx)
-			11°	
Fixture Power	18W	1	0.19	4203
Source Flux	242lm	2	0.38	1051
Fixture Flux	242lm	3	0.56	467
Efficacy	13lm/W	4	0.75	263
TS1032 Imax=17366cd/klm	Imax 4203cd	5	0.94	168

Driver	Colour	Code
EL. DMX		**1E3120**

LED RGBW / 34W 4Ch / FLOOD



		H(m)	D1(m)	D2(m)	Emax(lx)
-			85°	29°	
Fixture Power	18W	1	1.82	0.52	182
Source Flux	175lm	2	3.65	1.04	45
Fixture Flux	175lm	3	5.47	1.56	20
Efficacy	10lm/W	4	7.29	2.08	11
TS1035 Imax=1038cd/klm	Imax 182cd	5	9.11	2.60	7

Driver	Colour	Code
EL. DMX		**1E3121**

LED RGBW / 34W 4Ch / WALL WASHER



		H(m)	D1(m)	D2(m)	Emax(lx)
-			115°	55°	
Fixture Power	18W	1	3.17	1.18	189
Source Flux	191lm	2	6.33	2.36	47
Fixture Flux	191lm	3	9.50	3.55	21
Efficacy	11lm/W	4	12.67	4.73	12
TS1038 Imax=1163cd/klm	Imax 222cd	5	15.83	5.91	8

Driver	Colour	Code
EL. DMX		**1E3122**

LED RGBW / 34W 4Ch / GRAZING



		H(m)	D1(m)	D2(m)	Emax(lx)
-			73°	11°	
Fixture Power	18W	1	1.48	0.19	471
Source Flux	209lm	2	2.97	0.38	118
Fixture Flux	209lm	3	4.45	0.57	52
Efficacy	12lm/W	4	5.94	0.76	29
TS1027 Imax=2250cd/klm	Imax 471cd	5	7.42	0.96	19

Driver	Colour	Code
EL. DMX		**1E3119**

Note

Photometrics show the maximum emission values of fixtures.

Related codes

Mounting System



Code
1E2752

Short bracket for wall installation (2 pieces).



Code
1E2753

Long bracket for wall installation (2 pieces).



	Code
	1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps

	Code
	1E2761

End cap.

Connector



	Code
	1E2769

Connectors kit for 5 pole coaxial connections.

Cover Panel

	L	Code
	616	**1E3045**
	916	**1E3046**
	1216	**1E3047**

Side cover for ceiling installation.

Connector

	Code
	1E3184

DMX connection.

Cover Panel



	L	Code
	616	**1E2755**
	916	**1E2756**
	1216	**1E2757**

Side cover for wall/cornice installation.



	L	Code
	616	**1E2758**
	916	**1E2759**
	1216	**1E2760**

Anti-glare side cover.

Control systems

	Code
	1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.

JEDI

Compact

GENERAL INFO
Adjustable linear projector.
50x40mm (remote driver)
50x80mm (integrated driver)
Lengths 300mm – 600mm – 900mm 1200mm

LED
Linear boards
Da 1615lm a 7200lm
2700K – 3000K – 3500K – 4000K
Ra84

PRODUCT EFFICACY
Until 113lm/W

OPTICS
FL – GRAZING – WALL WASHER

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Extruded anodised aluminium body. Extra clear glass flat screen.

A compact, high performance linear LED fixture suitable for installation in small grooves or on particularly thin frames. Depending on the chosen optic it is suitable for general lighting in pedestrian areas, vaulted ceilings and vertical surfaces. Available also in a double version with an integrated or remote driver with an extremely thin profile of just 5x4mm.

If equipped with special brackets the projector can be adjusted up to +/-90°.

The L. 300mm version is only available with a remote driver.

Also available recessed version.

Catedral de Valledupar

Architect
Gustavo Vasquez

Country
Valledupar,
Colombia

Photographer
Sebastian Franco

01

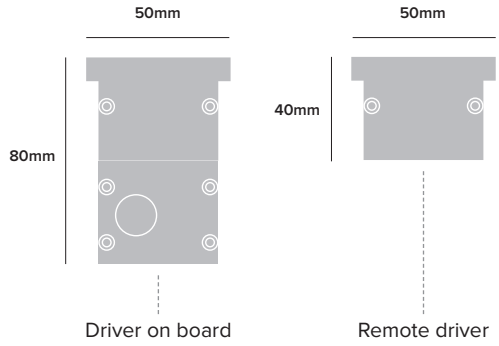

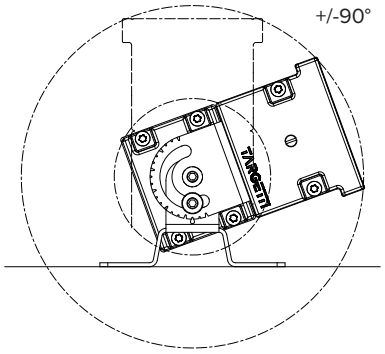

02

Compact size and adjustability

There are two profiles to choose from depending on the characteristics of the installation surface: with a remote driver where it is necessary to have a compact profile, or with an integrated driver when space permits and priority is given to connection speed. Furthermore, thanks to the special brackets that are available in two different lengths, the projector can be rotated from -90° to +90° with aim locking using an Allen key for maximum reliability in the installation phase.

Anti-glare multiple effects

A grazing light effect using the grazing optic, a uniform lighting effect on wide and high surfaces using the wall washer optic and a more concentrated effect with the Flood optic. Where it is necessary to limit the risk of glare the three optical solutions are also available already equipped with a LOUVRE, a particular anti-glare grid that limits lateral light emission.

IP67
Remote driver L. 312.5mm



LED / 12W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	14W	1	1.84	0.57	1203
Source Flux	1720lm	2	3.68	1.14	301
Fixture Flux	1285lm	3	5.52	1.70	134
Efficacy	92lm/W	4	7.36	2.27	75
TS1084 Imax=699cd/klm	Imax 1203cd	5	9.20	2.84	48

Driver	Colour	2700K	3000K	3500K	4000K
		1E3220	**1E3221**	**1E3222**	**1E3223**

LED / 12W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	14W	1	1.55	0.26	2752
Source Flux	1720lm	2	3.10	0.51	688
Fixture Flux	1429lm	3	4.65	0.77	306
Efficacy	102lm/W	4	6.21	1.02	172
TS1088 Imax=1600cd/klm	Imax 2752cd	5	7.76	1.28	110

Driver	Colour	2700K	3000K	3500K	4000K
		1E3224	**1E3225**	**1E3226**	**1E3227**

LED / 12W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	14W	1	3.12	1.34	1156
Source Flux	1720lm	2	6.23	2.67	289
Fixture Flux	1293lm	3	9.35	4.01	128
Efficacy	92lm/W	4	12.47	5.35	72
TS1092 Imax=774cd/klm	Imax 1331cd	5	15.59	6.69	46

Driver	Colour	2700K	3000K	3500K	4000K
		1E3228	**1E3229**	**1E3230**	**1E3231**

IP67 Louvre
Remote driver L. 312.5mm



LED / 12W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	14W	1	1.86	0.52	873
Source Flux	1720lm	2	3.71	1.05	218
Fixture Flux	752lm	3	5.57	1.57	97
Efficacy	54lm/W	4	7.42	2.09	55
TS1086 Imax=508cd/klm	Imax 873cd	5	9.28	2.62	35

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3307**	**1E3308**	**1E3309**	**1E3310**

JEDI COMPACT

LED / 12W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	14W	1	1.68	0.23	1903
Source Flux	1720lm	2	3.36	0.46	476
Fixture Flux	912lm	3	5.04	0.68	211
Efficacy	65lm/W	4	6.72	0.91	119
TS1090 Imax=1106cd/klm	Imax 1903cd	5	8.40	1.14	76

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3311**	**1E3312**	**1E3313**	**1E3314**

LED / 12W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	14W	1	3.17	1.49	960
Source Flux	1720lm	2	6.35	2.97	240
Fixture Flux	975lm	3	9.52	4.46	107
Efficacy	70lm/W	4	12.70	5.95	60
TS1094 Imax=671cd/klm	Imax 1153cd	5	15.87	7.43	38

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3315**	**1E3316**	**1E3317**	**1E3318**

IP67
Remote driver L. 593.5mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	28W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	92lm/W	4	7.36	2.27	150
TS1084 Imax=699cd/klm	Imax 2406cd	5	9.20	2.84	96

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3232**	**1E3233**	**1E3234**	**1E3235**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	28W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	102lm/W	4	6.21	1.02	344
TS1088 Imax=1600cd/klm	Imax 5505cd	5	7.76	1.28	220

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3236**	**1E3237**	**1E3238**	**1E3239**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	28W	1	3.12	1.34	2312
Source Flux	3440lm	2	6.23	2.67	578
Fixture Flux	2586lm	3	9.35	4.01	257
Efficacy	92lm/W	4	12.47	5.35	145
TS1092 Imax=774cd/klm	Imax 2661cd	5	15.59	6.69	92

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3240**	**1E3241**	**1E3242**	**1E3243**

IP67 Louvre
Remote driver L. 593.5mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	28W	1	1.86	0.52	1747
Source Flux	3440lm	2	3.71	1.05	437
Fixture Flux	1503lm	3	5.57	1.57	194
Efficacy	54lm/W	4	7.42	2.09	109
TS1086 Imax=508cd/klm	Imax 1747cd	5	9.28	2.62	70

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3319**	**1E3320**	**1E3321**	**1E3322**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	28W	1	1.68	0.23	3805
Source Flux	3440lm	2	3.36	0.46	951
Fixture Flux	1824lm	3	5.04	0.68	423
Efficacy	65lm/W	4	6.72	0.91	238
TS1090 Imax=1106cd/klm	Imax 3805cd	5	8.40	1.14	152

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3323**	**1E3324**	**1E3325**	**1E3326**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	28W	1	3.17	1.49	1919
Source Flux	3440lm	2	6.35	2.97	480
Fixture Flux	1950lm	3	9.52	4.46	213
Efficacy	70lm/W	4	12.70	5.95	120
TS1094 Imax=671cd/klm	Imax 2307cd	5	15.87	7.43	77

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3327**	**1E3328**	**1E3329**	**1E3330**

IP67
Remote driver L. 873.5mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	40W	1	1.84	0.57	3609
Source Flux	5160lm	2	3.68	1.14	902
Fixture Flux	3856lm	3	5.52	1.70	401
Efficacy	96lm/W	4	7.36	2.27	226
TS1085 Imax=699cd/klm	Imax 3609cd	5	9.20	2.84	144

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3244**	**1E3245**	**1E3246**	**1E3247**

JEDI COMPACT

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	40W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	107lm/W	4	6.21	1.02	516
TS1089 Imax=1601cd/klm	Imax 8259cd	5	7.76	1.28	330

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3248**	**1E3249**	**1E3250**	**1E3251**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	40W	1	3.12	1.34	3469
Source Flux	5160lm	2	6.23	2.67	867
Fixture Flux	3880lm	3	9.35	4.01	385
Efficacy	97lm/W	4	12.47	5.35	217
TS1093 Imax=774cd/klm	Imax 3992cd	5	15.59	6.69	139

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3252**	**1E3253**	**1E3254**	**1E3255**

IP67 Louvre
Remote driver L. 873.5mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	40W	1	1.86	0.52	2620
Source Flux	5160lm	2	3.71	1.05	655
Fixture Flux	2255lm	3	5.57	1.57	291
Efficacy	56lm/W	4	7.42	2.09	164
TS1087 Imax=508cd/klm	Imax 2620cd	5	9.28	2.62	105

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3331**	**1E3332**	**1E3333**	**1E3334**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	40W	1	1.68	0.23	5707
Source Flux	5160lm	2	3.36	0.46	1427
Fixture Flux	2735lm	3	5.04	0.68	634
Efficacy	68lm/W	4	6.72	0.91	357
TS1091 Imax=1106cd/klm	Imax 5707cd	5	8.40	1.14	228

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3335**	**1E3336**	**1E3337**	**1E3338**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	40W	1	3.17	1.49	2879
Source Flux	5160lm	2	6.35	2.97	720
Fixture Flux	2926lm	3	9.52	4.46	320
Efficacy	73lm/W	4	12.70	5.95	180
TS1095 Imax=671cd/klm	Imax 3460cd	5	15.87	7.43	115

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3339**	**1E3340**	**1E3341**	**1E3342**

IP67
Remote driver L. 1153.5mm



LED / 48W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			85°	32°	
	Fixture Power	53W	1	1.84	0.57	4812
	Source Flux	6880lm	2	3.68	1.14	1203
	Fixture Flux	5141lm	3	5.52	1.70	535
	Efficacy	97lm/W	4	7.36	2.27	301
TS1085	Imax=699cd/klm	Imax	4812cd	5	9.20	2.84	192

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3256**	**1E3257**	**1E3258**	**1E3259**

LED / 48W / GRAZING



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			76°	15°	
	Fixture Power	53W	1	1.55	0.26	11012
	Source Flux	6880lm	2	3.10	0.51	2753
	Fixture Flux	5717lm	3	4.65	0.77	1224
	Efficacy	108lm/W	4	6.21	1.02	688
TS1089	Imax=1601cd/klm	Imax	11012cd	5	7.76	1.28	440

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3260**	**1E3261**	**1E3262**	**1E3263**

LED / 48W / WALL WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			115°	59°	
	Fixture Power	53W	1	3.12	1.34	4625
	Source Flux	6880lm	2	6.23	2.67	1156
	Fixture Flux	5173lm	3	9.35	4.01	514
	Efficacy	98lm/W	4	12.47	5.35	289
TS1093	Imax=774cd/klm	Imax	5323cd	5	15.59	6.69	185

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3264**	**1E3265**	**1E3266**	**1E3267**

IP67 Louvre
Remote driver L. 1153.5mm



LED / 48W / FLOOD



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			86°	29°	
	Fixture Power	53W	1	1.86	0.52	3494
	Source Flux	6880lm	2	3.71	1.05	873
	Fixture Flux	3007lm	3	5.57	1.57	388
	Efficacy	57lm/W	4	7.42	2.09	218
TS1087	Imax=508cd/klm	Imax	3494cd	5	9.28	2.62	140

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3343**	**1E3344**	**1E3345**	**1E3346**

JEDI COMPACT

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	53W	1	1.68	0.23	7609
Source Flux	6880lm	2	3.36	0.46	1902
Fixture Flux	3646lm	3	5.04	0.68	845
Efficacy	69lm/W	4	6.72	0.91	476
TS1091 Imax=1106cd/klm	Imax 7609cd	5	8.40	1.14	304

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3347**	**1E3348**	**1E3349**	**1E3350**

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	53W	1	3.17	1.49	3838
Source Flux	6880lm	2	6.35	2.97	960
Fixture Flux	3901lm	3	9.52	4.46	426
Efficacy	74lm/W	4	12.70	5.95	240
TS1095 Imax=671cd/klm	Imax 4613cd	5	15.87	7.43	154

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		**1E3351**	**1E3352**	**1E3353**	**1E3354**

IP67
Integrated driver L. 576mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	28W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	92lm/W	4	7.36	2.27	150
TS1084 Imax=699cd/klm	Imax 2406cd	5	9.20	2.84	96

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3268EL**	**1E3269EL**	**1E3270EL**	**1E3271EL**
DALI		**1E3268DA**	**1E3269DA**	**1E3270DA**	**1E3271DA**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	28W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	102lm/W	4	6.21	1.02	344
TS1088 Imax=1600cd/klm	Imax 5505cd	5	7.76	1.28	220

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3272EL**	**1E3273EL**	**1E3274EL**	**1E3275EL**
DALI		**1E3272DA**	**1E3273DA**	**1E3274DA**	**1E3275DA**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	28W	1	3.12	1.34	2312
Source Flux	3440lm	2	6.23	2.67	578
Fixture Flux	2586lm	3	9.35	4.01	257
Efficacy	92lm/W	4	12.47	5.35	145
TS1092 Imax=774cd/klm	Imax 2661cd	5	15.59	6.69	92

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3276EL**	**1E3277EL**	**1E3278EL**	**1E3279EL**
DALI		**1E3276DA**	**1E3277DA**	**1E3278DA**	**1E3279DA**

IP67 Louvre
Integrated driver L. 576mm



LED / 24W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	28W	1	1.86	0.52	1747
Source Flux	3440lm	2	3.71	1.05	437
Fixture Flux	1503lm	3	5.57	1.57	194
Efficacy	54lm/W	4	7.42	2.09	109
TS1086 Imax=508cd/klm	Imax	1747cd	5	9.28	2.62	70

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3355EL**	**1E3356EL**	**1E3357EL**	**1E3358EL**
DALI		**1E3355DA**	**1E3356DA**	**1E3357DA**	**1E3358DA**

LED / 24W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	28W	1	1.68	0.23	3805
Source Flux	3440lm	2	3.36	0.46	951
Fixture Flux	1824lm	3	5.04	0.68	423
Efficacy	65lm/W	4	6.72	0.91	238
TS1090 Imax=1106cd/klm	Imax	3805cd	5	8.40	1.14	152

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3359EL**	**1E3360EL**	**1E3361EL**	**1E3362EL**
DALI		**1E3359DA**	**1E3360DA**	**1E3361DA**	**1E3362DA**

LED / 24W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	28W	1	3.17	1.49	1919
Source Flux	3440lm	2	6.35	2.97	480
Fixture Flux	1950lm	3	9.52	4.46	213
Efficacy	70lm/W	4	12.70	5.95	120
TS1094 Imax=671cd/klm	Imax	2307cd	5	15.87	7.43	77

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3363EL**	**1E3364EL**	**1E3365EL**	**1E3366EL**
DALI		**1E3363DA**	**1E3364DA**	**1E3365DA**	**1E3366DA**

IP67
Integrated driver L. 856mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	40W	1	1.84	0.57	3609
Source Flux	5160lm	2	3.68	1.14	902
Fixture Flux	3856lm	3	5.52	1.70	401
Efficacy	96lm/W	4	7.36	2.27	226
TS1085 Imax=699cd/klm	Imax	3609cd	5	9.20	2.84	144

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3280EL**	**1E3281EL**	**1E3282EL**	**1E3283EL**
DALI		**1E3280DA**	**1E3281DA**	**1E3282DA**	**1E3283DA**

JEDI COMPACT

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	40W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	107lm/W	4	6.21	1.02	516
TS1089 Imax=1601cd/klm	Imax 8259cd	5	7.76	1.28	330

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3284EL**	**1E3285EL**	**1E3286EL**	**1E3287EL**
DALI		**1E3284DA**	**1E3285DA**	**1E3286DA**	**1E3287DA**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	40W	1	3.12	1.34	3469
Source Flux	5160lm	2	6.23	2.67	867
Fixture Flux	3880lm	3	9.35	4.01	385
Efficacy	97lm/W	4	12.47	5.35	217
TS1093 Imax=774cd/klm	Imax 3992cd	5	15.59	6.69	139

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3288EL**	**1E3289EL**	**1E3290EL**	**1E3291EL**
DALI		**1E3288DA**	**1E3289DA**	**1E3290DA**	**1E3291DA**

IP67 Louvre
Integrated driver L. 856mm



LED / 36W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	40W	1	1.86	0.52	2620
Source Flux	5160lm	2	3.71	1.05	655
Fixture Flux	2255lm	3	5.57	1.57	291
Efficacy	56lm/W	4	7.42	2.09	164
TS1087 Imax=508cd/klm	Imax 2620cd	5	9.28	2.62	105

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3367EL**	**1E3368EL**	**1E3369EL**	**1E3370EL**
DALI		**1E3367DA**	**1E3368DA**	**1E3369DA**	**1E3370DA**

LED / 36W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	40W	1	1.68	0.23	5707
Source Flux	5160lm	2	3.36	0.46	1427
Fixture Flux	2735lm	3	5.04	0.68	634
Efficacy	68lm/W	4	6.72	0.91	357
TS1091 Imax=1106cd/klm	Imax 5707cd	5	8.40	1.14	228

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3371EL**	**1E3372EL**	**1E3373EL**	**1E3374EL**
DALI		**1E3371DA**	**1E3372DA**	**1E3373DA**	**1E3374DA**

LED / 36W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	40W	1	3.17	1.49	2879
Source Flux	5160lm	2	6.35	2.97	720
Fixture Flux	2926lm	3	9.52	4.46	320
Efficacy	73lm/W	4	12.70	5.95	180
TS1095 Imax=671cd/klm	Imax 3460cd	5	15.87	7.43	115

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3375EL**	**1E3376EL**	**1E3377EL**	**1E3378EL**
DALI		**1E3375DA**	**1E3376DA**	**1E3377DA**	**1E3378DA**

IP67
Integrated driver L. 1136mm



LED / 48W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			85°	32°	
Fixture Power	53W	1	1.84	0.57	4812
Source Flux	6880lm	2	3.68	1.14	1203
Fixture Flux	5141lm	3	5.52	1.70	535
Efficacy	97lm/W	4	7.36	2.27	301
TS1085 Imax=699cd/klm	Imax 4812cd	5	9.20	2.84	192

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3292EL**	**1E3293EL**	**1E3294EL**	**1E3295EL**
DALI		**1E3292DA**	**1E3293DA**	**1E3294DA**	**1E3295DA**

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	15°	
Fixture Power	53W	1	1.55	0.26	11012
Source Flux	6880lm	2	3.10	0.51	2753
Fixture Flux	5717lm	3	4.65	0.77	1224
Efficacy	108lm/W	4	6.21	1.02	688
TS1089 Imax=1601cd/klm	Imax 11012cd	5	7.76	1.28	440

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3296EL**	**1E3297EL**	**1E3298EL**	**1E3299EL**
DALI		**1E3296DA**	**1E3297DA**	**1E3298DA**	**1E3299DA**

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			115°	59°	
Fixture Power	53W	1	3.12	1.34	4625
Source Flux	6880lm	2	6.23	2.67	1156
Fixture Flux	5173lm	3	9.35	4.01	514
Efficacy	98lm/W	4	12.47	5.35	289
TS1093 Imax=774cd/klm	Imax 5323cd	5	15.59	6.69	185

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3300EL**	**1E3301EL**	**1E3302EL**	**1E3303EL**
DALI		**1E3300DA**	**1E3301DA**	**1E3302DA**	**1E3303DA**

IP67 Louvre
Integrated driver L. 1136mm



LED / 48W / FLOOD



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			86°	29°	
Fixture Power	53W	1	1.86	0.52	3494
Source Flux	6880lm	2	3.71	1.05	873
Fixture Flux	3007lm	3	5.57	1.57	388
Efficacy	57lm/W	4	7.42	2.09	218
TS1087 Imax=508cd/klm	Imax 3494cd	5	9.28	2.62	140

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3379EL**	**1E3380EL**	**1E3381EL**	**1E3382EL**
DALI		**1E3379DA**	**1E3380DA**	**1E3381DA**	**1E3382DA**

JEDI COMPACT

LED / 48W / GRAZING



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			80°	13°	
Fixture Power	53W	1	1.68	0.23	7609
Source Flux	6880lm	2	3.36	0.46	1902
Fixture Flux	3646lm	3	5.04	0.68	845
Efficacy	69lm/W	4	6.72	0.91	476
TS1091 Imax=1106cd/klm	Imax 7609cd	5	8.40	1.14	304

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3383EL**	**1E3384EL**	**1E3385EL**	**1E3386EL**
DALI		**1E3383DA**	**1E3384DA**	**1E3385DA**	**1E3386DA**

LED / 48W / WALL WASHER



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			116°	62°	
Fixture Power	53W	1	3.17	1.49	3838
Source Flux	6880lm	2	6.35	2.97	960
Fixture Flux	3901lm	3	9.52	4.46	426
Efficacy	74lm/W	4	12.70	5.95	240
TS1095 Imax=671cd/klm	Imax 4613cd	5	15.87	7.43	154

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3387EL**	**1E3388EL**	**1E3389EL**	**1E3390EL**
DALI		**1E3387DA**	**1E3388DA**	**1E3389DA**	**1E3390DA**

Related codes

Bracket



Code **1E3304**

Short bracket kit for surface installation (2 pieces).
Rotation +/-90°.



Code **1E3306**

Long bracket kit for surface installation (2 pieces).
Rotation +/-90°.

Power Supply

Code **1E3557**

EL power supply version kit composed of a aluminium watertight box (LxHxP=270x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 3G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 312.5/344mm versions.

Code **1E3558**

EL power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 3G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 593.5/625/873.5/905/1153.5/1185mm versions.

Code **1E3559**

DALI power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 5G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 312.5/344/593.5/625mm versions.

Code **1E3560**

DALI power supply version kit composed of a aluminium watertight box (LxHxP=486x49.5x44mm) complete with power supply input cable (1 metre, type H07RN-F, 5G1mm^2) and an output cable to the fixture (1 metre, type H07RN-F, 3G1mm^2).
For the L 873.5/905/1153.5/1185mm versions.

Accessories

Tool

	Code
	1E3305

(Tightening) wrench for the connector kit.

Connector



	Code
	1E2769

Connectors kit for 5 pole coaxial connections.

Control systems

	Code
	1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

	Code
	1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

DART

GENERAL INFO
Professional adjustable projector
76x76 - 134x134 - 214x214

LED
Chip on board
Emitter for versions NSP Small e Medium
From 200lm to 8978lm
3000K – 4000K
Ra80 – Ra84

PRODUCT EFFICACY
Until 110lm/W

OPTICS
NSP – SP – FL – MWFL for all versions.
WFL – ASYM for versions Medium e Maxi
NARROW ASYM for versions Medium

POWER SUPPLY
Electronic – DALI – 1-10V
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Painted die-cast anodised aluminium body and painted stainless steel mounting bracket.

A range of professional al projectors for outdoor architectural lighting, available in three different sizes-Small, Medium and Maxi; it has a compact and essential design that integrates into every architectural context.

DART is extremely versatile thanks to the possibility to choose from different versions with different lumens and optics for accent lighting or uniform lighting of large surfaces. Also available with an asymmetrical optic.

		SMALL	MEDIUM	MAXI
		Ø 76x76mm	Ø 134x134mm	Ø 214x214mm
LED	Flux (lm)	200-1869	1332-4628	3273-8978
	Power	3W - 12W	16W - 34W	26W - 80W
OPTICS				
NSP	Lens	•	•	
	Indirect			•
SP	Lens	•		
	Hybrid		•	•
FL	Lens	•		
	Hybrid		•	•
MWFL	Reflector	•	•	•
WFL	Reflector		•	•
ASYM	Reflector		•	•
NASYM	Reflector		•	

Abbaye de Maubuisson

Architect
YCA Yves Chemineau Architecte

Architect for the heritage
Valari Architecte Aristide Bravaccio

Photographer
Bruno Singer

Country
Saint-Ouen l'Aumone, France

01

The large version in the DART range

Is designed for architectural lighting of large surfaces and where it is essential to install fixtures at a distance.

DART MAXI has the NSP optic to have clean, precise 6° beams. It works by reflection which means the lamp is hidden from sight and aimed towards the parabolic reflector which collimates the beam and emits a particularly defined, precise cone of light.

02

DART MEDIUM is available with two asymmetrical optics

A more open version on the horizontal axis that makes it possible to widen the pitch between fixtures and a new version defined as Narrow Asymmetric that is more comfortable and controlled.

03

The MINI version is available with a remote power

Supply for installation in extremely confined spaces and with an integrated driver to simplify installation and accommodate cables on building facades.

04

Off-centre rotation to zoom

The body of the fixture towards and away from the support surface. Fitted with a graduated scale for precise aiming.

Ponte di Rialto

Photographer
Ivan Rossi

Country
Venice - Italy

DART

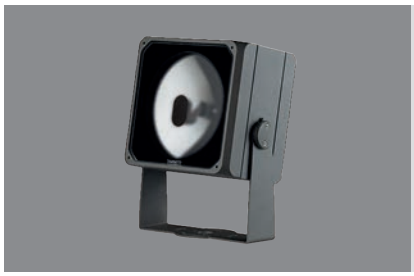

Maxi



LED / 26W / INDIRECT / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			6°	
Fixture Power		28W	1	0.11	152341
Source Flux		3273lm	2	0.22	38085
Fixture Flux		2170lm	3	0.33	16927
Efficacy		77lm/W	4	0.45	9521
TS1008	Imax=46545cd/klm	Imax	152341cd	5	0.56	6094

Driver	Colour	3000K	4000K
EL.		**1E3064EL**	**1E3070EL**
1-10V		**1E3064D**	**1E3070D**
DALI		**1E3064DA**	**1E3070DA**

LED / 34W / INDIRECT / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			6°	
Fixture Power		37W	1	0.11	196977
Source Flux		4232lm	2	0.22	49244
Fixture Flux		2806lm	3	0.33	21886
Efficacy		75lm/W	4	0.45	12311
TS1008	Imax=46545cd/klm	Imax	196977cd	5	0.56	7879

Driver	Colour	3000K	4000K
EL.		**1E3076EL**	**1E3082EL**
1-10V		**1E3076D**	**1E3082D**
DALI		**1E3076DA**	**1E3082DA**

LED / 51W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
Fixture Power		54W	1	0.30	34252
Source Flux		6780lm	2	0.60	8563
Fixture Flux		3634lm	3	0.89	3806
Efficacy		67lm/W	4	1.19	2141
TS1009	Imax=5052cd/klm	Imax	34252cd	5	1.49	1370

Driver	Colour	3000K	4000K
EL.		**1E3065EL**	**1E3071EL**
1-10V		**1E3065D**	**1E3071D**
DALI		**1E3065DA**	**1E3071DA**

LED / 80W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
Fixture Power		88W	1	0.30	43451
Source Flux		8601lm	2	0.60	10863
Fixture Flux		4609lm	3	0.89	4828
Efficacy		52lm/W	4	1.19	2716
TS1009	Imax=5052cd/klm	Imax	43451cd	5	1.49	1738

Driver	Colour	3000K	4000K
EL.		**1E3077EL**	**1E3083EL**
1-10V		**1E3077D**	**1E3083D**
DALI		**1E3077DA**	**1E3083DA**

LED / 51W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		54W	1	0.47	19248
Source Flux		6780lm	2	0.94	4812
Fixture Flux		4081lm	3	1.42	2139
Efficacy		75lm/W	4	1.89	1203
TS1010	Imax=2839cd/klm	Imax	19248cd	5	2.36	770

Driver	Colour	3000K	4000K
EL.		**1E3066EL**	**1E3072EL**
1-10V		**1E3066D**	**1E3072D**
DALI		**1E3066DA**	**1E3072DA**

LED / 80W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			27°	
Fixture Power		88W	1	0.47	24418
Source Flux		8601lm	2	0.94	6104
Fixture Flux		5177lm	3	1.42	2713
Efficacy		59lm/W	4	1.89	1526
TS1010	Imax=2839cd/klm	Imax	24418cd	5	2.36	977

Driver	Colour	3000K	4000K
EL.		**1E3078EL**	**1E3084EL**
1-10V		**1E3078D**	**1E3084D**
DALI		**1E3078DA**	**1E3084DA**

LED / 51W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			38°	
Fixture Power		54W	1	0.69	8952
Source Flux		6780lm	2	1.38	2238
Fixture Flux		5227lm	3	2.07	995
Efficacy		96lm/W	4	2.76	560
TS1011	Imax=1333cd/klm	Imax	9035cd	5	3.44	358

Driver	Colour	3000K	4000K
EL.		**1E3067EL**	**1E3073EL**
1-10V		**1E3067D**	**1E3073D**
DALI		**1E3067DA**	**1E3073DA**

LED / 80W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			38°	
Fixture Power		88W	1	0.69	11357
Source Flux		8601lm	2	1.38	2839
Fixture Flux		6631lm	3	2.07	1262
Efficacy		75lm/W	4	2.76	710
TS1011	Imax=1333cd/klm	Imax	11461cd	5	3.44	454

Driver	Colour	3000K	4000K
EL.		**1E3079EL**	**1E3085EL**
1-10V		**1E3079D**	**1E3085D**
DALI		**1E3079DA**	**1E3085DA**

LED / 51W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			52°	
Fixture Power		54W	1	0.97	6549
Source Flux		6780lm	2	1.94	1637
Fixture Flux		5213lm	3	2.91	728
Efficacy		96lm/W	4	3.88	409
TS1012	Imax=966cd/klm	Imax	6549cd	5	4.85	262

Driver	Colour	3000K	4000K
EL.		**1E3068EL**	**1E3074EL**
1-10V		**1E3068D**	**1E3074D**
DALI		**1E3068DA**	**1E3074DA**

LED / 80W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			52°	
Fixture Power		88W	1	0.97	8308
Source Flux		8601lm	2	1.94	2077
Fixture Flux		6614lm	3	2.91	923
Efficacy		75lm/W	4	3.88	519
TS1012	Imax=966cd/klm	Imax	8308cd	5	4.85	332

Driver	Colour	3000K	4000K
EL.		**1E3080EL**	**1E3086EL**
1-10V		**1E3080D**	**1E3086D**
DALI		**1E3080DA**	**1E3086DA**

LED / 51W / ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			89°	76°	
Fixture Power		54W	1	1.96	3.41	2831
Source Flux		6780lm	2	3.93	6.83	708
Fixture Flux		5827lm	3	5.89	10.24	315
Efficacy		107lm/W	4	7.86	13.66	177
TS1013	Imax=895cd/klm	Imax	6070cd	5	9.82	17.07	113

Driver	Colour	3000K	4000K
EL.		**1E3069EL**	**1E3075EL**
1-10V		**1E3069D**	**1E3075D**
DALI		**1E3069DA**	**1E3075DA**

DART

LED / 80W / ASYM



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			89°	76°	
Fixture Power	88W	1	1.96	3.41	3591
Source Flux	8601lm	2	3.93	6.83	898
Fixture Flux	7391lm	3	5.89	10.24	399
Efficacy	84lm/W	4	7.86	13.66	224
TS1013 Imax=895cd/klm	Imax 7700cd	5	9.82	17.07	144

Driver	Colour	3000K	4000K
EL.		**1E3081EL**	**1E3087EL**
1-10V		**1E3081D**	**1E3087D**
DALI		**1E3081DA**	**1E3087DA**

Accessories

Filter



Filter	Ø	Code
Red	168	**1E3088**
Green	168	**1E3089**
Blue	168	**1E3090**
Yellow	168	**1E3091**
Magenta	168	**1E3092**

Chromatic filter.
Glass with dichroic treatment.
Non suitable for the asymmetric reflector nor for grazing lighting.
To be completed with a dedicated holder ring.



Code
1E3094

Blade of light filter.
PMMA holographic filter for a blade of light effect.
To be completed with a dedicated holder ring.
Diameter 168mm.

Grid

Code
1E3096

Anti-glare louver.
The central elements may be removed to obtain two different levels of glare control.
Powder coated stainless steel black + ferrite.

Screen

Code
1E3095

Asymmetric screen.
Powder coated stainless steel ferrite.

Mounting System

Code
1E3026

Plate for fixture rotation.
Powder coated stainless steel ferrite.

Ø	H	Code
96	182	**1E3028**
150	352	**1E3188**

Earthspike.
Powder coated stainless steel ferrite.



Code

1E2825

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).

Code

1E3097

Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.



Code

1E3187

Pole with base.
Powder coated stainless steel.

Holder Ring



Code

1E3093

Holder ring.
Powder coated stainless steel.
AxB 195x195mm.

Tool

Code

1E3098

Laser pointing system.
Installed by friction on the projector's body.
Powder coated stainless steel.
Laser included.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

DART

Medium



LED / 16W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			10°	
Fixture Power	19W	1		0.17	24179
Source Flux	1332lm	2		0.34	6045
Fixture Flux	1008lm	3		0.51	2687
Efficacy	53lm/W	4		0.68	1511
TS941 Imax=18153cd/klm	Imax	24179cd	5	0.86	967

Driver	Colour	3000K	4000K
EL.		**1E2994EL**	**1E2995EL**
1-10V		**1E2994D**	**1E2995D**
DALI		**1E2994DA**	**1E2995DA**

LED / 34W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			13°	
Fixture Power	37W	1		0.23	38850
Source Flux	4428lm	2		0.46	9712
Fixture Flux	2738lm	3		0.69	4317
Efficacy	74lm/W	4		0.92	2428
TS942 Imax=8774cd/klm	Imax	38850cd	5	1.14	1554

Driver	Colour	3000K	4000K
EL.		**1E2996EL**	**1E2997EL**
1-10V		**1E2996D**	**1E2997D**
DALI		**1E2996DA**	**1E2997DA**

LED / 34W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			33°	
Fixture Power	37W	1		0.58	9385
Source Flux	4428lm	2		1.17	2346
Fixture Flux	2570lm	3		1.75	1043
Efficacy	69lm/W	4		2.33	587
TS943 Imax=2119cd/klm	Imax	9385cd	5	2.92	375

Driver	Colour	3000K	4000K
EL.		**1E2998EL**	**1E2999EL**
1-10V		**1E2998D**	**1E2999D**
DALI		**1E2998DA**	**1E2999DA**

LED / 33W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			48°	
Fixture Power	36W	1		0.89	5843
Source Flux	4434lm	2		1.78	1461
Fixture Flux	3703lm	3		2.68	649
Efficacy	104lm/W	4		3.57	365
TS944 Imax=1366cd/klm	Imax	6055cd	5	4.46	234

Driver	Colour	3000K	4000K
EL.		**1E3000EL**	**1E3001EL**
1-10V		**1E3000D**	**1E3001D**
DALI		**1E3000DA**	**1E3001DA**

LED / 33W / REFLECTOR / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			62°	
Fixture Power	36W	1		1.20	4420
Source Flux	4434lm	2		2.40	1105
Fixture Flux	3725lm	3		3.60	491
Efficacy	104lm/W	4		4.80	276
TS945 Imax=997cd/klm	Imax	4420cd	5	5.99	177

Driver	Colour	3000K	4000K
EL.		**1E3002EL**	**1E3003EL**
1-10V		**1E3002D**	**1E3003D**
DALI		**1E3002DA**	**1E3003DA**

LED / 33W / ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			113°	91°	
	Fixture Power	36W	1	3.02	4.08	1190
	Source Flux	4434lm	2	6.04	8.15	298
	Fixture Flux	3151lm	3	9.06	12.23	132
	Efficacy	88lm/W	4	12.08	16.30	74
TS946	Imax=504cd/klm	Imax 2236cd	5	15.10	20.38	48

Driver	Colour	3000K	4000K
EL.		**1E3004EL**	**1E3005EL**
1-10V		**1E3004D**	**1E3005D**
DALI		**1E3004DA**	**1E3005DA**

LED / 33W / NARROW ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			41°	52°	
	Fixture Power	36W	1	1.20	1.25	2760
	Source Flux	4514lm	2	2.41	2.49	690
	Fixture Flux	3497lm	3	3.61	3.74	307
	Efficacy	98lm/W	4	4.81	4.99	172
TS1054	Imax=1098cd/klm	Imax 4956cd	5	6.02	6.24	110

Driver	Colour	3000K	4000K
EL.		**1E3126EL**	**1E3127EL**
1-10V		**1E3126D**	**1E3127D**
DALI		**1E3126DA**	**1E3127DA**

Accessories

Filter



	Filter	Ø	Code
	Red	101	**1E3017**
	Green	101	**1E3018**
	Blue	101	**1E3019**
	Yellow	101	**1E3020**
	Magenta	101	**1E3021**

Chromatic filter.
Glass with dichroic treatment.
Non suitable for the asymmetric reflector nor for grazing lighting.
To be completed with a dedicated holder ring.



	Code
	1E3023

Blade of light filter.
PMMA holographic filter for a blade of light effect.
To be completed with a dedicated holder ring.
Diameter 101mm.

Grid

	Code
	1E3025

Anti-glare louver.
The central elements may be removed to obtain two different levels of glare control.
Powder coated stainless steel ferrite + nero.

Screen

	Code
	1E3024

Asymmetric screen.
Powder coated stainless steel ferrite.

Mounting System

	Code
	1E3026

Plate for fixture rotation.
Powder coated stainless steel ferrite.

	Ø	H	Code
	96	182	**1E3028**

Earthspike.
Powder coated stainless steel ferrite.

DART

Code

1E2825

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).

Code

1E3027

Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.

Holder Ring



Code

1E3022

Holder ring.
Powder coated stainless steel.
AxB 120x120mm.

Tool

Code

1E3029

Laser pointing system.
Installed by friction on the projector's body.
Powder coated stainless steel.
Laser included.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Small Driver integrato



LED / 2,7W / LENS / NSP



3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	5W	1	0.15	4041
Source Flux	200lm	2	0.30	1010
Fixture Flux	151lm	3	0.46	449
Efficacy	29lm/W	4	0.61	253
Imax	4041cd	5	0.76	162

TS937 Imax=20203cd/klm

Driver	Colour	3000K	4000K
EL.		**1E3056EL**	**1E3057EL**

LED / 11W / LENS / SP



3000K		H(m)	D(m)	Emax(lx)
Ra84			17°	
Fixture Power	15W	1	0.30	10469
Source Flux	1786lm	2	0.61	2617
Fixture Flux	1258lm	3	0.91	1163
Efficacy	85lm/W	4	1.21	654
Imax	10469cd	5	1.52	419

TS938 Imax=5862cd/klm

Driver	Colour	3000K	4000K
EL.		**1E3058EL**	**1E3059EL**

LED / 12W / LENS / FL



3000K		H(m)	D(m)	Emax(lx)
Ra84			32°	
Fixture Power	14W	1	0.58	3645
Source Flux	1821lm	2	1.15	911
Fixture Flux	1231lm	3	1.73	405
Efficacy	91lm/W	4	2.31	228
Imax	3645cd	5	2.88	146

TS939 Imax=2002cd/klm

Driver	Colour	3000K	4000K
EL.		**1E3060EL**	**1E3061EL**

LED / 12W / REFLECTOR / MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			46°	
Fixture Power	14W	1	0.85	2586
Source Flux	1821lm	2	1.70	647
Fixture Flux	1435lm	3	2.54	287
Efficacy	106lm/W	4	3.39	162
Imax	2588cd	5	4.24	103

TS940 Imax=1421cd/klm

Driver	Colour	3000K	4000K
EL.		**1E3062EL**	**1E3063EL**

DART

Small Driver remoto



LED / 2,7W / LENS / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power	5W		1	0.15	4041
Source Flux	200lm		2	0.30	1010
Fixture Flux	151lm		3	0.46	449
Efficacy	29lm/W		4	0.61	253
TS937	Imax=20203cd/klm	Imax	4041cd	5	0.76	162

Power supply	Colour	3000K	4000K
700/900mA		**1E2986**	**1E2987**

LED / 13W / LENS / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
Fixture Power	17W		1	0.30	10569
Source Flux	1803lm		2	0.61	2642
Fixture Flux	1270lm		3	0.91	1174
Efficacy	75lm/W		4	1.21	661
TS938	Imax=5862cd/klm	Imax	10569cd	5	1.52	423

Power supply	Colour	3000K	4000K
400mA		**1E2988**	**1E2989**

LED / 14W / LENS / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			32°	
Fixture Power	15W		1	0.58	4071
Source Flux	2034lm		2	1.15	1018
Fixture Flux	1375lm		3	1.73	452
Efficacy	89lm/W		4	2.31	254
TS939	Imax=2002cd/klm	Imax	4071cd	5	2.88	163

Power supply	Colour	3000K	4000K
400mA		**1E2990**	**1E2991**

LED / 14W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			46°	
Fixture Power	15W		1	0.85	2889
Source Flux	2034lm		2	1.70	722
Fixture Flux	1603lm		3	2.54	321
Efficacy	104lm/W		4	3.39	181
TS940	Imax=1421cd/klm	Imax	2891cd	5	4.24	116

Power supply	Colour	3000K	4000K
400mA		**1E2992**	**1E2993**

Related codes

Power Supply



	Code
20W - 220-240Vac, 400mA - 118x22x52mm - IP20	**1T4215EL**
20W - 110-240Vac, 900mA - 118x22x52mm - IP20	**1T5295EL**
20W - 220-240Vac, 400mA - 150x40x148mm - IP68	**1E3033EL**
20W - 110-240Vac, 900mA - 150x40x148mm - IP68	**1E3034EL**

Electronic power supply
LxHxP



	Code
20W - 110-240Vac, 400mA - 118x22x52mm - IP20	**1T4215D**
20W - 110-240Vac, 900mA - 118x22x52mm - IP20	**1T5295D**
20W - 110-240Vac, 400mA - 150x40x148mm - IP68	**1E3033D**
20W - 110-240Vac, 900mA - 150x40x148mm - IP68	**1E3034D**

1-10V electronic power supply
LxHxP



	Code
20W - 110-240Vac, 400mA - 118x22x52mm - IP20	**1T4215DA**
20W - 110-240Vac, 700mA - 118x22x52mm - IP20	**1T5295DA**
20W - 110-240Vac, 400mA - 150x40x148mm - IP68	**1E3033DA**
20W - 110-240Vac, 700mA - 150x40x148mm - IP68	**1E3034DA**

DALI electronic power supply
LxHxP

DART

Accessories

Filter



Filter	Ø	Code
Red	53	**1E3006**
Green	53	**1E3007**
Blue	53	**1E3008**
Yellow	53	**1E3009**
Magenta	53	**1E3010**

Chromatic filter.
Glass with dichroic treatment.
Non suitable for the asymmetric reflector nor for grazing lighting.
To be completed with a dedicated holder ring.



Ø	Code
53	**1E3012**

Blade of light filter.
PMMA holographic filter for a blade of light effect.
To be completed with a dedicated holder ring.

Grid

Code
1E3014

Anti-glare louver.
The central elements may be removed to obtain two different levels of glare control.
Powder coated stainless steel ferrite + black.

Screen

Code
1E3013

Asymmetric screen.
Powder coated stainless steel ferrite.

Mounting System

Code
1E3015

Plate for fixture rotation.
Powder coated stainless steel ferrite.

Code
1E3016

Earthspike.
Powder coated stainless steel ferrite.

Holder Ring



L	Code
66	**1E3011**

Holder ring.
Powder coated stainless steel.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

PYROS

GENERAL INFO
Professional projector.
PYROS
ø186mm
NANO PYROS
ø107mm
PICO PYROS
ø50mm

LED
Chip on board
LED Emitter for version PICO PYROS e RGBW
From 216lm to 9402lm
3000K – 4000K
Ra80 – Ra84

PRODUCT EFFICACY
Unitil 110lm/W

OPTICS
SP – FL – MWFL

POWER SUPPLY
Electronic

MATERIAL
Painted die-cast anodised aluminium body, brackets and joints.

A range that was designed for lighting building facades, accentuating trees and green elements and in all those contexts where precision must be combined with excellent performance.

The larger version is high performance making it suitable for lighting from long distances and large architectural structures. Where on the other hand it is required to light details the Nano and Pico versions provide optical solutions and different powers. PYROS shows the extent of its flexibility with its installation system that makes it possible to extend or contract it depending on requirements.

The Pyros and Nano Pyros versions are also available in RGBW and RGB versions.

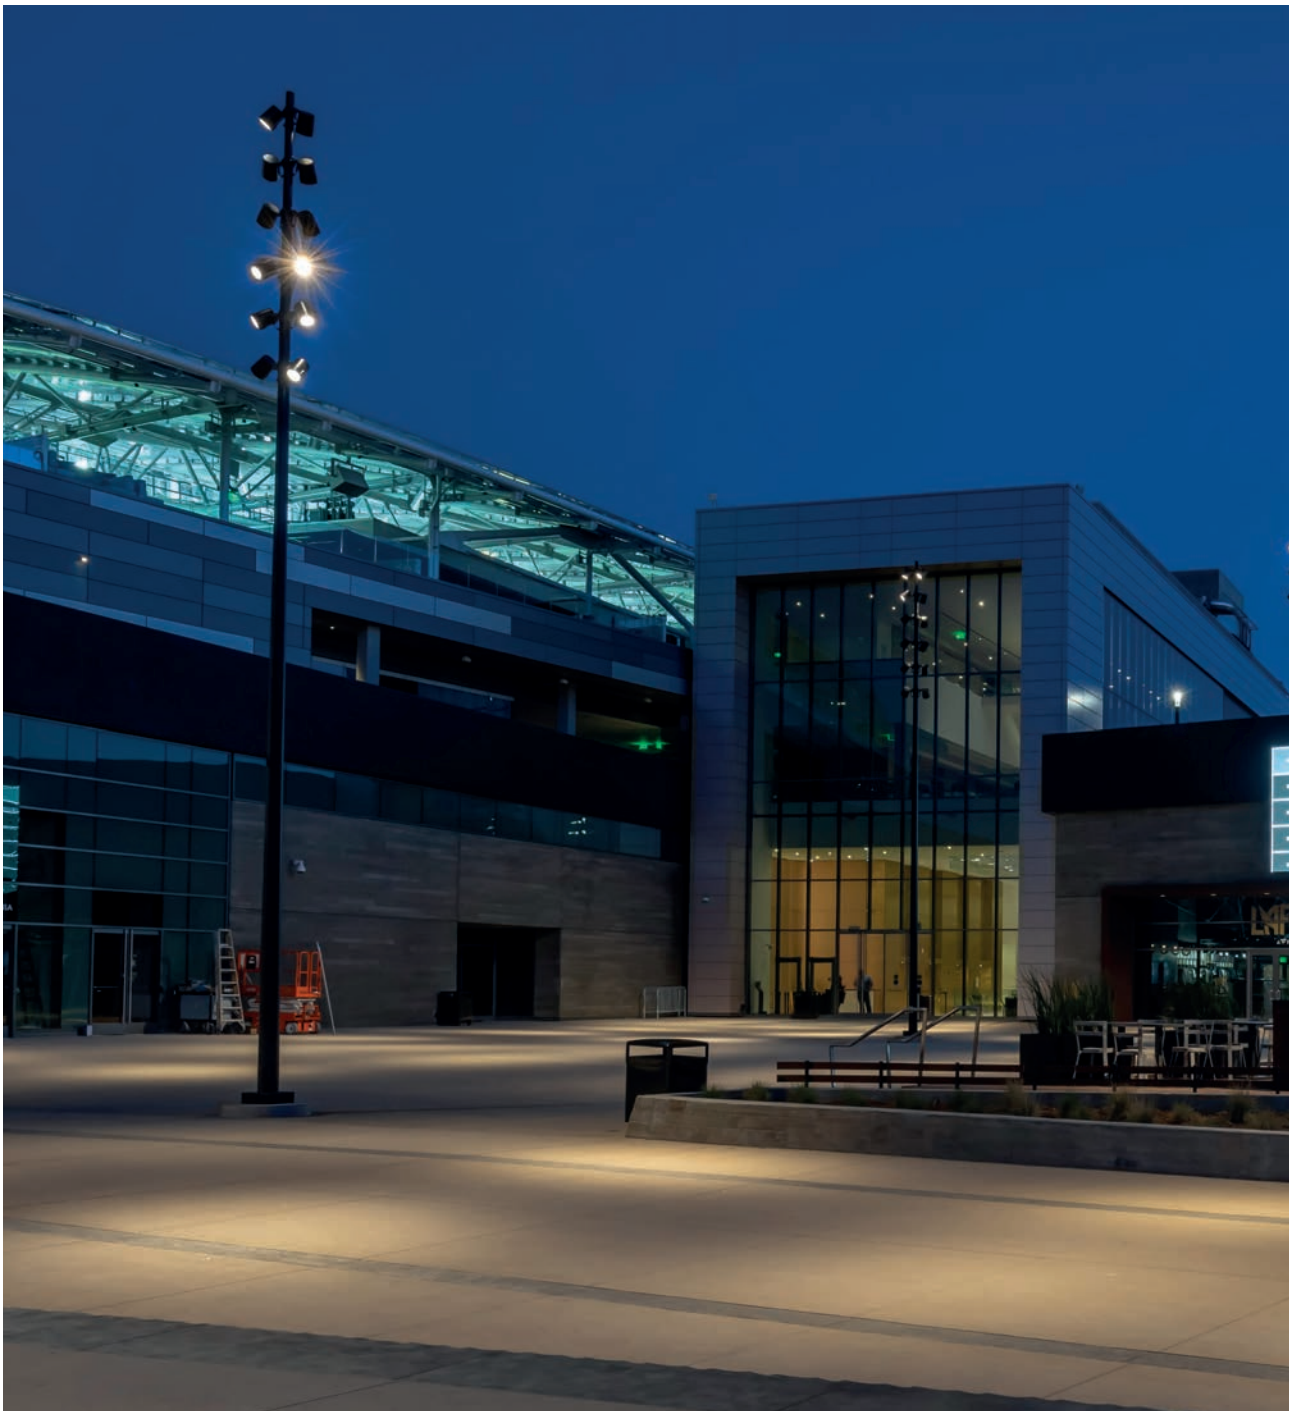

Banc of California Stadium

Architect
Gensler

Lighting Design
First Circle Design

Photographer
Henri Khodaverdi

Country
Los Angeles - USA

PYROS

L. 237mm



LED / 25W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			10°	
Fixture Power		28W	1	0.17	48565
Source Flux		3655lm	2	0.35	12141
Fixture Flux		2938lm	3	0.52	5396
Efficacy		105lm/W	4	0.69	3035
TS640	Imax=13287cd/klm	Imax	5	0.87	1943

Driver	Colour	3000K	4000K
EL.		**1E2779**	**1E2780**

LED / 25W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		28W	1	0.45	11885
Source Flux		3655lm	2	0.89	2971
Fixture Flux		2869lm	3	1.34	1321
Efficacy		102lm/W	4	1.79	743
TS641	Imax=3252cd/klm	Imax	5	2.23	475

Driver	Colour	3000K	4000K
EL.		**1E2781**	**1E2782**

LED / 39W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			10°	
Fixture Power		42W	1	0.17	67087
Source Flux		5049lm	2	0.35	16772
Fixture Flux		4059lm	3	0.52	7454
Efficacy		98lm/W	4	0.69	4193
TS640	Imax=13287cd/klm	Imax	5	0.87	2683

Driver	Colour	3000K	4000K
EL.		**1E2783**	**1E2784**

LED / 39W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			25°	
Fixture Power		42W	1	0.45	16417
Source Flux		5049lm	2	0.89	4104
Fixture Flux		3963lm	3	1.34	1824
Efficacy		95lm/W	4	1.79	1026
TS641	Imax=3252cd/klm	Imax	5	2.23	657

Driver	Colour	3000K	4000K
EL.		**1E2785**	**1E2786**

LED / 50W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			10°	
Fixture Power		55W	1	0.17	91495
Source Flux		6672lm	2	0.35	22874
Fixture Flux		5364lm	3	0.52	10166
Efficacy		98lm/W	4	0.70	5718
TS972	Imax=13713cd/klm	Imax	5	0.87	3660

Driver	Colour	3000K	4000K
EL.		**1E2978**	**1E2979**

LED / 50W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		55W	1	0.43	22191
Source Flux		6672lm	2	0.86	5548
Fixture Flux		5237lm	3	1.28	2466
Efficacy		95lm/W	4	1.71	1387
TS973	Imax=3326cd/klm	Imax	5	2.14	888

Driver	Colour	3000K	4000K
EL.		**1E2980**	**1E2981**

L. 307mm



LED / 80W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			10°	
Fixture Power		88W	1	0.17	123310
Source Flux		8992lm	2	0.35	30827
Fixture Flux		7230lm	3	0.52	13701
Efficacy		82lm/W	4	0.70	7707
TS972	Imax=13713cd/klm	Imax	5	0.87	4932

Driver	Colour	3000K	4000K
EL.		**1E2982**	**1E2983**

LED / 80W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			24°	
Fixture Power		88W	1	0.43	29908
Source Flux		8992lm	2	0.86	7477
Fixture Flux		7059lm	3	1.28	3323
Efficacy		80lm/W	4	1.71	1869
TS973	Imax=3326cd/klm	Imax	5	2.14	1196

Driver	Colour	3000K	4000K
EL.		**1E2984**	**1E2985**

Note

All projector bodies must be completed with dedicated mounting brackets equipped with graduated metal rings on the bracket allowing 360° rotation on the horizontal axis and 180° on the vertical axis. Mechanical locking system to ensure aiming stability.

Related codes

Mounting System



Kg	Colour	Code
0.6		**1E2806**

Die-cast aluminium bracket with double joint to allow 180° rotation on the vertical plane.
Graduated metal ring located at the base of the bracket to allow 360° rotation on the horizontal plane. Mechanical locking system to ensure aiming stability.
Short.



Kg	Colour	Code
1.3		**1E2807**

Die-cast aluminium bracket with double joint to allow 180° rotation on the vertical plane.
Graduated metal ring located at the base of the bracket to allow 360° rotation on the horizontal plane. Mechanical locking system to ensure aiming stability.
Long.

PYROS

Code
1E2825

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).

Code
1E2826

Pole head for pole with external diameter 60mm (+/-2mm) and internal diameter > 40mm.

Accessories

Filter



Filter	Ø	Code
Red	187	**1E2816**
Green	187	**1E2817**
Blue	187	**1E2818**
Yellow	187	**1E2819**

Chromatic filter. Complete with ring.

Ø	Code
187	**1E2821**

"Blade of light" effect refractive filter.
The special linear incisions modify the light beam, enlarging it in a perpendicular direction to the incisions.
With very narrow beams it is possible to obtain precise "blades" of light for special effects.
Complete with ring.



Ø	Code
187	**1E2822**

"Soft beam" effect refractive filter.
The special linear incisions reduce the variance between the primary and secondary light beam, making it more uniform.
Complete with ring.



Ø	Code
187	**1E2820**

Frosted glass. Complete with ring.

Screen



Code
1E2823

Adjustable stainless steel asymmetric screen with 8 positions and 2 mounting screws.
Permits the shielding of the light beam with wide beam optics.

Ray Shade



Code
1E2824

Stainless steel barn door with fixed flaps, adjustable to 4 positions with 2 mounting screws.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

RGBW short arm



LED RGBW / 35W / SP

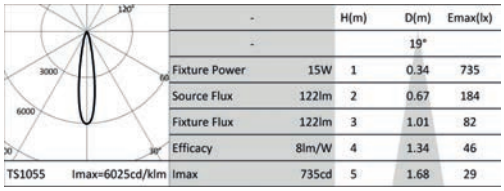

-		H(m)	D(m)	Emax(lx)
-			19°	
Fixture Power	15W	1	0.34	735
Source Flux	122lm	2	0.67	184
Fixture Flux	122lm	3	1.01	82
Efficacy	8lm/W	4	1.34	46
Imax	735cd	5	1.68	29

Driver	Colour	Code
EL. DMX		**1E3124**

LED RGBW / 35W / FL

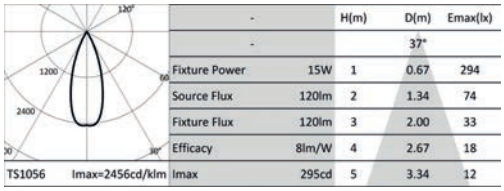

-		H(m)	D(m)	Emax(lx)
-			37°	
Fixture Power	15W	1	0.67	294
Source Flux	120lm	2	1.34	74
Fixture Flux	120lm	3	2.00	33
Efficacy	8lm/W	4	2.67	18
Imax	295cd	5	3.34	12

Driver	Colour	Code
EL. DMX		**1E3173**

RGBW long arm



LED RGBW / 35W / SP

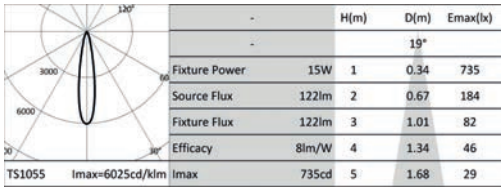

-		H(m)	D(m)	Emax(lx)
-			19°	
Fixture Power	15W	1	0.34	735
Source Flux	122lm	2	0.67	184
Fixture Flux	122lm	3	1.01	82
Efficacy	8lm/W	4	1.34	46
Imax	735cd	5	1.68	29

Driver	Colour	Code
EL. DMX		**1E3125**

LED RGBW / 35W / FL

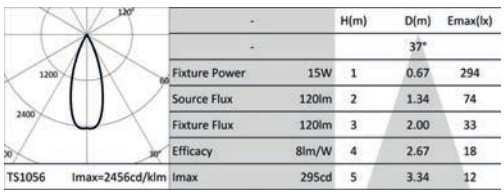

-		H(m)	D(m)	Emax(lx)
-			37°	
Fixture Power	15W	1	0.67	294
Source Flux	120lm	2	1.34	74
Fixture Flux	120lm	3	2.00	33
Efficacy	8lm/W	4	2.67	18
Imax	295cd	5	3.34	12

Driver	Colour	Code
EL. DMX		**1E3174**

Note

Photometrics show the maximum emission values of fixtures.

Accessories

Screen



Code
1E2823

Adjustable stainless steel asymmetric screen with 8 positions and 2 mounting screws. Permits the shielding of the light beam with wide beam optics.

Ray Shade



Code
1E2824

Stainless steel barn door with fixed flaps, adjustable to 4 positions with 2 mounting screws.

Mounting System

Code
1E2825

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).

Code
1E2826

Pole head for pole with external diameter 60mm (+/-2mm) and internal diameter > 40mm.

Control systems

Code
1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.

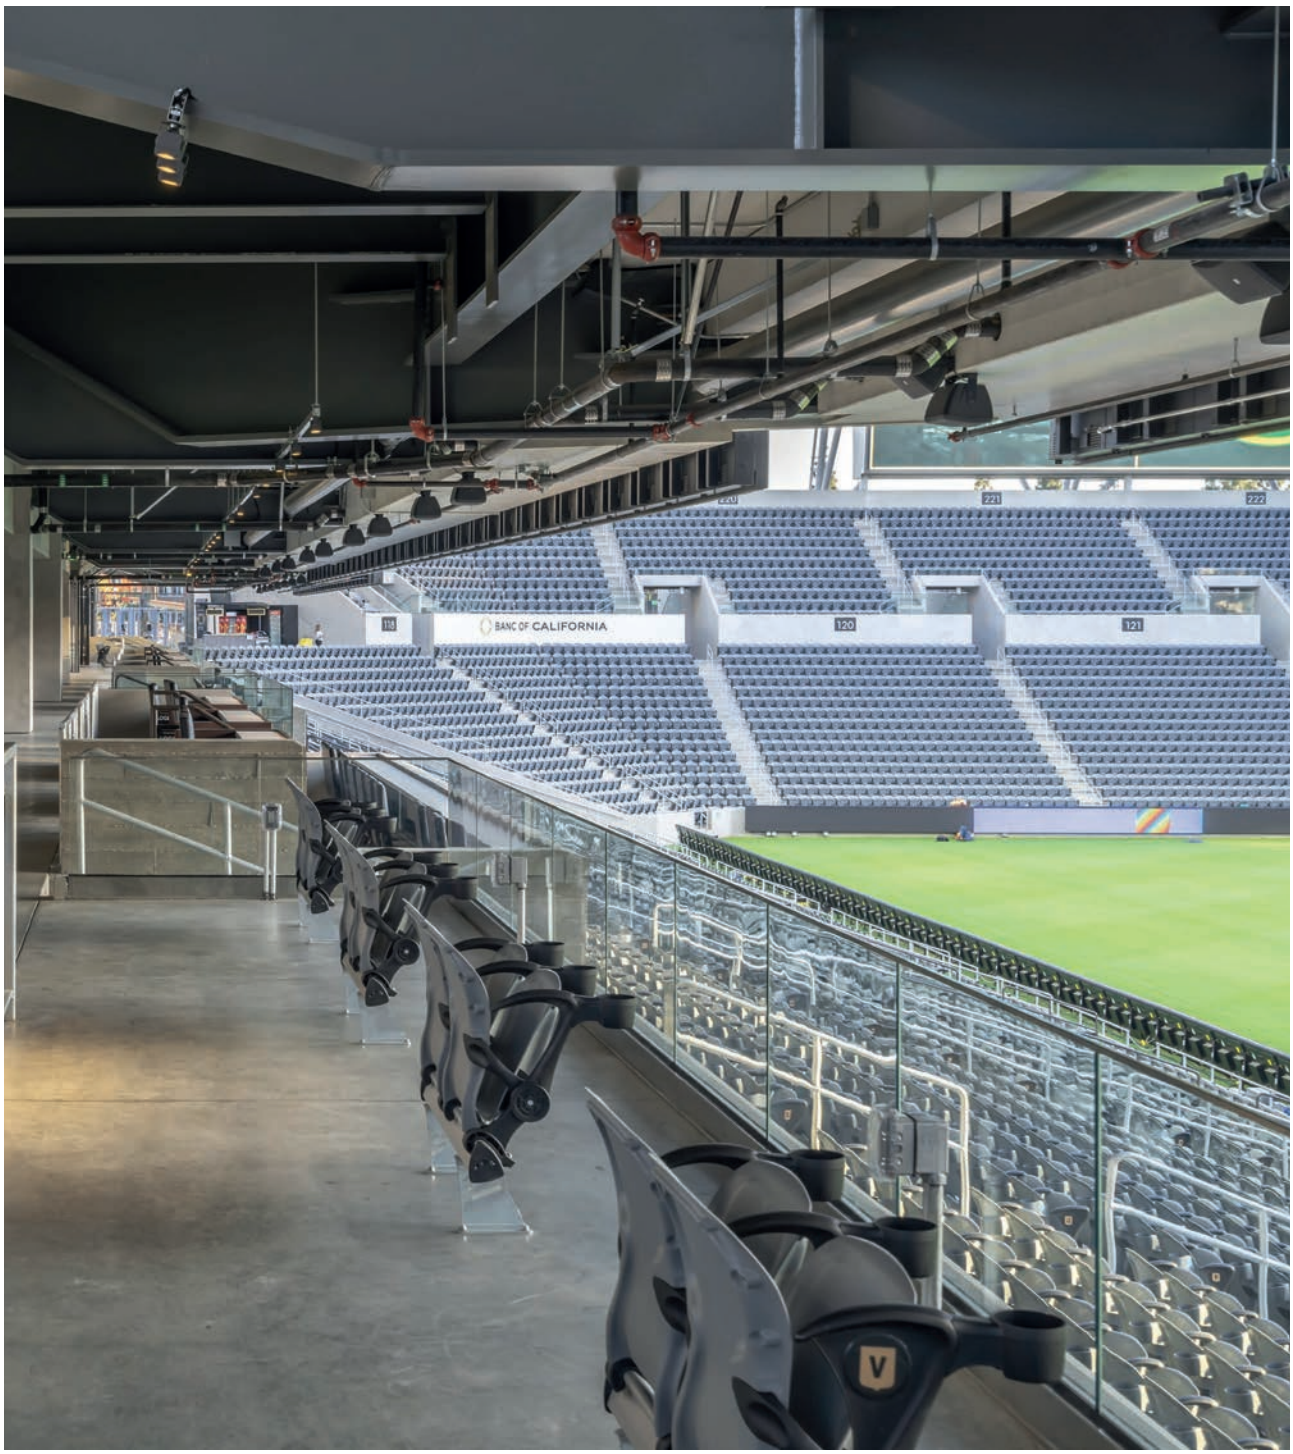

Banc of California Stadium

Architect
Gensler

Lighting Design
First Circle Design

Photographer
Henri Khodaverdi

Country
Los Angeles - USA

PYROS

NANO PYROS



LED / 21W / HYBRID / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			13°	
Fixture Power		24W	1	0.23	25082
Source Flux		2954lm	2	0.46	6271
Fixture Flux		1768lm	3	0.69	2787
Efficacy		73lm/W	4	0.92	1568
TS649	Imax=8491cd/klm	Imax	25082cd	5	1.14	1003

Driver	Colour	3000K	4000K
EL.		**1E2827**	**1E2828**

LED / 21W / HYBRID / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			32°	
Fixture Power		24W	1	0.58	6061
Source Flux		2954lm	2	1.17	1515
Fixture Flux		1656lm	3	1.75	673
Efficacy		69lm/W	4	2.33	379
TS650	Imax=2052cd/klm	Imax	6061cd	5	2.91	242

Driver	Colour	3000K	4000K
EL.		**1E2829**	**1E2830**

LED / 21W / REFLECTOR / MWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			45°	
Fixture Power		24W	1	0.82	4830
Source Flux		3153lm	2	1.64	1207
Fixture Flux		2582lm	3	2.46	537
Efficacy		107lm/W	4	3.28	302
TS651	Imax=1559cd/klm	Imax	4917cd	5	4.10	193

Driver	Colour	3000K	4000K
EL.		**1E2831**	**1E2832**

Accessories

Filter

Kg	Filter	Ø	Code
0.4	Red	107	**1E2849**
0.4	Green	107	**1E2850**
0.4	Blue	107	**1E2851**
0.4	Yellow	107	**1E2852**

Chromatic filter. Complete with ring.

Kg	Ø	Code
0.2	107	**1E2853**

"Blade of light" effect refractive filter.
The special linear incisions modify the light beam, enlarging it in a perpendicular direction to the incisions.
With very narrow beams it is possible to obtain precise "blades" of light.
Complete with ring.



Kg	Ø	Code
0.2	107	**1E2854**

"Soft beam" effect refractive filter.
The special linear incisions reduce the variance between the primary and secondary light beam, making it more uniform.
Complete with ring.

Grid

Code
1E2766

Anti-glare louver.
Black painted metal honeycomb structure.
Designed to be housed inside the fixture.

Screen



Code
1E2855

Adjustable stainless steel asymmetric screen with 8 positions and 2 mounting screws.
Permits the shielding of the light beam with wide beam optics.
0.7Kg.

Ray Shade



Code
1E2856

Stainless steel barn door with fixed flaps, adjustable to 4 positions with 2 mounting screws.
0.4Kg.

Mounting System

Kg	L	Code
0.5	200	**1E2845**
1.8	800	**1E2846**

Earthspike.

Kg	L	Code
0.7	232	**1E2847**
2	832	**1E2848**

Spike with base for surface installation.
1E2847 - Short peg with base for surface mounting.
1E2848 - Long peg with base for surface mounting.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

PYROS

NANO PYROS RGB



LED RGB / 20W / SP

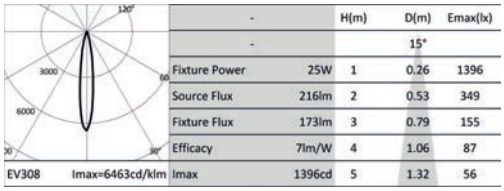

-		H(m)	D(m)	Emax(lx)
-			15°	
Fixture Power	25W	1	0.26	1396
Source Flux	216lm	2	0.53	349
Fixture Flux	173lm	3	0.79	155
Efficacy	7lm/W	4	1.06	87
Imax	1396cd	5	1.32	56

Driver	Colour	Code
EL. DMX		**1E2833**

LED RGB / 20W / FL

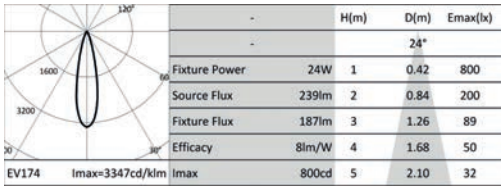

-		H(m)	D(m)	Emax(lx)
-			24°	
Fixture Power	24W	1	0.42	800
Source Flux	239lm	2	0.84	200
Fixture Flux	187lm	3	1.26	89
Efficacy	8lm/W	4	1.68	50
Imax	800cd	5	2.10	32

Driver	Colour	Code
EL. DMX		**1E2834**

Note

Photometrics show the maximum emission values of fixtures.

Accessories

Grid

Code
1E2766

Anti-glare louver.
Black painted metal honeycomb structure.
Designed to be housed inside the fixture.

Screen



Code
1E2855

Adjustable stainless steel asymmetric screen with 8 positions and 2 mounting screws.
Permits the shielding of the light beam with wide beam optics.
0.7Kg.

Ray Shade



Code
1E2856

Stainless steel barn door with fixed flaps, adjustable to 4 positions with 2 mounting screws.
0.4Kg.

Mounting System

Kg	L	Code
0.5	200	**1E2845**
1.8	800	**1E2846**

Earthspike.

Kg	L	Code
0.7	232	**1E2847**
2	832	**1E2848**

Spike with base for surface installation.
1E2847 - Short peg with base for surface mounting.
1E2848 - Long peg with base for surface mounting.

Cable

Code
1E1715

Multifunction cable for outdoor use (DMX + power supply).

Code
1T1932

Standard DMX cable (1 twisted pair + shield, 120Ohm).

Control systems

Code
1T1898

my-SCENARIO Show Store.
Digital devices designed to control dynamic lighting fixtures and programme dynamic light scenarios and sequences.
The system consists of intuitive software, compatible with Windows operating systems, able to control different hardware devices with the following functions: - record colour-changing scenarios set by the operator; - allow selection among the multiple scenarios already recorded; - transmit the control signals to the lighting system.
The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.
The software provides a graphic simulation of the operating keys of a lighting controller; the patching function allows the DMX control channels to be assigned to fixtures by using the internal library.
The Colour Manager function allows for quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times.
The built-in calendar allows full time scheduling of show playback (month, day, hour, minutes, recurring events).
The programmed light shows can be transferred to different control interfaces.

Sage Hill High School

Lighting Design
First Circle Design

Photographer
©SAC Design

Country
Newport Coast - USA

PICO PYROS



LED / 8W / SP



		3000K	H(m)	D(m)	Emax(lx)
		Ra80		18°	
EV218	Imax=4497cd/klm	Fixture Power 11W	1	0.32	2253
		Source Flux 501lm	2	0.65	563
		Fixture Flux 408lm	3	0.97	250
		Efficacy 39lm/W	4	1.29	141
		Imax 2253cd	5	1.62	90

Driver	Colour	3000K	4000K
EL.		**1E2857**	**1E2859**

LED / 8W / FL



		3000K	H(m)	D(m)	Emax(lx)
		Ra80		36°	
EV216	Imax=1308cd/klm	Fixture Power 11W	1	0.65	656
		Source Flux 501lm	2	1.30	164
		Fixture Flux 361lm	3	1.95	73
		Efficacy 34lm/W	4	2.60	41
		Imax 656cd	5	3.25	26

Driver	Colour	3000K	4000K
EL.		**1E2858**	**1E2860**

Accessories

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting for the following products: Jupiter, Jupiter Mini, Saturn, Saturn Mini, and Led.Y.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

JUPITER

GENERAL INFO
Ultra compact adjustable projector
Ø38mm

LED
Chip on board
From 353lm to 1251lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Unitil 101lm/W

OPTICS
SP – FL – WFL

POWER SUPPLY
Electronic – DALI – 1-10V
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Anodised polished aluminium body. Aluminium front ring. Bevelled extra-clear front glass. Stainless steel bracket fixed to the body for adjustability.

Range of ultra compact projectors with lenticular type optic that makes it possible to obtain defined, precise beams.

It made entirely of “ferrite” colour painted anodised aluminium allows for vertical and horizontal rotation.

Can be installed in environments such as SPAs or around swimming pools, ensured by the 24V power supply system.

Also available inground versions in two different diameters ø50mm and ø80mm also in the new driver over solution.

Toyekunov Family Palace

Lighting designer
Tatyana Shkolnikova

Photographer
Ilya Kouzov

Country
Moscow - Russia

01
JUPITER

JUPITER

JUPITER is the most simple and compact version in the family, with a fixed, lenticular-type optic system for precise and defined beams. It is entirely made of anodized aluminium painted ferrite complete with a steel bracket that allows it to be adjusted in respect to both the vertical and horizontal plane.

JUPITER PRO

JUPITER PRO is the most professional projector of the JUPITER range and it is available in two different diameters Ø40 and Ø50 with fixed or multiple optics.

Variable and flexible mounting

To ensure “universal” mounting, JUPITER PRO can be installed with any support equipped with a G ½” male shank slot. There are two different mounting systems available as an accessory: a stake for in-ground mounting, and a plate for wall or surface mounting.

04

05

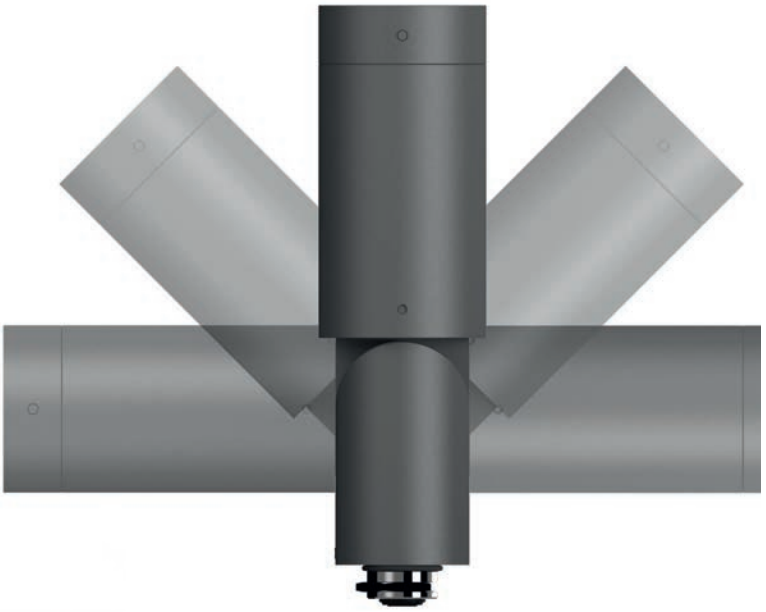

Multi-optic versions

One of the primary features of JUPITER is the ability to change the beam angle of the Multi-optic version. Without changing the IP rating, the holographic filter can be changed inside the optical compartment to obtain different beam angles. The product comes with additional holographic filters so they can be changed based on the project needs.

Three elements in a single projector

JUPITER is made up of three elements:
- the base that can be attached to the floor or wall and then completed with the actual projector body;
- The central body, which is the heart of the system and physically isolated from the other elements with resin coating;
- The optical compartment that allows to vary the beam angle by replacing the different holographic filters.

PRO



LED / 5,7W / LENS / NSP



3000K		H(m)	D(m)	Emax(lx)
Ra84			8°	
Fixture Power	9W	1	0.15	15123
Source Flux	625lm	2	0.30	3781
Fixture Flux	473lm	3	0.44	1680
Efficacy	54lm/W	4	0.59	945
TS1186 Imax=24196cd/klm	Imax	15123cd	5	0.74	605

Power supply	Colour	2700K	3000K	3500K
24Vdc		**1E3773**	**1E3774**	**1E3775**
24Vdc		**1E3776**	**1E3777**	**1E3778**

LED / 10,35W / MULTI-OPTIC LENS / SP, NFL, FL, MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			15°	
Fixture Power	12W	1	0.27	8372
Source Flux	1148lm	2	0.54	2093
Fixture Flux	858lm	3	0.81	930
Efficacy	72lm/W	4	1.08	523
TS1187 Imax=7292cd/klm	Imax	8372cd	5	1.35	335



3000K		H(m)	D(m)	Emax(lx)
Ra84			24°	
Fixture Power	12W	1	0.43	3309
Source Flux	1148lm	2	0.85	827
Fixture Flux	812lm	3	1.28	368
Efficacy	68lm/W	4	1.71	207
TS1188 Imax=2883cd/klm	Imax	3309cd	5	2.14	132



3000K		H(m)	D(m)	Emax(lx)
Ra84			44°	
Fixture Power	12W	1	0.82	1158
Source Flux	1148lm	2	1.63	290
Fixture Flux	801lm	3	2.45	129
Efficacy	67lm/W	4	3.27	72
TS1190 Imax=1009cd/klm	Imax	1158cd	5	4.08	46

Power supply	Colour	2700K	3000K	3500K
24Vdc		**1E3779**	**1E3780**	**1E3781**
24Vdc		**1E3782**	**1E3783**	**1E3784**



3000K		H(m)	D(m)	Emax(lx)
Ra84			31°	
Fixture Power	12W	1	0.55	2200
Source Flux	1148lm	2	1.09	550
Fixture Flux	819lm	3	1.64	244
Efficacy	68lm/W	4	2.18	137
TS1189 Imax=1916cd/klm	Imax	2200cd	5	2.73	88

Related codes

Mounting System

	Colour	Code
		1E3785
		1E3803

Earthspike.
Powder coated stainless steel.



	Colour	Code
		1E3786
		1E3804

Plate for fixture rotation.
Powder coated stainless steel.

JUPITER

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Filter

	Filter	Ø	Code
	Red	50	**1E3798**
	Green	50	**1E3799**
	Blue	50	**1E3800**
	Yellow	50	**1E3801**
	Magenta	50	**1E3802**

Chromatic filter.
Glass with dichroic treatment.

	Code
	1E3790

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Diameter 50mm.

Grid

	Code
	1E3792

Anti-glare louver.
Black painted metal honeycomb structure.
Ready to be housed inside the optical compartment.
Diameter 50mm.

Screen

	Colour	Code
		1E3788
		1E3806

Asymmetric screen.
Powder coated stainless steel.
Diameter 50mm.

Connector



Code

1E2769

Connectors kit for 5 pole coaxial connections.

Code

1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code

1T6581

DALI/1-10V dimmer 12/24V.

Code

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code

1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

JUPITER

PRO Small



LED / 5,7W / LENS MULTIOPTIC / SP, FL, MWFL



3000K		H(m)	D(m)	Emax(lx)
Ra84			11°	
Fixture Power	8W	1	0.19	8774
Source Flux	605lm	2	0.38	2194
Fixture Flux	442lm	3	0.57	975
Efficacy	57lm/W	4	0.75	548
TS1183 Imax=14505cd/klm	Imax	8774cd	5	0.94	351



3000K		H(m)	D(m)	Emax(lx)
Ra84			20°	
Fixture Power	8W	1	0.36	2174
Source Flux	605lm	2	0.72	543
Fixture Flux	387lm	3	1.08	242
Efficacy	50lm/W	4	1.44	136
TS1184 Imax=3593cd/klm	Imax	2174cd	5	1.80	87



3000K		H(m)	D(m)	Emax(lx)
Ra84			37°	
Fixture Power	8W	1	0.68	714
Source Flux	605lm	2	1.36	178
Fixture Flux	349lm	3	2.04	79
Efficacy	45lm/W	4	2.71	45
TS1185 Imax=1180cd/klm	Imax	714cd	5	3.39	29

Power supply	Colour	2700K	3000K	3500K
24Vdc		**1E3767**	**1E3768**	**1E3769**
24Vdc		**1E3770**	**1E3771**	**1E3772**

Related codes

Mounting System

Colour	Code
	1E3785
	1E3803

Earthspike.
Powder coated stainless steel.



Colour	Code
	1E3786
	1E3804

Plate for fixture rotation.
Powder coated stainless steel.

Power Supply

	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Filter

Filter	Ø	Code
Red	40	**1E3793**
Green	40	**1E3794**
Blue	40	**1E3795**
Yellow	40	**1E3796**
Magenta	40	**1E3797**

Chromatic filter.
Glass with dichroic treatment.

Code
1E3789

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Diameter 40mm.

Grid

Code
1E3791

Anti-glare louver.
Black painted metal honeycomb structure.
Ready to be housed inside the optical compartment.
Diameter 40mm.

Screen

Colour	Code
	1E3787
	1E3805

Asymmetric screen.
Powder coated stainless steel.
Diameter 40mm.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

JUPITER

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Mini Projector



LED / 3W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			17°	
	Fixture Power	4W	1	0.31	2037
	Source Flux	353lm	2	0.61	509
	Fixture Flux	295lm	3	0.92	226
	Efficacy	74lm/W	4	1.23	127
TS1048	Imax=5771cd/klm	Imax	2037cd	5	1.53	81

Power supply	Colour	3000K	4000K
24Vdc		**1E3167**	**1E3168**

LED / 3W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			30°	
	Fixture Power	4W	1	0.54	1062
	Source Flux	353lm	2	1.09	266
	Fixture Flux	289lm	3	1.63	118
	Efficacy	72lm/W	4	2.17	66
TS1049	Imax=3009cd/klm	Imax	1062cd	5	2.72	42

Power supply	Colour	3000K	4000K
24Vdc		**1E3169**	**1E3170**

LED / 3W / WFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			60°	
	Fixture Power	4W	1	1.16	367
	Source Flux	353lm	2	2.32	92
	Fixture Flux	302lm	3	3.47	41
	Efficacy	75lm/W	4	4.63	23
TS1050	Imax=1041cd/klm	Imax	367cd	5	5.79	15

Power supply	Colour	3000K	4000K
24Vdc		**1E3171**	**1E3172**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

JUPITER

Accessories

Mounting System

L	Code
110	**1E0995FE**

Ferrite painted peg for ground anchorage.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Toyekunov Family Palace

Lighting designer
Tatyana Shkolnikova

Photographer
Ilya Kouzov

Country
Moscow - Russia

LED.Y

GENERAL INFO
Adjustable on bracket projector
ø50mm

LED
Mono-led
LED emitter
3000K – 6000K
From 99lm to 143lm
Ra80
RGB: RGB LED Multichip
From 40lm to 48lm

PRODUCT EFFICACY
Until 47lm/W

OPTICS
Versions Mono-led
SP - FL

POWER SUPPLY
Electronic

MATERIAL
Anodised aluminium body and bracket.

A series of miniature fixtures available in recessed or projector versions with monochromatic LED and RGB technology.

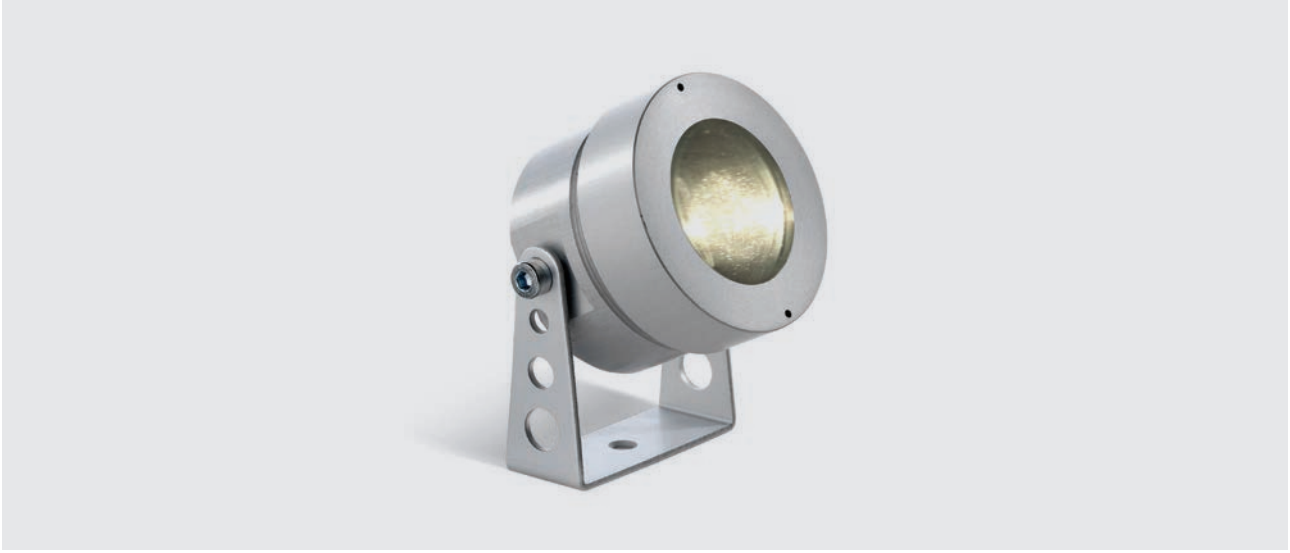

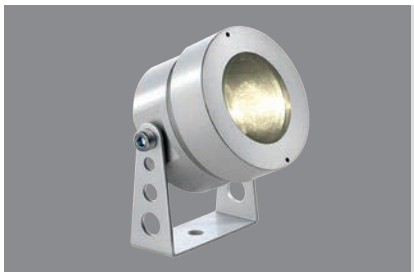

Projector



LED / 2W / SP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
	Fixture Power	3W	1	0.16	2012
	Source Flux	117lm	2	0.32	503
	Fixture Flux	116lm	3	0.48	224
	Efficacy	39lm/W	4	0.64	126
TS670	Imax=17195cd/klm	Imax	2012cd	5	0.80	80

Power supply	Colour	3000K	6000K
700mA		**1E2371**	**1E2372**

LED / 2W / FL



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			34°	
	Fixture Power	3W	1	0.60	223
	Source Flux	99lm	2	1.21	56
	Fixture Flux	99lm	3	1.81	25
	Efficacy	33lm/W	4	2.42	14
TS671	Imax=2253cd/klm	Imax	223cd	5	3.02	9

Power supply	Colour	3000K	6000K
700mA		**1E2373**	**1E2374**

Related codes

Power Supply

Code
1E1385

Electronic power supply 17W, Ø105 h74, 220-240V, 700mA - 12W, Ø105 h74, 110-120V, 700mA.
For Led.Y Monoled: it can drive up to 6 LED.Y fixtures simultaneously. Connection in series.

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting.

Accessories

Mounting System

L	Code
110	**1E0995**

Peg for ground anchorage.
Stainless steel.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm².
Cable diameter range from 8 to 12mm.
IP68

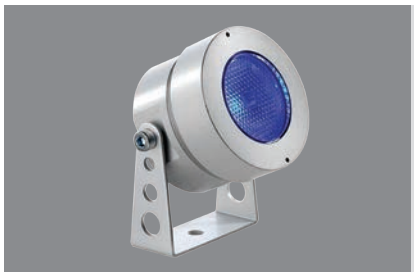

Projector RGB



LED RGB / 3,5W / SP

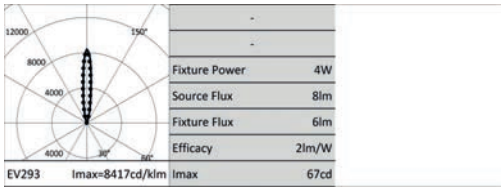

	Power supply	Colour	RGB
	3x350mA		**1E1855**

Note

Photometrics show the maximum emission values of fixtures.

LED RGB / 3,5W / FL

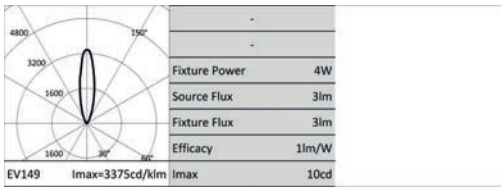

	Power supply	Colour	RGB
	3x350mA		**1E1410**

Note

Photometrics show the maximum emission values of fixtures.

Related codes

Control systems

	Code
	1E1401

SECS 75.
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output IP67

	Code
	1T1827

SECS 75.
Power supply and Control System SECS Scene Effect Control System.
SECS 75 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
75W output IP20

Code
1T2245

SECS 36.
Power supply and Control System SECS Scene Effect Control System.
SECS 36 drivers combine the following 3 functions in a single unit,: power supply to RGB LED devices, playback of pre-set colour sequences and a DMX interface for external control devices.
The SECS “Easy-Run-Menu” function is able to playback colour-changing light scenarios that are pre-stored into the driver without the use of an external driver: - 8 static colour scenarios; - 8 dynamic colour sequences; - 5 different playback speed values; - Start/Stop the selected scenario using a remote switch.
SECS 75 drivers can also be controlled through DMX 512; in this case: - DMX address (from 1 to 511) can be configured by using dip-switches; - 3 channel mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only; - 6 channel mode: the outputs are divided into 2 R-G-B groups, each one controlled by 3 different DMX channels; - DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch; - DMX output is available for connection to other DMX devices.
35W output IP20

Accessories

Mounting System

L	Code
110	**1E0995**

Peg for ground anchorage.
Stainless steel.

Cable

Code
1E1713

6-pole cable for driver output connection to Constant Current LED sources.

Control systems

Code
1T1898

my-SCENARIO Show Store.
Digital devices designed to control dynamic lighting fixtures and programme dynamic light scenarios and sequences.
The system consists of intuitive software, compatible with Windows operating systems, able to control different hardware devices with the following functions: - record colour-changing scenarios set by the operator; - allow selection among the multiple scenarios already recorded; - transmit the control signals to the lighting system.
The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.
The software provides a graphic simulation of the operating keys of a lighting controller; the patching function allows the DMX control channels to be assigned to fixtures by using the internal library.
The Colour Manager function allows for quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times.
The built-in calendar allows full time scheduling of show playback (month, day, hour, minutes, recurring events).
The programmed light shows can be transferred to different control interfaces.

Outdoor

Wall recessed

Wall recessed

708
ZEDGE PRO

719
ZEDGE Line

719
ZEDGE Line
Opal

722
ZEDGE

ZEDGE

GENERAL INFO
Recessed wall mounted fixture,
surface mounted and bollard.
Zedge 63x63mm
Zedge LINE 63x304mm
Zedge LINE OPAL 63x304mm
Zedge PRO 200x200mm

LED

Zedge
Linear boards
From 570lm to 598lm
3000K – 4000K
Ra84

Zedge Line e Zedge Line Opal
Linear boards
From 818lm to 1310lm
2700K – 3000K – 4000K
Ra84

Zedge PRO
2 Chip on board
From 2022lm to 2179lm
2700K – 3000K – 4000K
Ra84

PRODUCT EFFICACY
Zedge until 9lm/W
Zedge LINE until 29lm/W
Zedge PRO until 52lm/W

OPTICS

Zedge
Floor washer
Floor washer + Halo Louvre

Zedge LINE
Floor Washer

Zedge OPAL
Diffuse

Zedge PRO
Floor washer deep
Floor Washer wide
Floor Washer adjutable

POWER SUPPLY
Electronic - DALI - 24V
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
The body of the fixture are made of powder coated die-cast anodised aluminium.
Zedge LINE OPAL complete with polycaronate screen.

The Zedge range designed in collaboration with the firm Gensler to light passage ways, stairs or corridors with solutions with a simple design yet with extreme attention to detail.

Available in three different sizes and with 24V and 220V integrated drivers.

With the use of special accessories the PRO fixture is also available in a bollard and wall mounted version.

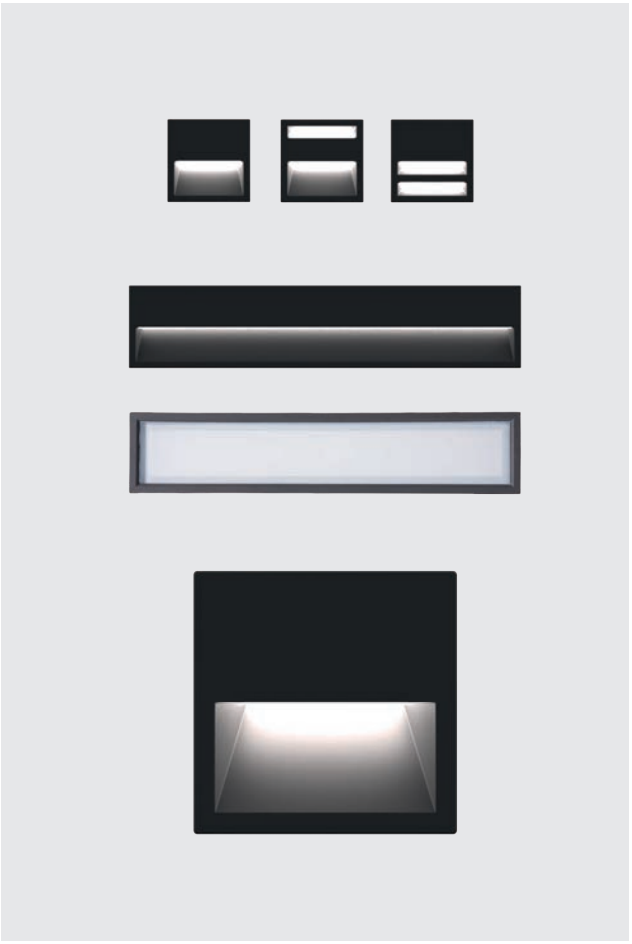

01

02

Zedge Pro

The larger and high-performance fixture it is a real floor-washer with an innovative optical system and a design based on a perfect play of proportions, inclined planes, defined corners and sharp edges.
The finishing screen can be installed on the surface or flush with the wall for maximum formal simplicity.

Optical systems is made of two independent beams that can be configured in different ways to produce multiple effects: DEEP, WIDE plus all the effects in between with the innovative ADJUSTABLE version.

Bollard and Wall mounted versions

Thanks to the special accessories it is now possible to install Zedge PRO even in a Wall mounted and Bollard versions, available in three different heights 400 - 800 - 1000mm.

03

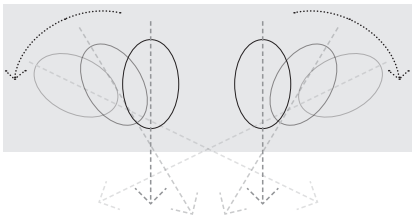

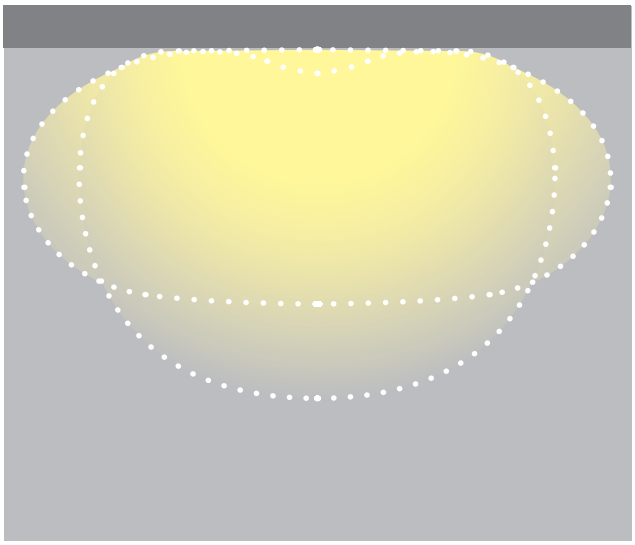

Adjustable Version

An innovative solution that makes it possible to obtain different light effects with the same fixture by calibrating the light beam to suit different project needs. Using an Allen key, it is possible to rotate the optical system changing from a DEEP effect to a WIDE effect fluidly, choosing the most suitable position for the project from among the myriad of intermediary positions.

04

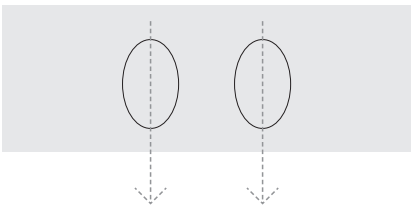

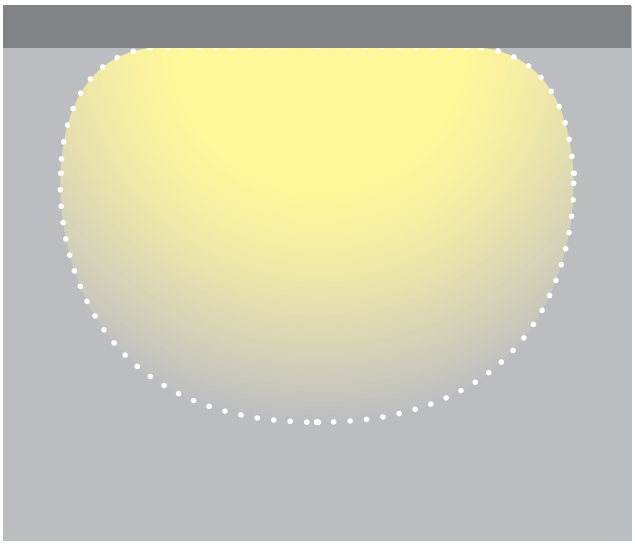

Deep Version

For deep lighting of horizontal surfaces where the priority is to light large open spaces or very wide pathways.

05

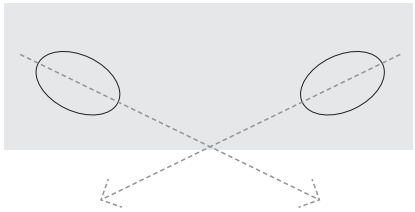

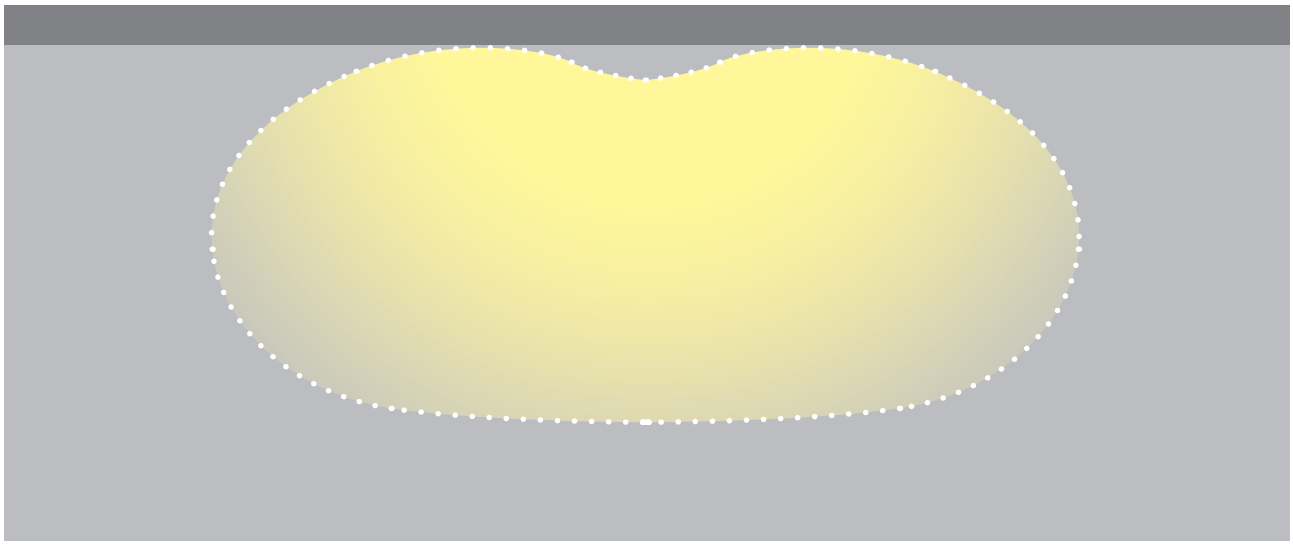

Wide Version

For lighting that favours illuminance uniformity on the longitudinal axis such as long public or private pedestrian walkways.

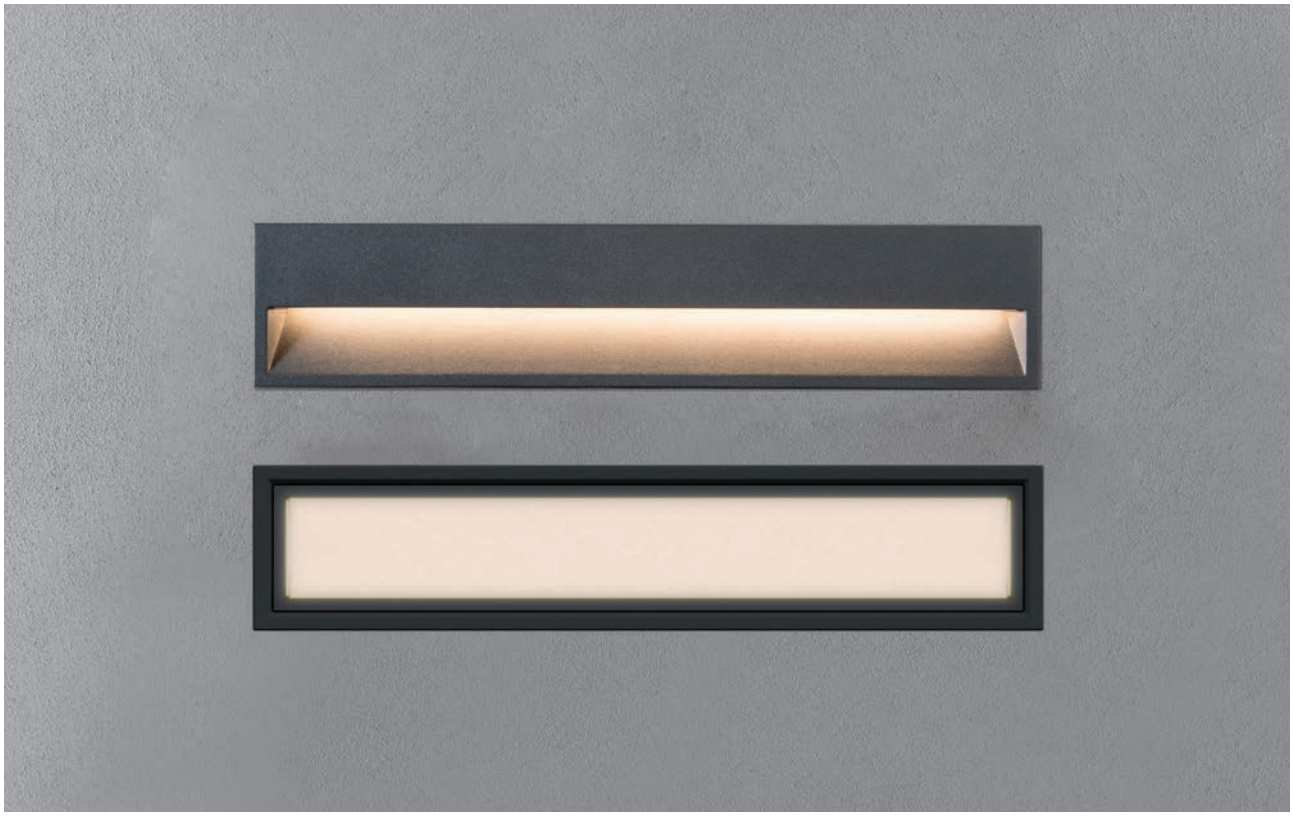

Double version for Zedge Line

It is the slim and slender version of the line, available in a double version with floor washer reflector for discreet and controlled illumination of the walking surface and in the new OPAL version for softer and more diffuse outdoor lighting.

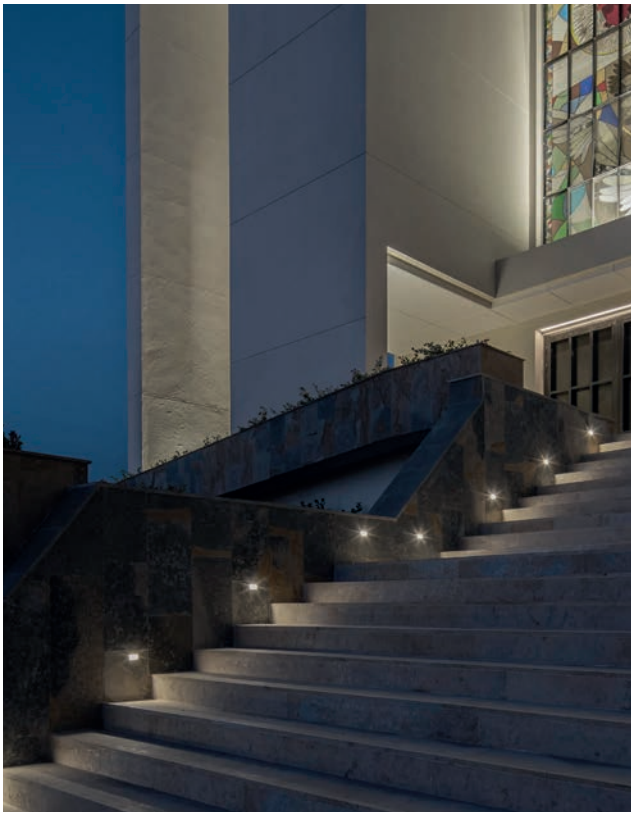

The smaller version is a real step-marker

It has perfect design proportions, maximum attention to detail and with a mild, delicate and comfortable lighting effect. Designed for outdoor lighting but it's extremely compact size - 6cm x 6cm – combined with the possibility to choose from 13 different colour finishes make it a functional and decorative element that can be used even for indoor installations.

Depending on different design requirements t can be installed using an accessory outer casing or directly in the plasterboard. The decorative screen only 5mm thick, simplifies and finishes any installation. Depending on the driver chosen it is possible to connect and power up to 45 fixtures in parallel connection.

Zedge Bollard

New small bollard step-marker from the ZEDGE range. Small, high performance with high visual comfort and excellent light distribution on the floor. Available in a 24V version to be powered by a 230V/24Vdc electronic transformer as an accessory and dimmable with a special accessory kit. To complete with a fixing system.

Pro



LED / 13W / DEEP



Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3192EL**	**1E3195EL**	**1E3760EL**	**1E3198EL**
DALI		**1E3192DA**	**1E3195DA**	**1E3760DA**	**1E3198DA**

LED / 13W / WIDE



Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3201EL**	**1E3204EL**	**1E3761EL**	**1E3207EL**
DALI		**1E3201DA**	**1E3204DA**	**1E3761DA**	**1E3207DA**

LED / 13W / ADJUSTABLE





Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3210EL**	**1E3213EL**	**1E3762EL**	**1E3216EL**
DALI		**1E3210DA**	**1E3213DA**	**1E3762DA**	**1E3216DA**

Related codes

Insertion Box



Code
1E3219

Nylon outer casing fitted for parallel connection with feed through-wiring.
AxBxH=207x207x114.5mm.

Bollard



L	P	H	Colour	Code
200	115	400		**1E3437**
200	115	800		**1E3438**
200	115	1000		**1E3439**

Powder coated anodised aluminium bollard.

ZEDGE

Mounting System

Code
1E3450

Fixing rods for installation in concrete 147x30x28mm.
AISI 316 stainless steel.
For Bollard installation.

Carter



Colour	Code
●	**1E3440**

Plate accessory for wall mounted installation.
Powder coated anodised aluminium.
AxBxH=201x201x107mm.

Accessories

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

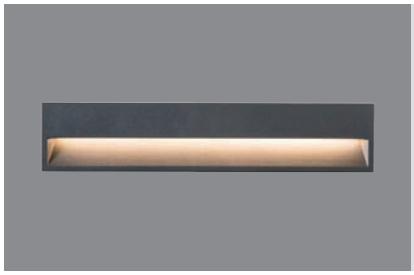

Line



LED / 6W / FLOOR WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			48°	88°	
Fixture Power		7W	1	1.90	2.12	115
Source Flux		870lm	2	3.80	4.25	29
Fixture Flux		171lm	3	5.70	6.37	13
Efficacy		24lm/W	4	7.60	8.49	7
TS1128	Imax=174cd/klm	Imax	151cd	5	9.50	10.61	5

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc		**1E3441**	**1E3445**	**1E3763**	**1E3446**

LED / 8W / FLOOR WASHER



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			48°	88°	
Fixture Power		9W	1	1.90	2.12	165
Source Flux		1250lm	2	3.80	4.25	41
Fixture Flux		245lm	3	5.70	6.37	18
Efficacy		27lm/W	4	7.60	8.49	10
TS1128	Imax=174cd/klm	Imax	217cd	5	9.50	10.61	7

Driver	Colour	2700K	3000K	3500K	4000K
EL		**1E3442EL**	**1E3443EL**	**1E3764EL**	**1E3444EL**
DALI		**1E3442DA**	**1E3443DA**	**1E3764DA**	**1E3444DA**

Line Opal



LED / 6W / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			116°	
Fixture Power		7W	1	3.21	175
Source Flux		898lm	2	6.42	44
Fixture Flux		515lm	3	9.63	19
Efficacy		74lm/W	4	12.84	11
TS1181	Imax=195cd/klm	Imax	175cd	5	16.06	7

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc		**1E3511**	**1E3513**	**1E3765**	**1E3515**

LED / 8W / VWFL



	3000K		H(m)	D(m)	Emax(lx)
	Ra84			116°	
Fixture Power		8W	1	3.19	177
Source Flux		876lm	2	6.38	44
Fixture Flux		517lm	3	9.57	20
Efficacy		65lm/W	4	12.76	11
TS1182	Imax=202cd/klm	Imax	177cd	5	15.95	7

Driver	Colour	2700K	3000K	3500K	4000K
EL.		**1E3512EL**	**1E3514EL**	**1E3766EL**	**1E3516EL**
DALI		**1E3512DA**	**1E3514DA**	**1E3766DA**	**1E3516DA**

ZEDGE

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Insertion Box



	Code
	1E3447

Nylon outer casing fitted for parallel connection with feed through-wiring.

Mounting System

	Code
	1T7003

Stainless steel spring kit for installation without insertion box.

Accessories

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Connector

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm².
Cable diameter range from 8 to 12mm.
IP68



Code
1E2769

Connectors kit for 5 pole coaxial connections.

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

ZEDGE

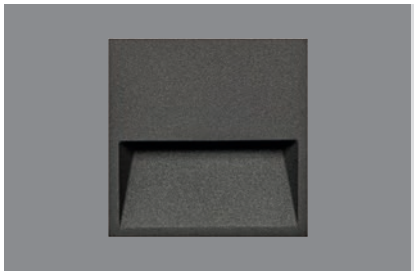

Floor Washer



LED / 4W



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			55°	86°	
Fixture Power	5W	1	2.62	2.11	23
Source Flux	570lm	2	5.25	4.22	6
Fixture Flux	40lm	3	7.87	6.33	3
Efficacy	7lm/W	4	10.50	8.44	1
Imax	30cd	5	13.12	10.55	1

TS999 Imax=53cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc	○	**1E3742**	**1E3154**	**1E3745**	**1E3157**
24Vdc	●	**1E3743**	**1E3160**	**1E3746**	**1E3163**
24Vdc	●	**1E3744**	**1E3148**	**1E3747**	**1E3151**

Floor Washer + Halo



LED / 4W



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			56°	90°	
Fixture Power	5W	1	2.82	2.30	23
Source Flux	570lm	2	5.65	4.60	6
Fixture Flux	46lm	3	8.47	6.90	3
Efficacy	9lm/W	4	11.30	9.19	1
Imax	31cd	5	14.12	11.49	1

TS1000 Imax=54cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc	○	**1E3748**	**1E3155**	**1E3751**	**1E3158**
24Vdc	●	**1E3749**	**1E3161**	**1E3752**	**1E3164**
24Vdc	●	**1E3750**	**1E3149**	**1E3753**	**1E3152**

Louvre



LED / 4W



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			49°	94°	
Fixture Power	5W	1	14.87	3.25	8
Source Flux	570lm	2	29.74	6.50	2
Fixture Flux	33lm	3	44.60	9.75	1
Efficacy	6lm/W	4	59.47	13.00	0
Imax	26cd	5	74.34	16.26	0

TS1001 Imax=46cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc	○	**1E3754**	**1E3156**	**1E3757**	**1E3159**
24Vdc	●	**1E3755**	**1E3162**	**1E3758**	**1E3165**
24Vdc	●	**1E3756**	**1E3150**	**1E3759**	**1E3153**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Insertion Box



	Code
	1E3166

Outer casing in plastic material fitted for parallel connection with feed through-wiring.
For the fixture.
Cutout hole AxBxP=87x59x72.5mm.



	Code
	1E3180

Stainless steel outer casing fitted for parallel connection with feed through-wiring.
For fixture + driver.
Cutout hole AxBxP=166x72x87mm.

Control systems



	Code
	1T6581

DALI/1-10V dimmer 12/24V.

Terminal Box

	Code
	1E3181

Terminal box with gel.

ZEDGE

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Outdoor

Surface luminaires

Surface luminaires

730
MR SMITH

737
MRS SMITH

740
FEBO EVO

728
Q-BO

746
STILO

758
HOCKEY

Q-BO

IP67

GENERAL INFO
Wall and ceiling mounted fixture
for grazing light effect.
Side 160mm

LED
Chip on board
From 4122lm to 4228lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Unitil 84lm/W

OPTICS
Reflector Optics
BI-EMISSION – PLURI-EMISSION

POWER SUPPLY
Electronic

MATERIAL
Painted die-cast anodised aluminium body.

A ceiling or wall mounted fixture for grazing light effect available in two versions, bi-emission direct/indirect or pluri-emission.

The range of accessories the fixture can be completed with make it possible to create scenographic lighting effects on the surface to be illuminated and to tailor the light beam according to specific project requirements.

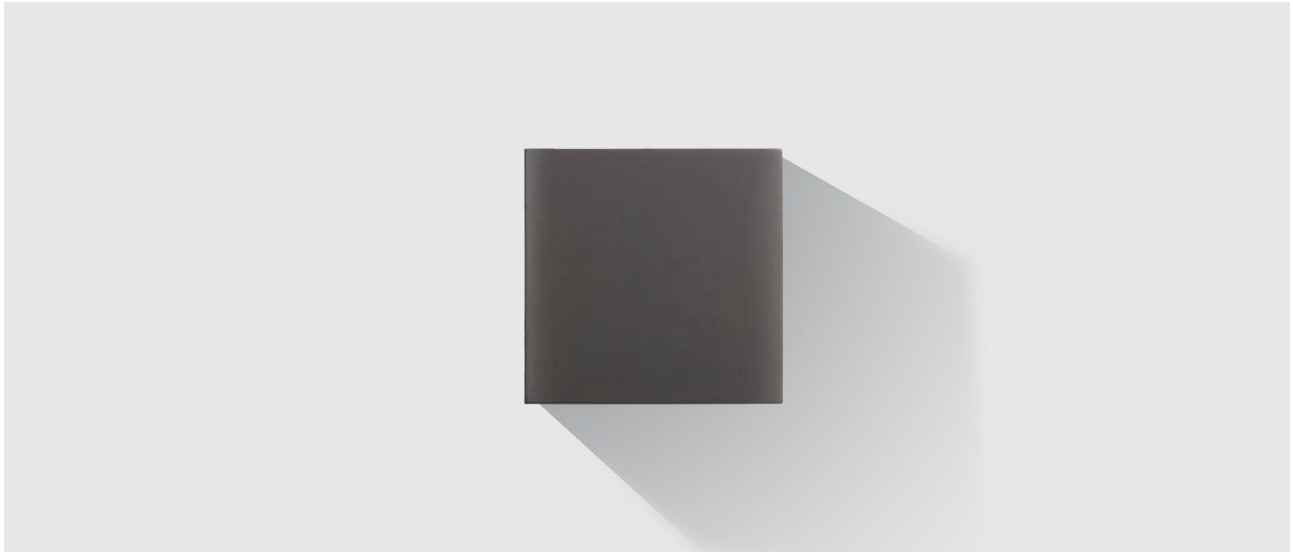



LED / 29W / BI-DIRECTIONAL EMISSION / VWFL



3000K	
Ra84	
Fixture Power	32W
Source Flux	4122lm
Fixture Flux	1659lm
Efficacy	52lm/W
Imax	1399cd

	Driver	Colour	3000K	4000K
	EL.		**1E2956**	**1E2957**

LED / 29W / MULTIDIRECTIONAL / VWFL



3000K	
Ra84	
Fixture Power	32W
Source Flux	4122lm
Fixture Flux	2618lm
Efficacy	82lm/W
Imax	1055cd

	Driver	Colour	3000K	4000K
	EL.		**1E2958**	**1E2959**

Accessories

Shaper



Code **1E2953**

Blade of light (4/6°).
Equipped with micrometric adjustability to obtain perfect light beam direction.



Code **1E2954**

Narrow blade of light (10/12°).
Equipped with micrometric adjustability to obtain perfect light beam direction.



Code **1E2960**

Louvre.
Beam width 50°.



Code **1E2961**

Louvre.
Beam width 30°.

Shutter



Code **1E2955**

Shutter.
To be mounted outside the fixture.

Mr & Mrs SMITH

GENERAL INFO
Wall mounted LED fixtures.
Mr Smith 130x130x51.5mm
Mrs Smith 305x63.6x51.5mm

LED
LED Chip on board high efficacy
From 388lm to 1217lm
2700K – 3000K – 4000K
Ra84
Ra90 - To order this version it is necessary to add the suffix “90” at the end of the standard code.

PRODUCT EFFICACY
Unitil 97m/W

OPTICS
Direct - Indirect - Direct/indirect

POWER SUPPLY
Electronic – DALI - 24V

MATERIAL
Anodized and painted extruded aluminium body.
Injection-moulded opal polycarbonate screen.

New applique for outdoor installation. Available in two different versions: Square shaped Mr Smith and rectangular shaped Mrs Smith for wall mounted installations with direct fixing on the back of the product. Both versions are available with different emissions: indirect, direct and direct/indirect.

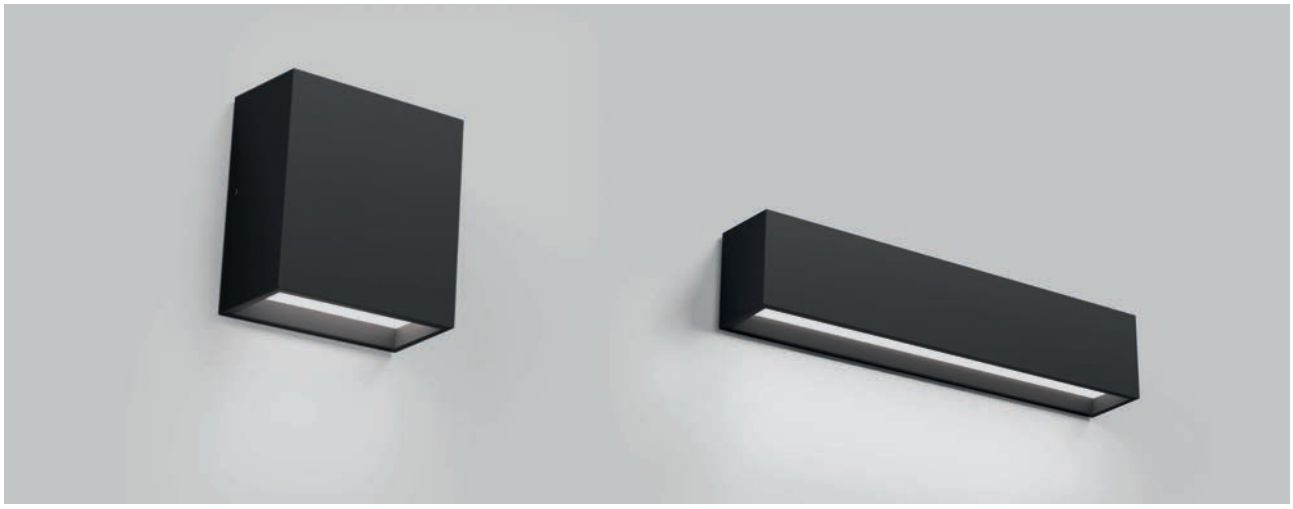

01

Double geometry and easy installation

130x130 square solution and 63x300 rectangular solution, both made up of two elements for quick mounting without visible screws and an overall clean effect. The base is attached to the installation surface and the body of the device, which has different sections based on the type of emission, is attached to it.

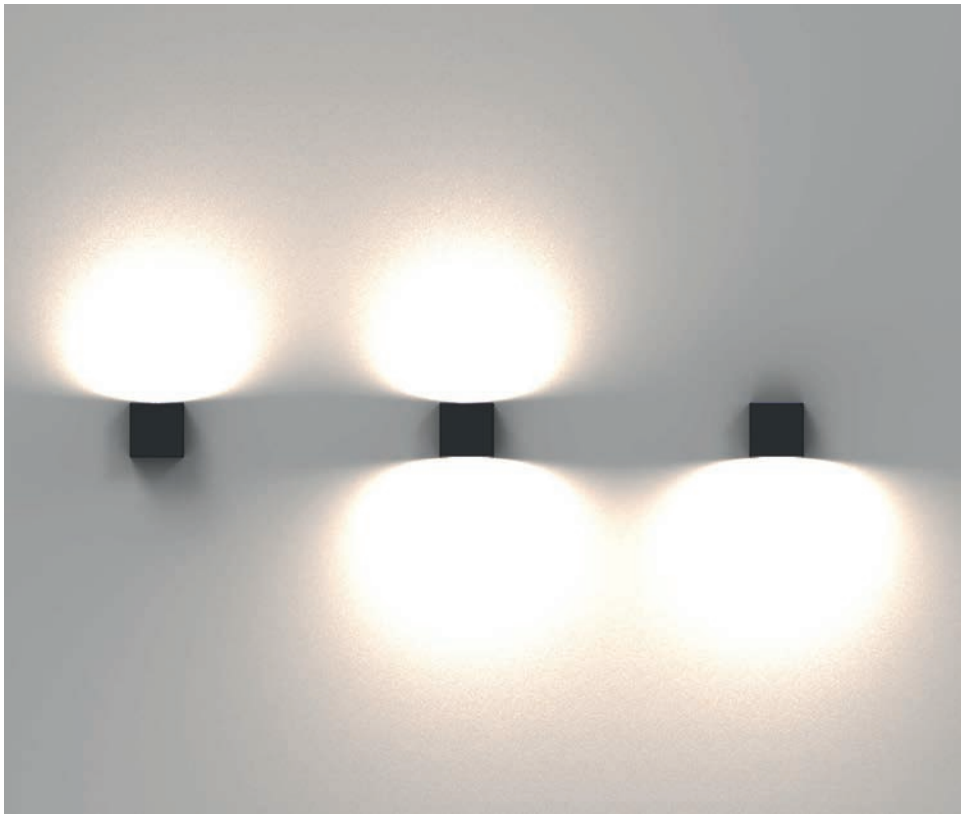

Three light skimming effects

Direct, indirect, and direct/indirect emission.
The direct light version has an inclined plane at the bottom that, together with the opal polycarbonate screen, softly accompanies the light recalling the design of the ZEDGE Series.
In the version with only indirect or direct/indirect emission the polycarbonate screen at the top softly diffuses the light.

MR & MRS SMITH

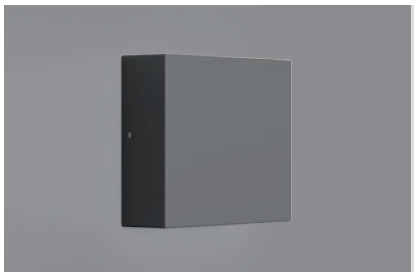

MR SMITH



LED / 6W / FLOOD / DIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			102°	64°	
Fixture Power	7W	1	2.46	1.26	296
Source Flux	896lm	2	4.91	2.51	74
Fixture Flux	490lm	3	7.37	3.77	33
Efficacy	70lm/W	4	9.82	5.03	18
TS1198 Imax=330cd/klm	Imax	296cd	5	12.28	6.29	12

Driver	Colour	2700K	3000K	4000K
	●	**1E3528**	**1E3530**	**1E3532**

Note

24V version to be powered with an electronic 230V/24Vdc transformer available as an accessory and dimmable with the special accessory kit.

LED / 6W / FLOOD / DIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			102°	64°	
Fixture Power	7W	1	2.46	1.26	315
Source Flux	954lm	2	4.91	2.51	79
Fixture Flux	522lm	3	7.37	3.77	35
Efficacy	75lm/W	4	9.82	5.03	20
TS1198 Imax=330cd/klm	Imax	315cd	5	12.28	6.29	13

Driver	Colour	2700K	3000K	4000K
EL.	●	**1E3527EL**	**1E3529EL**	**1E3531EL**
DALI	●	**1E3527DA**	**1E3529DA**	**1E3531DA**

LED / 6W / FLOOD / INDIRECT



3000K	
Ra84	
Fixture Power	7W
Source Flux	896lm
Fixture Flux	624lm
Efficacy	89lm/W
TS1197 Imax=379cd/klm	Imax	340cd

Driver	Colour	2700K	3000K	4000K
	●	**1E3522**	**1E3524**	**1E3526**

Note

24V version to be powered with an electronic 230V/24Vdc transformer available as an accessory and dimmable with the special accessory kit.

LED / 6W / FLOOD / INDIRECT



3000K	
Ra84	
Fixture Power	7W
Source Flux	954lm
Fixture Flux	664lm
Efficacy	95lm/W
TS1197 Imax=379cd/klm	Imax	361cd

Driver	Colour	2700K	3000K	4000K
EL.	●	**1E3521EL**	**1E3523EL**	**1E3525EL**
DALI	●	**1E3521DA**	**1E3523DA**	**1E3525DA**

LED / 12W / FLOOD / DIRECT/INDIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			102°	64°	
Fixture Power	14W	1	2.46	1.26	296
Source Flux	1793lm	2	4.91	2.51	74
Fixture Flux	1115lm	3	7.37	3.77	33
Efficacy	80lm/W	4	9.82	5.03	18
TS1199 Imax=184cd/klm	Imax 330cd	5	12.28	6.29	12

Driver	Colour	2700K	3000K	4000K
	●	**1E3534**	**1E3536**	**1E3538**

Note

24V version to be powered with an electronic 230V/24Vdc transformer available as an accessory and dimmable with the special accessory kit.

LED / 11,7W / FLOOD / DIRECT/INDIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			102°	64°	
Fixture Power	13W	1	2.46	1.26	315
Source Flux	1907lm	2	4.91	2.51	79
Fixture Flux	1186lm	3	7.37	3.77	35
Efficacy	91lm/W	4	9.82	5.03	20
TS1199 Imax=184cd/klm	Imax 351cd	5	12.28	6.29	13

Driver	Colour	2700K	3000K	4000K
EL.	●	**1E3533EL**	**1E3535EL**	**1E3537EL**
DALI	●	**1E3533DA**	**1E3535DA**	**1E3537DA**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Control systems



	Code
	1T6581

DALI/1-10V dimmer 12/24V.

	Code
	1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

	Code
	1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

MR & MRS SMITH

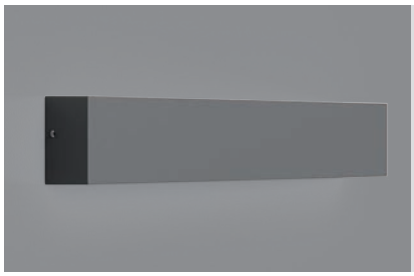

MRS SMITH



LED / 6,1W / FLOOD / DIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	93°	
Fixture Power	7W	1	1.60	2.12	302
Source Flux	870lm	2	3.21	4.25	75
Fixture Flux	494lm	3	4.81	6.37	34
Efficacy	72lm/W	4	6.41	8.50	19
TS1202 Imax=348cd/klm	Imax 302cd	5	8.02	10.62	12

Power supply	Colour	2700K	3000K	4000K
24Vdc	●	**1E3546**	**1E3548**	**1E3550**

LED / 6,1W / FLOOD / DIRECT



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			76°	93°	
Fixture Power	7W	1	1.60	2.12	302
Source Flux	870lm	2	3.21	4.25	75
Fixture Flux	494lm	3	4.81	6.37	34
Efficacy	72lm/W	4	6.41	8.50	19
TS1202 Imax=348cd/klm	Imax 302cd	5	8.02	10.62	12

Driver	Colour	2700K	3000K	4000K
EL.	●	**1E3545EL**	**1E3547EL**	**1E3549EL**
DALI	●	**1E3545DA**	**1E3547DA**	**1E3549DA**

LED / 6,1W / FLOOD / INDIRECT



3000K	
Ra84	
Fixture Power	7W
Source Flux	870lm
Fixture Flux	554lm
Efficacy	80lm/W
TS1200 Imax=342cd/klm	Imax 298cd

Power supply	Colour	2700K	3000K	4000K
24Vdc	●	**1E3540**	**1E3542**	**1E3544**

Note

24V version to be powered with an electronic 230V/24Vdc transformer available as an accessory and dimmable with the special accessory kit.

LED / 6,1W / FLOOD / INDIRECT



3000K	
Ra84	
Fixture Power	7W
Source Flux	870lm
Fixture Flux	554lm
Efficacy	80lm/W
TS1200 Imax=342cd/klm	Imax 298cd

Driver	Colour	2700K	3000K	4000K
EL.	●	**1E3539EL**	**1E3541EL**	**1E3543EL**
DALI	●	**1E3539DA**	**1E3541DA**	**1E3543DA**

LED / 12W / FLOOD / DIRECT/INDIRECT



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			76°	93°	
Fixture Power	14W		1	1.60	2.12	289
Source Flux	1740lm		2	3.21	4.24	72
Fixture Flux	1050lm		3	4.81	6.37	32
Efficacy	76lm/W		4	6.41	8.49	18
TS1204	Imax=177cd/klm	Imax	308cd	5	8.01	10.61	12

Power supply	Colour	2700K	3000K	4000K
24Vdc		**1E3552**	**1E3554**	**1E3556**

Note

24V version to be powered with an electronic 230V/24Vdc transformer available as an accessory and dimmable with the special accessory kit.

LED / 12W / FLOOD / DIRECT/INDIRECT



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			76°	93°	
Fixture Power	14W		1	1.60	2.12	289
Source Flux	1740lm		2	3.21	4.24	72
Fixture Flux	1050lm		3	4.81	6.37	32
Efficacy	76lm/W		4	6.41	8.49	18
TS1204	Imax=177cd/klm	Imax	308cd	5	8.01	10.61	12

Driver	Colour	2700K	3000K	4000K
EL.		**1E3551EL**	**1E3553EL**	**1E3555EL**
DALI		**1E3551DA**	**1E3553DA**	**1E3555DA**

Related codes

Power Supply



	Code
10W - 220-240Vac, 24Vdc - 79x24,5x38mm - IP67	**1E3179**
50W - 220-240Vac, 24Vdc - 185x22x63,5mm - IP20	**1T3726**
75W - 220-240Vac, 24Vdc - 130x32x80mm - IP67	**1T3586**
100W - 220-240Vac, 24Vdc - 230x87x43mm - IP67	**1T3587**
200W - 220-240Vac, 24Vdc - 238x42x67mm - IP67	**1T3588**

Electronic power supply
LxHxP

	Code
	1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.

Accessories

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

FEBO EVO

GENERAL INFO
Inground or wall fixture with grazing light effect.
ø160mm – H 150mm

LED
Multiple sources circuit, mid-power
LED
From 4452lm to 5038lm
2700K – 3000K – 4000K
Ra84

PRODUCT EFFICACY
Unitil 76m/W

OPTICS
Grazing

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Extruded aluminium body, die-cast aluminium optical head with black radial blades.

Inground or wall mounted LED fixture with grazing lighting effect with unbroken radial 360° emission that can be controlled using accessories to modulate the light as if it were a second skin.
The light emitted is capable of adhering perfectly to architectural surfaces and to emphasize textures and the consistency of different materials. Its compact design integrates harmoniously with the architecture making it a discrete element even during the daytime.

Studio Ceri

Architect
Studio Ceri

Photographer
Officine Fotografiche

Country
Prato - Italy

01

02

Installed on the floor FEBO EVO

Is a reliable tool with minimal visual impact capable of lighting paths in depth and breadth, or separating different areas using light. It is installed on the ground with a simple support base that is supplied.

It is in wall installations that FEBO EVO shows its potential the most

This sophisticated fixture emits a 360° blade of light without any interruptions that is capable of adhering to every surface like a second skin.

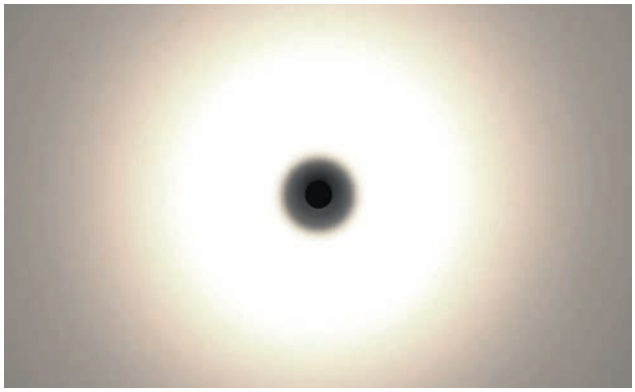
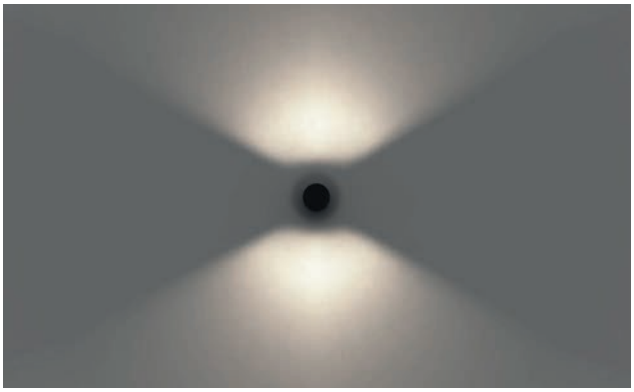
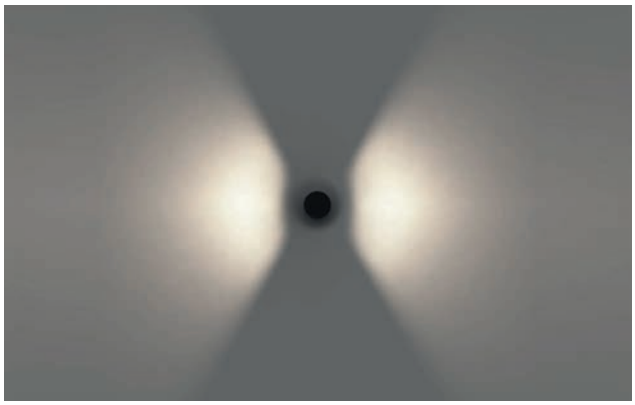
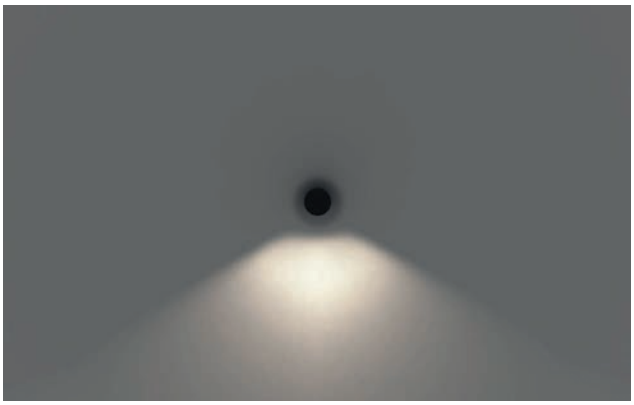

With the use of accessories

The light from FEBO EVO can be shaped according to needs. Simple rubber elements, combined, coordinated or cut can be positioned at any point so that they “design” the light that best suits the project needs..

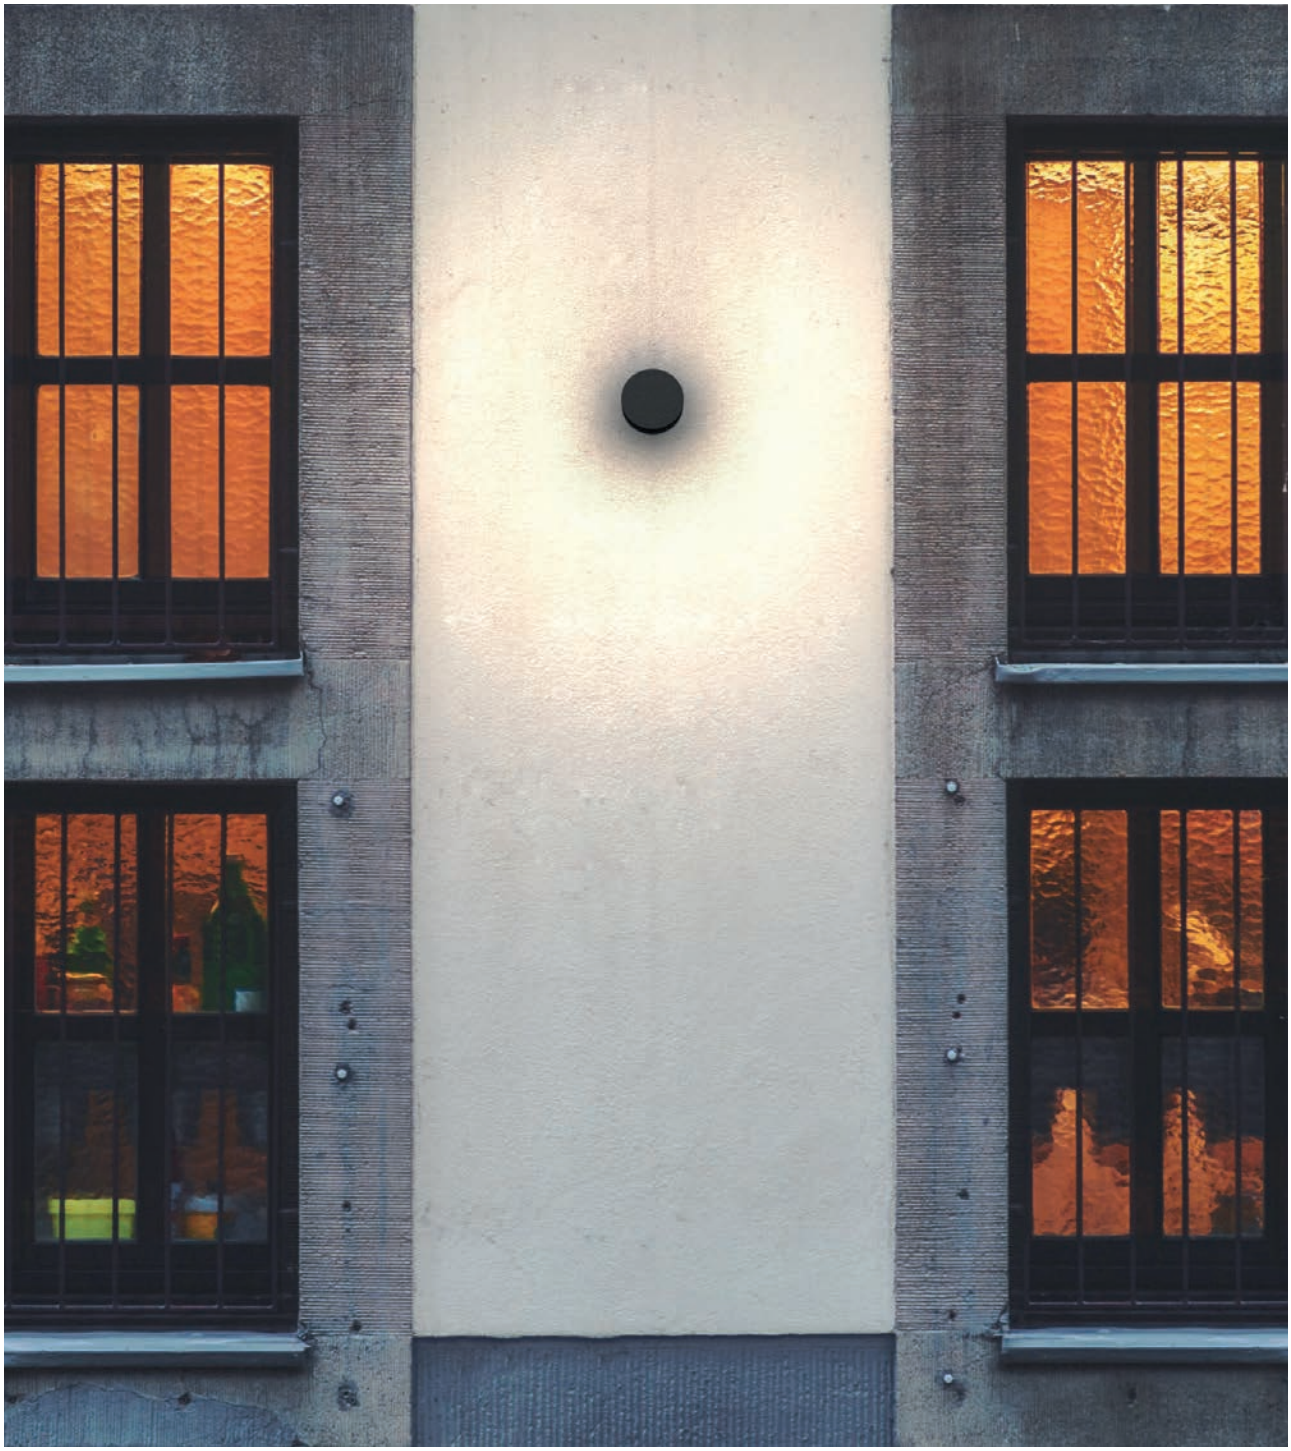



LED / 32W / WFL



3000K	
Ra84	
Fixture Power	36W
Source Flux	4787lm
Fixture Flux	2585lm
Efficacy	72lm/W
Imax	1042cd

	Driver	2700K	3000K	4000K
	EL.	**1E3189EL**	**1E3190EL**	**1E3191EL**
	DALI	**1E3189DA**	**1E3190DA**	**1E3191DA**

Accessories

Shutter



Code
1E3399

120° shutter kit (with 4 cut zones that allow to shutter even 105°/90°/75°/60° angles).
Max. no. of kits per product: 2.

Tool

Code
1E3305

(Tightening) wrench for the connector kit.

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

STILO

Wall mounted
Ceiling mounted

A range of products with the same design but with different installation characteristics: from architectural lighting of building facades and porticos right up to pedestrian walkways. Different needs and effects with a unique family feeling; wall mounted versions, ceiling mounted and bollards that produce a myriad of lighting effects, from purely graphic and defined effects to wider beams that fill large spaces

GENERAL INFO
Wall-mounted fixture.
282x80x184mm

LED
ASY and ELL optic: LED Chip on board
NSP optic: LED Emitter
Effect optic: LED Multichip Emitter
From 600lm to 6536lm
3000K – 4000K
Ra80 – Ra84

PRODUCT EFFICACY
Unitil 112lm/W

OPTICS
NSP – EFFECT – ASYM – ELLIPTICAL

POWER SUPPLY
Electronic

MATERIAL
Anodized and painted extruded aluminium body and anodized and powder coated die-cast aluminium optical unit and terminal. Tempered glass protective screen.

Arma

Architect
SKiP Architectural Bureau

Photographer
Ilya Melikhov

Country
Moscow - Russian Federation

01

Available in two installation types

FLAT (parallel to the wall) and STRAIGHT (perpendicular to the wall), both available in mono and bi-emission versions.

02

The ceiling mounted version

Are ideal to light porticos, the different optics make it possible to light pedestrian areas or vertical walls.

Stilo is available with four different optical solutions

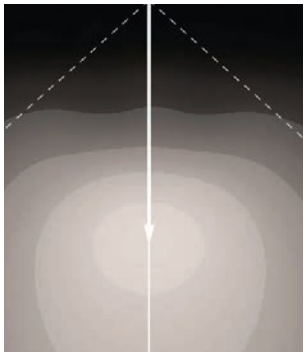

ELLIPTICAL EMISSION

Using it like a grazing lighting is ideal to illuminate the building facades.

The ceiling mounted versions allows to light pedestrian areas in a particularly uniform way,

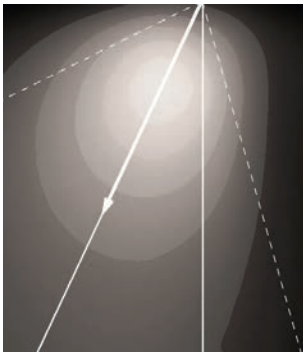

ASYMMETRIC EMISSION

Installed for indirect emission to light arches and direct emission for pedestrian areas.

The ceiling mounted version can also be used to light walls.

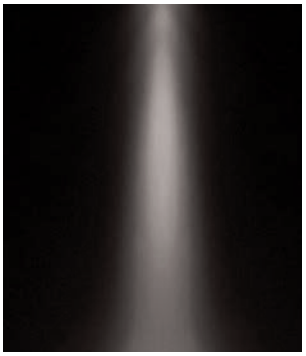

SUPERSPOT EMISSION

Has a particularly concentrated and defined effect that is suitable for lighting a facade.

DEFINED EFFECTS

Real light patterns on the wall from a blade light beam as thin as a pin, to wider, yet defined effects with beam angles of 30° and 90°.

STILO

Wall Flat



LED / 1x9W / NSP / MONO-EMISSION



3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	12W	1	0.16	13011
Source Flux	650lm	2	0.32	3253
Fixture Flux	544lm	3	0.48	1446
Efficacy	47lm/W	4	0.64	813
TS791 Imax=20017cd/klm	Imax	13011cd	5	0.80	520

Driver	Colour	3000K	4000K
EL.		**1E2547**	
EL.		**1E2556**	**1E2881**

LED / 1x11W / EFFECT / MONO-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			68°	95°	
Fixture Power	15W	1	1.36	2.19	189
Source Flux	600lm	2	2.72	4.39	47
Fixture Flux	292lm	3	4.08	6.58	21
Efficacy	20lm/W	4	5.44	8.78	12
TS788 Imax=315cd/klm	Imax	189cd	5	6.80	10.97	8

Driver	Colour	3000K	4000K
EL.		**1E2882**	**1E2883**

LED / 2x9W / NSP-NSP / BI-EMISSION



3000K		H(m)	D(m)	Emax(lx)
Ra80			9°	
Fixture Power	20W	1	0.16	13011
Source Flux	1300lm	2	0.32	3253
Fixture Flux	1087lm	3	0.48	1446
Efficacy	54lm/W	4	0.64	813
TS824 Imax=10009cd/klm	Imax	13011cd	5	0.80	520

Driver	Colour	3000K	4000K
EL.		**1E2551**	
EL.		**1E2560**	**1E2887**

LED / 2x11W / EFFECT-EFFECT / BI-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			68°	95°	
Fixture Power	27W	1	1.36	2.19	189
Source Flux	1200lm	2	2.72	4.39	47
Fixture Flux	584lm	3	4.08	6.58	21
Efficacy	22lm/W	4	5.44	8.78	12
TS814 Imax=157cd/klm	Imax	189cd	5	6.80	10.97	8

Driver	Colour	3000K	4000K
EL.		**1E2888**	**1E2889**

Note

EFFECT Version: the fixture comes equipped with a 90° beam aperture. The beam can be shaped using shutter accessories.

LED / 1x21W / ASYM / MONO-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			61°	86°	
Fixture Power	23W	1	1.51	1.98	1356
Source Flux	3187lm	2	3.01	3.96	339
Fixture Flux	2304lm	3	4.52	5.94	151
Efficacy	100lm/W	4	6.02	7.92	85
TS787 Imax=464cd/klm	Imax 1480cd	5	7.53	9.89	54

Driver	Colour	3000K	4000K
EL.		**1E2543**	
EL.		**1E2552**	**1E2877**

LED / 1x21W / ELLIPTICAL / MONO-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			42°	79°	
Fixture Power	23W	1	0.76	1.66	2266
Source Flux	3187lm	2	1.52	3.31	567
Fixture Flux	2530lm	3	2.28	4.97	252
Efficacy	110lm/W	4	3.04	6.62	142
TS786 Imax=711cd/klm	Imax 2266cd	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2545**	
EL.		**1E2554**	**1E2879**

LED / 1x33W / ASYM / MONO-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			61°	86°	
Fixture Power	36W	1	1.51	1.98	1860
Source Flux	4373lm	2	3.01	3.96	465
Fixture Flux	3162lm	3	4.52	5.94	207
Efficacy	89lm/W	4	6.02	7.92	116
TS787 Imax=464cd/klm	Imax 2031cd	5	7.53	9.89	74

Driver	Colour	3000K	4000K
EL.		**1E2544**	
EL.		**1E2553**	**1E2878**

LED / 1x33W / ELLIPTICAL / MONO-EMISSION



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			42°	79°	
Fixture Power	36W	1	0.76	1.66	3110
Source Flux	4373lm	2	1.52	3.31	777
Fixture Flux	3471lm	3	2.28	4.97	346
Efficacy	97lm/W	4	3.04	6.62	194
TS786 Imax=711cd/klm	Imax 3110cd	5	3.80	8.28	124

Driver	Colour	3000K	4000K
EL.		**1E2546**	
EL.		**1E2555**	**1E2880**

Note

EFFECT Version: the fixture comes equipped with a 90° beam aperture. The beam can be shaped using shutter accessories.

STILO

LED / 2x21W / ASYM-ASYM / BI-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			61°	86°	
Fixture Power		46W	1	1.51	1.98	1356
Source Flux		6375lm	2	3.01	3.96	339
Fixture Flux		4609lm	3	4.52	5.94	151
Efficacy		100lm/W	4	6.02	7.92	85
TS830	Imax=232cd/klm	Imax 1480cd	5	7.53	9.89	54

Driver	Colour	3000K	4000K
EL.		**1E2548**	
EL.		**1E2557**	**1E2884**

LED / 2x21W / ELLIPTICAL-ELLIPTICAL / BI-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		46W	1	0.76	1.66	2267
Source Flux		6375lm	2	1.52	3.31	567
Fixture Flux		5060lm	3	2.28	4.97	252
Efficacy		109lm/W	4	3.04	6.62	142
TS829	Imax=356cd/klm	Imax 2267cd	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2549**	
EL.		**1E2558**	**1E2885**

LED / 2x21W / ELLIPTICAL-ASYM / BI-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		46W	1	0.76	1.66	2267
Source Flux		6375lm	2	1.52	3.31	567
Fixture Flux		4835lm	3	2.28	4.97	252
Efficacy		104lm/W	4	3.04	6.62	142
TS831	Imax=356cd/klm	Imax 2267cd	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2550**	
EL.		**1E2559**	**1E2886**

Note

EFFECT Version: the fixture comes equipped with a 90° beam aperture. The beam can be shaped using shutter accessories.

Accessories

Filter

Filter	Code
Red	**1E3035**
Green	**1E3036**
Blue	**1E3037**
Yellow	**1E3038**
Magenta	**1E3039**

Chromatic coloured PMMA filter, anodised powder coated frame (ferrite).

Colour	Code
	1E2575
	1E2576

Blade of light filter.
PMMA holographic filter for a blade of light effect, CNC machine anodised and powder coated aluminium frame.
NSP

Colour	Code
	1E2577
	1E2578

Anti-glare.
PMMA holographic filter to reduce the beam angle, CNC machine anodised and powder coated aluminium frame.
NSP, ASYM, ELLIPTICAL

Shaper



Code
1E2901

30° shutter.
Powder coated stainless steel plate (ferrite).

Code
1E2902

Blade effect shutter.
PMMA plano convex cylindrical lens and powder coated stainless steel plate (ferrite).

Screen

Colour	Code
	1E2579
	1E2580

Asymmetric screen.
Powder coated stainless steel.
NSP

Mounting System

Code
1E2906

Pole bracket.
Powder coated stainless steel.

STILO

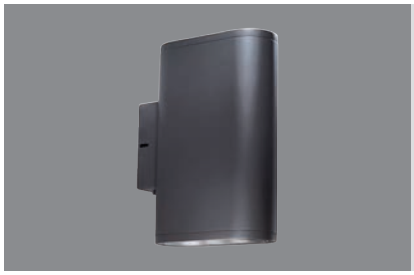

Wall Straight



LED / 1x9W / NSP / MONO-EMISSION



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		12W	1	0.16	13011
Source Flux		650lm	2	0.32	3253
Fixture Flux		544lm	3	0.48	1446
Efficacy		47lm/W	4	0.64	813
TS791	Imax=20017cd/klm	Imax 13011cd	5	0.80	520

Driver	Colour	3000K	4000K
EL.		**1E2894**	**1E2895**

LED / 1x21W / ELLIPTICAL / MONO-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		23W	1	0.76	1.66	2266
Source Flux		3187lm	2	1.52	3.31	567
Fixture Flux		2530lm	3	2.28	4.97	252
Efficacy		110lm/W	4	3.04	6.62	142
TS786	Imax=711cd/klm	Imax 2266cd	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2890**	**1E2891**

LED / 1x33W / ELLIPTICAL / MONO-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		36W	1	0.76	1.66	3110
Source Flux		4373lm	2	1.52	3.31	777
Fixture Flux		3471lm	3	2.28	4.97	346
Efficacy		97lm/W	4	3.04	6.62	194
TS786	Imax=711cd/klm	Imax 3110cd	5	3.80	8.28	124

Driver	Colour	3000K	4000K
EL.		**1E2892**	**1E2893**

LED / 2x9W / NSP-NSP / BI-EMISSION



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		20W	1	0.16	13011
Source Flux		1300lm	2	0.32	3253
Fixture Flux		1087lm	3	0.48	1446
Efficacy		54lm/W	4	0.64	813
TS824	Imax=10009cd/klm	Imax 13011cd	5	0.80	520

Driver	Colour	3000K	4000K
EL.		**1E2898**	**1E2899**

LED / 2x21W / ELLIPTICAL-ELLIPTICAL / BI-EMISSION



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		46W	1	0.76	1.66	2267
Source Flux		6375lm	2	1.52	3.31	567
Fixture Flux		5060lm	3	2.28	4.97	252
Efficacy		109lm/W	4	3.04	6.62	142
TS829	Imax=356cd/klm	Imax 2267cd	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2896**	**1E2897**

Accessories

Filter

Filter	Code
Red	**1E3035**
Green	**1E3036**
Blue	**1E3037**
Yellow	**1E3038**
Magenta	**1E3039**

Chromatic coloured PMMA filter, anodised powder coated frame (ferrite).

Colour	Code
●	**1E2576**

Blade of light filter.
PMMA holographic filter for a blade of light effect, CNC machine anodised and powder coated aluminium frame.
NSP

Colour	Code
●	**1E2578**

Anti-glare.
PMMA holographic filter to reduce the beam angle, CNC machine anodised and powder coated aluminium frame.
NSP, ASYM, ELLIPTICAL

Mounting System

Code
1E2906

Pole bracket.
Powder coated stainless steel.

Code
1E2907

Bracket for corner installation.
Powder coated stainless steel.

Code
1E2900

Bracket for edge installation.
Powder coated stainless steel.

STILO

Ceiling



LED / 9W / NSP



	3000K		H(m)	D(m)	Emax(lx)
	Ra80			9°	
Fixture Power		12W	1	0.16	13011
Source Flux		650lm	2	0.32	3253
Fixture Flux		544lm	3	0.48	1446
Efficacy		47lm/W	4	0.64	813
TS791	Imax=20017cd/klm	Imax	5	0.80	520

Driver	Colour	3000K	4000K
EL.		**1E2875**	**1E2876**

LED / 21W / ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			61°	86°	
Fixture Power		23W	1	1.51	1.98	1356
Source Flux		3187lm	2	3.01	3.96	339
Fixture Flux		2304lm	3	4.52	5.94	151
Efficacy		100lm/W	4	6.02	7.92	85
TS787	Imax=464cd/klm	Imax	5	7.53	9.89	54

Driver	Colour	3000K	4000K
EL.		**1E2871**	**1E2872**

LED / 21W / ELLIPTICAL



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		23W	1	0.76	1.66	2266
Source Flux		3187lm	2	1.52	3.31	567
Fixture Flux		2530lm	3	2.28	4.97	252
Efficacy		110lm/W	4	3.04	6.62	142
TS786	Imax=711cd/klm	Imax	5	3.80	8.28	91

Driver	Colour	3000K	4000K
EL.		**1E2867**	**1E2868**

LED / 33W / ASYM



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			61°	86°	
Fixture Power		36W	1	1.51	1.98	1860
Source Flux		4373lm	2	3.01	3.96	465
Fixture Flux		3162lm	3	4.52	5.94	207
Efficacy		89lm/W	4	6.02	7.92	116
TS787	Imax=464cd/klm	Imax	5	7.53	9.89	74

Driver	Colour	3000K	4000K
EL.		**1E2873**	**1E2874**

LED / 33W / ELLIPTICAL



	3000K		H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84			42°	79°	
Fixture Power		36W	1	0.76	1.66	3110
Source Flux		4373lm	2	1.52	3.31	777
Fixture Flux		3471lm	3	2.28	4.97	346
Efficacy		97lm/W	4	3.04	6.62	194
TS786	Imax=711cd/klm	Imax	5	3.80	8.28	124

Driver	Colour	3000K	4000K
EL.		**1E2869**	**1E2870**

Accessories

Filter

Filter	Code
Red	**1E3035**
Green	**1E3036**
Blue	**1E3037**
Yellow	**1E3038**
Magenta	**1E3039**

Chromatic coloured PMMA filter, anodised powder coated frame (ferrite).

Colour	Code
●	**1E2578**

Anti-glare.
PMMA holographic filter to reduce the beam angle, CNC machine anodised and powder coated aluminium frame.
NSP, ASYM, ELLIPTICAL

Screen

Colour	Code
●	**1E2580**

Asymmetric screen.
Powder coated stainless steel.
NSP

Colour	Code
●	**1E2576**

Blade of light filter.
PMMA holographic filter for a blade of light effect, CNC machine anodised and powder coated aluminium frame.
NSP

HOCKEY

GENERAL INFO
Applique, ceiling mounted
ø179mm

LED
LED board.
From 1533lm to 1632lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Unitil 109lm/W

OPTICS
VWFL

POWER SUPPLY
Electronic

MATERIAL
Die-cast ferrite colour anodised aluminium body.
LED plate with micro-prismatic diffuser in transparent PMMA.

A compact fixture with a simple design with two different installation types- ceiling and wall mounted for direct light- that makes this a flexible tool in the hands of lighting designers.

In the wall mounted version the cast aluminium bracket echoes the fixture's rounded shape becoming part of its design.

Ceiling

LED / 13W / VWFL

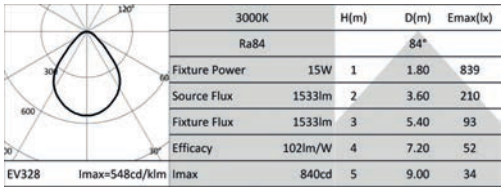

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			84°	
Fixture Power		15W	1	1.80	839
Source Flux		1533lm	2	3.60	210
Fixture Flux		1533lm	3	5.40	93
Efficacy		102lm/W	4	7.20	52
Imax		840cd	5	9.00	34

Driver	Colour	3000K	4000K
EL.		**1E2911**	**1E2912**

Wall



LED / 13W / VWFL

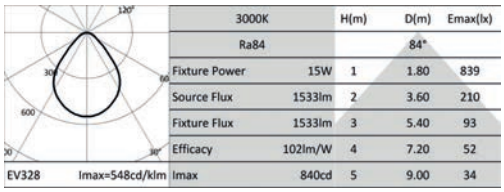

	3000K		H(m)	D(m)	Emax(lx)
	Ra84			84°	
Fixture Power		15W	1	1.80	839
Source Flux		1533lm	2	3.60	210
Fixture Flux		1533lm	3	5.40	93
Efficacy		102lm/W	4	7.20	52
Imax		840cd	5	9.00	34

Driver	Colour	3000K	4000K
EL.		**1E2909**	**1E2910**

Outdoor

Bollards

Bollards

762
MR. BO

768
CHIODINO

772
STILO

776
ZEDGE Bollard

Mr.BO

GENERAL INFO
Radial-emission bollard.
ø160mm
H 400mm – 800mm – 1000mm

LED
Chip on board
From 1427lm to 3817lm
2700K – 3000K – 4000K
Ra84
Ra90 upon request

PRODUCT EFFICACY
Unitil 51lm/W

OPTICS
90° - 90° + 90° - 180° - 360°

POWER SUPPLY
Electronic – DALI
Casambi control: the DALI version is fitted with special accessories.

MATERIAL
Powdered coated anodised die-cast aluminium body.
Die-cast aluminium optical head. Ferrite finish.

LED bollard specifically designed to light large open spaces.

Its mechanical characteristics (IK10) and performance make it possible to use in every space.

The highly controlled radial emission avoids any risk of glare while still ensuring deep lighting in pedestrian areas.

01

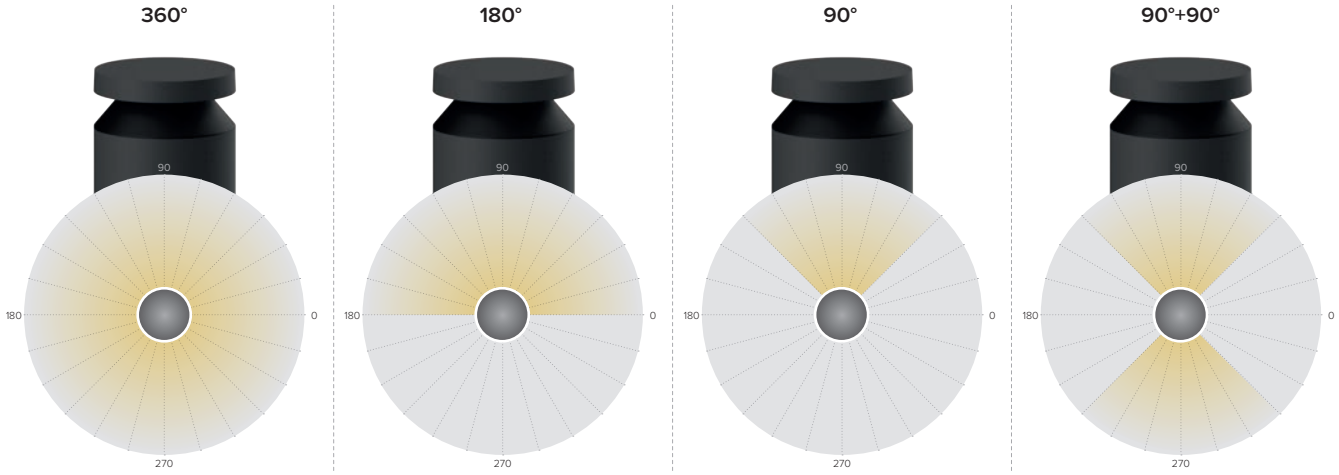

The fixture is made of three different elements

that combined together produce numerous combinations. Four different light heads for four radial emissions from 90° a 360° combine with stakes in three different heights of 334mm, 734mm and 934mm and with the mounting systems.

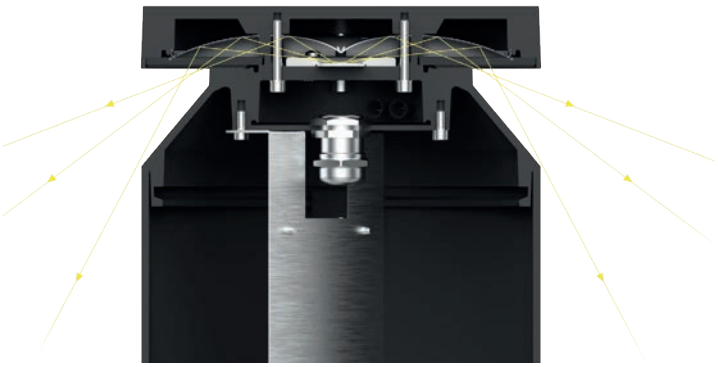

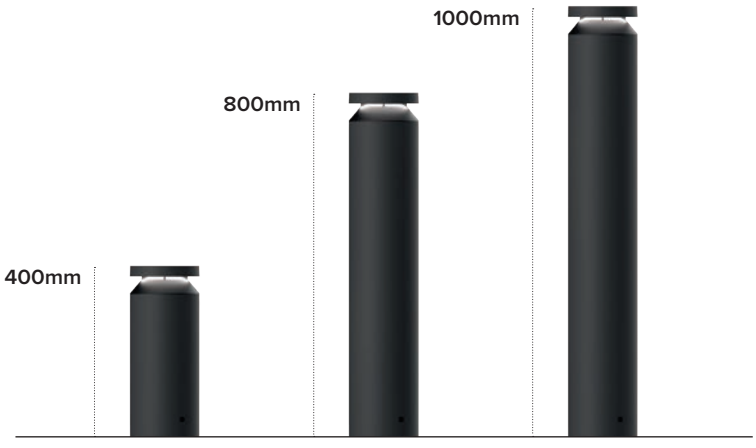

Optic head for bollard H. 334mm



LED / 8W / 90°



	3000K
	Ra84
Fixture Power	9W
Source Flux	1488lm
Fixture Flux	223lm
Efficacy	26lm/W
TS1120 Imax=165cd/klm	Imax 246cd

Driver	Colour	2700K	3000K	4000K
EL.		**1E3428EL**	**1E3429EL**	**1E3430EL**
DALI		**1E3428DA**	**1E3429DA**	**1E3430DA**

LED / 12W / 90°+90°



	3000K
	Ra84
Fixture Power	14W
Source Flux	2034lm
Fixture Flux	456lm
Efficacy	34lm/W
TS1121 Imax=122cd/klm	Imax 247cd

Driver	Colour	2700K	3000K	4000K
EL.		**1E3431EL**	**1E3432EL**	**1E3433EL**
DALI		**1E3431DA**	**1E3432DA**	**1E3433DA**

LED / 12W / 180°



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
	Ra84		43°	90°	
Fixture Power	14W	1	3.07	13.22	76
Source Flux	2034lm	2	6.14	26.45	19
Fixture Flux	454lm	3	9.21	39.67	8
Efficacy	34lm/W	4	12.28	52.89	5
TS1119 Imax=146cd/klm	Imax 297cd	5	15.35	66.11	3

Driver	Colour	2700K	3000K	4000K
EL.		**1E3425EL**	**1E3426EL**	**1E3427EL**
DALI		**1E3425DA**	**1E3426DA**	**1E3427DA**

LED / 17W / 360°



	3000K	H(m)	D(m)	Emax(lx)
	Ra84		41°	
Fixture Power	18W	1	2.98	79
Source Flux	2783lm	2	5.95	20
Fixture Flux	910lm	3	8.93	9
Efficacy	50lm/W	4	11.91	5
TS1118 Imax=100cd/klm	Imax 278cd	5	14.88	3

Driver	Colour	2700K	3000K	4000K
EL.		**1E3422EL**	**1E3423EL**	**1E3424EL**
DALI		**1E3422DA**	**1E3423DA**	**1E3424DA**

Note

Available with three different height poles - 400, 800 and 1000mm - to be combined with the relative head available in four different versions - 60°, 180°, 90° and 90°+90° (the same code for the 800 and 1000mm, specific code for the 400mm). To be completed with a stainless steel anchoring system, available for the double version with a plate for installation with dowels or with fixing rods for installation in concrete.

MR.BO

Optic head
for bollard H. 734/934mm



LED / 12W / 90°



3000K	
Ra84	
Fixture Power	14W
Source Flux	2034lm
Fixture Flux	305lm
Efficacy	23lm/W
TS1120 Imax=165cd/klm	Imax 336cd

Driver	Colour	2700K	3000K	4000K
EL.		**1E3416EL**	**1E3417EL**	**1E3418EL**
DALI		**1E3416DA**	**1E3417DA**	**1E3418DA**

LED / 17W / 90°+90°



3000K	
Ra84	
Fixture Power	18W
Source Flux	2783lm
Fixture Flux	623lm
Efficacy	34lm/W
TS1121 Imax=122cd/klm	Imax 338cd

Driver	Colour	2700K	3000K	4000K
EL.		**1E3419EL**	**1E3420EL**	**1E3421EL**
DALI		**1E3419DA**	**1E3420DA**	**1E3421DA**

LED / 17W / 180°



		H(m)	D1(m)	D2(m)	Emax(lx)
3000K			43°	90°	
Ra84					
Fixture Power	18W	1	3.07	13.22	104
Source Flux	2783lm	2	6.14	26.45	26
Fixture Flux	621lm	3	9.21	39.67	12
Efficacy	34lm/W	4	12.28	52.89	6
TS1119 Imax=146cd/klm	Imax 407cd	5	15.35	66.11	4

Driver	Colour	2700K	3000K	4000K
EL.		**1E3413EL**	**1E3414EL**	**1E3415EL**
DALI		**1E3413DA**	**1E3414DA**	**1E3415DA**

LED / 24W / 360°



		H(m)	D(m)	Emax(lx)
3000K			41°	
Ra84				
Fixture Power	26W	1	2.98	106
Source Flux	3723lm	2	5.95	26
Fixture Flux	1217lm	3	8.93	12
Efficacy	47lm/W	4	11.91	7
TS1118 Imax=100cd/klm	Imax 372cd	5	14.88	4

Driver	Colour	2700K	3000K	4000K
EL.		**1E3410EL**	**1E3411EL**	**1E3412EL**
DALI		**1E3410DA**	**1E3411DA**	**1E3412DA**

Note

Available with three different height poles - 400, 800 and 1000mm - to be combined with the relative head available in four different versions - 60°, 180°, 90° and 90°+90° (the same code for the 800 and 1000mm, specific code for the 400mm). To be completed with a stainless steel anchoring system, available for the double version with a plate for installation with dowels or with fixing rods for installation in concrete.

Related codes

Bollard



	Kg	H	Colour	Code
	1.34	334		**1E3434**
	2.95	734		**1E3435**
	3.8	934		**1E3436**

Powder coated anodised aluminium pole.

Mounting System



Code
1E3448

Plate with fixing rods for installation in concrete.
AISI 316 stainless steel.
0.335Kg.

Code
1E3449

Plate for surface installation.
AISI 316 stainless steel compatible with dowels to be inserted into holes with 8.5mm diameter.
0.68Kg.

Code
1E3510

Plate for surface installation.
AISI 316 stainless steel compatible with dowels to be inserted into 4 holes with 22mm diameter.
1.104Kg.

Accessories

Control systems

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

CHIODINO

GENERAL INFO
Radial-emission bollard.
Ø196mm
H 890mm

LED
Chip on board
From 2551lm to 2615lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Unitil 70lm/W

OPTICS
Radial

POWER SUPPLY
Electronic

MATERIAL
Tapered, anodized aluminium body and die-cast anodized head, both powder painted with a ferrite finish. Ultra flat transparent polycarbonate protective screen.

High performance bollard with sophisticated LED technology and an original design, ideal for public use thanks to its resistant sturdy construction, it is also a popular private option given its appealing design.

Already complete with stainless steel fixing rod.
Plate for surface installation available as an accessory.

01

02

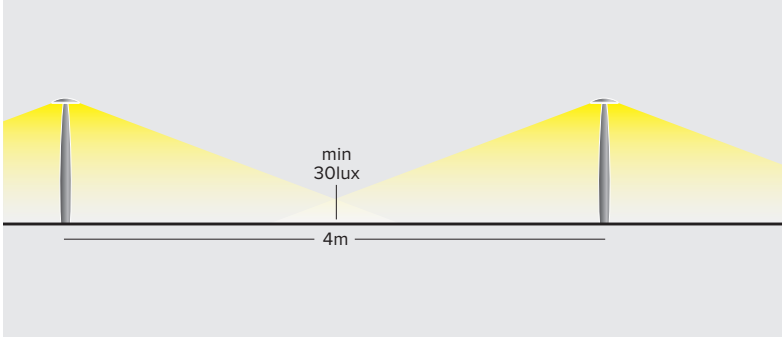

Thanks to its special, perfectly flat emission sceen

CHIODINO takes above horizon emissions to 0cd/klm in compliance with all national and international light pollution laws. This makes it the ideal bollard for public-urban contexts where antipollution regulations are particularly strict.

With an interval of three metres

between one fixtues and the next, the light never drops below 70lux to assure a perfectly uniform effect. With an interval of four metres between one fixtues and the next, the light never drops below 30lux.

CHIODINO



LED / 17W



3000K		H(m)	D(m)	Emax(lx)
Ra84			66°	
Fixture Power	19W	1	2.70	210
Source Flux	2551lm	2	5.40	52
Fixture Flux	1310lm	3	8.11	23
Efficacy	68lm/W	4	10.81	13
TS673 Imax=144cd/klm	Imax 367cd	5	13.51	8

	Driver	Colour	3000K	4000K
	EL.		**1E2967**	**1E2968**

Accessories

Shutter



Code **1E2970**

Shutter 90°.
Emission 2x90° or 270°



Code **1E2971**

Shutter 180°.
Emission 180°



Code **1E2972**

Shutter 270°.
Emission 90°

Mounting System



Code **1E2969**

Plate for surface installation.
Powder coated ferrite finish 316L grade stainless steel. Compatible with 10mm up to 23mm fixing rods.

Tool

Code **1E2495**

Features TORX HEAD, TX 30.

Connector

Code
1E2769

Connectors kit for 5 pole coaxial connections.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

STILO

Bollard

GENERAL INFO
Direct or asymmetric emission bollard.
Raised Version H. 864mm
Path Version H. 800/1100mm

LED
Chip on board
From 1960lm to 4351lm
3000K – 4000K
Ra80 – Ra84

PRODUCT EFFICACY
Unitil 90lm/W

OPTICS
ASYM – FLOOR WASHER – WALL WASHER

POWER SUPPLY
Electronic

MATERIAL
Powder coated in ferrite finish anodized extruded aluminium body and die-cast aluminium optical unit. Transparent methacrylate protective screen or extra clear tempered safety glass.

A range of products with the same design but with different installation characteristics: from architectural lighting of building facades and porticos right up to pedestrian walkways. Different needs and effects with a unique family feeling; wall mounted versions, ceiling mounted and bollards that produce a myriad of lighting effects, from purely graphic and defined to wider beams that fill large spaces.

The Bollard version comes in two different types, Path and Raised.

01

Cantine Briziarelli

Photographer:
Antonino Ciddio

The bollard versions are available in two different types

The PATH version is ideal for lighting paths with its particular “size” that hides the optical system, shielding the source to obtain a well, distributed effect on pedestrian paths without the risk of glare.

The RAISED version is designed for architectural lighting and is available with different optical systems. A Floor Washer optic makes it possible to light horizontal surfaces in great depth to cover wide surfaces up to 6 metres; it is ideal to light parks, gardens and forecourts. There is also a Wall Washer optic that is ideal for lighting vertical surfaces in an extraordinary uniform way, such as facades, perimeter walls and vertical gardens.

STILO

Bollard Path H. 800mm



LED / 12W / ASYM



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			93°	53°	
Fixture Power	14W	1	2.10	1.17	754
Source Flux	1960lm	2	4.20	2.33	188
Fixture Flux	1108lm	3	6.30	3.50	84
Efficacy	82lm/W	4	8.40	4.66	47
TS812 Imax=396cd/klm	Imax 776cd	5	10.50	5.83	30

Driver	Colour	3000K	4000K
EL.	●	**1E2863**	**1E2864**

Bollard Path H. 1100mm



LED / 21W / ASYM



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			93°	53°	
Fixture Power	23W	1	2.10	1.17	1225
Source Flux	3187lm	2	4.20	2.33	306
Fixture Flux	1802lm	3	6.30	3.50	136
Efficacy	78lm/W	4	8.40	4.66	77
TS812 Imax=396cd/klm	Imax 1261cd	5	10.50	5.83	49

Driver	Colour	3000K	4000K
EL.	●	**1E2861**	**1E2862**

Accessories

Mounting System



Colour	Code
●	**1E2564**

Plate for surface installation.

Tool

Code
1E3185

T20 Torx insert.

Bollard Raised



LED / 21W / FLOOR WASHER

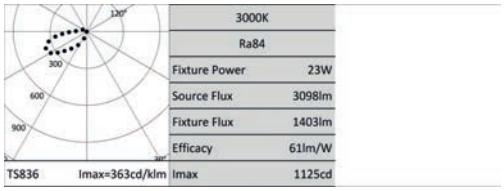

	Driver	Colour	3000K	4000K
	EL.		**1E2539**	
	EL.		**1E2540**	**1E2865**

LED / 33W / WALL WASHER

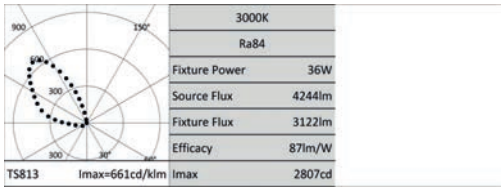

	Driver	Colour	3000K	4000K
	EL.		**1E2541**	
	EL.		**1E2542**	**1E2866**

Accessories

Filter

	Filter	Code
	Red	**1E3040**
	Green	**1E3041**
	Blue	**1E3042**
	Yellow	**1E3043**
	Magenta	**1E3044**

Chromatic coloured PMMA filter, anodised powder coated frame (ferrite).

Mounting System



	Colour	Code
		1E2564
		1E2563

Plate for surface installation.

Tool

	Code
	1E3185

T20 Torx insert.

ZEDGE

Bollard

GENERAL INFO
Pathlight bollard
64x64mm H.400mm

LED
Linear boards
From 570lm to 598lm
3000K – 4000K
Ra84

PRODUCT EFFICACY
Until 9lm/W

OPTICS
Floor washer

POWER SUPPLY
24Vdc

MATERIAL
The body of the fixture are made of powder coated die-cast anodised aluminium.

The Zedge range designed in collaboration with the firm Gensler to light passage ways.

Compact bollard step marker suitable for illuminating small path areas.
The floor washer optic allows to deeply illuminate with the maximum visual comfort.

Thanks to special accessories, the PRO version is available in a bollard model as well, for a high-performance solution, able to be suitable for your different needs.

ZEDGE

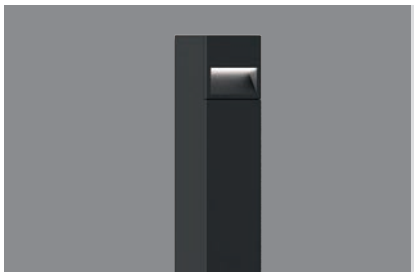

BOLLARD



LED / 4W



3000K		H(m)	D1(m)	D2(m)	Emax(lx)
Ra84			55°	86°	
Fixture Power	5W	1	2.62	2.11	23
Source Flux	570lm	2	5.25	4.22	6
Fixture Flux	40lm	3	7.87	6.33	3
Efficacy	71m/W	4	10.50	8.44	1
TS1177 Imax=53cd/klm	Imax 30cd	5	13.12	10.55	1

Power supply	Colour	2700K	3000K	3500K	4000K
24Vdc		**1E3736**	**1E3737**	**1E3738**	**1E3739**

Related codes

Mounting System



Code
1E3740

Plate with fixing rods for installation in concrete.



Code
1E3741

Plate for surface installation.



Code
1E3450

Fixing rods for installation in concrete.
AISI 316 stainless steel.
For Bollard installation.

Power Supply



Code
1E3179

Electronic power supply 10W, LxHxP=79x24.5x38mm, 220/240V-AC, 24V-DC, IP67.



Code
1T3586

Electronic power supply 75W, LxHxP=130x32x80mm, 220-240V, 24V-DC, IP67.



Code
1T3587

Electronic power supply 100W, LxHxP=230x87x43mm, 220-240V, 24V-DC, IP67.



Code
1T3588

Electronic power supply 200W, LxHxP=238x42x67mm, 220-240V, 24V-DC, IP67.

Code
1E0993

Electronic power supply max 20W, Ø98 h78, 220/240V-AC, 24V-DC, IP68.
For Led.Y Multiled: up to 16 LED.Y connected in parallel.

Accessories

Connector



Code
1E2769

Connectors kit for 5 pole coaxial connections.
Remote mounting for the following products: Jupiter, Jupiter Mini, Saturn, Saturn Mini, and Led.Y.

Code
1E2494

Non DALI looping connector.
1 IN - 3 OUT 4 poles max. wire section 2.5mm^2.
Cable diameter range from 8 to 12mm.
IP68

Control systems



Code
1T6581

DALI/1-10V dimmer 12/24V.

Code
1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers.
The module needs to be positioned in order to receive radio signals.
The distance to the lighting fixtures can reach up to 50m.

Code
1E3049

IP67 Extender for wireless control of DALI fixtures.
It generates a local DALI bus with the capacity to drive up to 64 fixtures.
Can control DALI fixtures in outdoor applications.

Control system

Control system

476
CONTROL SYSTEM

488
PROGRAMMING SYSTEM

488
LMS

CONTROL SYSTEMS

DYNAMIC LIGHT SOLUTIONS FOR ARCHITECTURAL APPLICATIONS

LED with the best colour rendering and efficiency available on the market are the sources used for fixtures. By using these fixtures installation providing high emotional value can be created and, at the same time, the operative cost savings and eco-sustainability made available by LEDs are exploited.

To change the light colour a colour mixing system is used, this technique exploits the advantageous properties of LED lamps to generate enhanced colour saturation.

Targetti dynamic light fixtures are made using different kinds of technology:
- RGB: for typical dynamic coloured light applications;
- RGBW: with which it is possible to also have high quality white light;
- Tunable White: that produces a high quality white light with colour temperatures from 2700K to 5700K.

FIXTURE POWER SUPPLY

LED RGB and RGBW fixtures need special power supplies with PWM (Pulse Width Modulation) technology that makes it possible to regulate the light intensity separately of primary colours.

In larger RGB and RGBW products the electronic power supply is always combined with the one used for dynamic control (DMX); in this case the fixtures are self-sufficient and defined as "smart"; smaller fixtures on the other hand require an external device called a SECS BOX that can power and control several fixtures at the same time.

RGB fixtures and drivers are compatible with the DMX control protocol and are fitted with a dip-switch for address programming and operating modes. RGBW fixtures are compatible with the DMX – RDM protocol that allows for remote programming via the data line.

AUTOMATIC OPERATION

To programme colour-changing light scenarios an external device is usually needed.

Thanks to the "Easy-Run-Menu" function the so called "intelligent" RGB fixtures and the SECS drivers can operate automatically performing dynamic colour sequences without any external controller. Through internal dip-switches it is possible to select among 16 different chromatic sequences:
- 8 static colour scenarios
- 8 dynamic colour sequences
- 5 different playback speed values (30sec, 80sec, 160sec, 320sec, 740sec).

MASTER/SLAVE" - CONFIGURATION

RGB Fixtures can be configured in a master/slave configuration where a virtually unlimited number of fixtures is controlled by a main one. In case of "non intelligent" fixture the master/slave configuration is achieved through a SECS BOX.

EXTERNAL CONTROL THROUGH DMX 512 - PROTOCOL

For control and programming RGBW uses the standard DMX512 protocol, the most popular and well-tested protocol for intelligent lighting control. This feature provides a total compatibility with similar devices available on the market and a great variety of accessories at a reasonable cost.

DYNAMIC LIGHTING CONTROL

RGB and RGBW lines include digital devices for dynamic lighting control through DMX protocol. These devices are characterized by very intuitive user interfaces and by a very simple software.

My Scenario is suitable for the most different architectural applications, from the most simple to the most complex one.

SECS 75/36

Power supply and Control System SECS
Scene Effect Control System

SECS 75 and SECS 36 drivers combine, in a single unit, the following 3 functions: power supply of RGB LED devices, playback of pre-set colour sequences andDMX interfa ce for external control devices. The SECS “Easy-Run-Menu” function allows to playback of colour-changing light scenarios that are pre-stored into the driver, without the use of any external driver:
- 8 static colour scenarios;
- 8 dynamic colour sequences;
- 5 different playback speed values;
- Start/Stop of the selected scenario through a remote switch.

SECS 75 and SECS 36 drivers can also be controlled through DMX 512; in this case:
- DMX address (from 1 to 511) can be configured by using dip-switches;
- 3 channels mode: all R-G-B outputs are controlled simultaneously by 3 DMX channels only;
- 6 channels mode: the outputs are divided in 2 R-G-B groups, each one controlled by 3 different DMX channels;
- DMX line termination: SECS drivers contain a 120Ohm resistance which can be activated using a dip-switch;
- a DMX output is available for connection to other DMX devices.

SECS 75/36

SECS 75

1,25 IP20



75W output	**1T1827**

SECS 75

1,5 IP67



75W output	**1E1401**

TECHNICAL FEATURES

- Power supply: 100-240 VAC, 50-60 Hz with automatic adjustment and short circuit protection
- Max. output power: 75W
- Output voltage: maximum 24 VDC
- Driving current can be selected using dip-switches: 350 mA (for 1W leds) or 700 mA (for 3W leds)
- Controllable led devices: RGB led with common anode (+24 VDC, 4 wires) and power RGB led (1-3W, 6 wires)
- Led control mode: Pulse Width Modulation (PWM)
- Number of devices controlled: proportional to the wattage absorbed by the devices
- Resolution: 8 bytes with 256 levels equal to 16.770 million colours
- Digital interface: RS485 with opto-isolator and integrated buffer, compatible with USITT DMX 512 (1990) protocol
- Input: socket for DMX signal, over-voltage protection
- Outputs (modular terminal boards) that can be used simultaneously:
    - 2 outputs for constant voltage led devices
    - 2 outputs for constant current
    - 1 DMX output (over-voltage protection)
- Operating configuration: through dip-switches
- Internal diagnostics: led signalling correct or erroneous DMX connection,
- Firmware updates: by PC using DMX input
- Operating temperature: -20° +50°C.

SECS 36

1,25 IP20



35W output	**1T2245**

TECHNICAL FEATURES

- Power supply: 90-240 VAC, 50-60 Hz with automatic adjustment and short circuit protection
- Max. output power: 35W
- Power factor 0.9 (PFC)
- Led control mode: Pulse Width Modulation (PWM)
- Output voltage: maximum 30 VDC, SELV
- Driving current 350 mA
- Controllable devices: power RGB led (1-3W, 6 wires)
- Number of devices controlled: 9 LED for colour max
- Resolution: 8 bytes with 256 levels equal to 16.770 million colours
- Digital interface: RS485 with opto-isolator and integrated buffer, compatible with USITT DMX 512 (1990) protocol
- Input: socket for DMX signal, over-voltage protection
- Outputs:
    - 2 outputs for constant current LED devices
    - 1 DMX output with over-voltage protection
- Operating configuration: through dip-switches
- Internal diagnostics: led signalling correct or erratic DMX connection
- Operating temperature: -20° +50°C
- External control through DMX512 protocol.

OPTOSPLITTER

0,85 IP66



Device that has to be used for splitting a DMX 512 line to create up to four new branches, each fully optoisolated from the others. Optical isolation of each line increases transmission reliability, since it eliminates any possibility of ground looping. OptoSplitter 4ch also amplifies the DMX signals in output; this permits extending the transmission length to the maximum recommended by the DMX standards; each of the new DMX lines may be used as an independent line and each can handle up to 32 devices (not buffered). The fixture is not RDM compatible.

4 ch	**1T2266**

ELECTRICAL AND TECHNICAL FEATURES

- Power supply: 100-240 V AC, 50-60 Hz input (built-in)
- Power consumption: 5W
- Main switch for switching the device ON/OFF
- Input: 1 input for DMX 512 - USITT 1990 signal
- Outputs: 4 optoisolated, amplified DMX 512 outputs (3 kV)
- 1 amplified output for daisy-chain connection
- Connectors: modular terminal blocks inside the housing
- DIP switch: for inserting terminal resistor at end DMX line
- Protection classification: IP66
- Housing: Plastic material with input and output cable glands
- Complete with 1.5-meter power cord
- Ambient temperature for operation: -20°C to +50°C
- Dimensions: 250 x 200 x 75 mm.

FEEDING CABLE

6-pole cable for driver output connection to Constant Current LEDs	**1E1713**
Multifunction cable for outdoor use (DMX + power supply)	**1E1715**
Standard DMX cable (1 twisted pair + shield, 120Ohm)	**1T1932**

SCHEMA TIPICO DI COLLEGAMENTO / TYPIAL WIRING LAYOUT

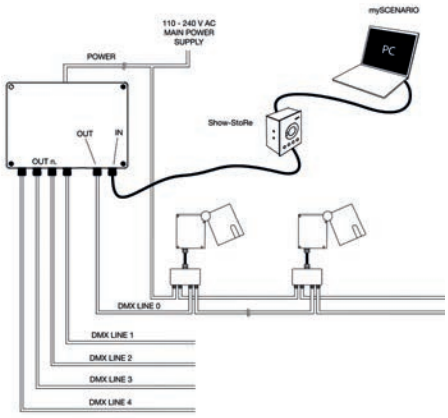

DMX 512 WIRELESS TECHNOLOGY

DMX Wireless technology can be transmitted the control signal to the lighting fixtures, without cables. Transmission is handled by a radio transmitter operating on a reserved frequency that is license-free worldwide.

It is able to transmit a signal:
- from one building to another;
- from a central control room to multiple installations in different positions, distant the ones from the others;
- from the inside of a building to the exterior, the facade, the roof, or a surrounding;
- in archaeological contexts in which digging trenches for laying.

A “DMX 512 Wireless” system requires that the control unit be equipped with a radio transmitter (external or built-in) and that a radio receiver is available in proximity to each DMX device or group of fixtures.

The product range includes a series of devices/fixture incorporating DMX 512 wireless technology, having the following characteristics in common:

- the signal is transmitted via radio, using a protocol and components derived from the GSM mobile telephony standard;
- the frequency used is FCC approved and is license-free throughout the world, including Japan and the USA;
- the devices apply FHSS (Frequency Hopping Spread Spectrum) technology;
- installation is the “plug-and-play” type; that is, there is no need to attribute IP addresses to the fixtures, which automatically recognize the transmitter by which they are controlled;
- the radio signal can be transmitted in a range up to 500 meters (1700 feet) in free space and through material such as walls, glass, and metals;
- multiple transmitters may be used in the same area because they can be individually to control a single group of fixtures without creating reciprocal interference;
- the fixtures are not RDM compatible.

WIRELESS OPTOSPLITTER

IP65

A device that operates as a radio receiver with up to 4 wired DMX lines in output.

4 ch with Wireless receiver	**1E1906**

TECHNICAL FEATURES

Technical feature of this unit are identical to the ones of the normal Optosplitter with the following additional features:
- Built-in radio receiver module
- Built-in antenna
- RLS (Radio Link Status) monitoring system and LOG command (for transmitter linkage)
- Built-in power supply for all components, including radio section
- Protection grade: IP65
- Not RDM compatible

WIRELESS DMX - TRANSMITTER

0,2 IP65

This device receives a DMX-IN signal via cable. It can be installed at any point in a DMX line and from that point on it transmits the signal via radio. For example, connecting the device directly to the output of any DMX512 controller transforms it into a wireless controller. Not RDM compatible.

Transm. with 1 DMX input	**1E1929**

TECHNICAL FEATURES

- Built-in radio module transmitting on the 2.45 GHz license-free radio frequency
- One radio output with external antenna
- Capability to control a DMX universe and to address individually 512 radio receivers
- RLS (Radio Link Status) LED system for monitoring quality of DMX transmission
- LOG key for secure receiver linkage
- Transmission range: 50S0 meters in open air
- Built-in power supply: 90-250V AC, 50/60 Hz
- Housing in plastic material, for outdoor use (IP65)
- Dimensions: 175 x 125 x 76 mm.

mySCENARIO

Systems of digital devices designed to control dynamic lighting fixtures and to programme dynamic light scenarios and sequences.

The system consists of an intuitive software, compatible with Windows operating systems, able to control different hardware devices having the following functions:

- recording colour-changing scenarios set by the operator;
- allowing the selection among the multiple scenarios recorded;
- transmitting the control signals to the lighting system.

The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.

The software provides a graphic simulation of the operating keys of lighting controller; the patching function allows to assign the DMX control channels to the fixtures by using the internal library.

The Colour Manager function allows a quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times. The built-in calendar allows a full time scheduling of show playback (month, day, hour, minutes, recurring events). The programmed light shows can be transferred to the different control interfaces.

mySCENARIO SHOW STORE

Software + USB interface	**1T1898**

INTERFACE TECHNICAL FEATURES

- Storage, via USB, of light-shows created through mySCENARIO software
- Automatic stand-alone operation with non need of a PC or any other external driver
- Keys for scrolling through programmed sequences
- Digital display to show the number (1-99) of active scene
- Led indicators for ON/OFF status
- Three poles XLR output – DMX signal to lighting fixtures
- XLR input for daisy chain connection to other identical unit
- Management of 512 DMX channels (512 parameters to be programmed separately)
- Memory dedicated to light shows proportional to number of connected channels (2877 with 20 channels; 2877 with 60 channels; 355 with 512 channels);
- Internal clock for sequences triggering
- External power supply 100-240 VAC, 50-60 Hz in case of use without PC.

TYPIAL WIRING LAYOUT

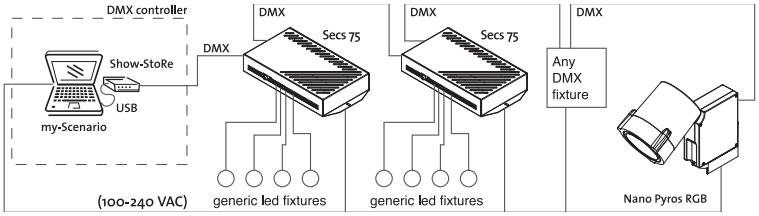

mySCENARIO WALL

DMX controller with a glass touch sensitive screen for architectural applications.

It can control two different DMX universes (2x 512 channels).

Stand alone function or connected to a computer using a USB port.

Software for creating scenarios (that can be downloaded from the Targetti website) is included.

It can manage 10 different lighting zones and 50 scenarios per zone.

The touch keys on the front make it possible to modify and recall programmed scenarios.

Power supply adapter and USB cable included.

To be used with all RGB and RGBW products.

mySCENARIO WALL



1T6499

INTEFACE TECHNICAL FEATURES

- 6 Vdc power supply
- 4W output
- SD memory card
- DMX 2x 512 channels
- Windows 32/64 bit operating system
- Dimensions 146 x 106 x 11 mm

USB-RDM PROGRAMMER CODE

DMX-RDM (Remote Device Management) address planner.

Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.

To be used with all RGBW products.

USB –RDM

1E2767

CASAMBI - LIGHTING MANAGEMENT SYSTEM

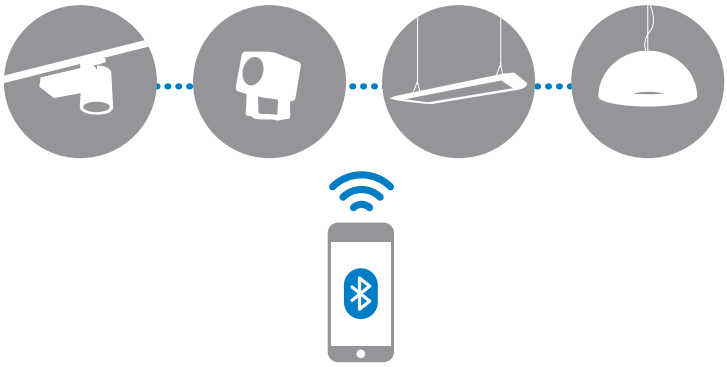

LMS is the Targetti wireless home automation system that can manage even the most complex lighting systems. Designed for the consumer and the professional market, LMS is the result of the combination of components from Casambi - a leading company producing wireless lighting control solutions - and Targetti light fixtures.

iOS AND ANDROID APPS
Thanks to the intuitive simplicity of the app developed by Casambi for iOS and Android, LMS ensures system operational readiness. You just need a phone or another mobile device and anyone can create and manage a lighting network singlehandedly by controlling every fixture individually or in groups depending on the needs and the functions required. Managing the system using a standard handset is also made possible with the use of specific accessories.

EXTREME USABILITY
The ease of use and programming of the system makes it easy to manage without the use of special control units or assistance from specialised technicians. The application recognises and associates the Targetti fixtures that are installed in the space automatically by using the BLE (Casambi Bluetooth Low Energy) proprietary protocol to communicate with the various fixtures. No Internet connection is necessary except for synchronisation functions or remote access.

MESH SELF-HEALING NETWORK
LMS allows the final user to generate adaptive and multipoint networks: “adaptive” because every fixture can work as a buffer for all the others, adapting automatically to various contexts to optimise control signal propagation; “multipoint” because you can connect up to 127 fixtures on each network without
any limit on the number of networks. The result is strong, reliable and affordable networks that manage the system, the profiles of individual fixtures
and access rights.

	1.	Choose Targetti fixtures by opting for the Targetti Casambi Ready package or Casambi accessory components.
	2.	Install the fixtures without running more cables.
	3.	Download the Casambi iOS or Android App depending on the device used.
	4.	Activate the Bluetooth function on the device.
	5.	Turn on the installed fixtures.
	6.	Launch the App: the fixtures in operation will be detected automatically.
	7.	Create one or two networks depending on the characteristics of the environment.
	8.	Create groups of devices as needed.
	9.	Program scenes and/or sequences.
	10.	Set the level of network sharing by choosing one of the following possibilities: a. No network sharing b. Sharing with administrators only: access with an admin password c. Sharing with visitors: the password in this case does not permit network programming d. Open access without programming possibilities. Synchronisation between the different fixtures is ensured by the Cloud function.

WORK BETTER WITH LMS
For optimum system operation we recommend you follow the sequence of steps given below.

LIGHTING MANAGEMENT SYSTEM

LMS FUNCTIONS

Here is a list of the various functions of the system that can vary depending on the characteristics of the product and the degree of complexity of the system.

1. Create a network.

2. On/Off of the fixtures: touch the icon relating to the fixture once or twice.

3. Dimming: scroll to the right to increase the light intensity and to the left to reduce it.

4. Colour temperature control: scroll up or down for getting respectively warmer or colder colour temperatures.

5. Colour control: touch and hold the icon of the device to see the colour-options.

6. Create groups.

7. Function Gallery: capture/upload a photo or a render of the space to manage the device directly on the image.

8. Configure lighting scenes.

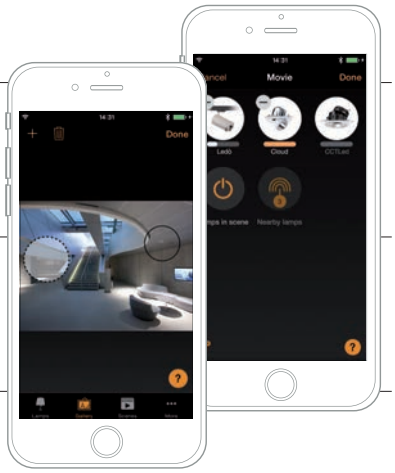

9. Configure sequences (dynamic scenes or sequences of different scenes).

10. Timer Function: set fade times between scenes and sequences and programme date and duration.

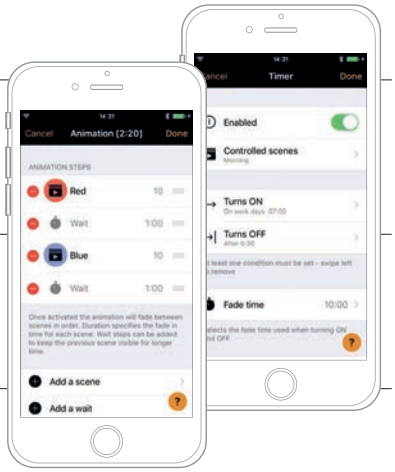

11. Geolocation: by activating this tool it is possible to programme on and off functions that can be automatically associated to sunrise and sunset irrespective of the period of the year (astronomical watch).

12. Cloud Function: makes it possible to share different devices and remote access to the network. In remote access a device acts as a gateway while the others are connected via the Cloud.

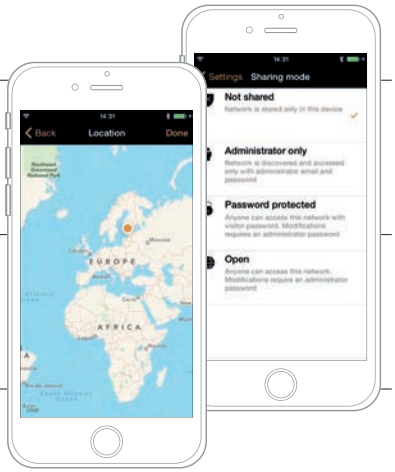

13. iBeacon technology (only for iOS): fixtures equipped with LMS modules are equipped to interact with iBeacon technology based retail or museum applications.

LIGHTING MANAGEMENT SYSTEM

CASAMBI ACCESSORIES

External accessories with simple electric cables make it possible to control Targetti fixtures in wireless mode.

For a clear and easy choice for the correct accessories, please refer to the explanatory table on page 794 that shows:

- An alphabetical list of the Targetti fixtures that are compatible with Casambi accessories
- Product variants that are compatible with Casambi accessories (only some variants of the
same product can be controlled by the LMS system)
- Compatible accessories (descriptions and technical characteristics are listed below)
- Wiring diagram (the complete list is available on page 800)

Gateway DALI/Casambi available that allows fixtures fitted with mesh Bluetooth Casambi technology to interface with a traditional DALI system and to be adjusted by a DALI control unit. For further information seethe website.

Control module IP20

1T5349

A wireless control module with a DALI interface. It generates a local DALI bus which makes it possible to connect a LED driver directly to a DALI interface. The module can only be used in a closed system and cannot be connected to an existing DALI network. The module is wireless controlled using a CASAMBI app for smartphones and tablets using Bluetooth 4.0 technology. The devices create an adaptive, secure and reliable wireless mesh network that can control a large number of fixtures in a simple and efficient way. IP20.

	1T5349
Power supply	220-240 VAC
Power	1,1W - PF 0,6
Max current	0,6 Amp AC
Max n. DALI driver	1
Max n. 1-10v driver	1
Dimensions	37x41x14 mm
Exit	

Dimmer wireless Bluetooth

1T7944

Wireless Bluetooth Dimmer capable of handling constant voltage loads of 12V or 24V subdivided into 4 channels with PWM output. This dimmer must be connected between the 12V or 24V power supply and the constant voltage LED module. The maximum total current that can be supplied by the control unit is 6A (equivalent to a total of 144W) that can be divided between the 4 outputs.Compatible with Minimercure RGB and Micromercure

	1T7944
Power supply	12/24 VDC
Power	144W (24V)
Max current	72W (12V)
Max n. DALI driver	
Max n. 1-10v driver	
Dimensions	72,6x18x30mm
Exit	PWM

Xpress

1T5350

Xpress is a wall mounted wireless user interface; it can be installed wherever the user chooses thanks to battery power with autonomy of 2-3 years providing direct access to all the most important CASAMBI system control functions. As well as switching the fixtures on and off, Xpress controls dimming, colour temperature change in fixtures equipped with this technology, and control of individual fixtures and lighting scene or sequence management.

Trailing Edge dimmer IP20

1T5351

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology. It works with LED 230 V-AC modules, dimmable LED sources and halogen lamps. It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies. It can manage systems with a maximum absorption of 150W. The module is wireless controlled using a CASAMBI app for smartphones and tablets or traditional wall switches. IP20.

Power supply	85-240 VAC
Power	0,3W - PF 0,35
PMax power fixtures*	
Dimensions	37x41x14 mm

*Consult the assembly instructions.

Extender IP20

1T5352

Extender IP20 allows for wireless control with a DALI interface.
It generates a local DALI bus with the capacity to drive up to 64 fixtures and can control groups of fixtures in indoor applications. It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6A. It prevents any change to the management features provided by the CASAMBI system.

Power supply	100-240 VAC
Power	2,7W - PF 0,6
Max current	6 Amp AC
Max n. DALI driver	64
Max n. 1-10v driver	30
Dimensions	100x42x30 mm

Control module IP67

1E3048

A IP67 Module for individual control of external devices equipped with DALI drivers. The module needs to be positioned in order to receive radio signals. The distance to the lighting fixtures can reach up to 50m.

Power supply	220-240 VAC
Power	1,1W - PF 0,6
Max current	0,6 Amp AC
Max n. DALI driver	1
Max n. 1-10v driver	1
Dimensions	120x65x30 mm

Extender IP67

1E3049

A IP67 Extender allows for wireless control with DALI interfaces.
It generates a local DALI bus with the capacity to drive up to 64 fixtures and can control groups of fixtures in outdoor applications. It prevents any change to the management features provided by the CASAMBI system.

Power supply	100-240 VAC
Power	2,7W - PF 0,6
Max current	6 Amp AC
Max n. DALI driver	64
Max n. 1-10v driver	30
Dimensions	150x150x40 mm

LIGHTING MANAGEMENT SYSTEM

PRODUCT		VARIANT	1T5349 CONTROL MODULE IP20	1T5351 TRAILING EDGE DIMMER IP20	1T5352 EXTENDER IP20	1E3048 CONTROL MODULE IP67	1E3049 EXTENDER IP67	DIAGRAMS page 800/801
BEBOP RECESSED		DALI Version	●		●			**01 - 04**
BOTTONE		LED module 230Vac max 150W		●				**03**
BRAQUE		LED module 230Vac max 150W		●				**03**
CARTESIO	Rectangular suspension	DALI Version			●			**04**
	Square suspension		●		●			**01 - 04**
	Square ceiling		●		●			**01 - 04**
CCT FLASH LED		DALI Version	●		●			**01 - 04**
CCTLED ARCHITECTURAL		DALI Version	●		●			**01 - 04**
CCTLED ARCHITECTURAL MICRO		DALI Version	●		●			**01 - 04**
CCTLED ARCHITECTURAL MINI		DALI Version	●		●			**01 - 04**
CCTLED DOWNLIGHT		DALI Version	●		●			**01 - 04**
CCTLED DOWNLIGHT MICRO		DALI Version	●		●			**01 - 04**
CCTLED DOWNLIGHT MINI		DALI Version	●		●			**01 - 04**
CCTLED PENDANT		DALI Version	●		●			**01 - 04**

ACCESSORIES

PRODUCT	VARIANT	1T5349 CONTROL MODULE IP20	1T5351 TRAILING EDGE DIMMER IP20	1T5352 EXTENDER IP20	1E3048 CONTROL MODULE IP67	1E3049 EXTENDER IP67	DIAGRAMS page 800/801
CCTLED TUBE	DALI Version	●		●			**01 - 04**
CLOUD	DALI Version	●		●			**01 - 04**
CLOUD MINI	DALI Version	●		●			**01 - 04**
CORO	With DALI driver	●		●			**01 - 04**
COZY	With DALI driver	●		●			**01 - 04**
DART MAXI	DALI Version				●	●	**05 - 06**
DART MEDIUM	DALI Version				●	●	**05 - 06**
DART SMALL	With DALI driver				●	●	**05 - 06**
DIVA	DALI Version			●			**04**
FEBO EVO	DALI Version				●	●	**05 - 06**
FLOOD	DALI Version	●		●			**01 - 04**
FORTYEIGHT - LABEL 48V	DALI Version	●		●			**01 - 04**
FORTYEIGHT - LOGICO 30	DALI Version	●		●			**01 - 04**

LIGHTING MANAGEMENT SYSTEM

PRODUCT	VARIANT	1T5349 CONTROL MODULE IP20	1T5351 TRAILING EDGE DIMMER IP20	1T5352 EXTENDER IP20	1E3048 CONTROL MODULE IP67	1E3049 EXTENDER IP67	DIAGRAMS page 800/801
GLOBO	Halogen max 150W		●				**03**
HALL	DALI Version	●		●			**01 - 04**
ISO		●		●			**01 - 04**
JEDI	DALI Version				●	●	**05 - 06**
JEDI INCASSO					●	●	**05 - 06**
JEDI COMPACT IP40	DALI Version	●		●			**01 - 04**
JEDI COMPACT IP67	DALI Version				●	●	**05 - 06**
JUPITER	With DALI controller				●	●	**05 - 06**
JUPITER PRO					●	●	**05 - 06**
LABEL 230V	DALI Version	●		●			**01 - 04**
LOGICO	DALI Version *For fixture with 1 driver	●		●			**01 - 04**
MONETA	LED module 230Vac max 150W		●				**03**
MR. BO	DALI Version				●	●	**05 - 06**

ACCESSORIES

PRODUCT	VARIANT	1T5349 CONTROL MODULE IP20	1T5351 TRAILING EDGE DIMMER IP20	1T5352 EXTENDER IP20	1E3048 CONTROL MODULE IP67	1E3049 EXTENDER IP67	DIAGRAMS page 800/801
MR. SMITH					●	●	**05 - 06**
MRS. SMITH					●	●	**05 - 06**
OMEGA		●		●			**01 - 04**
OSIRIDE LED	Version with LED module 230Vac max 150W		●				**03**
OZ STAND ALONE 230V		●		●			**01 - 04**
PANTHEON	LED module 230Vac max 150W		●				**03**
PROFESSIONAL LED	Version with LED module 230Vac max 150W		●				**03**
QUICKLED	DALI Version	●		●			**01 - 04**
SATURN	With DALI controller				●	●	**05 - 06**
STORE GIMBAL	DALI Version	●		●			**01 - 04**
STORE MINI GIMBAL	DALI Version	●		●			**01 - 04**
THREESIXTY	DALI Version *For fixture with 1 driver	●		●			**01 - 04**
VOLTA IP66	With DALI driver				●	●	**05 - 06**

LIGHTING MANAGEMENT SYSTEM

PRODUCT	VARIANT	1T5349 CONTROL MODULE IP20	1T5351 TRAILING EDGE DIMMER IP20	1T5352 EXTENDER IP20	1E3048 CONTROL MODULE IP67	1E3049 EXTENDER IP67	DIAGRAMS page 800/801
WASABI	LED module 230Vac max 150W		●				**03**
ZEDGE	With DALI controller				●	●	**05 - 06**
ZEDGE LINE	DALI Version				●	●	**05 - 06**
ZEDGE PRO	DALI Version				●	●	**05 - 06**
ZENO APPLIQUE	DALI Version	●		●			**01 - 04**
ZENO SMALL	DALI Version	●		●			**01 - 04**

WIRING DIAGRAMS

01

Single DALI control IP20

1T5349

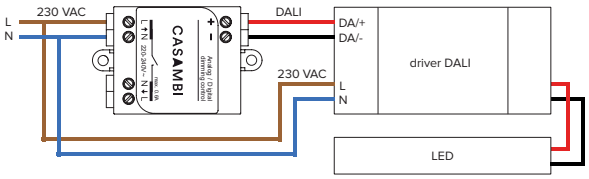

02

CASAMBI control, 1-4 channels IP20

1T7944

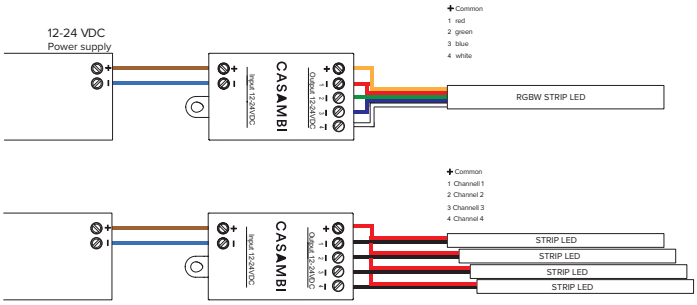

03

Single Trailing Edge control for LED 230 V-AC Modules, dimmable LED sources and halogen lamps - 12V and mains voltage (IP20)

1T5351



04

DALI multiple control IP20

1T5352

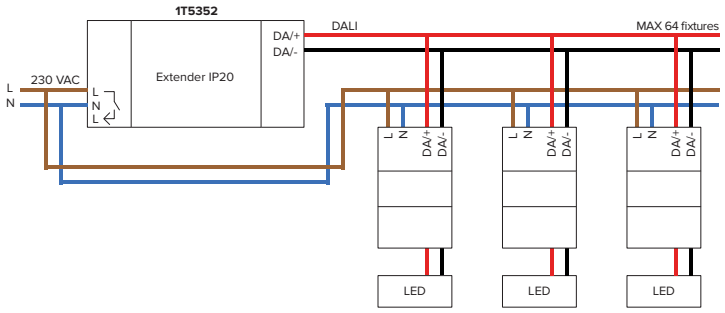

04

DALI multiple control
with relay IP20

1T5352

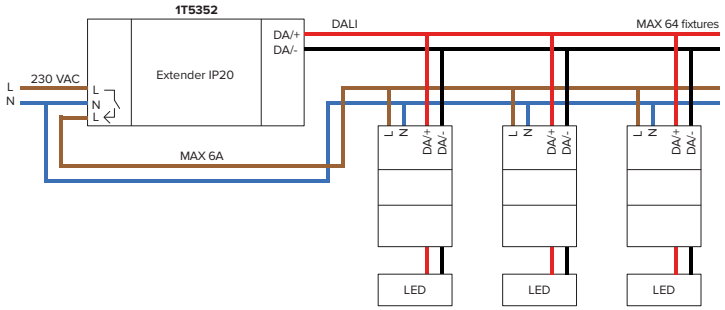

05

DALI single control IP67

1E3048

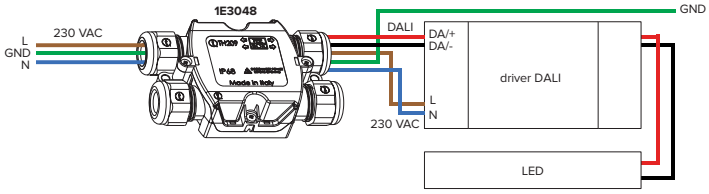

06

DALI multiple control IP67

1E3049

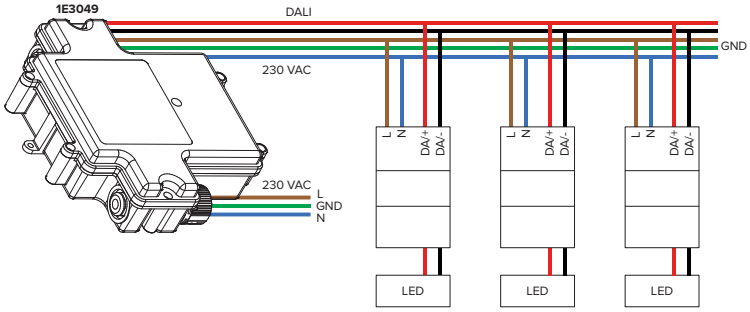

07

Diagram for use with wall mounted push button

normally closed

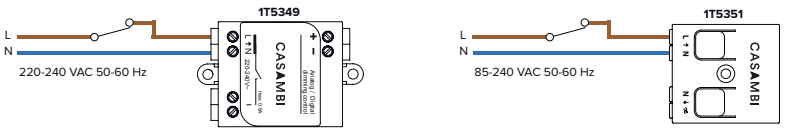

normally open

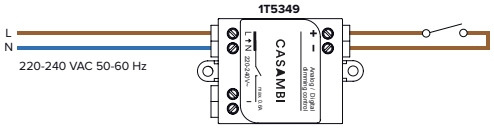

Technical data

POWER SUPPLY



ELECTRONIC BALLAST/POWER SUPPLY FOR LED SOURCE

Power	LxHxP	Power supply	Output current	Output voltage	Dimming	Protection	
max 20W	Ø 98 H 78	220-240V		24V-DC		IP68	**1E0993**
17W	Ø 105 H 74	220-240V	700 mA				**1E1385**
12W	Ø 105 H 74	110-120V	700 mA				**1E1385**
70W	225x51x65	220-240V		48V-DC		IP67	**1E2320**
150W	225x51x65	220-240V		48V-DC		IP67	**1E2321**
480W	227x100x125	220-240V		48V-DC		IP20	**1E2323**
240W	125x100x125	220-240V		48V-DC		IP20	**1E2533**
max 43W	150x40x150	220-240V	600mA			IP68	**1E2571**
max 43W	150x40x148	220-240V	600mA		DALI	IP68	**1E2572**
max 50W	150x40x148	220-240V	900mA			IP68	**1E2573**
max 50W	150x40x148	220-240V	900mA		DALI	IP68	**1E2574**
20W	150x40x148	110-240V	400mA		1-10V	IP68	**1E3033D**
20W	150x40x148	110-240V	400mA		DALI	IP68	**1E3033DA**
20W	150x40x148	220-240V	400mA			IP68	**1E3033EL**
20W	150x40x148	110-240V	900mA		1-10V	IP68	**1E3034D**
20W	150x40x148	110-240V	700mA		DALI	IP68	**1E3034DA**
20W	150x40x148	110-240V	900mA			IP68	**1E3034EL**
10W	69x33x38	220-240V		24V-DC		IP67	**1E3179**
15W	119x22x52	220-240V	350mA			IP20	**1T1757**
29W	160x35x83	110-240V	700mA			IP20	**1T2963**
29W	160x35x83	110-240V	700mA		DALI	IP20	**1T2965**
max 50W	160x35x83	220-240V	900mA			IP20	**1T2966**
max 50W	160x35x83	110-240V	900mA		DALI	IP20	**1T2968**
75W	130x32x80	220-240V		24V-DC		IP67	**1T3586**
100W	230x87x43	220-240V		24V-DC		IP67	**1T3587**
200W	238x42x67	220-240V		24V-DC		IP67	**1T3588**
32W	160x35x83	110-240V	600mA			IP20	**1T3625**
32W	160x35x83	110-240V	600mA		DALI	IP20	**1T3627**
50W	185x22x63,5	220-240V		24V-DC		IP20	**1T3726**
42W	160x35x83	110-240V	1050mA			IP20	**1T3781**
42W	160x35x83	110-240V	1050mA		DALI	IP20	**1T3783**
max 22W	130x30x42	220-240V	500mA			IP20	**1T3966**
20W	118x22x52	110-240V	400mA		1-10V	IP20	**1T4215D**
20W	118x22x52	110-240V	400mA		DALI	IP20	**1T4215DA**
20W	118x22x52	220-240V	400mA			IP20	**1T4215EL**
max 15W	119x22x52	110-240V	350mA		DALI	IP20	**1T4630**
20W	119x22x52	220-240V	500mA		DALI	IP20	**1T4631**
15W	119x22x52	110-120V	500mA		DALI	IP20	**1T4631**
max 60W	129x30x76	220-240V	1050mA			IP20	**1T4723**
max 60W	129x30x76	220-240V	1050mA		DALI	IP20	**1T4725**
20W	118x22x52	110-240V	900mA		1-10V	IP20	**1T5295D**
20W	118x22x52	110-240V	700mA		DALI	IP20	**1T5295DA**
20W	118x22x52	110-240V	900mA			IP20	**1T5295EL**
12W	101,5x29,5x51	220-240V	350mA			IP20	**1T6503**
12W	67x103x21	220-240V	350mA		DALI	IP20	**1T6504**
12W	158x19x22	220-240V	350mA			IP20	**1T6505**
42W	129x30x42	220-240V	1050mA			IP20	**1T6524**
10W/20W	145x19x55	110-240V/220-240V		12V-DC		IP20	**T1585**
70W	225x51x65	220-240V		12V-DC		IP65	**T1586**

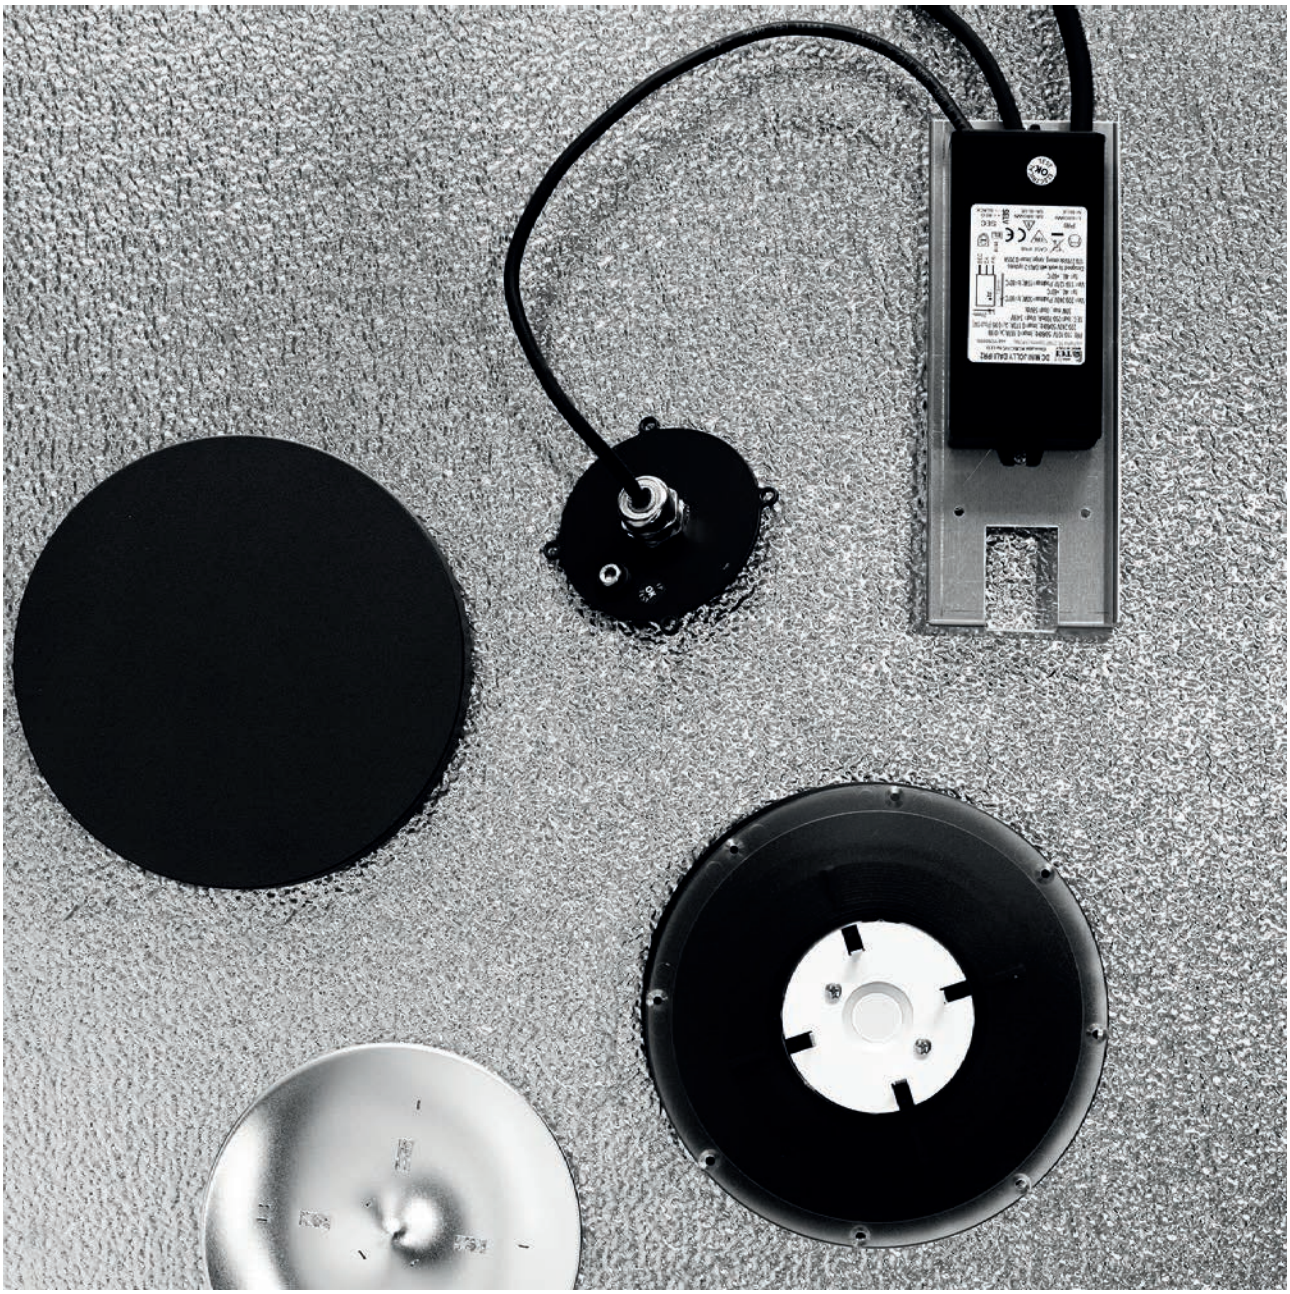

LED

CHARACTERISTICS OF THE LED LAMPS TARGETTI FIXTURES ARE FITTED WITH

Colour tolerance

The Targetti collection uses different LED lamps depending on the type of fixture. Nevertheless the hue of the light emitted is always the same from one fixture to another because only LED lamps produced by leading companies in the sector are used, with the same chromaticity identified by the methodology of MacAdam ellipse or SDCM (Standard Color Deviation Matching).

Light chromaticity is identified using a two-dimensional value within an ellipse that defines the maximum displacement of chromaticity from the point of reference (the centre of the ellipse).

A 3 SDCM value is generally considered the maximum value before an average observer perceives chromaticity differences.
The colour tolerance values used in Targetti are as follows:
1.5 SDCM (1 on request) for fixtures that use COB LED lamps
3 SDCM (2 on request) for fixtures that use LED COB Hight density and LED Mid-Power lamps
It is also important to consider colour tolerance throughout the life span lamps (long term color consistency). Targetti LED lamps ensure the declared colour tolerance for the entire life of all fixtures.

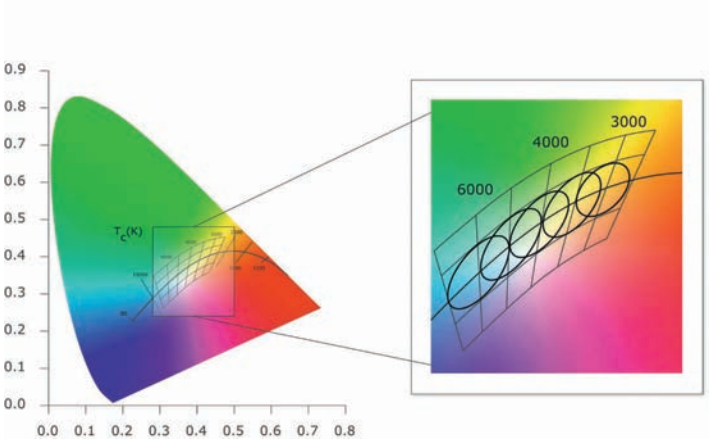

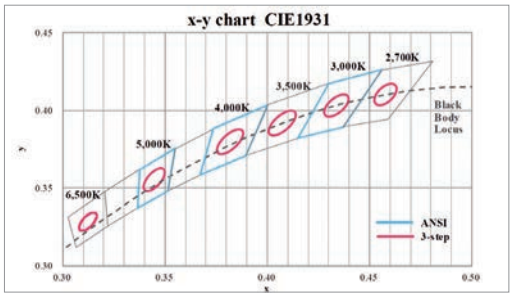

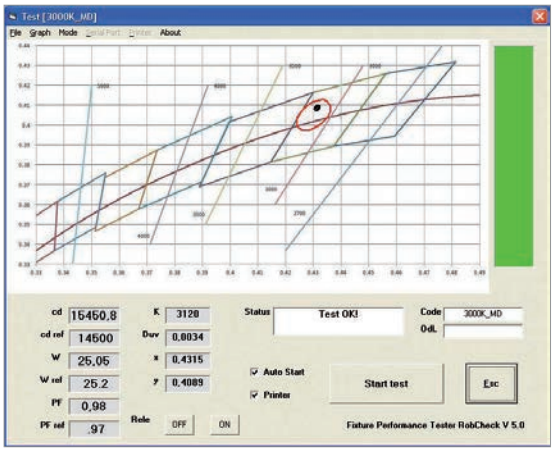

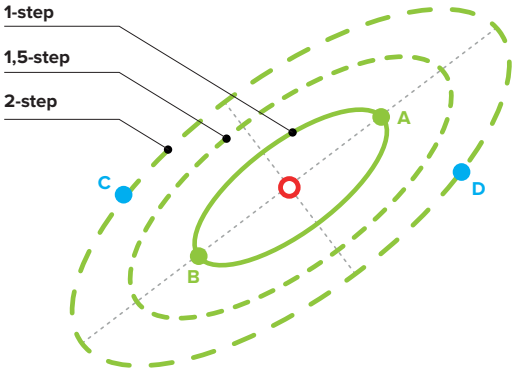

Colour rendering
The colour rendering index is the quantitative measure of the ability of a light source to reproduce colours faithfully . The method approved and currently used is the **CIE CRI (Color Rendering Index)** also known as **CIE Ra**. To determine it a comparison is carried out between the lamps to be evaluated and a reference light source with the same colour temperature.

It is based on a comparison of 15 “patches” of colour. The Ra index is the average of the 15 Patches, R9 is the rendering of the red patch.
A colour rendering index between 90 and 100 is considered excellent and a value between 80 and 90 is good.
Among specialists in the field the CRI method is often contested given that it provides values that are sometimes inadequate especially for some LED sources.

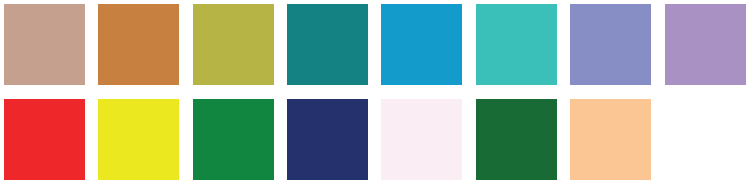

At meetings between the regulatory and standardisation committees various alternative methods have been put forward.
The one that is more popular and considered more reliable today is the **TM 30-15** method from the IES (Illuminating Engineering Society).

Most importantly is the IES TM-30-15 IES – the acronym for the Illuminating Engineering Society – the organisation that developed the scale as a new method for evaluating the colour rendering of a light source. It appears to be more reliable than the previous Ra because it is based on the colour rendering comparison of 99 “colour patches" rather than 8+6 like the CRI. In addition, where the CRI provides a single score, therefore it does not significantly express the narrow but broad relationship between light and colour, the TM-30 appears to be more complete because it is identified using three different parameters: an Rf Fidelity index, an Rg Gamut index and a colour vector graphic. These combine to provide a more accurate image of the colour fidelity of a light source and a better explanation of the exceptional colour rendering capabilities of LED sources.

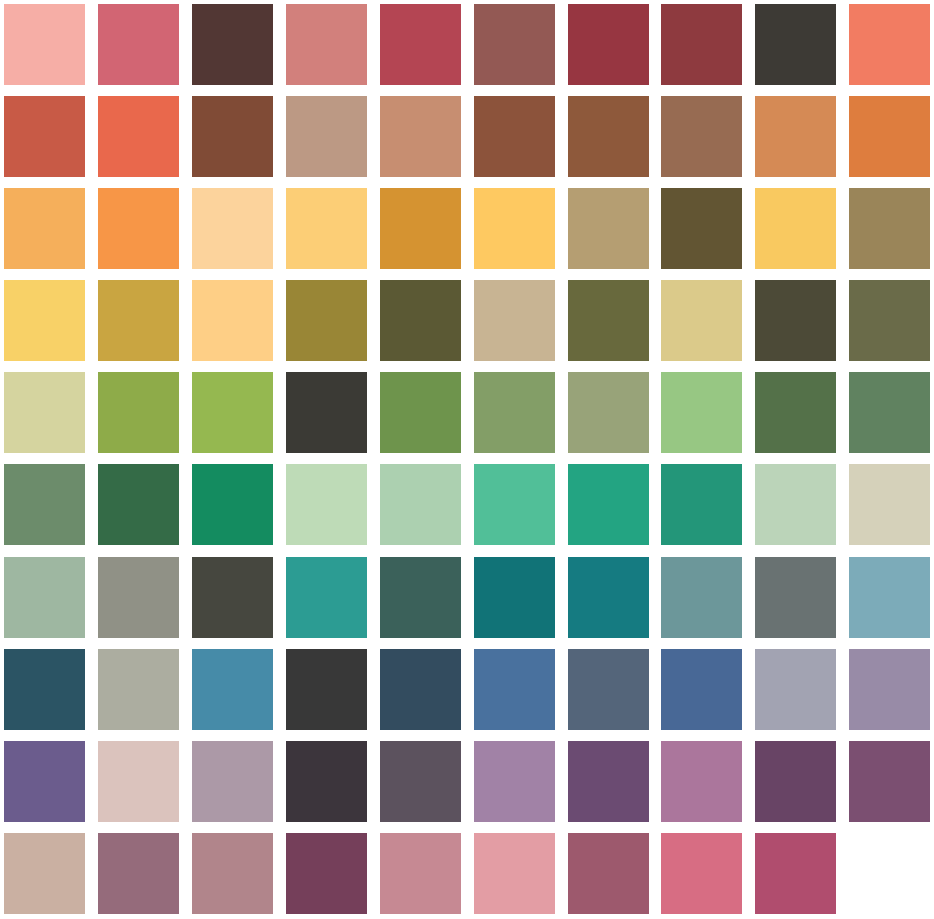

LED

Rf (Fidelity)
The TM-30 Fidelity index uses 99 colours, rather than 8+4 of the CRI, chosen from real world objects. Like the CRI the points of the Fidelity index go from 0 to 100. A score of less than 60 is too poor for indoor use and a 90+ score is ideal for an effect that is similar to daylight.

The TM-30, 99 “colour patches" are classified into seven groups (nature, skin tones, textiles, paints, plastics, printed material and colour systems). This categorisation helps because the light source can be tested on specific application areas.

Rg (Gamut)
Evaluates the intensity of colours under a certain light, therefore it provides indications of the source’s ability to reproduce colour saturation (breadth of colour range).
A score range equal to 100 indicates that the light source does not change the hue or colour saturation that are reproduced in the same way as the sample source.
R>100 indicates an increase in colour saturation, therefore they appear more intense.
R<100 indicates a decrease in saturation.

TM-30 colour vector graphic
TM-30 colour vector graphic
Indicates which colours appear to be saturated and which desaturated.

In the TM- 30 colour vector graphic the white circle represents the sample light, while the circle with the colored background is the light being tested. If the circles overlap perfectly the tested light corresponds to sunlight.
The areas that extend beyond the black circle indicate that the colours are more intense compared to the sample, however those that remain inside represent colours that appear desaturated.
Unlike the Fidelity and Gamut indexes which are numerical scores, the colour vector graphic is a visual representation that makes it possible to understand which colours are more and less intense.
This is particular useful when it is necessary to highlight a particular colour, for example in retail applications.

Life expectancy of LED sources and lumen maintenance
LED lamps emit light for an extremely long length of time with an almost insignificant failure rate.
The life expectancy of a LED lamp is based on the decreasing lumen rate and the percentage of fixtures are subject to this decrease in a certain period of time.

For example a LED source with a life expectancy of 80000 hours is identified with the code L80 B10 when lots of this type of source once they reach 80000 hours will have at least 90% (100% - B=10) of the LED with lumen of over 80% of the original (L=80).

The lifetime of LED lamps is measured using tests carried out according to the IES LM80 standard. A certain number of LED lamps are left working at different temperatures for at least 6000 hours. Every 1000 hours various parameters are measured: lumen, chromaticity, power etc. The results are then processed using the IES TM 21 procedure that makes it possible to extract the data and produce the lumen maintenance values in hours, L and B depending on the operating temperature.

Life span of LED fixtures
The life span of LED light fixtures depends mainly on two components: the LED lamp and the LED driver.
The life span of LED sources and LED drivers are heavily dependent on the temperature these components operate inside the fixture. Targetti fixtures are designed to have very low operating temperatures for LED sources and drivers compared to the limits indicated by producers to ensure excellent performance in terms of duration and lumen

maintenance.

Targetti fixture data
Since LED technology was applied to light fixtures we have always wanted to be completely transparent in publishing data relating to the performance of our fixtures.
For every fixture we have always indicated:

- The power of the LED source (Watt)
- The lumen of the LED source (lm)
- The power of the fixture (Watt)
- The lumen of the fixture (lm)
- Maximum intensity (cd)
- Typical colour rendering CIE Ra - TM30 Rf, Rg

Warnings on LED fixtures
Given the production process of LED lamps, typical values indicated by parameters only represent statistical magnitude. These values are affected by the manufacturing tolerances of producers of LED lamps, drivers (LED power feed) and also the operating temperature of the fixtures (LED voltage varies with temperature).

Targetti fixtures are designed, built and tested in compliance with current standard regulations and technical requirements. As required by regulation IEC 60598, technical checks are carried out at a room temperature of 25°C. Even lumen output and lighting data are based on a room temperature of 25°C. At different temperatures deviations from the values indicated in the catalogue are possible.

Manufacturing tolerance on data relating to declared output and performance is ± 10%
Then laboratory measurement uncertainties are then added:
Lumen 5%
Intensity 1%
Power 0.5%
Temperature 3%

PHOTOMETRIC DATA

Photometric measurements were taken at the “Photometric Laboratory Targetti. These measurements are performed at a room temperature equal to 25±1 °C as required by UNI EN 13032-1 - Light and lighting - Measurement and presentation of photometric data of lamps and luminaries - Part 1.

The photometric values quoted are dependent on the optical system to which they relate, and from the light source used. In order to improve its production, the Company reserves the right to change these optical systems and consequently relative photometric data without notice.

This catalog shows the only photometries for the 3000K color temperature version, to consult the photometric data of the other versions, please refer to the website www.targetti.com

For ease of use, the photometric curve present within this catalogue is shown and explained below.

Photometric data are available in the “download” section of www.targetti.com, in digital format.

The photometric curves shown in this catalogue are compiled according to the “C-γ” international reference system, where the C0-C180 plane is perpendicular to the fixtues and the C90-C270 plane is parallel to the fixtues, as depicted in the figue. For symmetrical and rotationally symmetric fixtues therefore, a single curve is used.



REFERENCE “C-γ”

TRANSVERSE PLANE
Piano C0 ° - C180 °
Beam angles α α

LONGITUDINAL PLANE
Piano C90 ° - C270 °
Beam angles α β

POLAR DYAGRAM



LUMINOUS INTENSITY

PHOTOMETRIC CURVE

IMAX

PHOTOMETRIC CODE

3000K Ra84		KELVIN - IRC
Fixture Power	23W	FIXTURE POWER
Source Flux	2886lm	LED FLUX
Fixture Flux	2453lm	FIXTURE FLUX
Efficacy	107lm/W	EFFICACY
Imax	22638cd	IMAX

H(m)	D(m)	Emax(lx)	
	14°		BEAM ANGLE
1	0.24	22638	DISTANCE FROM THE PLAN (m)
2	0.48	5659	
3	0.72	2515	Ø LUMINOUS CONE (m)
4	0.96	1415	
5	1.20	906	MAX ILLUMINATION (lx)

CIE FLUX CODE - The Commission Internationale de l’Eclairage (CIE) provides a classification of luminaires according to the distribution of the flux delivered within certain limits of solid angle. The first three numbers indicate the fluxes contained in the cones identified by solid angles equal to π/2, π, 3/2π. The fourth number gives the percentage of direct light compared to total emission. The fifth is the ratio between the total emission of the fixtures and total emission of the lamps (efficiency of the fixtures). The 5 codes are expressed in percentages.

FIXTURE PERFORMANCE - In accordance with EN 13032-2 - Light and lighting - Measurement and presentation of photometric data of lamps and luminaries - Part 2: Presentation of data for indoor and outdoor work places - the performance of lighting fixtures is indicated by the acronym “LOR” (Light Output Ratio) defined as the ratio of the luminous flux emitted by a fixture and the total flux of the sources used. For direct/indirect light fixtures appliances, the regulation introduces the components “DLOR” (Down Light Output Ratio) and “ULOR” (Up Light Output Ratio). These components show the distribution of luminous flux of the fixtures in the lower and upper half-space. The 3 parameters are expressed as percentages.

UGR VALUES - The UGR (Unified Glare Rating) method was introduced by the CIE (Commission Internationale de l’Eclairage) with the CIE 117 – 1995 publication “Glare Discomfort in Interior Lighting” in order to have a unified method for evaluating glare. Unlike the previous method (Diagram of light or Söllner), the index of glare depends on both the characteristics of the fixtures, and the characteristics of the environment in which it is installed, taking into account the relative position of observer- fixtures.
The UGR glare index is calculated from the size of the room, the type of light fixtures, its size and the surface reflection properties of the environment.
It is expressed by the formula:

$$UGR = 8 \log \left(\frac{0{,}25}{L_b} \sum \frac{L^2 \pi}{\rho^2} \right)$$

• UGR: A value that defines the class of the annoying glare (or glare that causes disruption without affecting the view of objects) directly produced by the fixtures of an indoor lighting system.
• Background luminance Lb: luminance of the visual field, in cd/sqm, with the exclusion of glaring sources.
• Fixtures luminance L: luminance of the luminous parts, in cd/sqm, of each appliance in the direction of observation.
• Solid angle π: solid angle, in steradian, of the luminous parts of each illumination fixture in the direction of the eye of the observer.
• Guth's position index ρ: a value that defines the offset angle to the axis of vision for each individual luminary.

UGR glare index values are between 10 and 30, from minimum to maximum probability of distress.
- UGR C 0: refers to the transversal direction of observation of the fixtures
- UGR C 90: refers to the longitudinal direction of observation of the fixtures.
Glare ratio reported in polar diagrams are calculated in relation to a local standard, as provided for by regulation CIE 117, having the following characteristics (Figure 1):

The size of the room as well as the distance between fixtures in both directions are specified in relation to the distance H between the fixture plane and the observer plane (usually assumed to be equal to 1.2 m):
- S Distance between fixtures in both directions equal to 0.25H
- X longitudinal dimension of the room equal to 4H
- Y transverse dimension of the room equal to 8H
Reflectance index of the ceiling, walls and floor, respectively, equal to 0.7, 0.5, 0.2

To aid better understanding, the UGR values reported in the polar diagram of the lighting fixtures have been grouped into the following illustrative classes by type of application, as specified in UNI EN 12464-1:

• <16 maximum viewing comfort
• <19 comfort required in offices
• <22 comfort required in other work places
• <25 need for reduced visual comfort
• <28 extremely low visual comfort



Figura 1 / Figure 1

LUMINANCE VALUES - The UNI EN 12464-1 - Light and lighting - Lighting of workplaces - Part 1: internal workplaces - prescribes the boundary values of average luminance of the lighting equipment at elevation angles of 65° and above from the downward vertical, radially around the luminaires, for work stations where display screens which are vertical or inclined up to 15° tilt angle are used.

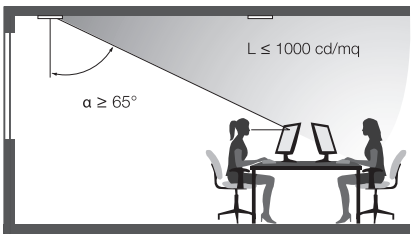

Screen high state luminance	High luminance screen >200cd/mq	Medium luminance screen ≤ 200cd/mq
Case A	≤ 3000 cd/mq	≤ 1500 cd/mq
Case B	≤ 1500 cd/mq	≤ 1000 cd/mq

• Case A: flat screens operating at positive polarity with normal requirements concerning colour and details of the shown information, as used in office, education, etc.
• Case B: to flat screens operating at negative polarity and/or with higher requirements concerning colour and details of the shown information, as used for CAD colour inspection, etc.

Photometry of devices with accessories available on request.

INDEX FOR CODE

COD.	PAG.
1E0388	573, 587, 589, 592, 599, 601
1E0990	622, 624, 627
1E0993	608, 612, 616, 618, 622, 694, 696, 699, 720, 723, 735, 737, 779
1E0994	622, 624, 626
1E0995	703, 705
1E0995FE	700
1E0996	622, 624, 626
1E1001	621
1E1002	621
1E1008	621
1E1011	621
1E1012	621
1E1018	621
1E1021	621
1E1022	621
1E1028	621
1E1385	623, 703
1E1401	575, 626, 704, 784
1E1409	625
1E1410	704
1E1713	627, 705, 785
1E1715	685, 785
1E1854	625
1E1855	704
1E1906	786
1E1929	786
1E2264	573
1E2265	573
1E2266	573
1E2267	577
1E2268	577
1E2269	577
1E2272	572
1E2274	572
1E2275	572
1E2320	594, 596, 598, 601
1E2321	366, 594, 596, 598, 601
1E2323	594, 596, 598, 601
1E2367	623
1E2368	623
1E2369	623
1E2370	623
1E2371	703
1E2372	703
1E2373	703
1E2374	703
1E2381	575
1E2382	574, 575
1E2383	574, 575
1E2386	585
1E2387	585
1E2388	588
1E2389	588
1E2390	588
1E2391	588
1E2392	588
1E2393	588
1E2394	585, 586, 588, 590, 591
1E2402	587, 589
1E2494	587, 589, 599, 601, 603, 609, 613, 617, 619, 622, 624, 665, 668, 673, 678, 683, 687, 695, 697, 700, 703, 721, 771, 779
1E2495	550, 554, 587, 589, 592, 599, 601, 770
1E2496	587, 589, 592
1E2497	593
1E2498	593
1E2499	593
1E2500	593
1E2501	595
1E2502	595
1E2503	595
1E2504	595
1E2505	595
1E2506	595
1E2507	595
1E2508	595
1E2509	597
1E2510	597
1E2511	597
1E2512	597
1E2513	597
1E2514	597
1E2515	597
1E2516	597
1E2517	597
1E2518	597
1E2519	597
1E2520	597
1E2521	593, 595, 597, 600
1E2522	593, 595, 597, 600
1E2523	599
1E2524	599, 601
1E2525	594, 596, 598, 600
1E2526	594, 596, 598, 600
1E2533	594, 596, 598, 601
1E2539	775
1E2540	775
1E2541	775
1E2542	775
1E2543	751
1E2544	751
1E2545	751
1E2546	751
1E2547	750
1E2548	752
1E2549	752
1E2550	752
1E2551	750
1E2552	751
1E2553	751
1E2554	751
1E2555	751
1E2556	750
1E2557	752
1E2558	752
1E2559	752
1E2560	750
1E2561	591
1E2562	591
1E2563	775
1E2564	774, 775
1E2565	298
1E2566	298
1E2567	298
1E2568	298
1E2569	298
1E2570	298
1E2571	299
1E2572	299
1E2573	299
1E2574	299
1E2575	299, 752
1E2576	299, 752, 755, 757
1E2577	299, 753
1E2578	299, 753, 755, 757
1E2579	299, 753
1E2580	299, 753, 757
1E2581	633
1E2582	633
1E2583	633
1E2584	633
1E2585	633
1E2586	633
1E2587	633
1E2588	633
1E2589	634
1E2590	634
1E2591	634
1E2592	634
1E2593	634
1E2594	634
1E2595	634
1E2596	634
1E2597	635
1E2598	635
1E2599	635
1E2600	635
1E2601	635
1E2602	635
1E2603	635
1E2604	635
1E2605	632
1E2606	632
1E2607	632
1E2608	632
1E2609	632
1E2610	632
1E2611	632
1E2612	632
1E2613	633
1E2614	633
1E2615	633
1E2616	633
1E2617	633
1E2618	633
1E2619	633
1E2620	633

COD.	PAG.
1E2621	635
1E2622	635
1E2623	635
1E2624	635
1E2625	635
1E2626	635
1E2627	635
1E2628	635
1E2629	632
1E2630	632
1E2631	632
1E2632	632
1E2633	632
1E2634	632
1E2635	632
1E2636	632
1E2637	634
1E2638	634
1E2639	634
1E2640	634
1E2641	634
1E2642	634
1E2643	634
1E2644	634
1E2645	635
1E2646	635
1E2647	635
1E2648	635
1E2649	635
1E2650	635
1E2651	635
1E2652	635
1E2653	632
1E2654	632
1E2655	632
1E2656	632
1E2657	633
1E2658	633
1E2659	633
1E2660	633
1E2661	634
1E2662	634
1E2663	634
1E2664	634
1E2665	546
1E2666	546
1E2667	546
1E2668	546
1E2669	546
1E2670	546
1E2671	546
1E2672	546
1E2673	548
1E2674	548
1E2675	548
1E2676	548
1E2677	548
1E2678	548
1E2679	548
1E2680	548
1E2681	549
1E2682	549
1E2683	549
1E2684	549
1E2685	549
1E2686	549
1E2687	549
1E2688	549
1E2689	546
1E2690	546
1E2691	546
1E2692	546
1E2693	546
1E2694	546
1E2695	546
1E2696	546
1E2697	547
1E2698	547
1E2699	547
1E2700	547
1E2701	547
1E2702	547
1E2703	547
1E2704	547
1E2705	549
1E2706	549
1E2707	549
1E2708	549
1E2709	549
1E2710	549
1E2711	549
1E2712	549
1E2713	547
1E2714	547
1E2715	547
1E2716	547
1E2717	547
1E2718	547
1E2719	547
1E2720	547
1E2721	548
1E2722	548
1E2723	548
1E2724	548
1E2725	548
1E2726	548
1E2727	548
1E2728	548
1E2729	549
1E2730	549
1E2731	549
1E2732	549
1E2733	549
1E2734	549
1E2735	549
1E2736	549
1E2737	546
1E2738	546
1E2739	546
1E2740	546
1E2741	547
1E2742	547
1E2743	547
1E2744	547
1E2745	548
1E2746	548
1E2747	548
1E2748	548
1E2752	636, 640
1E2753	636, 640
1E2754	636, 641
1E2755	637, 641
1E2756	637, 641
1E2757	637, 641
1E2758	637, 641
1E2759	637, 641
1E2760	637, 641
1E2761	636, 641
1E2762	550, 636
1E2763	550, 636
1E2764	550, 636
1E2765	550, 636
1E2766	683, 684
1E2767	554, 587, 592, 641, 680, 788
1E2768	586
1E2769	550, 554, 568, 587, 589, 599, 601, 603, 609, 613, 617, 619, 622, 624, 636, 641, 655, 665, 668, 673, 678, 683, 687, 695, 697, 700, 703, 718, 721, 771, 779
1E2770	603
1E2771	603
1E2772	603
1E2773	603
1E2774	603
1E2775	603
1E2779	676
1E2780	676
1E2781	676
1E2782	676
1E2783	676
1E2784	676
1E2785	676
1E2786	676
1E2806	677
1E2807	677
1E2816	678
1E2817	678
1E2818	678
1E2819	678
1E2820	678
1E2821	678
1E2822	678
1E2823	678, 680
1E2824	678, 680
1E2825	665, 668, 678, 680
1E2826	678, 680
1E2827	682
1E2828	682
1E2829	682
1E2830	682
1E2831	682
1E2832	682
1E2833	684
1E2834	684
1E2845	683, 685

INDEX FOR CODE

COD.	PAG.
1E2846	683, 685
1E2847	683, 685
1E2848	683, 685
1E2849	682
1E2850	682
1E2851	682
1E2852	682
1E2853	682
1E2854	683
1E2855	683, 684
1E2856	683, 685
1E2857	687
1E2858	687
1E2859	687
1E2860	687
1E2861	774
1E2862	774
1E2863	774
1E2864	774
1E2865	775
1E2866	775
1E2867	756
1E2868	756
1E2869	756
1E2870	756
1E2871	756
1E2872	756
1E2873	756
1E2874	756
1E2875	756
1E2876	756
1E2877	751
1E2878	751
1E2879	751
1E2880	751
1E2881	750
1E2882	750
1E2883	750
1E2884	752
1E2885	752
1E2886	752
1E2887	750
1E2888	750
1E2889	750
1E2890	754
1E2891	754
1E2892	754
1E2893	754
1E2894	754
1E2895	754
1E2896	754
1E2897	754
1E2898	754
1E2899	754
1E2900	755
1E2901	753
1E2902	753
1E2906	753, 755
1E2907	755
1E2909	759
1E2910	759
1E2911	759
1E2912	759
1E2953	729
1E2954	729
1E2955	729
1E2956	729
1E2957	729
1E2958	729
1E2959	729
1E2960	729
1E2961	729
1E2967	770
1E2968	770
1E2969	770
1E2970	770
1E2971	770
1E2972	770
1E2978	676
1E2979	676
1E2980	677
1E2981	677
1E2982	677
1E2983	677
1E2984	677
1E2985	677
1E2986	670
1E2987	670
1E2988	670
1E2989	670
1E2990	670
1E2991	670
1E2992	670
1E2993	670
1E2994D	666
1E2994DA	666
1E2994EL	666
1E2995D	666
1E2995DA	666
1E2995EL	666
1E2996D	666
1E2996DA	666
1E2996EL	666
1E2997D	666
1E2997DA	666
1E2997EL	666
1E2998D	666
1E2998DA	666
1E2998EL	666
1E2999D	666
1E2999DA	666
1E2999EL	666
1E3000D	666
1E3000DA	666
1E3000EL	666
1E3001D	666
1E3001DA	666
1E3001EL	666
1E3002D	666
1E3002DA	666
1E3002EL	666
1E3003D	666
1E3003DA	666
1E3003EL	666
1E3004D	667
1E3004DA	667
1E3004EL	667
1E3005D	667
1E3005DA	667
1E3005EL	667
1E3006	672
1E3007	672
1E3008	672
1E3009	672
1E3010	672
1E3011	672
1E3012	672
1E3013	672
1E3014	672
1E3015	672
1E3016	672
1E3017	667
1E3018	667
1E3019	667
1E3020	667
1E3021	667
1E3022	668
1E3023	667
1E3024	667
1E3025	667
1E3026	664, 667
1E3027	668
1E3028	664, 667
1E3029	668
1E3033D	671
1E3033DA	671
1E3033EL	671
1E3034D	671
1E3034DA	671
1E3034EL	671
1E3035	752, 755, 757
1E3036	752, 755, 757
1E3037	752, 755, 757
1E3038	752, 755, 757
1E3039	752, 755, 757
1E3040	775
1E3041	775
1E3042	775
1E3043	775
1E3044	775
1E3045	637, 641
1E3046	637, 641
1E3047	637, 641
1E3048	300, 550, 568, 609, 613, 617, 619, 637, 655, 665, 668, 673, 695, 698, 700, 718, 721, 724, 735, 738, 745, 767, 779, 793
1E3049	300, 550, 568, 609, 613, 617, 619, 637, 655, 665, 668, 673, 695, 698, 700, 718, 721, 724, 735, 738, 745, 767, 779, 793
1E3050	590
1E3051	590
1E3052	590
1E3053	590

COD.	PAG.
1E3054	590
1E3055	590
1E3056EL	669
1E3057EL	669
1E3058EL	669
1E3059EL	669
1E3060EL	669
1E3061EL	669
1E3062EL	669
1E3063EL	669
1E3064D	662
1E3064DA	662
1E3064EL	662
1E3065D	662
1E3065DA	662
1E3065EL	662
1E3066D	662
1E3066DA	662
1E3066EL	662
1E3067D	663
1E3067DA	663
1E3067EL	663
1E3068D	663
1E3068DA	663
1E3068EL	663
1E3069D	663
1E3069DA	663
1E3069EL	663
1E3070D	662
1E3070DA	662
1E3070EL	662
1E3071D	662
1E3071DA	662
1E3071EL	662
1E3072D	662
1E3072DA	662
1E3072EL	662
1E3073D	663
1E3073DA	663
1E3073EL	663
1E3074D	663
1E3074DA	663
1E3074EL	663
1E3075D	663
1E3075DA	663
1E3075EL	663
1E3076D	662
1E3076DA	662
1E3076EL	662
1E3077D	662
1E3077DA	662
1E3077EL	662
1E3078D	663
1E3078DA	663
1E3078EL	663
1E3079D	663
1E3079DA	663
1E3079EL	663
1E3080D	663
1E3080DA	663
1E3080EL	663
1E3081D	664
1E3081DA	664
1E3081EL	664
1E3082D	662
1E3082DA	662
1E3082EL	662
1E3083D	662
1E3083DA	662
1E3083EL	662
1E3084D	663
1E3084DA	663
1E3084EL	663
1E3085D	663
1E3085DA	663
1E3085EL	663
1E3086D	663
1E3086DA	663
1E3086EL	663
1E3087D	664
1E3087DA	664
1E3087EL	664
1E3088	664
1E3089	664
1E3090	664
1E3091	664
1E3092	664
1E3093	665
1E3094	664
1E3095	664
1E3096	664
1E3097	665
1E3098	665
1E3099	551
1E3100	551
1E3101	551
1E3102	551
1E3103	552
1E3104	552
1E3105	552
1E3106	552
1E3107	553
1E3108	553
1E3109	553
1E3110	553
1E3111	638
1E3112	638
1E3113	638
1E3114	638
1E3115	639
1E3116	639
1E3117	639
1E3118	639
1E3119	640
1E3120	640
1E3121	640
1E3122	640
1E3123	591
1E3124	679
1E3125	679
1E3126D	667
1E3126DA	667
1E3126EL	667
1E3127D	667
1E3127DA	667
1E3127EL	667
1E3128	606
1E3129	606
1E3130	606
1E3131	606
1E3132	606
1E3133	606
1E3136	610
1E3137	610
1E3138	610
1E3139	610
1E3140	610
1E3141	610
1E3144	616
1E3145	616
1E3146	618
1E3147	618
1E3148	722
1E3149	722
1E3150	722
1E3151	722
1E3152	722
1E3153	722
1E3154	722
1E3155	722
1E3156	722
1E3157	722
1E3158	722
1E3159	722
1E3160	722
1E3161	722
1E3162	722
1E3163	722
1E3164	722
1E3165	722
1E3166	723
1E3167	699
1E3168	699
1E3169	699
1E3170	699
1E3171	699
1E3172	699
1E3173	679
1E3174	679
1E3175	609
1E3176	613
1E3177	617
1E3178	619
1E3179	608, 612, 616, 618, 694, 696, 699, 720, 723, 735, 737, 778
1E3180	723
1E3181	723
1E3184	554, 587, 592, 641
1E3185	774, 775
1E3187	665
1E3188	664
1E3189DA	745
1E3189EL	745
1E3190DA	745
1E3190EL	745
1E3191DA	745
1E3191EL	745

INDEX FOR CODE

COD.	PAG.
1E3192DA	717
1E3192EL	717
1E3195DA	717
1E3195EL	717
1E3198DA	717
1E3198EL	717
1E3201DA	717
1E3201EL	717
1E3204DA	717
1E3204EL	717
1E3207DA	717
1E3207EL	717
1E3210DA	717
1E3210EL	717
1E3213DA	717
1E3213EL	717
1E3216DA	717
1E3216EL	717
1E3219	717
1E3220	645
1E3221	645
1E3222	645
1E3223	645
1E3224	645
1E3225	645
1E3226	645
1E3227	645
1E3228	645
1E3229	645
1E3230	645
1E3231	645
1E3232	646
1E3233	646
1E3234	646
1E3235	646
1E3236	646
1E3237	646
1E3238	646
1E3239	646
1E3240	646
1E3241	646
1E3242	646
1E3243	646
1E3244	647
1E3245	647
1E3246	647
1E3247	647
1E3248	648
1E3249	648
1E3250	648
1E3251	648
1E3252	648
1E3253	648
1E3254	648
1E3255	648
1E3256	649
1E3257	649
1E3258	649
1E3259	649
1E3260	649
1E3261	649
1E3262	649
1E3263	649
1E3264	649
1E3265	649
1E3266	649
1E3267	649
1E3268DA	650
1E3268EL	650
1E3269DA	650
1E3269EL	650
1E3270DA	650
1E3270EL	650
1E3271DA	650
1E3271EL	650
1E3272DA	650
1E3272EL	650
1E3273DA	650
1E3273EL	650
1E3274DA	650
1E3274EL	650
1E3275DA	650
1E3275EL	650
1E3276DA	650
1E3276EL	650
1E3277DA	650
1E3277EL	650
1E3278DA	650
1E3278EL	650
1E3279DA	650
1E3279EL	650
1E3280DA	651
1E3280EL	651
1E3281DA	651
1E3281EL	651
1E3282DA	651
1E3282EL	651
1E3283DA	651
1E3283EL	651
1E3284DA	652
1E3284EL	652
1E3285DA	652
1E3285EL	652
1E3286DA	652
1E3286EL	652
1E3287DA	652
1E3287EL	652
1E3288DA	652
1E3288EL	652
1E3289DA	652
1E3289EL	652
1E3290DA	652
1E3290EL	652
1E3291DA	652
1E3291EL	652
1E3292DA	653
1E3292EL	653
1E3293DA	653
1E3293EL	653
1E3294DA	653
1E3294EL	653
1E3295DA	653
1E3295EL	653
1E3296DA	653
1E3296EL	653
1E3297DA	653
1E3297EL	653
1E3298DA	653
1E3298EL	653
1E3299DA	653
1E3299EL	653
1E3300DA	653
1E3300EL	653
1E3301DA	653
1E3301EL	653
1E3302DA	653
1E3302EL	653
1E3303DA	653
1E3303EL	653
1E3304	654
1E3305	568, 655, 745
1E3306	654
1E3307	645
1E3308	645
1E3309	645
1E3310	645
1E3311	646
1E3312	646
1E3313	646
1E3314	646
1E3315	646
1E3316	646
1E3317	646
1E3318	646
1E3319	647
1E3320	647
1E3321	647
1E3322	647
1E3323	647
1E3324	647
1E3325	647
1E3326	647
1E3327	647
1E3328	647
1E3329	647
1E3330	647
1E3331	648
1E3332	648
1E3333	648
1E3334	648
1E3335	648
1E3336	648
1E3337	648
1E3338	648
1E3339	648
1E3340	648
1E3341	648
1E3342	648
1E3343	649
1E3344	649
1E3345	649
1E3346	649
1E3347	650
1E3348	650
1E3349	650
1E3350	650
1E3351	650
1E3352	650
1E3353	650

COD.	PAG.
1E3354	650
1E3355DA	651
1E3355EL	651
1E3356DA	651
1E3356EL	651
1E3357DA	651
1E3357EL	651
1E3358DA	651
1E3358EL	651
1E3359DA	651
1E3359EL	651
1E3360DA	651
1E3360EL	651
1E3361DA	651
1E3361EL	651
1E3362DA	651
1E3362EL	651
1E3363DA	651
1E3363EL	651
1E3364DA	651
1E3364EL	651
1E3365DA	651
1E3365EL	651
1E3366DA	651
1E3366EL	651
1E3367DA	652
1E3367EL	652
1E3368DA	652
1E3368EL	652
1E3369DA	652
1E3369EL	652
1E3370DA	652
1E3370EL	652
1E3371DA	652
1E3371EL	652
1E3372DA	652
1E3372EL	652
1E3373DA	652
1E3373EL	652
1E3374DA	652
1E3374EL	652
1E3375DA	652
1E3375EL	652
1E3376DA	652
1E3376EL	652
1E3377DA	652
1E3377EL	652
1E3378DA	652
1E3378EL	652
1E3379DA	653
1E3379EL	653
1E3380DA	653
1E3380EL	653
1E3381DA	653
1E3381EL	653
1E3382DA	653
1E3382EL	653
1E3383DA	654
1E3383EL	654
1E3384DA	654
1E3384EL	654
1E3385DA	654
1E3385EL	654

COD.	PAG.
1E3386DA	654
1E3386EL	654
1E3387DA	654
1E3387EL	654
1E3388DA	654
1E3388EL	654
1E3389DA	654
1E3389EL	654
1E3390DA	654
1E3390EL	654
1E3399	745
1E3404	574
1E3405	574
1E3406	574
1E3407	574
1E3410DA	766
1E3410EL	766
1E3411DA	766
1E3411EL	766
1E3412DA	766
1E3412EL	766
1E3413DA	766
1E3413EL	766
1E3414DA	766
1E3414EL	766
1E3415DA	766
1E3415EL	766
1E3416DA	766
1E3416EL	766
1E3417DA	766
1E3417EL	766
1E3418DA	766
1E3418EL	766
1E3419DA	766
1E3419EL	766
1E3420DA	766
1E3420EL	766
1E3421DA	766
1E3421EL	766
1E3422DA	765
1E3422EL	765
1E3423DA	765
1E3423EL	765
1E3424DA	765
1E3424EL	765
1E3425DA	765
1E3425EL	765
1E3426DA	765
1E3426EL	765
1E3427DA	765
1E3427EL	765
1E3428DA	765
1E3428EL	765
1E3429DA	765
1E3429EL	765
1E3430DA	765
1E3430EL	765
1E3431DA	765
1E3431EL	765
1E3432DA	765
1E3432EL	765
1E3433DA	765
1E3433EL	765

COD.	PAG.
1E3434	767
1E3435	767
1E3436	767
1E3437	717
1E3438	717
1E3439	717
1E3440	718
1E3441	719
1E3442DA	719
1E3442EL	719
1E3443DA	719
1E3443EL	719
1E3444DA	719
1E3444EL	719
1E3445	719
1E3446	719
1E3447	720
1E3448	767
1E3449	767
1E3450	718, 778
1E3451	606
1E3452	607
1E3453	607
1E3454	606
1E3455	607
1E3456	607
1E3457	606
1E3458	607
1E3459	607
1E3460	609
1E3461	610
1E3462	611
1E3463	611
1E3464	610
1E3465	611
1E3466	611
1E3467	610
1E3468	611
1E3469	611
1E3470	613
1E3471	607
1E3472	607
1E3473	607
1E3474	607
1E3475	607
1E3476	607
1E3477	607
1E3478	607
1E3479	607
1E3480	611
1E3481	611
1E3482	611
1E3483	611
1E3484	611
1E3485	611
1E3486	611
1E3487	611
1E3488	611
1E3489	608
1E3490	608
1E3491	608
1E3492	608
1E3493	608

INDEX FOR CODE

COD.	PAG.
1E3494	608
1E3495	608
1E3496	608
1E3497	608
1E3498	612
1E3499	612
1E3500	612
1E3501	612
1E3502	612
1E3503	612
1E3504	612
1E3505	612
1E3506	612
1E3507	550, 554
1E3508	550, 554
1E3509	550, 554
1E3510	767
1E3511	719
1E3512DA	719
1E3512EL	719
1E3513	719
1E3514DA	719
1E3514EL	719
1E3515	719
1E3516DA	719
1E3516EL	719
1E3517	600
1E3518	600
1E3519	600
1E3520	600
1E3521DA	734
1E3521EL	734
1E3522	734
1E3523DA	734
1E3523EL	734
1E3524	734
1E3525DA	734
1E3525EL	734
1E3526	734
1E3527DA	734
1E3527EL	734
1E3528	734
1E3529DA	734
1E3529EL	734
1E3530	734
1E3531DA	734
1E3531EL	734
1E3532	734
1E3533DA	735
1E3533EL	735
1E3534	735
1E3535DA	735
1E3535EL	735
1E3536	735
1E3537DA	735
1E3537EL	735
1E3538	735
1E3539DA	736
1E3539EL	736
1E3540	736
1E3541DA	736
1E3541EL	736
1E3542	736
1E3543DA	736
1E3543EL	736
1E3544	736
1E3545DA	736
1E3545EL	736
1E3546	736
1E3547DA	736
1E3547EL	736
1E3548	736
1E3549DA	736
1E3549EL	736
1E3550	736
1E3551DA	737
1E3551EL	737
1E3552	737
1E3553DA	737
1E3553EL	737
1E3554	737
1E3555DA	737
1E3555EL	737
1E3556	737
1E3557	567, 654
1E3558	567, 654
1E3559	568, 654
1E3560	568, 654
1E3561	558
1E3562	558
1E3563	558
1E3564	558
1E3565	558
1E3566	558
1E3567	558
1E3568	558
1E3569	558
1E3570	558
1E3571	558
1E3572	558
1E3573	558
1E3574	558
1E3575	558
1E3576	558
1E3577	559
1E3578	559
1E3579	559
1E3580	559
1E3581	559
1E3582	559
1E3583	559
1E3584	559
1E3585	559
1E3586	559
1E3587	559
1E3588	559
1E3589	559
1E3590	559
1E3591	559
1E3592	559
1E3593	559
1E3594	559
1E3595	559
1E3596	559
1E3597	560
1E3598	560
1E3599	560
1E3600	560
1E3601	560
1E3602	560
1E3603	560
1E3604	560
1E3605	560
1E3606	560
1E3607	560
1E3608	560
1E3609	560
1E3610	560
1E3611	560
1E3612	560
1E3613	561
1E3614	561
1E3615	561
1E3616	561
1E3617	561
1E3618	561
1E3619	561
1E3620	561
1E3621	561
1E3622	561
1E3623	561
1E3624	561
1E3625	561
1E3626	561
1E3627	561
1E3628	561
1E3629	561
1E3630	561
1E3631	561
1E3632	561
1E3633	562
1E3634	562
1E3635	562
1E3636	562
1E3637	562
1E3638	562
1E3639	562
1E3640	562
1E3641	562
1E3642	562
1E3643	562
1E3644	562
1E3645	562
1E3646	562
1E3647	562
1E3648	562
1E3649	563
1E3650	563
1E3651	563
1E3652	563
1E3653	563
1E3654	563
1E3655	563
1E3656	563
1E3657DA	563
1E3657EL	563
1E3658DA	563
1E3658EL	563
1E3659DA	563

COD.	PAG.
1E3659EL	563
1E3660DA	563
1E3660EL	563
1E3661DA	563
1E3661EL	563
1E3662DA	563
1E3662EL	563
1E3663DA	563
1E3663EL	563
1E3664DA	563
1E3664EL	563
1E3665DA	563
1E3665EL	563
1E3666DA	563
1E3666EL	563
1E3667DA	563
1E3667EL	563
1E3668DA	563
1E3668EL	563
1E3669DA	564
1E3669EL	564
1E3670DA	564
1E3670EL	564
1E3671DA	564
1E3671EL	564
1E3672DA	564
1E3672EL	564
1E3673DA	564
1E3673EL	564
1E3674DA	564
1E3674EL	564
1E3675DA	564
1E3675EL	564
1E3676DA	564
1E3676EL	564
1E3677DA	564
1E3677EL	564
1E3678DA	564
1E3678EL	564
1E3679DA	564
1E3679EL	564
1E3680DA	564
1E3680EL	564
1E3681DA	564
1E3681EL	564
1E3682DA	564
1E3682EL	564
1E3683DA	564
1E3683EL	564
1E3684DA	564
1E3684EL	564
1E3685DA	565
1E3685EL	565
1E3686DA	565
1E3686EL	565
1E3687DA	565
1E3687EL	565
1E3688DA	565
1E3688EL	565
1E3689DA	565
1E3689EL	565
1E3690DA	565
1E3690EL	565

COD.	PAG.
1E3691DA	565
1E3691EL	565
1E3692DA	565
1E3692EL	565
1E3693DA	565
1E3693EL	565
1E3694DA	565
1E3694EL	565
1E3695DA	565
1E3695EL	565
1E3696DA	565
1E3696EL	565
1E3697DA	565
1E3697EL	565
1E3698DA	565
1E3698EL	565
1E3699DA	565
1E3699EL	565
1E3700DA	565
1E3700EL	565
1E3701DA	565
1E3701EL	565
1E3702DA	565
1E3702EL	565
1E3703DA	565
1E3703EL	565
1E3704DA	565
1E3704EL	565
1E3705DA	566
1E3705EL	566
1E3706DA	566
1E3706EL	566
1E3707DA	566
1E3707EL	566
1E3708DA	566
1E3708EL	566
1E3709DA	566
1E3709EL	566
1E3710DA	566
1E3710EL	566
1E3711DA	566
1E3711EL	566
1E3712DA	566
1E3712EL	566
1E3713DA	566
1E3713EL	566
1E3714DA	566
1E3714EL	566
1E3715DA	566
1E3715EL	566
1E3716DA	566
1E3716EL	566
1E3717DA	566
1E3717EL	566
1E3718DA	566
1E3718EL	566
1E3719DA	566
1E3719EL	566
1E3720DA	566
1E3720EL	566
1E3721DA	567
1E3721EL	567
1E3722DA	567

COD.	PAG.
1E3722EL	567
1E3723DA	567
1E3723EL	567
1E3724DA	567
1E3724EL	567
1E3725DA	567
1E3725EL	567
1E3726DA	567
1E3726EL	567
1E3727DA	567
1E3727EL	567
1E3728DA	567
1E3728EL	567
1E3729	567
1E3730	567
1E3731	567
1E3732	567
1E3733	567
1E3734	567
1E3735	567
1E3736	778
1E3737	778
1E3738	778
1E3739	778
1E3740	778
1E3741	778
1E3742	722
1E3743	722
1E3744	722
1E3745	722
1E3746	722
1E3747	722
1E3748	722
1E3749	722
1E3750	722
1E3751	722
1E3752	722
1E3753	722
1E3754	722
1E3755	722
1E3756	722
1E3757	722
1E3758	722
1E3759	722
1E3760DA	717
1E3760EL	717
1E3761DA	717
1E3761EL	717
1E3762DA	717
1E3762EL	717
1E3763	719
1E3764DA	719
1E3764EL	719
1E3765	719
1E3766DA	719
1E3766EL	719
1E3767	696
1E3768	696
1E3769	696
1E3770	696
1E3771	696
1E3772	696
1E3773	693

INDEX FOR CODE

COD.	PAG.
1E3774	693
1E3775	693
1E3776	693
1E3777	693
1E3778	693
1E3779	693
1E3780	693
1E3781	693
1E3782	693
1E3783	693
1E3784	693
1E3785	693, 696
1E3786	693, 696
1E3787	697
1E3788	694
1E3789	697
1E3790	694
1E3791	697
1E3792	694
1E3793	697
1E3794	697
1E3795	697
1E3796	697
1E3797	697
1E3798	694
1E3799	694
1E3800	694
1E3801	694
1E3802	694
1E3803	693, 696
1E3804	693, 696
1E3805	697
1E3806	694
1T0123	503
1T0123DA	503
1T0124	503
1T0124DA	503
1T0130	504
1T0130DA	504
1T1173	129
1T1245	129
1T1463	130
1T1696	586, 589
1T1699	587, 589
1T1700	586, 589
1T1701	586, 589
1T1702	586, 589
1T1703	586, 589
1T1704	586, 589
1T1708	184, 203, 241, 247, 272, 598
1T1709	184, 203, 241, 247, 272
1T1711	185, 204, 240, 248, 273, 599
1T1712	184, 203, 247, 272, 598
1T1713	184, 203, 247, 272, 598
1T1714	184, 203, 247, 272, 598
1T1715	184, 203, 247, 272, 598
1T1716	184, 203, 247, 272, 598
1T1757	215, 216, 217, 321
1T1827	575, 626, 704, 784
1T1898	576, 627, 685, 705, 787
1T1932	576, 685, 785
1T2219	228, 231, 232, 249, 262, 265, 270, 273, 277, 505
1T2220	228, 231, 232, 249, 262, 265, 270, 273, 277, 505
1T2221	228, 231, 232, 249, 262, 265, 270, 273, 277, 505
1T2222	228, 231, 232, 249, 262, 265, 270, 274, 277, 505
1T2223	228, 231, 232, 249, 262, 265, 270, 274, 277, 505
1T2224	228, 231, 232, 249, 262, 265, 270, 274, 277, 505
1T2245	576, 626, 705, 784
1T2266	785
1T2418	130
1T2833	143, 150
1T2921D	114
1T2921DA	114
1T2921EL	114
1T2922D	114
1T2922DA	114
1T2922EL	114
1T2923D	114
1T2923DA	114
1T2923EL	114
1T2924D	114
1T2924DA	114
1T2924EL	114
1T2925D	114
1T2925DA	114
1T2925EL	114
1T2926D	114
1T2926DA	114
1T2926EL	114
1T2927D	114
1T2927DA	114
1T2927EL	114
1T2928D	114
1T2928DA	114
1T2928EL	114
1T2929D	116
1T2929DA	116
1T2929EL	116
1T2930D	116
1T2930DA	116
1T2930EL	116
1T2931D	116
1T2931DA	116
1T2931EL	116
1T2932D	116
1T2932DA	116
1T2932EL	116
1T2933	113, 115, 116, 117, 118, 138, 140, 141
1T2934	115
1T2935	113, 115, 116, 117, 118, 138, 140, 141
1T2937	119, 143
1T2939	113, 115, 116, 117
1T2948D	121
1T2948DA	121
1T2948EL	121
1T2949D	121
1T2949DA	121
1T2949EL	121
1T2950D	121
1T2950DA	121
1T2950EL	121
1T2951D	121
1T2951DA	121
1T2951EL	121
1T2952D	121
1T2952DA	121
1T2952EL	121
1T2953D	121
1T2953DA	121
1T2953EL	121
1T2954D	121
1T2954DA	121
1T2954EL	121
1T2955D	121
1T2955DA	121
1T2955EL	121
1T2956D	122
1T2956DA	122
1T2956EL	122
1T2957D	122
1T2957DA	122
1T2957EL	122
1T2958D	122
1T2958DA	122
1T2958EL	122
1T2959D	122
1T2959DA	122
1T2959EL	122
1T2960	119
1T2961	119
1T2962	119
1T2963	314
1T2965	314
1T2966	299, 314, 321
1T2968	299, 314, 321
1T3035	113
1T3076D	139
1T3076DA	139
1T3076EL	139
1T3077D	139
1T3077DA	139
1T3077EL	139
1T3080D	139
1T3080DA	139
1T3080EL	139
1T3081D	139

COD.	PAG.
1T3081DA	139
1T3081EL	139
1T3082D	138
1T3082DA	138
1T3082EL	138
1T3083D	138
1T3083DA	138
1T3083EL	138
1T3084D	139
1T3084DA	139
1T3084EL	139
1T3085D	139
1T3085DA	139
1T3085EL	139
1T3086D	139
1T3086DA	139
1T3086EL	139
1T3087D	139
1T3087DA	139
1T3087EL	139
1T3088D	140
1T3088DA	140
1T3088EL	140
1T3089D	140
1T3089DA	140
1T3089EL	140
1T3092D	146
1T3092DA	146
1T3092EL	146
1T3093D	146
1T3093DA	146
1T3093EL	146
1T3096D	147
1T3096DA	147
1T3096EL	147
1T3097D	147
1T3097DA	147
1T3097EL	147
1T3098D	146
1T3098DA	146
1T3098EL	146
1T3099D	146
1T3099DA	146
1T3099EL	146
1T3100D	147
1T3100DA	147
1T3100EL	147
1T3101D	147
1T3101DA	147
1T3101EL	147
1T3102D	146
1T3102DA	146
1T3102EL	146
1T3103D	146
1T3103DA	146
1T3103EL	146
1T3104D	147
1T3104DA	147
1T3104EL	147
1T3105D	147
1T3105DA	147
1T3105EL	147
1T3108D	136
1T3108DA	136
1T3108EL	136
1T3109D	136
1T3109DA	136
1T3109EL	136
1T3112D	137
1T3112DA	137
1T3112EL	137
1T3113D	137
1T3113DA	137
1T3113EL	137
1T3114D	136
1T3114DA	136
1T3114EL	136
1T3115D	136
1T3115DA	136
1T3115EL	136
1T3116D	137
1T3116DA	137
1T3116EL	137
1T3117D	137
1T3117DA	137
1T3117EL	137
1T3118D	136
1T3118DA	136
1T3118EL	136
1T3119D	136
1T3119DA	136
1T3119EL	136
1T3120D	137
1T3120DA	137
1T3120EL	137
1T3121D	137
1T3121DA	137
1T3121EL	137
1T3124D	144
1T3124DA	144
1T3124EL	144
1T3125D	144
1T3125DA	144
1T3125EL	144
1T3128D	145
1T3128DA	145
1T3128EL	145
1T3129D	145
1T3129DA	145
1T3129EL	145
1T3130D	144
1T3130DA	144
1T3130EL	144
1T3131D	144
1T3131DA	144
1T3131EL	144
1T3132D	145
1T3132DA	145
1T3132EL	145
1T3133D	145
1T3133DA	145
1T3133EL	145
1T3134D	144
1T3134DA	144
1T3134EL	144
1T3135D	144
1T3135DA	144
1T3135EL	144
1T3136D	145
1T3136DA	145
1T3136EL	145
1T3137D	145
1T3137DA	145
1T3137EL	145
1T3138	142, 149
1T3139	142, 149
1T3140	142, 149, 261, 263, 314
1T3141	142, 149, 261, 263, 314
1T3142	143, 150, 185, 204, 241, 248, 262, 265, 273, 315
1T3143	185, 204, 248, 262, 265, 273, 315
1T3144	119, 123, 125, 126, 130, 143, 150, 155, 159, 186, 191, 204, 207, 209, 211, 213, 299, 316, 322
1T3157D	117
1T3157DA	117
1T3157EL	117
1T3158D	117
1T3158DA	117
1T3158EL	117
1T3159D	117
1T3159DA	117
1T3159EL	117
1T3160D	117
1T3160DA	117
1T3160EL	117
1T3162	500
1T3163	500
1T3164	500
1T3165	500
1T3166	501
1T3167	501
1T3168	501
1T3169	501
1T3170	502
1T3171	502
1T3172	502
1T3173	502
1T3174	500
1T3175	500
1T3176	500
1T3177	500
1T3178	501
1T3179	501
1T3180	501
1T3181	501
1T3182	500
1T3183	500
1T3184	500
1T3185	500
1T3186	501
1T3187	501
1T3188	501

INDEX FOR CODE

COD.	PAG.
1T3189	501
1T3190	502
1T3191	502
1T3192	502
1T3193	502
1T3194	500
1T3195	500
1T3196	500
1T3197	500
1T3198	501
1T3199	501
1T3200	501
1T3201	501
1T3202	500
1T3203	500
1T3204	500
1T3205	500
1T3206	501
1T3207	501
1T3208	501
1T3209	501
1T3210	502
1T3211	502
1T3212	502
1T3213	502
1T3214	500
1T3215	500
1T3216	500
1T3217	500
1T3218	501
1T3219	501
1T3220	501
1T3221	501
1T3222	500
1T3223	500
1T3224	500
1T3225	500
1T3226	501
1T3227	501
1T3228	501
1T3229	501
1T3230	502
1T3231	502
1T3232	502
1T3233	502
1T3234	500
1T3235	500
1T3236	500
1T3237	500
1T3238	501
1T3239	501
1T3240	501
1T3241	501
1T3242DA	504
1T3243	503
1T3244	503
1T3245	503
1T3246	503
1T3247	503
1T3248	505
1T3249	505
1T3250	505
1T3251	505

COD.	PAG.
1T3256D	114
1T3256DA	114
1T3256EL	114
1T3257D	114
1T3257DA	114
1T3257EL	114
1T3258D	114
1T3258DA	114
1T3258EL	114
1T3259D	114
1T3259DA	114
1T3259EL	114
1T3260D	116
1T3260DA	116
1T3260EL	116
1T3261D	116
1T3261DA	116
1T3261EL	116
1T3266D	121
1T3266DA	121
1T3266EL	121
1T3267D	121
1T3267DA	121
1T3267EL	121
1T3268D	121
1T3268DA	121
1T3268EL	121
1T3269D	121
1T3269DA	121
1T3269EL	121
1T3270D	122
1T3270DA	122
1T3270EL	122
1T3271D	122
1T3271DA	122
1T3271EL	122
1T3272	495
1T3273	495
1T3274	495
1T3275	495
1T3296	495
1T3297	495
1T3298	495
1T3299	495
1T3320	495
1T3321	495
1T3322	495
1T3323	495
1T3344	495
1T3345	495
1T3346	495
1T3347	495
1T3368D	118
1T3368DA	118
1T3368EL	118
1T3369D	118
1T3369DA	118
1T3369EL	118
1T3370D	118
1T3370DA	118
1T3370EL	118
1T3371D	118
1T3371DA	118

COD.	PAG.
1T3371EL	118
1T3372D	118
1T3372DA	118
1T3372EL	118
1T3373D	118
1T3373DA	118
1T3373EL	118
1T3374D	123
1T3374DA	123
1T3374EL	123
1T3375D	123
1T3375DA	123
1T3375EL	123
1T3376D	123
1T3376DA	123
1T3376EL	123
1T3377D	123
1T3377DA	123
1T3377EL	123
1T3378D	123
1T3378DA	123
1T3378EL	123
1T3379D	123
1T3379DA	123
1T3379EL	123
1T3422	142, 149
1T3423	142, 149, 261, 265, 315
1T3424	142, 149, 261, 314
1T3425	142, 149, 261, 314
1T3426	142, 149, 261, 314
1T3427	142, 149, 261, 314
1T3428	142, 149, 261, 314
1T3432	143, 150, 185, 204, 248, 262, 265, 273, 315
1T3433	503
1T3434	503
1T3435	503
1T3436	503
1T3437	503
1T3438	503
1T3439	503
1T3440	503
1T3441	503
1T3442	503
1T3443	503
1T3444	503
1T3445	503
1T3446	503
1T3447	503
1T3448	503
1T3449	503
1T3450	503
1T3451	503
1T3452	504
1T3453	504
1T3454	504
1T3483	257
1T3484	257
1T3485	257
1T3486	257
1T3491	257

COD.	PAG.
1T3492	257
1T3493	257
1T3494	257
1T3499	257
1T3500	257
1T3501	257
1T3502	257
1T3529	113, 115, 116, 117, 118, 138, 140, 141
1T3530	113, 115, 116, 117, 118, 138, 140, 141
1T3531	115
1T3548D	136
1T3548DA	136
1T3548EL	136
1T3550D	137
1T3550DA	137
1T3550EL	137
1T3551D	136
1T3551DA	136
1T3551EL	136
1T3552D	137
1T3552DA	137
1T3552EL	137
1T3553D	136
1T3553DA	136
1T3553EL	136
1T3554D	137
1T3554DA	137
1T3554EL	137
1T3556D	139
1T3556DA	139
1T3556EL	139
1T3558D	139
1T3558DA	139
1T3558EL	139
1T3559D	138
1T3559DA	138
1T3559EL	138
1T3560D	139
1T3560DA	139
1T3560EL	139
1T3561D	139
1T3561DA	139
1T3561EL	139
1T3562D	140
1T3562DA	140
1T3562EL	140
1T3564D	144
1T3564DA	144
1T3564EL	144
1T3566D	145
1T3566DA	145
1T3566EL	145
1T3567D	144
1T3567DA	144
1T3567EL	144
1T3568D	145
1T3568DA	145
1T3568EL	145
1T3569D	144
1T3569DA	144
1T3569EL	144
1T3570D	145
1T3570DA	145
1T3570EL	145
1T3572D	146
1T3572DA	146
1T3572EL	146
1T3574D	147
1T3574DA	147
1T3574EL	147
1T3575D	146
1T3575DA	146
1T3575EL	146
1T3576D	147
1T3576DA	147
1T3576EL	147
1T3577D	146
1T3577DA	146
1T3577EL	146
1T3578D	147
1T3578DA	147
1T3578EL	147
1T3586	574, 608, 612, 616, 618, 694, 696, 699, 720, 723, 735, 737, 778
1T3587	608, 612, 616, 618, 694, 696, 699, 720, 723, 735, 737, 779
1T3588	608, 612, 616, 618, 694, 696, 699, 720, 723, 735, 737, 779
1T3607D	199
1T3607DA	199
1T3607EL	199
1T3608D	199
1T3608DA	199
1T3608EL	199
1T3609D	199
1T3609DA	199
1T3609EL	199
1T3610D	199
1T3610DA	199
1T3610EL	199
1T3611D	200
1T3611DA	200
1T3611EL	200
1T3612D	200
1T3612DA	200
1T3612EL	200
1T3613D	199
1T3613DA	199
1T3613EL	199
1T3614D	200
1T3614DA	200
1T3614EL	200
1T3615D	200
1T3615DA	200
1T3615EL	200
1T3616D	199
1T3616DA	199
1T3616EL	199
1T3617D	199
1T3617DA	199
1T3617EL	199
1T3618D	199
1T3618DA	199
1T3618EL	199
1T3619D	199
1T3619DA	199
1T3619EL	199
1T3620D	200
1T3620DA	200
1T3620EL	200
1T3621D	200
1T3621DA	200
1T3621EL	200
1T3622D	199
1T3622DA	199
1T3622EL	199
1T3623D	200
1T3623DA	200
1T3623EL	200
1T3624D	200
1T3624DA	200
1T3624EL	200
1T3625	299
1T3627	299
1T3684	268
1T3684DA	268
1T3685	268
1T3685DA	268
1T3686	268
1T3686DA	268
1T3687	268
1T3687DA	268
1T3692	268
1T3692DA	268
1T3693	268
1T3693DA	268
1T3694	269
1T3694DA	269
1T3695	269
1T3695DA	269
1T3696	269
1T3697	217
1T3698	217
1T3699	215
1T3700	215
1T3701	216
1T3702	216
1T3725	119, 143
1T3726	608, 612, 616, 618, 694, 696, 699, 720, 723, 735, 737
1T3727	185, 204, 241, 248, 273, 599
1T3759	529
1T3760	529
1T3762	529
1T3763	529
1T3765	515
1T3766	515
1T3768	515
1T3769	515
1T3771	527
1T3772	527

INDEX FOR CODE

COD.	PAG.
1T3781	314
1T3783	314
1T3935	217
1T3936	217
1T3937	215
1T3938	215
1T3939	216
1T3940	216
1T3966	321
1T3978	491, 492, 511
1T3979	511
1T3980	511
1T3985	511
1T3986	511
1T3991	511
1T3992	511
1T3997	531
1T3998	531
1T3999	531
1T4002	534
1T4003	535
1T4004	535
1T4005	541
1T4006	541
1T4049	490
1T4050	490
1T4051	490
1T4052	490
1T4053	491
1T4054	491
1T4055	492
1T4056	492
1T4061	495
1T4062	495
1T4063	458
1T4065	458
1T4067	458
1T4069	458
1T4071	458
1T4072	458
1T4075	458
1T4076	513
1T4077	513
1T4082	513
1T4083	513
1T4088	513
1T4089	513
1T4112D	199
1T4112DA	199
1T4112EL	199
1T4113D	199
1T4113DA	199
1T4113EL	199
1T4114D	199
1T4114DA	199
1T4114EL	199
1T4115D	199
1T4115DA	199
1T4115EL	199
1T4116D	199
1T4116DA	199
1T4116EL	199
1T4117D	199
1T4117DA	199
1T4117EL	199
1T4118D	200
1T4118DA	200
1T4118EL	200
1T4119D	200
1T4119DA	200
1T4119EL	200
1T4120D	199
1T4120DA	199
1T4120EL	199
1T4121D	199
1T4121DA	199
1T4121EL	199
1T4122D	200
1T4122DA	200
1T4122EL	200
1T4123D	200
1T4123DA	200
1T4123EL	200
1T4124D	199
1T4124DA	199
1T4124EL	199
1T4125D	200
1T4125DA	200
1T4125EL	200
1T4126D	200
1T4126DA	200
1T4126EL	200
1T4127D	199
1T4127DA	199
1T4127EL	199
1T4128D	200
1T4128DA	200
1T4128EL	200
1T4129D	200
1T4129DA	200
1T4129EL	200
1T4170	525
1T4171	525
1T4172	525
1T4173	525
1T4174	525
1T4175	525
1T4176	525
1T4177	525
1T4178	469
1T4179	469
1T4180	469
1T4181	469
1T4182	469
1T4183	469
1T4184	469
1T4185	469
1T4186	465
1T4187	465
1T4188	465
1T4189	466
1T4190	466
1T4191	466
1T4192	523
1T4193	523
1T4194	523
1T4195	523
1T4197	271
1T4197DA	271
1T4198	271
1T4198DA	271
1T4199	271
1T4199DA	271
1T4201	271
1T4201DA	271
1T4202	271
1T4202DA	271
1T4203	271
1T4203DA	271
1T4213	113, 115, 116, 117, 118, 138, 140, 141
1T4215D	671
1T4215DA	671
1T4215EL	671
1T4216DA	205
1T4216EL	205
1T4217DA	205
1T4217EL	205
1T4218DA	205
1T4218EL	205
1T4219DA	205
1T4219EL	205
1T4220DA	205
1T4220EL	205
1T4221DA	205
1T4221EL	205
1T4222DA	205
1T4222EL	205
1T4223DA	205
1T4223EL	205
1T4224DA	206
1T4224EL	206
1T4225DA	206
1T4225EL	206
1T4226DA	206
1T4226EL	206
1T4227DA	206
1T4227EL	206
1T4228DA	205
1T4228EL	205
1T4229DA	205
1T4229EL	205
1T4230DA	205
1T4230EL	205
1T4231DA	205
1T4231EL	205
1T4232DA	205
1T4232EL	205
1T4233DA	205
1T4233EL	205
1T4234DA	205
1T4234EL	205
1T4235DA	205
1T4235EL	205
1T4236DA	206
1T4236EL	206
1T4237DA	206
1T4237EL	206
1T4238DA	206

COD.	PAG.
1T4238EL	206
1T4239DA	206
1T4239EL	206
1T4240	458
1T4241	458
1T4242	458
1T4243	458
1T4244	458
1T4245	459
1T4246	459
1T4247	459
1T4248	459
1T4249	268
1T4249DA	268
1T4250	268
1T4250DA	268
1T4251	268
1T4251DA	268
1T4252	268
1T4252DA	268
1T4253	269
1T4253DA	269
1T4254	269
1T4254DA	269
1T4255	269
1T4255DA	269
1T4256	269
1T4256DA	269
1T4257	271
1T4257DA	271
1T4258	271
1T4258DA	271
1T4259	272
1T4259DA	272
1T4260	271
1T4260DA	271
1T4261	271
1T4261DA	271
1T4262	272
1T4262DA	272
1T4264D	139
1T4264DA	139
1T4264EL	139
1T4266D	139
1T4266DA	139
1T4266EL	139
1T4268D	139
1T4268DA	139
1T4268EL	139
1T4270D	140
1T4270DA	140
1T4270EL	140
1T4272D	147
1T4272DA	147
1T4272EL	147
1T4274D	147
1T4274DA	147
1T4274EL	147
1T4276D	147
1T4276DA	147
1T4276EL	147
1T4278D	148
1T4278DA	148
1T4278EL	148
1T4297D	200
1T4297DA	200
1T4297EL	200
1T4298D	201
1T4298DA	201
1T4298EL	201
1T4299D	201
1T4299DA	201
1T4299EL	201
1T4300D	201
1T4300DA	201
1T4300EL	201
1T4301D	201
1T4301DA	201
1T4301EL	201
1T4302D	201
1T4302DA	201
1T4302EL	201
1T4303D	202
1T4303DA	202
1T4303EL	202
1T4304	129
1T4304DA	129
1T4305	129
1T4305DA	129
1T4322	155, 191, 207, 239, 253, 277, 322, 375
1T4324	155, 191, 207, 253, 277, 322
1T4325	191, 207, 253, 277, 322
1T4369	257
1T4370	257
1T4373	257
1T4374	257
1T4377	257
1T4378	257
1T4381	257
1T4381CA	258
1T4382	257
1T4382CA	258
1T4385	257
1T4385CA	258
1T4386	257
1T4386CA	258
1T4389	257
1T4389CA	258
1T4390	257
1T4390CA	258
1T4439CA	263
1T4440CA	263
1T4441CA	263
1T4442CA	263
1T4443CA	263
1T4444CA	263
1T4445CA	263
1T4446CA	263
1T4447CA	263
1T4448CA	263
1T4449CA	263
1T4450CA	263
1T4451	503
1T4452	503
1T4453	503
1T4454	503
1T4455	500
1T4456	500
1T4457	500
1T4458	500
1T4459	501
1T4460	501
1T4461	501
1T4462	501
1T4463	502
1T4464	502
1T4465	504
1T4466	503
1T4467	503
1T4469	503
1T4470	503
1T4472	503
1T4473	503
1T4475	503
1T4476	503
1T4478	504
1T4479	504
1T4499	521
1T4499CA	521
1T4506	521
1T4507	521
1T4512	519
1T4513	519
1T4514	519
1T4515	519
1T4522	462
1T4523	462
1T4524	462
1T4525	462
1T4526	319
1T4527	319
1T4528	317
1T4529	317
1T4530	319
1T4531	319
1T4532	317
1T4533	317
1T4538	319
1T4539	319
1T4540	320
1T4541	317
1T4542	318
1T4543	318
1T4544	319
1T4545	319
1T4546	320
1T4547	317
1T4548	318
1T4549	318
1T4550	319
1T4551	320
1T4552	318
1T4553	318
1T4554	319
1T4555	320
1T4556	318

INDEX FOR CODE

COD.	PAG.
1T4557	318
1T4558	310
1T4559	310
1T4560	306
1T4561	307
1T4562	310
1T4563	310
1T4564	306
1T4565	307
1T4566	310
1T4567	311
1T4568	311
1T4569	307
1T4570	307
1T4571	308
1T4572	310
1T4573	311
1T4574	311
1T4575	307
1T4576	307
1T4577	308
1T4578	310
1T4579	311
1T4580	311
1T4581	307
1T4582	308
1T4583	308
1T4584	310
1T4585	311
1T4586	311
1T4587	307
1T4588	308
1T4589	308
1T4590	311
1T4591	312
1T4592	308
1T4593	308
1T4594	311
1T4595	312
1T4596	308
1T4597	308
1T4598	311
1T4599	312
1T4600	308
1T4601	309
1T4602	311
1T4603	312
1T4604	308
1T4605	309
1T4606	313, 320
1T4607	313, 320
1T4608	320
1T4609	320
1T4609CA	320
1T4610	320
1T4611	320
1T4611CA	320
1T4612	313
1T4613	313
1T4613CA	313
1T4614	313, 320
1T4615	313, 320
1T4615CA	313, 320
1T4616	313
1T4617	313
1T4617CA	313
1T4618	320
1T4619	320
1T4619CA	320
1T4620	320
1T4621	320
1T4621CA	320
1T4622	313
1T4623	313
1T4623CA	313
1T4624	313, 320
1T4625	313, 320
1T4625CA	313, 320
1T4626	313
1T4627	313
1T4627CA	313
1T4628	313, 320
1T4629	313, 320
1T4630	321
1T4631	321
1T4632	298
1T4633	298
1T4634	298
1T4635	298
1T4636	298
1T4637	298
1T4638	299
1T4639	299
1T4640	299
1T4641	299
1T4642	299
1T4643	299
1T4644DA	151
1T4644EL	151
1T4645DA	151
1T4645EL	151
1T4648DA	151
1T4648EL	151
1T4649DA	151
1T4649EL	151
1T4652DA	151
1T4652EL	151
1T4653DA	151
1T4653EL	151
1T4656DA	151
1T4656EL	151
1T4657DA	151
1T4657EL	151
1T4660DA	151
1T4660EL	151
1T4661DA	151
1T4661EL	151
1T4664DA	151
1T4664EL	151
1T4665DA	151
1T4665EL	151
1T4668DA	152
1T4668EL	152
1T4669DA	152
1T4669EL	152
1T4672DA	152
1T4672EL	152
1T4673DA	152
1T4673EL	152
1T4676DA	152
1T4676EL	152
1T4677DA	152
1T4677EL	152
1T4680DA	152
1T4680EL	152
1T4681DA	152
1T4681EL	152
1T4684DA	152
1T4684EL	152
1T4685DA	152
1T4685EL	152
1T4688DA	153
1T4688EL	153
1T4689DA	153
1T4689EL	153
1T4692DA	153
1T4692EL	153
1T4693DA	153
1T4693EL	153
1T4696	125, 153, 157
1T4697	125, 153, 157
1T4698	125, 153, 157
1T4699	125, 153, 157
1T4700	157
1T4701	157
1T4702	153, 157
1T4703	153, 157
1T4704	125, 153, 157
1T4705	125, 153, 157
1T4706	154, 157
1T4707	154, 157
1T4710	154, 157
1T4711	154, 157
1T4714	153, 157
1T4715	153, 157
1T4716	153, 157
1T4717	153, 157
1T4721	154, 190, 207, 240, 252, 276, 321, 375
1T4722	318
1T4723	314
1T4724	317
1T4725	314
1T4726	318
1T4728	317
1T4754DA	211
1T4754EL	211
1T4755DA	211
1T4755EL	211
1T4756DA	211
1T4756EL	211
1T4757DA	211
1T4757EL	211
1T4758DA	211
1T4758EL	211
1T4759DA	211
1T4759EL	211
1T4760DA	211
1T4760EL	211

COD.	PAG.
1T4761DA	211
1T4761EL	211
1T4762EL	507
1T4763EL	507
1T4764EL	507
1T4765EL	507
1T4766EL	507
1T4767EL	507
1T4768EL	507
1T4769EL	507
1T4770DA	213
1T4770EL	213
1T4771DA	213
1T4771EL	213
1T4772DA	213
1T4772EL	213
1T4773DA	213
1T4773EL	213
1T4774DA	213
1T4774EL	213
1T4775DA	213
1T4775EL	213
1T4776DA	213
1T4776EL	213
1T4777DA	213
1T4777EL	213
1T4781	309
1T4782	309
1T4783	309
1T4784	309
1T4785	306
1T4786	306
1T4787	306
1T4788	306
1T4791D	200
1T4791DA	200
1T4791EL	200
1T4792D	201
1T4792DA	201
1T4792EL	201
1T4793DA	205
1T4793EL	205
1T4794DA	205
1T4794EL	205
1T4795DA	205
1T4795EL	205
1T4796DA	205
1T4796EL	205
1T4797D	138
1T4797DA	138
1T4797EL	138
1T4798D	138
1T4798DA	138
1T4798EL	138
1T4799D	146
1T4799DA	146
1T4799EL	146
1T4800D	146
1T4800DA	146
1T4800EL	146
1T4801D	136
1T4801DA	136
1T4801EL	136
1T4802D	136
1T4802DA	136
1T4802EL	136
1T4803D	144
1T4803DA	144
1T4803EL	144
1T4804D	144
1T4804DA	144
1T4804EL	144
1T4805D	136
1T4805DA	136
1T4805EL	136
1T4806D	138
1T4806DA	138
1T4806EL	138
1T4807D	144
1T4807DA	144
1T4807EL	144
1T4808D	146
1T4808DA	146
1T4808EL	146
1T4809D	146
1T4809DA	146
1T4809EL	146
1T4810D	146
1T4810DA	146
1T4810EL	146
1T4811D	136
1T4811DA	136
1T4811EL	136
1T4812D	136
1T4812DA	136
1T4812EL	136
1T4813D	144
1T4813DA	144
1T4813EL	144
1T4814D	144
1T4814DA	144
1T4814EL	144
1T4815D	136
1T4815DA	136
1T4815EL	136
1T4816D	138
1T4816DA	138
1T4816EL	138
1T4817D	144
1T4817DA	144
1T4817EL	144
1T4818D	146
1T4818DA	146
1T4818EL	146
1T4819D	138
1T4819DA	138
1T4819EL	138
1T4820D	138
1T4820DA	138
1T4820EL	138
1T4821DA	124
1T4821EL	124
1T4822DA	124
1T4822EL	124
1T4823DA	124
1T4823EL	124
1T4824DA	124
1T4824EL	124
1T4825DA	124
1T4825EL	124
1T4826DA	124
1T4826EL	124
1T4827DA	124
1T4827EL	124
1T4828DA	124
1T4828EL	124
1T4838D	141
1T4838DA	141
1T4838EL	141
1T4839D	141
1T4839DA	141
1T4839EL	141
1T4840D	141
1T4840DA	141
1T4840EL	141
1T4841D	141
1T4841DA	141
1T4841EL	141
1T4878	257
1T4879	257
1T4880	257
1T4881	257
1T4882	257
1T4883	257
1T4884	257
1T4885	257
1T4886	257
1T4887	257
1T4888	257
1T4889	257
1T4890	257
1T4891	257
1T4892	257
1T4893	257
1T4894	257
1T4895	257
1T4896	257
1T4896CA	258
1T4897	257
1T4897CA	258
1T4898	257
1T4898CA	258
1T4899	257
1T4899CA	258
1T4900	257
1T4900CA	258
1T4901	257
1T4901CA	258
1T4926DA	187
1T4926EL	187
1T4927DA	187
1T4927EL	187
1T4928DA	187
1T4928EL	187
1T4929DA	187
1T4929EL	187
1T4930DA	187
1T4930EL	187
1T4931DA	187

INDEX FOR CODE

COD.	PAG.
1T4931EL	187
1T4932DA	187
1T4932EL	187
1T4933DA	187
1T4933EL	187
1T4934DA	187
1T4934EL	187
1T4935DA	187
1T4935EL	187
1T4936DA	187
1T4936EL	187
1T4937DA	187
1T4937EL	187
1T4938DA	187
1T4938EL	187
1T4939DA	187
1T4939EL	187
1T4940DA	187
1T4940EL	187
1T4941DA	187
1T4941EL	187
1T4942DA	187
1T4942EL	187
1T4943DA	187
1T4943EL	187
1T4944DA	188
1T4944EL	188
1T4945DA	188
1T4945EL	188
1T4946DA	188
1T4946EL	188
1T4947DA	188
1T4947EL	188
1T4948DA	187
1T4948EL	187
1T4949DA	187
1T4949EL	187
1T4950DA	188
1T4950EL	188
1T4951DA	188
1T4951EL	188
1T4952DA	188
1T4952EL	188
1T4953DA	188
1T4953EL	188
1T5010DA	251
1T5010EL	250
1T5011DA	251
1T5011EL	250
1T5012DA	251
1T5012EL	250
1T5013DA	251
1T5013EL	250
1T5014DA	251
1T5014EL	250
1T5015DA	251
1T5015EL	250
1T5016DA	251
1T5016EL	250
1T5017DA	251
1T5017EL	250
1T5018DA	251
1T5018EL	250

COD.	PAG.
1T5019DA	251
1T5019EL	250
1T5020DA	251
1T5020EL	250
1T5021DA	251
1T5021EL	250
1T5022DA	251
1T5022EL	250
1T5023DA	251
1T5023EL	250
1T5024DA	252
1T5024EL	250
1T5025DA	252
1T5025EL	250
1T5026DA	252
1T5026EL	251
1T5027DA	252
1T5027EL	251
1T5028DA	251
1T5028EL	250
1T5029DA	251
1T5029EL	250
1T5030DA	252
1T5030EL	250
1T5031DA	252
1T5031EL	250
1T5032DA	252
1T5032EL	251
1T5033DA	252
1T5033EL	251
1T5034DA	244
1T5034EL	244
1T5035DA	244
1T5035EL	244
1T5036DA	244
1T5036EL	244
1T5037DA	244
1T5037EL	244
1T5038DA	244
1T5038EL	244
1T5039DA	244
1T5039EL	244
1T5040DA	244
1T5040EL	244
1T5041DA	244
1T5041EL	244
1T5042DA	244
1T5042EL	244
1T5043DA	245
1T5043EL	245
1T5044DA	244
1T5044EL	244
1T5045DA	245
1T5045EL	245
1T5046DA	245
1T5046EL	245
1T5047DA	245
1T5047EL	245
1T5048DA	245
1T5048EL	245
1T5049DA	245
1T5049EL	245
1T5050DA	244

COD.	PAG.
1T5050EL	244
1T5051DA	244
1T5051EL	244
1T5052DA	244
1T5052EL	244
1T5053DA	244
1T5053EL	244
1T5054DA	244
1T5054EL	244
1T5055DA	244
1T5055EL	244
1T5056DA	244
1T5056EL	244
1T5057DA	244
1T5057EL	244
1T5058DA	244
1T5058EL	244
1T5059DA	245
1T5059EL	245
1T5060DA	244
1T5060EL	244
1T5061DA	245
1T5061EL	245
1T5062DA	245
1T5062EL	245
1T5063DA	245
1T5063EL	245
1T5064DA	245
1T5064EL	245
1T5065DA	245
1T5065EL	245
1T5066DA	245
1T5066EL	245
1T5067DA	245
1T5067EL	245
1T5068DA	245
1T5068EL	245
1T5069DA	245
1T5069EL	245
1T5070DA	245
1T5070EL	245
1T5071DA	246
1T5071EL	246
1T5072DA	245
1T5072EL	245
1T5073DA	246
1T5073EL	246
1T5074DA	246
1T5074EL	246
1T5075DA	246
1T5075EL	246
1T5076DA	246
1T5076EL	246
1T5077DA	246
1T5077EL	246
1T5078DA	246
1T5078EL	246
1T5079DA	246
1T5079EL	246
1T5080DA	246
1T5080EL	246
1T5081DA	246
1T5081EL	246

COD.	PAG.
1T5082DA	245
1T5082EL	245
1T5083DA	245
1T5083EL	245
1T5084DA	245
1T5084EL	245
1T5085DA	245
1T5085EL	245
1T5086DA	245
1T5086EL	245
1T5087DA	246
1T5087EL	246
1T5088DA	245
1T5088EL	245
1T5089DA	246
1T5089EL	246
1T5090DA	246
1T5090EL	246
1T5091DA	246
1T5091EL	246
1T5092DA	246
1T5092EL	246
1T5093DA	246
1T5093EL	246
1T5094DA	246
1T5094EL	246
1T5095DA	246
1T5095EL	246
1T5096DA	246
1T5096EL	246
1T5097DA	246
1T5097EL	246
1T5098DA	178
1T5098EL	178
1T5099DA	178
1T5099EL	178
1T5100DA	178
1T5100EL	178
1T5101DA	178
1T5101EL	178
1T5102DA	178
1T5102EL	178
1T5103DA	178
1T5103EL	178
1T5104DA	178
1T5104EL	178
1T5105DA	178
1T5105EL	178
1T5106DA	178
1T5106EL	178
1T5107DA	179
1T5107EL	179
1T5108DA	178
1T5108EL	178
1T5109DA	179
1T5109EL	179
1T5110DA	179
1T5110EL	179
1T5111DA	179
1T5111EL	179
1T5112DA	179
1T5112EL	179
1T5113DA	179

COD.	PAG.
1T5113EL	179
1T5114DA	178
1T5114EL	178
1T5115DA	178
1T5115EL	178
1T5116DA	178
1T5116EL	178
1T5117DA	178
1T5117EL	178
1T5118DA	178
1T5118EL	178
1T5119DA	178
1T5119EL	178
1T5120DA	178
1T5120EL	178
1T5121DA	178
1T5121EL	178
1T5122DA	178
1T5122EL	178
1T5123DA	179
1T5123EL	179
1T5124DA	178
1T5124EL	178
1T5125DA	179
1T5125EL	179
1T5126DA	179
1T5126EL	179
1T5127DA	179
1T5127EL	179
1T5128DA	179
1T5128EL	179
1T5129DA	179
1T5129EL	179
1T5130DA	179
1T5130EL	179
1T5131DA	179
1T5131EL	179
1T5132DA	179
1T5132EL	179
1T5133DA	179
1T5133EL	179
1T5134DA	179
1T5134EL	179
1T5135DA	180
1T5135EL	180
1T5136DA	179
1T5136EL	179
1T5137DA	180
1T5137EL	180
1T5138DA	180
1T5138EL	180
1T5139DA	180
1T5139EL	180
1T5140DA	180
1T5140EL	180
1T5141DA	180
1T5141EL	180
1T5142DA	180
1T5142EL	180
1T5143DA	180
1T5143EL	180
1T5144DA	180
1T5144EL	180

COD.	PAG.
1T5145DA	180
1T5145EL	180
1T5146DA	179
1T5146EL	179
1T5147DA	179
1T5147EL	179
1T5148DA	179
1T5148EL	179
1T5149DA	179
1T5149EL	179
1T5150DA	179
1T5150EL	179
1T5151DA	180
1T5151EL	180
1T5152DA	179
1T5152EL	179
1T5153DA	180
1T5153EL	180
1T5154DA	180
1T5154EL	180
1T5155DA	180
1T5155EL	180
1T5156DA	180
1T5156EL	180
1T5157DA	180
1T5157EL	180
1T5158DA	180
1T5158EL	180
1T5159DA	180
1T5159EL	180
1T5160DA	180
1T5160EL	180
1T5161DA	180
1T5161EL	180
1T5242	125, 155, 157
1T5243	125, 155, 157
1T5244	125, 155, 157
1T5295D	671
1T5295DA	671
1T5295EL	167, 172, 671
1T5296	319
1T5297	319
1T5298	317
1T5299	317
1T5300	310
1T5301	310
1T5302	307
1T5303	307
1T5304	310
1T5305	310
1T5306	307
1T5307	307
1T5308	309
1T5309	309
1T5310	309
1T5311	309
1T5312	306
1T5313	306
1T5314	306
1T5315	306
1T5321	268
1T5321DA	268
1T5322	268

INDEX FOR CODE

COD.	PAG.
1T5322DA	268
1T5323	268
1T5323DA	268
1T5324	268
1T5324DA	268
1T5325	268
1T5325DA	268
1T5326	268
1T5326DA	268
1T5327	269
1T5327DA	269
1T5328	269
1T5328DA	269
1T5329	268
1T5329DA	268
1T5330	268
1T5330DA	268
1T5331	268
1T5331DA	268
1T5332	268
1T5332DA	268
1T5333	269
1T5333DA	269
1T5334	269
1T5334DA	269
1T5335	269
1T5335DA	269
1T5336	269
1T5336DA	269
1T5337	271
1T5337DA	271
1T5338	271
1T5338DA	271
1T5339	271
1T5339DA	271
1T5340	271
1T5340DA	271
1T5341	271
1T5341DA	271
1T5342	271
1T5342DA	271
1T5343	271
1T5343DA	271
1T5344	271
1T5344DA	271
1T5345	272
1T5345DA	272
1T5346	271
1T5346DA	271
1T5347	271
1T5347DA	271
1T5348	272
1T5348DA	272
1T5349	88, 92, 103, 119, 123, 125, 127, 131, 143, 150, 155, 159, 167, 172, 186, 191, 195, 204, 207, 209, 213, 291, 294, 295, 300, 316, 322, 394, 399, 407, 412, 416, 420, 422, 424, 426, 441, 447, 455, 459, 474, 486, 495, 505, 519, 521, 792
1T5350	792
1T5351	491, 492, 509, 515, 527, 529, 535, 541, 793
1T5352	88, 92, 103, 119, 123, 125, 127, 131, 143, 150, 155, 159, 167, 172, 186, 191, 195, 204, 207, 209, 213, 234, 240, 241, 291, 294, 295, 300, 316, 322, 367, 394, 399, 407, 412, 416, 420, 422, 424, 426, 441, 447, 455, 459, 462, 474, 486, 495, 505, 519, 521, 793
1T5353DA	229
1T5353DACA	229
1T5353EL	229
1T5354DA	229
1T5354DACA	229
1T5354EL	229
1T5355DA	229
1T5355DACA	229
1T5355EL	229
1T5356DA	229
1T5356DACA	229
1T5356EL	229
1T5357DA	229
1T5357DACA	229
1T5357EL	229
1T5358DA	229
1T5358DACA	229
1T5358EL	229
1T5359DA	229
1T5359DACA	229
1T5359EL	229
1T5360DA	229
1T5360DACA	229
1T5360EL	229
1T5361DA	229
1T5361DACA	229
1T5361EL	229
1T5362DA	229
1T5362DACA	229
1T5362EL	229
1T5363DA	229
1T5363DACA	229
1T5363EL	229
1T5364DA	229
1T5364DACA	229
1T5364EL	229
1T5365DA	229
1T5365DACA	229
1T5365EL	229
1T5366DA	229
1T5366DACA	229
1T5366EL	229
1T5367DA	229
1T5367DACA	229
1T5367EL	229
1T5368DA	229
1T5368DACA	229
1T5368EL	229
1T5369DA	230
1T5369DACA	230
1T5369EL	230
1T5370DA	230
1T5370DACA	230
1T5370EL	230
1T5371DA	230
1T5371DACA	230
1T5371EL	230
1T5372DA	230
1T5372DACA	230
1T5372EL	230
1T5373DA	230
1T5373DACA	230
1T5373EL	230
1T5374DA	230
1T5374DACA	230
1T5374EL	230
1T5375DA	230
1T5375DACA	230
1T5375EL	230
1T5376DA	230
1T5376DACA	230
1T5376EL	230
1T5377DA	226
1T5377DACA	226
1T5377EL	226
1T5378DA	226
1T5378DACA	226
1T5378EL	226
1T5379DA	226
1T5379DACA	226
1T5379EL	226
1T5380DA	226
1T5380DACA	226
1T5380EL	226
1T5381DA	226
1T5381DACA	226
1T5381EL	226
1T5382DA	226
1T5382DACA	226
1T5382EL	226
1T5383DA	226
1T5383DACA	226
1T5383EL	226
1T5384DA	226
1T5384DACA	226
1T5384EL	226
1T5385DA	226
1T5385DACA	226
1T5385EL	226
1T5386DA	226
1T5386DACA	226
1T5386EL	226
1T5387DA	226
1T5387DACA	226
1T5387EL	226
1T5388DA	226
1T5388DACA	226
1T5388EL	226
1T5389DA	226
1T5389DACA	226
1T5389EL	226

COD.	PAG.
1T5390DA	226
1T5390DACA	226
1T5390EL	226
1T5391DA	226
1T5391DACA	226
1T5391EL	226
1T5392DA	226
1T5392DACA	226
1T5392EL	226
1T5393DA	227
1T5393DACA	227
1T5393EL	227
1T5394DA	227
1T5394DACA	227
1T5394EL	227
1T5395DA	227
1T5395DACA	227
1T5395EL	227
1T5396DA	227
1T5396DACA	227
1T5396EL	227
1T5397DA	227
1T5397DACA	227
1T5397EL	227
1T5398DA	227
1T5398DACA	227
1T5398EL	227
1T5399DA	227
1T5399DACA	227
1T5399EL	227
1T5400DA	227
1T5400DACA	227
1T5400EL	227
1T5406DA	211
1T5406EL	211
1T5407DA	211
1T5407EL	211
1T5408DA	211
1T5408EL	211
1T5409DA	211
1T5409EL	211
1T5410DA	211
1T5410EL	211
1T5411DA	211
1T5411EL	211
1T5412DA	211
1T5412EL	211
1T5413DA	211
1T5413EL	211
1T5414EL	507
1T5415EL	507
1T5416EL	507
1T5417EL	507
1T5418EL	507
1T5419EL	507
1T5420EL	507
1T5421EL	507
1T5422	217
1T5423	217
1T5430	492, 511
1T5431DA	89
1T5431EL	89
1T5432DA	89
1T5432EL	89
1T5433DA	89
1T5433EL	89
1T5434DA	89
1T5434EL	89
1T5435DA	89
1T5435EL	89
1T5436DA	89
1T5436EL	89
1T5437DA	89
1T5437EL	89
1T5438DA	89
1T5438EL	89
1T5439DA	89
1T5439EL	89
1T5440DA	89
1T5440EL	89
1T5441DA	90
1T5441EL	90
1T5442DA	90
1T5442EL	90
1T5443DA	90
1T5443EL	90
1T5444DA	90
1T5444EL	90
1T5445DA	90
1T5445EL	90
1T5446DA	90
1T5446EL	90
1T5447DA	90
1T5447EL	90
1T5448DA	90
1T5448EL	90
1T5449DA	90
1T5449EL	90
1T5450DA	90
1T5450EL	90
1T5451DA	91
1T5451EL	91
1T5452DA	91
1T5452EL	91
1T5453DA	91
1T5453EL	91
1T5454DA	91
1T5454EL	91
1T5455DA	91
1T5455EL	91
1T5456DA	91
1T5456EL	91
1T5457DA	91
1T5457EL	91
1T5458DA	91
1T5458EL	91
1T5459DA	92
1T5459EL	92
1T5460DA	92
1T5460EL	92
1T5461DA	402
1T5461EL	402
1T5462DA	402
1T5462EL	402
1T5463DA	402
1T5463EL	402
1T5464DA	402
1T5464EL	402
1T5465DA	402
1T5465EL	402
1T5466DA	402
1T5466EL	402
1T5467DA	402
1T5467EL	402
1T5468DA	402
1T5468EL	402
1T5469DA	402
1T5469EL	402
1T5470DA	402
1T5470EL	402
1T5471DA	403
1T5471EL	403
1T5472DA	403
1T5472EL	403
1T5473DA	403
1T5473EL	403
1T5474DA	403
1T5474EL	403
1T5475DA	403
1T5475EL	403
1T5476DA	403
1T5476EL	403
1T5477DA	403
1T5477EL	403
1T5478DA	403
1T5478EL	403
1T5479DA	403
1T5479EL	403
1T5480DA	403
1T5480EL	403
1T5481DA	404
1T5481EL	404
1T5482DA	404
1T5482EL	404
1T5483DA	404
1T5483EL	404
1T5484DA	404
1T5484EL	404
1T5485DA	404
1T5485EL	404
1T5486DA	404
1T5486EL	404
1T5487DA	404
1T5487EL	404
1T5488DA	404
1T5488EL	404
1T5489DA	404
1T5489EL	404
1T5490DA	404
1T5490EL	404
1T5491DA	450
1T5491EL	450
1T5492DA	450
1T5492EL	450
1T5493DA	450
1T5493EL	450
1T5494DA	450
1T5494EL	450
1T5495DA	450

INDEX FOR CODE

COD.	PAG.
1T5495EL	450
1T5496DA	450
1T5496EL	450
1T5497DA	450
1T5497EL	450
1T5498DA	450
1T5498EL	450
1T5499DA	450
1T5499EL	450
1T5500DA	450
1T5500EL	450
1T5501DA	450
1T5501EL	450
1T5502DA	450
1T5502EL	450
1T5503DA	451
1T5503EL	451
1T5504DA	451
1T5504EL	451
1T5505DA	451
1T5505EL	451
1T5506DA	451
1T5506EL	451
1T5507DA	451
1T5507EL	451
1T5508DA	451
1T5508EL	451
1T5509DA	451
1T5509EL	451
1T5510DA	451
1T5510EL	451
1T5511DA	451
1T5511EL	451
1T5512DA	451
1T5512EL	451
1T5513DA	451
1T5513EL	451
1T5514DA	451
1T5514EL	451
1T5515DA	450
1T5515EL	450
1T5516DA	450
1T5516EL	450
1T5517DA	450
1T5517EL	450
1T5518DA	450
1T5518EL	450
1T5519DA	450
1T5519EL	450
1T5520DA	450
1T5520EL	450
1T5521DA	451
1T5521EL	451
1T5522DA	451
1T5522EL	451
1T5523DA	451
1T5523EL	451
1T5524DA	451
1T5524EL	451
1T5525DA	451
1T5525EL	451
1T5526DA	451
1T5526EL	451

COD.	PAG.
1T5527DA	450
1T5527EL	450
1T5528DA	450
1T5528EL	450
1T5529DA	450
1T5529EL	450
1T5530DA	450
1T5530EL	450
1T5531DA	450
1T5531EL	450
1T5532DA	450
1T5532EL	450
1T5533DA	450
1T5533EL	450
1T5534DA	450
1T5534EL	450
1T5535DA	450
1T5535EL	450
1T5536DA	450
1T5536EL	450
1T5537DA	450
1T5537EL	450
1T5538DA	450
1T5538EL	450
1T5539DA	451
1T5539EL	451
1T5540DA	451
1T5540EL	451
1T5541DA	451
1T5541EL	451
1T5542DA	451
1T5542EL	451
1T5543DA	451
1T5543EL	451
1T5544DA	451
1T5544EL	451
1T5545DA	451
1T5545EL	451
1T5546DA	451
1T5546EL	451
1T5547DA	451
1T5547EL	451
1T5548DA	451
1T5548EL	451
1T5549DA	451
1T5549EL	451
1T5550DA	451
1T5550EL	451
1T5551DA	452
1T5551EL	452
1T5552DA	452
1T5552EL	452
1T5553DA	452
1T5553EL	452
1T5554DA	452
1T5554EL	452
1T5555DA	452
1T5555EL	452
1T5556DA	452
1T5556EL	452
1T5557DA	452
1T5557EL	452
1T5558DA	452

COD.	PAG.
1T5558EL	452
1T5559DA	452
1T5559EL	452
1T5560DA	452
1T5560EL	452
1T5561DA	452
1T5561EL	452
1T5562DA	452
1T5562EL	452
1T5563DA	452
1T5563EL	452
1T5564DA	452
1T5564EL	452
1T5565DA	452
1T5565EL	452
1T5566DA	452
1T5566EL	452
1T5567DA	452
1T5567EL	452
1T5568DA	452
1T5568EL	452
1T5569DA	452
1T5569EL	452
1T5570DA	452
1T5570EL	452
1T5571DA	452
1T5571EL	452
1T5572DA	452
1T5572EL	452
1T5573DA	452
1T5573EL	452
1T5574DA	452
1T5574EL	452
1T5575DA	452
1T5575EL	452
1T5576DA	452
1T5576EL	452
1T5577DA	452
1T5577EL	452
1T5578DA	452
1T5578EL	452
1T5579DA	452
1T5579EL	452
1T5580DA	452
1T5580EL	452
1T5581DA	452
1T5581EL	452
1T5582DA	452
1T5582EL	452
1T5583DA	452
1T5583EL	452
1T5584DA	452
1T5584EL	452
1T5585DA	452
1T5585EL	452
1T5586DA	452
1T5586EL	452
1T5587DA	453
1T5587EL	453
1T5588DA	453
1T5588EL	453
1T5589DA	453
1T5589EL	453

COD.	PAG.
1T5590DA	453
1T5590EL	453
1T5591DA	453
1T5591EL	453
1T5592DA	453
1T5592EL	453
1T5593DA	453
1T5593EL	453
1T5594DA	453
1T5594EL	453
1T5595DA	453
1T5595EL	453
1T5596DA	453
1T5596EL	453
1T5597DA	453
1T5597EL	453
1T5598DA	453
1T5598EL	453
1T5599DA	454
1T5599EL	454
1T5600DA	454
1T5600EL	454
1T5601DA	454
1T5601EL	454
1T5602DA	454
1T5602EL	454
1T5603DA	454
1T5603EL	454
1T5604DA	454
1T5604EL	454
1T5605DA	454
1T5605EL	454
1T5606DA	454
1T5606EL	454
1T5607DA	454
1T5607EL	454
1T5608DA	454
1T5608EL	454
1T5609DA	454
1T5609EL	454
1T5610DA	454
1T5610EL	454
1T5611DA	453
1T5611EL	453
1T5612DA	453
1T5612EL	453
1T5613DA	453
1T5613EL	453
1T5614DA	453
1T5614EL	453
1T5615DA	453
1T5615EL	453
1T5616DA	453
1T5616EL	453
1T5617DA	454
1T5617EL	454
1T5618DA	454
1T5618EL	454
1T5619DA	454
1T5619EL	454
1T5620DA	454
1T5620EL	454
1T5621DA	454

COD.	PAG.
1T5621EL	454
1T5622DA	454
1T5622EL	454
1T5623DA	453
1T5623EL	453
1T5624DA	453
1T5624EL	453
1T5625DA	453
1T5625EL	453
1T5626DA	453
1T5626EL	453
1T5627DA	453
1T5627EL	453
1T5628DA	453
1T5628EL	453
1T5629DA	453
1T5629EL	453
1T5630DA	453
1T5630EL	453
1T5631DA	453
1T5631EL	453
1T5632DA	453
1T5632EL	453
1T5633DA	453
1T5633EL	453
1T5634DA	453
1T5634EL	453
1T5635DA	385
1T5635EL	385
1T5636DA	385
1T5636EL	385
1T5637DA	385
1T5637EL	385
1T5638DA	385
1T5638EL	385
1T5639DA	385
1T5639EL	385
1T5640DA	385
1T5640EL	385
1T5641DA	385
1T5641EL	385
1T5642DA	385
1T5642EL	385
1T5643DA	385
1T5643EL	385
1T5644DA	385
1T5644EL	385
1T5645DA	385
1T5645EL	385
1T5646DA	385
1T5646EL	385
1T5647DA	386
1T5647EL	386
1T5648DA	386
1T5648EL	386
1T5649DA	386
1T5649EL	386
1T5650DA	386
1T5650EL	386
1T5651DA	386
1T5651EL	386
1T5652DA	386
1T5652EL	386

COD.	PAG.
1T5653DA	386
1T5653EL	386
1T5654DA	386
1T5654EL	386
1T5655DA	386
1T5655EL	386
1T5656DA	386
1T5656EL	386
1T5657DA	386
1T5657EL	386
1T5658DA	386
1T5658EL	386
1T5659DA	386
1T5659EL	386
1T5660DA	386
1T5660EL	386
1T5661DA	386
1T5661EL	386
1T5662DA	386
1T5662EL	386
1T5663DA	386
1T5663EL	386
1T5664DA	386
1T5664EL	386
1T5665DA	386
1T5665EL	386
1T5666DA	386
1T5666EL	386
1T5667DA	386
1T5667EL	386
1T5668DA	386
1T5668EL	386
1T5669DA	386
1T5669EL	386
1T5670DA	386
1T5670EL	386
1T5671DA	386
1T5671EL	386
1T5672DA	386
1T5672EL	386
1T5673DA	386
1T5673EL	386
1T5674DA	386
1T5674EL	386
1T5675DA	386
1T5675EL	386
1T5676DA	386
1T5676EL	386
1T5677DA	386
1T5677EL	386
1T5678DA	386
1T5678EL	386
1T5679DA	386
1T5679EL	386
1T5680DA	386
1T5680EL	386
1T5681DA	386
1T5681EL	386
1T5682DA	386
1T5682EL	386
1T5683DA	387
1T5683EL	387
1T5684DA	387

INDEX FOR CODE

COD.	PAG.
1T5684EL	387
1T5685DA	387
1T5685EL	387
1T5686DA	387
1T5686EL	387
1T5687DA	387
1T5687EL	387
1T5688DA	387
1T5688EL	387
1T5689DA	387
1T5689EL	387
1T5690DA	387
1T5690EL	387
1T5691DA	387
1T5691EL	387
1T5692DA	387
1T5692EL	387
1T5693DA	387
1T5693EL	387
1T5694DA	387
1T5694EL	387
1T5695DA	388
1T5695EL	388
1T5696DA	388
1T5696EL	388
1T5697DA	388
1T5697EL	388
1T5698DA	388
1T5698EL	388
1T5699DA	388
1T5699EL	388
1T5700DA	388
1T5700EL	388
1T5701DA	388
1T5701EL	388
1T5702DA	388
1T5702EL	388
1T5703DA	388
1T5703EL	388
1T5704DA	388
1T5704EL	388
1T5705DA	388
1T5705EL	388
1T5706DA	388
1T5706EL	388
1T5707DA	387
1T5707EL	387
1T5708DA	387
1T5708EL	387
1T5709DA	387
1T5709EL	387
1T5710DA	387
1T5710EL	387
1T5711DA	387
1T5711EL	387
1T5712DA	387
1T5712EL	387
1T5713DA	388
1T5713EL	388
1T5714DA	388
1T5714EL	388
1T5715DA	388
1T5715EL	388
1T5716DA	388
1T5716EL	388
1T5717DA	388
1T5717EL	388
1T5718DA	388
1T5718EL	388
1T5719DA	387
1T5719EL	387
1T5720DA	387
1T5720EL	387
1T5721DA	387
1T5721EL	387
1T5722DA	387
1T5722EL	387
1T5723DA	387
1T5723EL	387
1T5724DA	387
1T5724EL	387
1T5725DA	387
1T5725EL	387
1T5726DA	387
1T5726EL	387
1T5727DA	387
1T5727EL	387
1T5728DA	387
1T5728EL	387
1T5729DA	387
1T5729EL	387
1T5730DA	387
1T5730EL	387
1T5731DA	388
1T5731EL	388
1T5732DA	388
1T5732EL	388
1T5733DA	388
1T5733EL	388
1T5734DA	388
1T5734EL	388
1T5735DA	388
1T5735EL	388
1T5736DA	388
1T5736EL	388
1T5737DA	388
1T5737EL	388
1T5738DA	388
1T5738EL	388
1T5739DA	388
1T5739EL	388
1T5740DA	388
1T5740EL	388
1T5741DA	388
1T5741EL	388
1T5742DA	388
1T5742EL	388
1T5743DA	389
1T5743EL	389
1T5744DA	389
1T5744EL	389
1T5745DA	389
1T5745EL	389
1T5746DA	389
1T5746EL	389
1T5747DA	389
1T5747EL	389
1T5748DA	389
1T5748EL	389
1T5749DA	389
1T5749EL	389
1T5750DA	389
1T5750EL	389
1T5751DA	389
1T5751EL	389
1T5752DA	389
1T5752EL	389
1T5753DA	389
1T5753EL	389
1T5754DA	389
1T5754EL	389
1T5755DA	389
1T5755EL	389
1T5756DA	389
1T5756EL	389
1T5757DA	389
1T5757EL	389
1T5758DA	389
1T5758EL	389
1T5759DA	389
1T5759EL	389
1T5760DA	389
1T5760EL	389
1T5761DA	389
1T5761EL	389
1T5762DA	389
1T5762EL	389
1T5763DA	389
1T5763EL	389
1T5764DA	389
1T5764EL	389
1T5765DA	389
1T5765EL	389
1T5766DA	389
1T5766EL	389
1T5767DA	389
1T5767EL	389
1T5768DA	389
1T5768EL	389
1T5769DA	389
1T5769EL	389
1T5770DA	389
1T5770EL	389
1T5771DA	389
1T5771EL	389
1T5772DA	389
1T5772EL	389
1T5773DA	389
1T5773EL	389
1T5774DA	389
1T5774EL	389
1T5775DA	389
1T5775EL	389
1T5776DA	389
1T5776EL	389
1T5777DA	389
1T5777EL	389
1T5778DA	389
1T5778EL	389

COD.	PAG.
1T5779DA	85
1T5779EL	85
1T5780DA	85
1T5780EL	85
1T5781DA	85
1T5781EL	85
1T5782DA	85
1T5782EL	85
1T5783DA	85
1T5783EL	85
1T5784DA	85
1T5784EL	85
1T5785DA	85
1T5785EL	85
1T5786DA	85
1T5786EL	85
1T5787DA	85
1T5787EL	85
1T5788DA	85
1T5788EL	85
1T5789DA	85
1T5789EL	85
1T5790DA	85
1T5790EL	85
1T5791DA	85
1T5791EL	85
1T5792DA	85
1T5792EL	85
1T5793DA	85
1T5793EL	85
1T5794DA	85
1T5794EL	85
1T5795DA	85
1T5795EL	85
1T5796DA	85
1T5796EL	85
1T5797DA	85
1T5797EL	85
1T5798DA	85
1T5798EL	85
1T5799DA	86
1T5799EL	86
1T5800DA	86
1T5800EL	86
1T5801DA	86
1T5801EL	86
1T5802DA	86
1T5802EL	86
1T5803DA	86
1T5803EL	86
1T5804DA	86
1T5804EL	86
1T5805DA	86
1T5805EL	86
1T5806DA	86
1T5806EL	86
1T5807DA	86
1T5807EL	86
1T5808DA	86
1T5808EL	86
1T5809DA	86
1T5809EL	86
1T5810DA	86

COD.	PAG.
1T5810EL	86
1T5811DA	86
1T5811EL	86
1T5812DA	86
1T5812EL	86
1T5813DA	86
1T5813EL	86
1T5814DA	86
1T5814EL	86
1T5815DA	86
1T5815EL	86
1T5816DA	86
1T5816EL	86
1T5817DA	86
1T5817EL	86
1T5818DA	86
1T5818EL	86
1T5819DA	87
1T5819EL	87
1T5820DA	87
1T5820EL	87
1T5821DA	87
1T5821EL	87
1T5822DA	87
1T5822EL	87
1T5823DA	87
1T5823EL	87
1T5824DA	87
1T5824EL	87
1T5825DA	87
1T5825EL	87
1T5826DA	87
1T5826EL	87
1T5827DA	87
1T5827EL	87
1T5828DA	87
1T5828EL	87
1T5829DA	87
1T5829EL	87
1T5830DA	87
1T5830EL	87
1T5831DA	87
1T5831EL	87
1T5832DA	87
1T5832EL	87
1T5833DA	87
1T5833EL	87
1T5834DA	87
1T5834EL	87
1T5835DA	88
1T5835EL	88
1T5836DA	88
1T5836EL	88
1T5837DA	88
1T5837EL	88
1T5838DA	88
1T5838EL	88
1T5839DA	396
1T5839EL	396
1T5840DA	396
1T5840EL	396
1T5841DA	396
1T5841EL	396

COD.	PAG.
1T5842DA	396
1T5842EL	396
1T5843DA	396
1T5843EL	396
1T5844DA	396
1T5844EL	396
1T5845DA	396
1T5845EL	396
1T5846DA	396
1T5846EL	396
1T5847DA	396
1T5847EL	396
1T5848DA	396
1T5848EL	396
1T5849DA	396
1T5849EL	396
1T5850DA	396
1T5850EL	396
1T5851DA	396
1T5851EL	396
1T5852DA	396
1T5852EL	396
1T5853DA	396
1T5853EL	396
1T5854DA	396
1T5854EL	396
1T5855DA	396
1T5855EL	396
1T5856DA	396
1T5856EL	396
1T5857DA	396
1T5857EL	396
1T5858DA	396
1T5858EL	396
1T5859DA	397
1T5859EL	397
1T5860DA	397
1T5860EL	397
1T5861DA	397
1T5861EL	397
1T5862DA	397
1T5862EL	397
1T5863DA	397
1T5863EL	397
1T5864DA	397
1T5864EL	397
1T5865DA	397
1T5865EL	397
1T5866DA	397
1T5866EL	397
1T5867DA	397
1T5867EL	397
1T5868DA	397
1T5868EL	397
1T5869DA	397
1T5869EL	397
1T5870DA	397
1T5870EL	397
1T5871DA	397
1T5871EL	397
1T5872DA	397
1T5872EL	397
1T5873DA	397

INDEX FOR CODE

COD.	PAG.
1T5873EL	397
1T5874DA	397
1T5874EL	397
1T5875DA	397
1T5875EL	397
1T5876DA	397
1T5876EL	397
1T5877DA	397
1T5877EL	397
1T5878DA	397
1T5878EL	397
1T5879DA	398
1T5879EL	398
1T5880DA	398
1T5880EL	398
1T5881DA	398
1T5881EL	398
1T5882DA	398
1T5882EL	398
1T5883DA	398
1T5883EL	398
1T5884DA	398
1T5884EL	398
1T5885DA	398
1T5885EL	398
1T5886DA	398
1T5886EL	398
1T5887DA	398
1T5887EL	398
1T5888DA	398
1T5888EL	398
1T5889DA	398
1T5889EL	398
1T5890DA	398
1T5890EL	398
1T5891DA	398
1T5891EL	398
1T5892DA	398
1T5892EL	398
1T5893DA	398
1T5893EL	398
1T5894DA	398
1T5894EL	398
1T5895DA	398
1T5895EL	398
1T5896DA	398
1T5896EL	398
1T5897DA	398
1T5897EL	398
1T5898DA	398
1T5898EL	398
1T5899	393, 411, 422, 429, 455
1T5900	393, 411, 422, 429, 455
1T5901	393, 411, 422, 429, 455
1T5902	393, 411, 422, 429, 455
1T5903	393, 411, 422, 429, 455
1T5904	393, 411, 422, 429, 455
1T5905DA	393, 411, 422, 455
1T5905EL	393, 411, 422, 455
1T5906DA	393, 411, 422, 455
1T5906EL	393, 411, 422, 455
1T5907DA	393, 411, 422, 455
1T5907EL	393, 411, 422, 455
1T5908	407, 419, 425, 433
1T5911	394, 399, 407, 412, 416, 420, 422, 424, 426, 429, 431, 433
1T5912	393, 411, 422, 429, 454
1T5913	393, 411, 422, 429, 454
1T5914	393, 411, 422, 429, 454
1T5915	399, 416
1T5916	399, 416
1T5917	399, 416
1T5918	88
1T5919	88
1T5920	88
1T5921	399, 416
1T5935	156
1T5936	156
1T5937	393, 399, 411, 416, 421, 423, 428, 430
1T5938	393, 399, 411, 416, 421, 423, 428, 430
1T5939	393, 411, 416, 421, 428
1T5940DA	405
1T5940EL	405
1T5941DA	405
1T5941EL	405
1T5942DA	405
1T5942EL	405
1T5943DA	405
1T5943EL	405
1T5944DA	405
1T5944EL	405
1T5945DA	405
1T5945EL	405
1T5946DA	406
1T5946EL	406
1T5947DA	406
1T5947EL	406
1T5948DA	406
1T5948EL	406
1T5949DA	406
1T5949EL	406
1T5950DA	406
1T5950EL	406
1T5951DA	406
1T5951EL	406
1T5952DA	188
1T5952EL	188
1T5953DA	188
1T5953EL	188
1T5954DA	188
1T5954EL	188
1T5955DA	188
1T5955EL	188
1T5956DA	189
1T5956EL	189
1T5957DA	189
1T5957EL	189
1T5958DA	189
1T5958EL	189
1T5959DA	189
1T5959EL	189
1T5960DA	188
1T5960EL	188
1T5961DA	188
1T5961EL	188
1T5962DA	188
1T5962EL	188
1T5963DA	188
1T5963EL	188
1T5964DA	189
1T5964EL	189
1T5965DA	189
1T5965EL	189
1T5966DA	189
1T5966EL	189
1T5967DA	189
1T5967EL	189
1T5968DA	188
1T5968EL	188
1T5969DA	188
1T5969EL	188
1T5970DA	189
1T5970EL	189
1T5971DA	189
1T5971EL	189
1T5972DA	189
1T5972EL	189
1T5973DA	189
1T5973EL	189
1T5974DA	188
1T5974EL	188
1T5975DA	188
1T5975EL	188
1T5976DA	390
1T5976EL	390
1T5977DA	390
1T5977EL	390
1T5978DA	390
1T5978EL	390
1T5979DA	390
1T5979EL	390
1T5980DA	390
1T5980EL	390
1T5981DA	390
1T5981EL	390
1T5982DA	390
1T5982EL	390
1T5983DA	390
1T5983EL	390
1T5984DA	390
1T5984EL	390
1T5985DA	390
1T5985EL	390
1T5986DA	390
1T5986EL	390
1T5987DA	390

COD.	PAG.
1T5987EL	390
1T5988DA	391
1T5988EL	391
1T5989DA	391
1T5989EL	391
1T5990DA	391
1T5990EL	391
1T5991DA	391
1T5991EL	391
1T5992DA	391
1T5992EL	391
1T5993DA	391
1T5993EL	391
1T5994DA	391
1T5994EL	391
1T5995DA	391
1T5995EL	391
1T5996DA	391
1T5996EL	391
1T5997DA	391
1T5997EL	391
1T5998DA	391
1T5998EL	391
1T5999DA	391
1T5999EL	391
1T6000DA	392
1T6000EL	392
1T6001DA	392
1T6001EL	392
1T6002DA	392
1T6002EL	392
1T6003DA	392
1T6003EL	392
1T6004DA	392
1T6004EL	392
1T6005DA	392
1T6005EL	392
1T6006DA	392
1T6006EL	392
1T6007DA	392
1T6007EL	392
1T6008DA	392
1T6008EL	392
1T6009DA	392
1T6009EL	392
1T6010DA	392
1T6010EL	392
1T6011DA	392
1T6011EL	392
1T6012	88
1T6013	88
1T6014	88
1T6015DA	401
1T6015EL	401
1T6016DA	401
1T6016EL	401
1T6017DA	401
1T6017EL	401
1T6018DA	401
1T6018EL	401
1T6019DA	395
1T6019EL	395
1T6020DA	395

COD.	PAG.
1T6020EL	395
1T6021DA	395
1T6021EL	395
1T6022DA	395
1T6022EL	395
1T6023DA	395
1T6023EL	395
1T6024DA	395
1T6024EL	395
1T6025DA	395
1T6025EL	395
1T6026DA	395
1T6026EL	395
1T6027DA	384
1T6027EL	384
1T6028DA	384
1T6028EL	384
1T6029DA	384
1T6029EL	384
1T6030DA	384
1T6030EL	384
1T6031DA	384
1T6031EL	384
1T6032DA	384
1T6032EL	384
1T6033DA	384
1T6033EL	384
1T6034DA	384
1T6034EL	384
1T6035DA	384
1T6035EL	384
1T6036DA	384
1T6036EL	384
1T6037DA	384
1T6037EL	384
1T6038DA	384
1T6038EL	384
1T6039DA	385
1T6039EL	385
1T6040DA	385
1T6040EL	385
1T6041DA	385
1T6041EL	385
1T6042DA	385
1T6042EL	385
1T6043DA	385
1T6043EL	385
1T6044DA	385
1T6044EL	385
1T6045DA	385
1T6045EL	385
1T6046DA	385
1T6046EL	385
1T6047DA	385
1T6047EL	385
1T6048DA	385
1T6048EL	385
1T6049DA	385
1T6049EL	385
1T6050DA	385
1T6050EL	385
1T6051	399, 416, 424, 431
1T6052	399, 416, 424, 431

COD.	PAG.
1T6053	228
1T6054	227
1T6055	227
1T6056	227
1T6057	227
1T6058	228
1T6059	231
1T6060	231
1T6061	231
1T6062	231
1T6063	231
1T6064	231
1T6066DA	98, 480
1T6066EL	98, 480
1T6067DA	98, 480
1T6067EL	98, 480
1T6068DA	98, 480
1T6068EL	98, 480
1T6069DA	98, 480
1T6069EL	98, 480
1T6070DA	98, 480
1T6070EL	98, 480
1T6071DA	98, 480
1T6071EL	98, 480
1T6072DA	98, 480
1T6072EL	98, 480
1T6073DA	98, 480
1T6073EL	98, 480
1T6074DA	98, 480
1T6074EL	98, 480
1T6075DA	98, 480
1T6075EL	98, 480
1T6076DA	98, 480
1T6076EL	98, 480
1T6077DA	98, 480
1T6077EL	98, 480
1T6078DA	98, 481
1T6078EL	98, 481
1T6079DA	98, 481
1T6079EL	98, 481
1T6080DA	98, 481
1T6080EL	98, 481
1T6081DA	98, 481
1T6081EL	98, 481
1T6082DA	98, 481
1T6082EL	98, 481
1T6083DA	98, 481
1T6083EL	98, 481
1T6084DA	98, 481
1T6084EL	98, 481
1T6085DA	98, 481
1T6085EL	98, 481
1T6086DA	98, 481
1T6086EL	98, 481
1T6087DA	98, 481
1T6087EL	98, 481
1T6088DA	98, 481
1T6088EL	98, 481
1T6089DA	98, 481
1T6089EL	98, 481
1T6090DA	480
1T6090EL	480
1T6091DA	480

INDEX FOR CODE

COD.	PAG.
1T6091EL	480
1T6092DA	480
1T6092EL	480
1T6093DA	480
1T6093EL	480
1T6094DA	480
1T6094EL	480
1T6095DA	480
1T6095EL	480
1T6096DA	480
1T6096EL	480
1T6097DA	480
1T6097EL	480
1T6098DA	480
1T6098EL	480
1T6099DA	480
1T6099EL	480
1T6100DA	480
1T6100EL	480
1T6101DA	480
1T6101EL	480
1T6102DA	98, 480
1T6102EL	98, 480
1T6103DA	98, 480
1T6103EL	98, 480
1T6104DA	98, 480
1T6104EL	98, 480
1T6105DA	98, 480
1T6105EL	98, 480
1T6106DA	98, 480
1T6106EL	98, 480
1T6107DA	98, 480
1T6107EL	98, 480
1T6114DA	99, 481
1T6114EL	99, 481
1T6115DA	99, 481
1T6115EL	99, 481
1T6116DA	99, 481
1T6116EL	99, 481
1T6117DA	99, 481
1T6117EL	99, 481
1T6118DA	99, 481
1T6118EL	99, 481
1T6119DA	99, 481
1T6119EL	99, 481
1T6126DA	481
1T6126EL	481
1T6127DA	481
1T6127EL	481
1T6128DA	481
1T6128EL	481
1T6129DA	481
1T6129EL	481
1T6130DA	481
1T6130EL	481
1T6131DA	481
1T6131EL	481
1T6138DA	99, 481
1T6138EL	99, 481
1T6139DA	99, 481
1T6139EL	99, 481
1T6140DA	99, 481
1T6140EL	99, 481
1T6141DA	99, 481
1T6141EL	99, 481
1T6142DA	99, 481
1T6142EL	99, 481
1T6143DA	99, 481
1T6143EL	99, 481
1T6144DA	99, 482
1T6144EL	99, 482
1T6145DA	99, 482
1T6145EL	99, 482
1T6146DA	99, 482
1T6146EL	99, 482
1T6147DA	99, 482
1T6147EL	99, 482
1T6148DA	99, 482
1T6148EL	99, 482
1T6149DA	99, 482
1T6149EL	99, 482
1T6150DA	100, 482
1T6150EL	100, 482
1T6151DA	100, 482
1T6151EL	100, 482
1T6152DA	100, 482
1T6152EL	100, 482
1T6153DA	100, 482
1T6153EL	100, 482
1T6154DA	100, 482
1T6154EL	100, 482
1T6155DA	100, 482
1T6155EL	100, 482
1T6156DA	100, 483
1T6156EL	100, 483
1T6157DA	100, 483
1T6157EL	100, 483
1T6158DA	100, 483
1T6158EL	100, 483
1T6159DA	100, 483
1T6159EL	100, 483
1T6160DA	100, 483
1T6160EL	100, 483
1T6161DA	100, 483
1T6161EL	100, 483
1T6162DA	482
1T6162EL	482
1T6163DA	482
1T6163EL	482
1T6164DA	482
1T6164EL	482
1T6165DA	482
1T6165EL	482
1T6166DA	482
1T6166EL	482
1T6167DA	482
1T6167EL	482
1T6168DA	482
1T6168EL	482
1T6169DA	482
1T6169EL	482
1T6170DA	482
1T6170EL	482
1T6171DA	482
1T6171EL	482
1T6172DA	482
1T6172EL	482
1T6173DA	482
1T6173EL	482
1T6174DA	99, 482
1T6174EL	99, 482
1T6175DA	99, 482
1T6175EL	99, 482
1T6176DA	99, 482
1T6176EL	99, 482
1T6177DA	99, 482
1T6177EL	99, 482
1T6178DA	99, 482
1T6178EL	99, 482
1T6179DA	99, 482
1T6179EL	99, 482
1T6186DA	100, 483
1T6186EL	100, 483
1T6187DA	100, 483
1T6187EL	100, 483
1T6188DA	100, 483
1T6188EL	100, 483
1T6189DA	100, 483
1T6189EL	100, 483
1T6190DA	100, 483
1T6190EL	100, 483
1T6191DA	100, 483
1T6191EL	100, 483
1T6198DA	482
1T6198EL	482
1T6199DA	482
1T6199EL	482
1T6200DA	482
1T6200EL	482
1T6201DA	482
1T6201EL	482
1T6202DA	482
1T6202EL	482
1T6203DA	482
1T6203EL	482
1T6210DA	100, 483
1T6210EL	100, 483
1T6211DA	100, 483
1T6211EL	100, 483
1T6212DA	100, 483
1T6212EL	100, 483
1T6213DA	100, 483
1T6213EL	100, 483
1T6214DA	100, 483
1T6214EL	100, 483
1T6215DA	100, 483
1T6215EL	100, 483
1T6216DA	101, 483
1T6216EL	101, 483
1T6217DA	101, 483
1T6217EL	101, 483
1T6218DA	101, 483
1T6218EL	101, 483
1T6219DA	101, 483
1T6219EL	101, 483
1T6220DA	101, 483
1T6220EL	101, 483
1T6221DA	101, 483
1T6221EL	101, 483

COD.	PAG.
1T6222DA	101, 484
1T6222EL	101, 484
1T6223DA	101, 484
1T6223EL	101, 484
1T6224DA	101, 484
1T6224EL	101, 484
1T6225DA	101, 484
1T6225EL	101, 484
1T6226DA	101, 484
1T6226EL	101, 484
1T6227DA	101, 484
1T6227EL	101, 484
1T6228DA	101, 484
1T6228EL	101, 484
1T6229DA	101, 484
1T6229EL	101, 484
1T6230DA	101, 484
1T6230EL	101, 484
1T6231DA	101, 484
1T6231EL	101, 484
1T6232DA	101, 484
1T6232EL	101, 484
1T6233DA	101, 484
1T6233EL	101, 484
1T6234DA	484
1T6234EL	484
1T6235DA	484
1T6235EL	484
1T6236DA	484
1T6236EL	484
1T6237DA	484
1T6237EL	484
1T6238DA	484
1T6238EL	484
1T6239DA	484
1T6239EL	484
1T6240DA	484
1T6240EL	484
1T6241DA	484
1T6241EL	484
1T6242DA	484
1T6242EL	484
1T6243DA	484
1T6243EL	484
1T6244DA	484
1T6244EL	484
1T6245DA	484
1T6245EL	484
1T6246DA	101, 484
1T6246EL	101, 484
1T6247DA	101, 484
1T6247EL	101, 484
1T6248DA	101, 484
1T6248EL	101, 484
1T6249DA	101, 484
1T6249EL	101, 484
1T6250DA	101, 484
1T6250EL	101, 484
1T6251DA	101, 484
1T6251EL	101, 484
1T6252DA	102, 485
1T6252EL	102, 485
1T6253DA	102, 485
1T6253EL	102, 485
1T6254DA	102, 485
1T6254EL	102, 485
1T6255DA	102, 485
1T6255EL	102, 485
1T6256DA	102, 485
1T6256EL	102, 485
1T6257DA	102, 485
1T6257EL	102, 485
1T6258DA	102, 485
1T6258EL	102, 485
1T6259DA	102, 485
1T6259EL	102, 485
1T6260DA	102, 485
1T6260EL	102, 485
1T6261DA	102, 485
1T6261EL	102, 485
1T6262DA	102, 485
1T6262EL	102, 485
1T6263DA	102, 485
1T6263EL	102, 485
1T6264DA	102, 485
1T6264EL	102, 485
1T6265DA	102, 485
1T6265EL	102, 485
1T6266DA	102, 485
1T6266EL	102, 485
1T6267DA	102, 485
1T6267EL	102, 485
1T6268DA	102, 485
1T6268EL	102, 485
1T6269DA	102, 485
1T6269EL	102, 485
1T6270DA	485
1T6270EL	485
1T6271DA	485
1T6271EL	485
1T6272DA	485
1T6272EL	485
1T6273DA	485
1T6273EL	485
1T6274DA	485
1T6274EL	485
1T6275DA	485
1T6275EL	485
1T6276DA	485
1T6276EL	485
1T6277DA	485
1T6277EL	485
1T6278DA	485
1T6278EL	485
1T6279DA	485
1T6279EL	485
1T6280DA	485
1T6280EL	485
1T6281DA	485
1T6281EL	485
1T6282	486
1T6285	486
1T6288DA	486
1T6288EL	486
1T6289DA	486
1T6289EL	486
1T6290DA	486
1T6290EL	486
1T6291	103
1T6292	103
1T6293	103
1T6294	103
1T6295	103
1T6296	103
1T6297	103
1T6298	103
1T6299	103
1T6300	103
1T6301	103
1T6302	103
1T6303	103
1T6304	103
1T6305	103
1T6306	103
1T6307	103
1T6308	103
1T6309DA	295
1T6309EL	295
1T6310DA	295
1T6310EL	295
1T6311DA	295
1T6311EL	295
1T6312DA	295
1T6312EL	295
1T6313DA	294
1T6313EL	294
1T6314DA	294
1T6314EL	294
1T6315DA	294
1T6315EL	294
1T6316DA	294
1T6316EL	294
1T6317	276
1T6318	276
1T6319	276
1T6320	276
1T6321	276
1T6322	276
1T6323	276
1T6324	276
1T6325	328
1T6326	328
1T6327	328
1T6328	328
1T6329	329
1T6330	329
1T6331	327
1T6332	327
1T6333	219
1T6334	219
1T6335	219
1T6336	219
1T6337	328
1T6338	328
1T6339	328
1T6340	328
1T6341	329
1T6342	329
1T6343	327

INDEX FOR CODE

COD.	PAG.
1T6344	327
1T6345	219
1T6346	219
1T6347	219
1T6348	219
1T6349	328
1T6350	328
1T6351	328
1T6352	328
1T6353	329
1T6354	329
1T6355	327
1T6356	327
1T6357	219
1T6358	219
1T6359	219
1T6360	219
1T6361	158
1T6362	158
1T6363	158
1T6364	158
1T6365	158
1T6366	158
1T6367	158
1T6368	158
1T6369	158
1T6370	158
1T6371	158
1T6372	158
1T6373	126
1T6374	126
1T6375	126
1T6376	126
1T6377	209
1T6378	209
1T6379	209
1T6380	209
1T6381	154, 190, 206, 240, 252, 276, 321, 375
1T6382	142, 149, 261, 314
1T6383	154, 190, 206, 240, 252, 276, 321, 375
1T6384	142, 149, 261, 314
1T6385	154, 190, 206, 240, 252, 276, 321, 375
1T6386	142, 149, 261, 315
1T6387	154, 190, 206, 240, 252, 276, 321, 375
1T6388	142, 149, 261, 315
1T6389	154, 190, 206, 240, 252, 276, 321, 375
1T6390	142, 149, 261, 315
1T6391	154, 190, 206, 240, 252, 276, 321, 375
1T6392	142, 149, 261, 315
1T6393	154, 190, 206, 240, 253, 277, 322, 375
1T6394	142, 149, 261, 315
1T6401	103
1T6402	103
1T6403	103
1T6404	103
1T6405	103
1T6406	103
1T6407	159
1T6408	159
1T6415	215
1T6416	215
1T6417	216
1T6418	216
1T6419DA	189
1T6419EL	189
1T6420DA	189
1T6420EL	189
1T6421DA	189
1T6421EL	189
1T6422DA	189
1T6422EL	189
1T6423	189
1T6424	189
1T6425	189
1T6426	189
1T6427	189
1T6428	189
1T6429DA	181
1T6429EL	181
1T6430DA	181
1T6430EL	181
1T6431DA	181
1T6431EL	181
1T6432DA	181
1T6432EL	181
1T6433DA	181
1T6433EL	181
1T6434DA	181
1T6434EL	181
1T6435DA	181
1T6435EL	181
1T6436DA	181
1T6436EL	181
1T6437DA	181
1T6437EL	181
1T6438DA	182
1T6438EL	182
1T6439DA	181
1T6439EL	181
1T6440DA	182
1T6440EL	182
1T6441DA	182
1T6441EL	182
1T6442DA	182
1T6442EL	182
1T6443DA	182
1T6443EL	182
1T6444DA	182
1T6444EL	182
1T6445DA	181
1T6445EL	181
1T6446DA	181
1T6446EL	181
1T6447DA	181
1T6447EL	181
1T6448DA	181
1T6448EL	181
1T6449DA	181
1T6449EL	181
1T6450DA	181
1T6450EL	181
1T6451DA	181
1T6451EL	181
1T6452DA	181
1T6452EL	181
1T6453DA	181
1T6453EL	181
1T6454DA	182
1T6454EL	182
1T6455DA	181
1T6455EL	181
1T6456DA	182
1T6456EL	182
1T6457DA	182
1T6457EL	182
1T6458DA	182
1T6458EL	182
1T6459DA	182
1T6459EL	182
1T6460DA	182
1T6460EL	182
1T6461DA	182
1T6461EL	182
1T6462DA	182
1T6462EL	182
1T6463DA	182
1T6463EL	182
1T6464DA	182
1T6464EL	182
1T6465DA	182
1T6465EL	182
1T6466DA	183
1T6466EL	183
1T6467DA	182
1T6467EL	182
1T6468DA	183
1T6468EL	183
1T6469DA	183
1T6469EL	183
1T6470DA	183
1T6470EL	183
1T6471DA	183
1T6471EL	183
1T6472DA	183
1T6472EL	183
1T6473DA	183
1T6473EL	183
1T6474DA	183
1T6474EL	183
1T6475DA	183
1T6475EL	183
1T6476DA	183
1T6476EL	183
1T6477DA	182
1T6477EL	182
1T6478DA	182
1T6478EL	182
1T6479DA	182
1T6479EL	182
1T6480DA	182
1T6480EL	182
1T6481DA	182

COD.	PAG.
1T6481EL	182
1T6482DA	183
1T6482EL	183
1T6483DA	182
1T6483EL	182
1T6484DA	183
1T6484EL	183
1T6485DA	183
1T6485EL	183
1T6486DA	183
1T6486EL	183
1T6487DA	183
1T6487EL	183
1T6488DA	183
1T6488EL	183
1T6489DA	183
1T6489EL	183
1T6490DA	183
1T6490EL	183
1T6491DA	183
1T6491EL	183
1T6492DA	183
1T6492EL	183
1T6493	183
1T6494	183
1T6495	184
1T6496	183
1T6497	183
1T6498	184
1T6499	788
1T6500	228
1T6501	231
1T6502	88, 92, 394, 399, 407, 455
1T6503	126, 158
1T6504	126, 158, 209
1T6505	209
1T6506	184, 203, 241, 247, 272
1T6507	184, 203, 241, 247, 272
1T6508	185, 203, 241, 247, 272
1T6509	185, 203, 241, 247, 272
1T6510	185, 203, 241, 247, 272
1T6511	185, 203, 241, 247, 272
1T6512	185, 203, 241, 247, 272
1T6521	191, 207, 239, 253, 277, 375
1T6522	185, 203, 248, 261, 265, 273
1T6523	269
1T6524	219, 327, 329
1T6525	329
1T6526	329
1T6527	329
1T6528	327
1T6529	327
1T6530	327

COD.	PAG.
1T6531DA	233
1T6531EL	233
1T6532DA	233
1T6532EL	233
1T6533DA	233
1T6533EL	233
1T6534DA	233
1T6534EL	233
1T6535DA	233
1T6535EL	233
1T6536DA	233
1T6536EL	233
1T6537DA	233
1T6537EL	233
1T6538DA	233
1T6538EL	233
1T6539DA	233
1T6539EL	233
1T6540DA	233
1T6540EL	233
1T6541DA	233
1T6541EL	233
1T6542DA	233
1T6542EL	233
1T6543DA	233
1T6543EL	233
1T6544DA	233
1T6544EL	233
1T6545DA	233
1T6545EL	233
1T6546DA	233
1T6546EL	233
1T6547DA	233
1T6547EL	233
1T6548DA	233
1T6548EL	233
1T6549DA	233
1T6549EL	233
1T6550DA	233
1T6550EL	233
1T6551DA	194
1T6551EL	194
1T6552DA	194
1T6552EL	194
1T6553DA	194
1T6553EL	194
1T6554DA	194
1T6554EL	194
1T6555DA	194
1T6555EL	194
1T6556DA	194
1T6556EL	194
1T6557DA	194
1T6557EL	194
1T6558DA	194
1T6558EL	194
1T6559DA	194
1T6559EL	194
1T6560DA	194
1T6560EL	194
1T6561DA	194
1T6561EL	194
1T6562DA	194

COD.	PAG.
1T6562EL	194
1T6563DA	194
1T6563EL	194
1T6564DA	194
1T6564EL	194
1T6565DA	194
1T6565EL	194
1T6566DA	194
1T6566EL	194
1T6567DA	194
1T6567EL	194
1T6568DA	194
1T6568EL	194
1T6569DA	194
1T6569EL	194
1T6570DA	194
1T6570EL	194
1T6571	195, 234
1T6572	195, 234
1T6573	195, 234
1T6574	195, 234
1T6575	195, 234
1T6576	195, 234
1T6579	195
1T6580	195
1T6581	609, 613, 617, 619, 695, 698, 700, 721, 723, 735, 738, 779
1T6582DA	238
1T6582EL	238
1T6583DA	238
1T6583EL	238
1T6584DA	238
1T6584EL	238
1T6585DA	238
1T6585EL	238
1T6586DA	238
1T6586EL	238
1T6587DA	238
1T6587EL	238
1T6588DA	238
1T6588EL	238
1T6589DA	238
1T6589EL	238
1T6590DA	238
1T6590EL	238
1T6591DA	238
1T6591EL	238
1T6592DA	238
1T6592EL	238
1T6593DA	238
1T6593EL	238
1T6594DA	238
1T6594EL	238
1T6595DA	238
1T6595EL	238
1T6596DA	238
1T6596EL	238
1T6597DA	238
1T6597EL	238
1T6598DA	238
1T6598EL	238
1T6599DA	238

INDEX FOR CODE

COD.	PAG.
1T6599EL	238
1T6600DA	239
1T6600EL	238
1T6601DA	239
1T6601EL	238
1T6602DA	239
1T6602EL	238
1T6603DA	239
1T6603EL	238
1T6604DA	239
1T6604EL	238
1T6605DA	239
1T6605EL	238
1T6606DA	239
1T6606EL	239
1T6607DA	239
1T6607EL	239
1T6608DA	239
1T6608EL	239
1T6609DA	239
1T6609EL	239
1T6610DA	239
1T6610EL	239
1T6611DA	239
1T6611EL	239
1T6612DA	239
1T6612EL	239
1T6613DA	239
1T6613EL	239
1T6614DA	239
1T6614EL	239
1T6615DA	239
1T6615EL	239
1T6616DA	239
1T6616EL	239
1T6617DA	239
1T6617EL	239
1T6618	240
1T6619DA	368
1T6619EL	368
1T6620DA	368
1T6620EL	368
1T6621DA	368
1T6621EL	368
1T6622DA	368
1T6622EL	368
1T6623DA	368
1T6623EL	368
1T6624DA	368
1T6624EL	368
1T6625DA	368
1T6625EL	368
1T6626DA	368
1T6626EL	368
1T6627DA	368
1T6627EL	368
1T6628DA	368
1T6628EL	368
1T6629DA	368
1T6629EL	368
1T6630DA	368
1T6630EL	368
1T6631DA	369
1T6631EL	369
1T6632DA	369
1T6632EL	369
1T6633DA	369
1T6633EL	369
1T6634DA	369
1T6634EL	369
1T6635DA	369
1T6635EL	369
1T6636DA	369
1T6636EL	369
1T6637DA	369
1T6637EL	369
1T6638DA	369
1T6638EL	369
1T6639DA	370
1T6639EL	370
1T6640DA	370
1T6640EL	370
1T6641DA	370
1T6641EL	370
1T6642DA	370
1T6642EL	370
1T6643DA	370
1T6643EL	370
1T6644DA	370
1T6644EL	370
1T6645DA	370
1T6645EL	370
1T6646DA	370
1T6646EL	370
1T6647DA	370
1T6647EL	370
1T6648DA	370
1T6648EL	370
1T6649DA	370
1T6649EL	370
1T6650DA	370
1T6650EL	370
1T6651DA	370
1T6651EL	370
1T6652DA	370
1T6652EL	370
1T6653DA	370
1T6653EL	370
1T6654DA	370
1T6654EL	370
1T6655DA	370
1T6655EL	370
1T6656DA	370
1T6656EL	370
1T6657DA	371
1T6657EL	371
1T6658DA	371
1T6658EL	371
1T6659DA	371
1T6659EL	371
1T6660DA	371
1T6660EL	371
1T6661DA	371
1T6661EL	371
1T6662DA	371
1T6662EL	371
1T6663DA	371
1T6663EL	371
1T6664DA	371
1T6664EL	371
1T6665DA	371
1T6665EL	371
1T6666DA	371
1T6666EL	371
1T6667DA	371
1T6667EL	371
1T6668DA	371
1T6668EL	371
1T6669DA	371
1T6669EL	371
1T6670DA	371
1T6670EL	371
1T6671DA	371
1T6671EL	371
1T6672DA	371
1T6672EL	371
1T6673DA	371
1T6673EL	371
1T6674DA	371
1T6674EL	371
1T6675DA	372
1T6675EL	372
1T6676DA	372
1T6676EL	372
1T6677DA	372
1T6677EL	372
1T6678DA	372
1T6678EL	372
1T6679DA	372
1T6679EL	372
1T6680DA	372
1T6680EL	372
1T6681DA	373
1T6681EL	373
1T6682DA	373
1T6682EL	373
1T6683DA	373
1T6683EL	373
1T6684DA	373
1T6684EL	373
1T6685DA	373
1T6685EL	373
1T6686DA	373
1T6686EL	373
1T6687DA	373
1T6687EL	373
1T6688DA	373
1T6688EL	373
1T6689DA	373
1T6689EL	373
1T6690DA	373
1T6690EL	373
1T6691DA	373
1T6691EL	373
1T6692DA	373
1T6692EL	373
1T6693DA	370
1T6693EL	370
1T6694DA	370

COD.	PAG.
1T6694EL	370
1T6695DA	370
1T6695EL	370
1T6696DA	370
1T6696EL	370
1T6697DA	370
1T6697EL	370
1T6698DA	370
1T6698EL	370
1T6699DA	371
1T6699EL	371
1T6700DA	371
1T6700EL	371
1T6701DA	371
1T6701EL	371
1T6702DA	371
1T6702EL	371
1T6703DA	371
1T6703EL	371
1T6704DA	371
1T6704EL	371
1T6705DA	371
1T6705EL	371
1T6706DA	371
1T6706EL	371
1T6707DA	371
1T6707EL	371
1T6708DA	371
1T6708EL	371
1T6709DA	371
1T6709EL	371
1T6710DA	371
1T6710EL	371
1T6711DA	372
1T6711EL	372
1T6712DA	372
1T6712EL	372
1T6713DA	372
1T6713EL	372
1T6714DA	372
1T6714EL	372
1T6715DA	372
1T6715EL	372
1T6716DA	372
1T6716EL	372
1T6717DA	372
1T6717EL	372
1T6718DA	372
1T6718EL	372
1T6719DA	372
1T6719EL	372
1T6720DA	372
1T6720EL	372
1T6721DA	372
1T6721EL	372
1T6722DA	372
1T6722EL	372
1T6723DA	372
1T6723EL	372
1T6724DA	372
1T6724EL	372
1T6725DA	372
1T6725EL	372

COD.	PAG.
1T6726DA	372
1T6726EL	372
1T6727DA	372
1T6727EL	372
1T6728DA	372
1T6728EL	372
1T6729DA	373
1T6729EL	373
1T6730DA	373
1T6730EL	373
1T6731DA	373
1T6731EL	373
1T6732DA	373
1T6732EL	373
1T6733DA	373
1T6733EL	373
1T6734DA	373
1T6734EL	373
1T6735DA	373
1T6735EL	373
1T6736DA	373
1T6736EL	373
1T6737DA	373
1T6737EL	373
1T6738DA	373
1T6738EL	373
1T6739DA	373
1T6739EL	373
1T6740DA	373
1T6740EL	373
1T6741DA	373
1T6741EL	373
1T6742DA	373
1T6742EL	373
1T6743DA	373
1T6743EL	373
1T6744DA	373
1T6744EL	373
1T6745DA	373
1T6745EL	373
1T6746DA	373
1T6746EL	373
1T6747	288
1T6748	288
1T6749	288
1T6750	288
1T6751	288
1T6752	288
1T6753	288
1T6754	288
1T6755	288
1T6756	288
1T6757	288
1T6758	288
1T6759DA	288
1T6759EL	288
1T6760DA	288
1T6760EL	288
1T6761DA	288
1T6761EL	288
1T6762DA	288
1T6762EL	288
1T6763DA	289

COD.	PAG.
1T6763EL	289
1T6764DA	289
1T6764EL	289
1T6765DA	289
1T6765EL	289
1T6766DA	289
1T6766EL	289
1T6767DA	289
1T6767EL	289
1T6768DA	289
1T6768EL	289
1T6769DA	289
1T6769EL	289
1T6770DA	289
1T6770EL	289
1T6771DA	289
1T6771EL	289
1T6772DA	289
1T6772EL	289
1T6773DA	289
1T6773EL	289
1T6774DA	289
1T6774EL	289
1T6775DA	289
1T6775EL	289
1T6776DA	289
1T6776EL	289
1T6777DA	289
1T6777EL	289
1T6778DA	289
1T6778EL	289
1T6779DA	289
1T6779EL	289
1T6780DA	289
1T6780EL	289
1T6781DA	289
1T6781EL	289
1T6782DA	289
1T6782EL	289
1T6783DA	290
1T6783EL	290
1T6784DA	290
1T6784EL	290
1T6785DA	290
1T6785EL	290
1T6786DA	290
1T6786EL	290
1T6787DA	290
1T6787EL	290
1T6788DA	290
1T6788EL	290
1T6789DA	290
1T6789EL	290
1T6790DA	290
1T6790EL	290
1T6791DA	290
1T6791EL	290
1T6792DA	290
1T6792EL	290
1T6793DA	290
1T6793EL	290
1T6794DA	290
1T6794EL	290

INDEX FOR CODE

COD.	PAG.
1T6795	291
1T6796	291
1T6797DA	291
1T6797EL	291
1T6798DA	291
1T6798EL	291
1T6799	290
1T6800	290
1T6801	366
1T6802	366
1T6803	366
1T6804	366
1T6805	366
1T6806	291
1T6807DA	401
1T6807EL	401
1T6808DA	401
1T6808EL	401
1T6809DA	401
1T6809EL	401
1T6810DA	401
1T6810EL	401
1T6811DA	401
1T6811EL	401
1T6812DA	401
1T6812EL	401
1T6813DA	395
1T6813EL	395
1T6814DA	395
1T6814EL	395
1T6815DA	395
1T6815EL	395
1T6816DA	395
1T6816EL	395
1T6817DA	395
1T6817EL	395
1T6818DA	395
1T6818EL	395
1T6819DA	395
1T6819EL	395
1T6820DA	395
1T6820EL	395
1T6821DA	395
1T6821EL	395
1T6822DA	395
1T6822EL	395
1T6823DA	395
1T6823EL	395
1T6824DA	395
1T6824EL	395
1T6825DA	384
1T6825EL	384
1T6826DA	384
1T6826EL	384
1T6827DA	384
1T6827EL	384
1T6828DA	384
1T6828EL	384
1T6829DA	384
1T6829EL	384
1T6830DA	384
1T6830EL	384
1T6831DA	385
1T6831EL	385
1T6832DA	385
1T6832EL	385
1T6833DA	385
1T6833EL	385
1T6834DA	385
1T6834EL	385
1T6835DA	385
1T6835EL	385
1T6836DA	385
1T6836EL	385
1T6837DA	384
1T6837EL	384
1T6838DA	384
1T6838EL	384
1T6839DA	384
1T6839EL	384
1T6840DA	384
1T6840EL	384
1T6841DA	384
1T6841EL	384
1T6842DA	384
1T6842EL	384
1T6843DA	384
1T6843EL	384
1T6844DA	384
1T6844EL	384
1T6845DA	384
1T6845EL	384
1T6846DA	384
1T6846EL	384
1T6847DA	384
1T6847EL	384
1T6848DA	384
1T6848EL	384
1T6849DA	405
1T6849EL	405
1T6850DA	405
1T6850EL	405
1T6851DA	406
1T6851EL	406
1T6852DA	406
1T6852EL	406
1T6853DA	406
1T6853EL	406
1T6854DA	406
1T6854EL	406
1T6855DA	390
1T6855EL	390
1T6856DA	390
1T6856EL	390
1T6857DA	390
1T6857EL	390
1T6858DA	390
1T6858EL	390
1T6859DA	390
1T6859EL	390
1T6860DA	390
1T6860EL	390
1T6861DA	391
1T6861EL	391
1T6862DA	391
1T6862EL	391
1T6863DA	391
1T6863EL	391
1T6864DA	391
1T6864EL	391
1T6865DA	391
1T6865EL	391
1T6866DA	391
1T6866EL	391
1T6867DA	392
1T6867EL	392
1T6868DA	392
1T6868EL	392
1T6869DA	392
1T6869EL	392
1T6870DA	392
1T6870EL	392
1T6871DA	392
1T6871EL	392
1T6872DA	392
1T6872EL	392
1T6873DA	390
1T6873EL	390
1T6874DA	390
1T6874EL	390
1T6875DA	390
1T6875EL	390
1T6876DA	390
1T6876EL	390
1T6877DA	390
1T6877EL	390
1T6878DA	390
1T6878EL	390
1T6879DA	391
1T6879EL	391
1T6880DA	391
1T6880EL	391
1T6881DA	391
1T6881EL	391
1T6882DA	391
1T6882EL	391
1T6883DA	391
1T6883EL	391
1T6884DA	391
1T6884EL	391
1T6885DA	392
1T6885EL	392
1T6886DA	392
1T6886EL	392
1T6887DA	392
1T6887EL	392
1T6888DA	392
1T6888EL	392
1T6889DA	392
1T6889EL	392
1T6890DA	392
1T6890EL	392
1T6891DA	390
1T6891EL	390
1T6892DA	390
1T6892EL	390
1T6893DA	390
1T6893EL	390
1T6894DA	390

COD.	PAG.
1T6894EL	390
1T6895DA	390
1T6895EL	390
1T6896DA	390
1T6896EL	390
1T6897DA	391
1T6897EL	391
1T6898DA	391
1T6898EL	391
1T6899DA	391
1T6899EL	391
1T6900DA	391
1T6900EL	391
1T6901DA	391
1T6901EL	391
1T6902DA	391
1T6902EL	391
1T6903DA	392
1T6903EL	392
1T6904DA	392
1T6904EL	392
1T6905DA	392
1T6905EL	392
1T6906DA	392
1T6906EL	392
1T6907DA	392
1T6907EL	392
1T6908DA	392
1T6908EL	392
1T6916EL	367
1T6917EL	366
1T6918	269
1T6919	393, 411, 422, 429, 454
1T6920	393, 411, 422, 429, 454
1T6921	393, 411, 422, 429, 454
1T6922	374
1T6923	374
1T6924	374
1T6925	374
1T6926	374
1T6927	374
1T6928	374
1T6930	375
1T6931	374
1T6932	374
1T6933	374
1T6934	374
1T6935	374
1T6936	374
1T6937	374
1T6938	374
1T6939	374
1T6940	290
1T6941CA	230
1T6942CA	230
1T6943CA	230
1T6944CA	230
1T6945CA	312
1T6946CA	312
1T6947CA	313
1T6948CA	313
1T6950CA	202
1T6955CA	259
1T6956CA	259
1T6957CA	259
1T6958CA	259
1T6959CA	259
1T6960CA	259
1T6961CA	259
1T6962CA	259
1T6963CA	259
1T6964CA	259
1T6965CA	259
1T6966CA	259
1T6967CA	259
1T6968CA	259
1T6969CA	259
1T6970CA	259
1T6971CA	137
1T6972CA	137
1T6973CA	145
1T6974CA	145
1T6975CA	140
1T6976CA	140
1T6977CA	148
1T6978CA	148
1T6979D	112
1T6979DA	112
1T6979EL	112
1T6980D	112
1T6980DA	112
1T6980EL	112
1T6981D	112
1T6981DA	112
1T6981EL	112
1T6982D	112
1T6982DA	112
1T6982EL	112
1T6983D	112
1T6983DA	112
1T6983EL	112
1T6984D	112
1T6984DA	112
1T6984EL	112
1T6985D	112
1T6985DA	112
1T6985EL	112
1T6986D	112
1T6986DA	112
1T6986EL	112
1T6987D	120
1T6987DA	120
1T6987EL	120
1T6988D	120
1T6988DA	120
1T6988EL	120
1T6989D	120
1T6989DA	120
1T6989EL	120
1T6990D	120
1T6990DA	120
1T6990EL	120
1T6991D	120
1T6991DA	120
1T6991EL	120
1T6992D	120
1T6992DA	120
1T6992EL	120
1T6993D	120
1T6993DA	120
1T6993EL	120
1T6994D	120
1T6994DA	120
1T6994EL	120
1T6995D	112
1T6995DA	112
1T6995EL	112
1T6996D	112
1T6996DA	112
1T6996EL	112
1T6997D	112
1T6997DA	112
1T6997EL	112
1T6998D	112
1T6998DA	112
1T6998EL	112
1T6999D	120
1T6999DA	120
1T6999EL	120
1T7000D	120
1T7000DA	120
1T7000EL	120
1T7001D	120
1T7001DA	120
1T7001EL	120
1T7002D	120
1T7002DA	120
1T7002EL	120
1T7003	720
1T7004	280
1T7005	280
1T7006	280
1T7007	280
1T7008	280
1T7009	280
1T7016	344
1T7017	344
1T7018	344
1T7019	344
1T7020	344
1T7021	344
1T7022	344
1T7023	344
1T7024	343
1T7025	343
1T7026	343
1T7027	343
1T7028EL	343
1T7029EL	343
1T7030EL	343
1T7031	352
1T7032	352
1T7033	352
1T7034	352
1T7035	352
1T7036	352

INDEX FOR CODE

COD.	PAG.
1T7037	353
1T7038	353
1T7039	353
1T7040	353
1T7041	353
1T7043	352
1T7044	354
1T7045	354
1T7046	354
1T7047	354
1T7048	354
1T7049	354
1T7050	354
1T7051	354
1T7052	354
1T7053	354
1T7054	354
1T7055	354
1T7056	355
1T7057	356
1T7058	356
1T7059	355
1T7060	356
1T7061	356
1T7062	355
1T7063	355
1T7064	356
1T7065	355
1T7066	355
1T7067	352
1T7068	352
1T7069	352
1T7070	352
1T7071	352
1T7072	352
1T7073	353
1T7074	353
1T7076	352
1T7077	355
1T7078	355
1T7079	355
1T7080	355
1T7081	355
1T7082	355
1T7083	354
1T7084	354
1T7085	354
1T7086	354
1T7087	354
1T7088	354
1T7089	355
1T7090	356
1T7091	356
1T7092	355
1T7093	356
1T7094	356
1T7095	355
1T7096	355
1T7097	356
1T7098	344
1T7099	345
1T7099CA	345
1T7100	345
1T7100CA	345
1T7101	345
1T7101CA	345
1T7102	345
1T7102CA	345
1T7103	345
1T7103CA	345
1T7104	345
1T7104CA	345
1T7105	345
1T7105CA	345
1T7106	345
1T7106CA	345
1T7107	346
1T7107CA	345
1T7108	346
1T7108CA	345
1T7109	346
1T7109CA	345
1T7110	346
1T7110CA	345
1T7111	345
1T7111CA	345
1T7112	345
1T7112CA	345
1T7113	345
1T7113CA	345
1T7114	345
1T7114CA	345
1T7115	345
1T7115CA	345
1T7116	345
1T7116CA	345
1T7117	345
1T7117CA	345
1T7118	345
1T7118CA	345
1T7119	346
1T7119CA	345
1T7120	346
1T7120CA	345
1T7121	346
1T7121CA	345
1T7122	346
1T7122CA	345
1T7123	346
1T7123CA	346
1T7124	346
1T7124CA	346
1T7125	346
1T7125CA	346
1T7126	346
1T7126CA	346
1T7127	347
1T7127CA	346
1T7128	347
1T7128CA	346
1T7129	347
1T7129CA	346
1T7130	347
1T7130CA	346
1T7131	347
1T7131CA	346
1T7132	347
1T7132CA	346
1T7133	347
1T7133CA	346
1T7134	347
1T7134CA	346
1T7135	346
1T7135CA	346
1T7136	346
1T7136CA	346
1T7137	346
1T7137CA	346
1T7138	346
1T7138CA	346
1T7139	347
1T7139CA	346
1T7140	347
1T7140CA	346
1T7141	347
1T7141CA	346
1T7142	347
1T7142CA	346
1T7143	347
1T7143CA	346
1T7144	347
1T7144CA	346
1T7145	347
1T7145CA	346
1T7146	347
1T7146CA	346
1T7147	348
1T7147CA	347
1T7148	348
1T7148CA	347
1T7149	348
1T7149CA	347
1T7150	348
1T7150CA	347
1T7151	348
1T7151CA	347
1T7152	348
1T7152CA	347
1T7153	348
1T7153CA	347
1T7154	348
1T7154CA	347
1T7155	348
1T7155CA	347
1T7156	348
1T7156CA	347
1T7157	348
1T7157CA	347
1T7158	348
1T7158CA	347
1T7159	348
1T7159CA	347
1T7160	348
1T7160CA	347
1T7161	348
1T7161CA	347
1T7162	348
1T7162CA	347
1T7163	348

COD.	PAG.
1T7163CA	347
1T7164	348
1T7164CA	347
1T7165	348
1T7165CA	347
1T7166	348
1T7166CA	347
1T7167	348
1T7167CA	347
1T7168	348
1T7168CA	347
1T7169	348
1T7169CA	347
1T7170	348
1T7170CA	347
1T7171	366
1T7172EL	343
1T7173DA	417
1T7173EL	417
1T7174DA	417
1T7174EL	417
1T7175DA	417
1T7175EL	417
1T7176DA	417
1T7176EL	417
1T7177DA	417
1T7177EL	417
1T7178DA	417
1T7178EL	417
1T7179DA	440
1T7179EL	440
1T7180DA	440
1T7180EL	440
1T7181DA	440
1T7181EL	440
1T7182DA	440
1T7182EL	440
1T7183DA	440
1T7183EL	440
1T7184DA	440
1T7184EL	440
1T7185DA	417
1T7185EL	417
1T7186DA	418
1T7186EL	418
1T7187DA	418
1T7187EL	418
1T7188DA	417
1T7188EL	417
1T7189DA	418
1T7189EL	418
1T7190DA	418
1T7190EL	418
1T7191DA	440
1T7191EL	440
1T7192DA	440
1T7192EL	440
1T7193DA	440
1T7193EL	440
1T7194DA	440
1T7194EL	440
1T7195DA	440
1T7195EL	440

COD.	PAG.
1T7196DA	440
1T7196EL	440
1T7197DA	413
1T7197EL	413
1T7198DA	413
1T7198EL	413
1T7199DA	413
1T7199EL	413
1T7200DA	413
1T7200EL	413
1T7201DA	413
1T7201EL	413
1T7202DA	413
1T7202EL	413
1T7203DA	413
1T7203EL	413
1T7204DA	413
1T7204EL	413
1T7205DA	413
1T7205EL	413
1T7206DA	413
1T7206EL	413
1T7207DA	413
1T7207EL	413
1T7208DA	413
1T7208EL	413
1T7209DA	413
1T7209EL	413
1T7210DA	414
1T7210EL	414
1T7211DA	414
1T7211EL	414
1T7212DA	413
1T7212EL	413
1T7213DA	414
1T7213EL	414
1T7214DA	414
1T7214EL	414
1T7215DA	413
1T7215EL	413
1T7216DA	414
1T7216EL	414
1T7217DA	414
1T7217EL	414
1T7218DA	413
1T7218EL	413
1T7219DA	414
1T7219EL	414
1T7220DA	414
1T7220EL	414
1T7221DA	408
1T7221EL	408
1T7222DA	408
1T7222EL	408
1T7223DA	408
1T7223EL	408
1T7224DA	408
1T7224EL	408
1T7225DA	408
1T7225EL	408
1T7226DA	408
1T7226EL	408
1T7227DA	408

COD.	PAG.
1T7227EL	408
1T7228DA	408
1T7228EL	408
1T7229DA	408
1T7229EL	408
1T7230DA	408
1T7230EL	408
1T7231DA	408
1T7231EL	408
1T7232DA	408
1T7232EL	408
1T7233DA	408
1T7233EL	408
1T7234DA	408
1T7234EL	408
1T7235DA	408
1T7235EL	408
1T7236DA	408
1T7236EL	408
1T7237DA	408
1T7237EL	408
1T7238DA	408
1T7238EL	408
1T7239DA	408
1T7239EL	408
1T7240DA	409
1T7240EL	409
1T7241DA	409
1T7241EL	409
1T7242DA	408
1T7242EL	408
1T7243DA	409
1T7243EL	409
1T7244DA	409
1T7244EL	409
1T7245DA	408
1T7245EL	408
1T7246DA	409
1T7246EL	409
1T7247DA	409
1T7247EL	409
1T7248DA	408
1T7248EL	408
1T7249DA	409
1T7249EL	409
1T7250DA	409
1T7250EL	409
1T7251DA	408
1T7251EL	408
1T7252DA	409
1T7252EL	409
1T7253DA	409
1T7253EL	409
1T7254DA	408
1T7254EL	408
1T7255DA	409
1T7255EL	409
1T7256DA	409
1T7256EL	409
1T7257DA	418
1T7257EL	418
1T7258DA	418
1T7258EL	418

INDEX FOR CODE

COD.	PAG.
1T7259DA	418
1T7259EL	418
1T7260DA	418
1T7260EL	418
1T7261DA	418
1T7261EL	418
1T7262DA	418
1T7262EL	418
1T7263DA	440
1T7263EL	440
1T7264DA	440
1T7264EL	440
1T7265DA	440
1T7265EL	440
1T7266DA	440
1T7266EL	440
1T7267DA	446
1T7267EL	446
1T7268DA	446
1T7268EL	446
1T7269DA	419
1T7269EL	419
1T7270DA	419
1T7270EL	419
1T7271DA	419
1T7271EL	419
1T7272DA	419
1T7272EL	419
1T7273DA	419
1T7273EL	419
1T7274DA	419
1T7274EL	419
1T7275DA	446
1T7275EL	446
1T7276DA	446
1T7276EL	446
1T7277DA	446
1T7277EL	446
1T7278DA	446
1T7278EL	446
1T7279DA	446
1T7279EL	446
1T7280DA	446
1T7280EL	446
1T7281DA	414
1T7281EL	414
1T7282DA	414
1T7282EL	414
1T7283DA	414
1T7283EL	414
1T7284DA	414
1T7284EL	414
1T7285DA	414
1T7285EL	414
1T7286DA	414
1T7286EL	414
1T7287DA	414
1T7287EL	414
1T7288DA	414
1T7288EL	414
1T7289DA	414
1T7289EL	414
1T7290DA	414
1T7290EL	414
1T7291DA	414
1T7291EL	414
1T7292DA	414
1T7292EL	414
1T7293DA	415
1T7293EL	415
1T7294DA	415
1T7294EL	415
1T7295DA	415
1T7295EL	415
1T7296DA	415
1T7296EL	415
1T7297DA	415
1T7297EL	415
1T7298DA	415
1T7298EL	415
1T7299DA	415
1T7299EL	415
1T7300DA	415
1T7300EL	415
1T7301DA	415
1T7301EL	415
1T7302DA	415
1T7302EL	415
1T7303DA	415
1T7303EL	415
1T7304DA	415
1T7304EL	415
1T7305DA	409
1T7305EL	409
1T7306DA	409
1T7306EL	409
1T7307DA	409
1T7307EL	409
1T7308DA	409
1T7308EL	409
1T7309DA	409
1T7309EL	409
1T7310DA	409
1T7310EL	409
1T7311DA	409
1T7311EL	409
1T7312DA	409
1T7312EL	409
1T7313DA	409
1T7313EL	409
1T7314DA	409
1T7314EL	409
1T7315DA	409
1T7315EL	409
1T7316DA	409
1T7316EL	409
1T7317DA	409
1T7317EL	409
1T7318DA	409
1T7318EL	409
1T7319DA	409
1T7319EL	409
1T7320DA	409
1T7320EL	409
1T7321DA	409
1T7321EL	409
1T7322DA	409
1T7322EL	409
1T7323DA	410
1T7323EL	410
1T7324DA	410
1T7324EL	410
1T7325DA	410
1T7325EL	410
1T7326DA	410
1T7326EL	410
1T7327DA	410
1T7327EL	410
1T7328DA	410
1T7328EL	410
1T7329DA	410
1T7329EL	410
1T7330DA	410
1T7330EL	410
1T7331DA	410
1T7331EL	410
1T7332DA	410
1T7332EL	410
1T7333DA	410
1T7333EL	410
1T7334DA	410
1T7334EL	410
1T7335DA	410
1T7335EL	410
1T7336DA	410
1T7336EL	410
1T7337DA	410
1T7337EL	410
1T7338DA	410
1T7338EL	410
1T7339DA	410
1T7339EL	410
1T7340DA	410
1T7340EL	410
1T7341DA	425
1T7341EL	425
1T7342DA	425
1T7342EL	425
1T7343DA	446
1T7343EL	446
1T7344DA	446
1T7344EL	446
1T7345DA	423
1T7345EL	423
1T7346DA	423
1T7346EL	423
1T7347DA	423
1T7347EL	423
1T7348DA	423
1T7348EL	423
1T7349DA	421
1T7349EL	421
1T7350DA	421
1T7350EL	421
1T7351DA	421
1T7351EL	421
1T7352DA	421
1T7352EL	421
1T7353DA	421

COD.	PAG.
1T7353EL	421
1T7354DA	421
1T7354EL	421
1T7355DA	425
1T7355EL	425
1T7356DA	425
1T7356EL	425
1T7357DA	446
1T7357EL	446
1T7358DA	446
1T7358EL	446
1T7359DA	423
1T7359EL	423
1T7360DA	423
1T7360EL	423
1T7361DA	423
1T7361EL	423
1T7362DA	423
1T7362EL	423
1T7363DA	421
1T7363EL	421
1T7364DA	421
1T7364EL	421
1T7365DA	421
1T7365EL	421
1T7366DA	421
1T7366EL	421
1T7367DA	421
1T7367EL	421
1T7368DA	421
1T7368EL	421
1T7369	399, 416, 424, 431
1T7370	399, 416, 424, 431
1T7371	432
1T7372	432
1T7373	432
1T7374	433
1T7375	433
1T7381	430
1T7382	430
1T7383	430
1T7384	430
1T7385	427
1T7386	427
1T7387	427
1T7388	428
1T7389	428
1T7390	427
1T7391	427
1T7392	427
1T7393	428
1T7394	428
1T7395	427
1T7396	427
1T7397	427
1T7398	428
1T7399	428
1T7400	209
1T7401	209
1T7402	504
1T7403EL	343
1T7404	189
1T7405	190
1T7406	190
1T7407	349
1T7407CA	348
1T7408	349
1T7408CA	348
1T7409	349
1T7409CA	348
1T7410	349
1T7410CA	348
1T7411	349
1T7411CA	348
1T7412	349
1T7412CA	348
1T7413	349
1T7413CA	348
1T7414	349
1T7414CA	348
1T7415	349
1T7415CA	349
1T7416	349
1T7416CA	349
1T7417	349
1T7417CA	349
1T7418	349
1T7418CA	349
1T7419	349
1T7419CA	348
1T7420	349
1T7420CA	348
1T7421	349
1T7421CA	348
1T7422	349
1T7422CA	348
1T7423	349
1T7423CA	348
1T7424	349
1T7424CA	348
1T7425	349
1T7425CA	348
1T7426	349
1T7426CA	348
1T7427	349
1T7427CA	349
1T7428	349
1T7428CA	349
1T7429	349
1T7429CA	349
1T7430	349
1T7430CA	349
1T7431	343
1T7432	343
1T7433	343
1T7434	343
1T7435	343
1T7436	343
1T7437	353
1T7438	353
1T7439	344
1T7440	344
1T7441	350
1T7441CA	350
1T7442	350
1T7442CA	350
1T7443	350
1T7443CA	350
1T7444	350
1T7444CA	350
1T7445	350
1T7445CA	350
1T7446	350
1T7446CA	350
1T7447	350
1T7447CA	350
1T7448	350
1T7448CA	350
1T7449	350
1T7449CA	350
1T7450	350
1T7450CA	350
1T7451	350
1T7451CA	350
1T7452	350
1T7452CA	350
1T7453	350
1T7453CA	350
1T7454	350
1T7454CA	350
1T7455	350
1T7455CA	350
1T7456	350
1T7456CA	350
1T7457	350
1T7457CA	350
1T7458	350
1T7458CA	350
1T7459	350
1T7459CA	350
1T7460	350
1T7460CA	350
1T7461	350
1T7461CA	350
1T7462	350
1T7462CA	350
1T7463	350
1T7463CA	350
1T7464	350
1T7464CA	350
1T7465	351
1T7465CA	351
1T7466	351
1T7466CA	351
1T7467	351
1T7467CA	351
1T7468	351
1T7468CA	351
1T7469	351
1T7469CA	351
1T7470	351
1T7470CA	351
1T7471	351
1T7471CA	351
1T7472	351
1T7472CA	351
1T7473	351
1T7473CA	351
1T7474	351

INDEX FOR CODE

COD.	PAG.
1T7474CA	351
1T7475	351
1T7475CA	351
1T7476	351
1T7476CA	351
1T7477	351
1T7477CA	351
1T7478	351
1T7478CA	351
1T7479	351
1T7479CA	351
1T7480	351
1T7480CA	351
1T7481	351
1T7481CA	351
1T7482	351
1T7482CA	351
1T7483	351
1T7483CA	351
1T7484	351
1T7484CA	351
1T7485	351
1T7485CA	351
1T7486	351
1T7486CA	351
1T7487	351
1T7487CA	351
1T7488	351
1T7488CA	351
1T7489	357
1T7490	357
1T7491	357
1T7492	357
1T7493	357
1T7494	357
1T7495	357
1T7496	357
1T7497	357
1T7498	357
1T7499	357
1T7500	357
1T7501	357
1T7502DA	232
1T7502DACA	232
1T7502EL	232
1T7503DA	232
1T7503DACA	232
1T7503EL	232
1T7504DA	232
1T7504DACA	232
1T7504EL	232
1T7505DA	232
1T7505DACA	232
1T7505EL	232
1T7506	345
1T7507	345
1T7508	345
1T7509	345
1T7510	345
1T7511	345
1T7512	345
1T7513	345
1T7514	345
1T7515	345
1T7516	345
1T7517	345
1T7518	345
1T7519	345
1T7520	345
1T7521	345
1T7522	345
1T7523	345
1T7524	345
1T7525	345
1T7526	345
1T7527	345
1T7528	345
1T7529	345
1T7530	346
1T7531	346
1T7532	346
1T7533	346
1T7534	346
1T7535	346
1T7536	346
1T7537	346
1T7538	346
1T7539	346
1T7540	346
1T7541	346
1T7542	346
1T7543	346
1T7544	346
1T7545	346
1T7546	346
1T7547	346
1T7548	346
1T7549	346
1T7550	346
1T7551	346
1T7552	346
1T7553	346
1T7554	347
1T7555	347
1T7556	347
1T7557	347
1T7558	347
1T7559	347
1T7560	347
1T7561	347
1T7562	347
1T7563	347
1T7564	347
1T7565	347
1T7566	347
1T7567	347
1T7568	347
1T7569	347
1T7570	347
1T7571	347
1T7572	347
1T7573	347
1T7574	347
1T7575	347
1T7576	347
1T7577	347
1T7578	348
1T7579	348
1T7580	348
1T7581	348
1T7582	348
1T7583	348
1T7584	348
1T7585	348
1T7586	349
1T7587	349
1T7588	349
1T7589	349
1T7590	348
1T7591	348
1T7592	348
1T7593	348
1T7594	348
1T7595	348
1T7596	348
1T7597	348
1T7598	349
1T7599	349
1T7600	349
1T7601	349
1T7602	165
1T7603	165
1T7604	165
1T7605	165
1T7606	165
1T7607	165
1T7608	165
1T7609	165
1T7610	165
1T7611	165
1T7612	165
1T7613	165
1T7614	165
1T7615	165
1T7616	165
1T7617	165
1T7618	165
1T7619	165
1T7620	165
1T7621	165
1T7622	165
1T7623	165
1T7624	165
1T7625	165
1T7626	165
1T7627	165
1T7628	165
1T7629	165
1T7630	166
1T7631	166
1T7632	166
1T7633	166
1T7634	166
1T7635	166
1T7636	166
1T7637	166
1T7638	165
1T7639	165
1T7640	165

COD.	PAG.
1T7641	165
1T7642	166
1T7643	166
1T7644	166
1T7645	166
1T7646	166
1T7647	166
1T7648	166
1T7649	166
1T7650	166
1T7651	166
1T7652	166
1T7653	166
1T7654	166
1T7655	166
1T7656	166
1T7657	166
1T7658	166
1T7659	166
1T7660	166
1T7661	166
1T7662	166
1T7663	166
1T7664	166
1T7665	166
1T7666	166
1T7667	166
1T7668	166
1T7669	166
1T7670	166
1T7671	166
1T7672	166
1T7673	166
1T7674	170
1T7675	170
1T7676	170
1T7677	170
1T7678	170
1T7679	170
1T7680	170
1T7681	170
1T7682	170
1T7683	170
1T7684	170
1T7685	170
1T7686DA	167, 172
1T7698	170
1T7699	170
1T7700	170
1T7701	170
1T7702	171
1T7703	171
1T7704	171
1T7705	171
1T7706	171
1T7707	171
1T7708	171
1T7709	171
1T7722	171
1T7723	171
1T7724	171
1T7725	171
1T7726	171

COD.	PAG.
1T7727	171
1T7728	171
1T7729	171
1T7730	171
1T7731	171
1T7732	171
1T7733	171
1T7746DA	168
1T7746EL	168
1T7747DA	168
1T7747EL	168
1T7748DA	168
1T7748EL	168
1T7749DA	168
1T7749EL	168
1T7750DA	168
1T7750EL	168
1T7751DA	168
1T7751EL	168
1T7752DA	168
1T7752EL	168
1T7753DA	168
1T7753EL	168
1T7754DA	168
1T7754EL	168
1T7755DA	168
1T7755EL	168
1T7756DA	168
1T7756EL	168
1T7757DA	168
1T7757EL	168
1T7758DA	168
1T7758EL	168
1T7759DA	168
1T7759EL	168
1T7760DA	168
1T7760EL	168
1T7761DA	168
1T7761EL	168
1T7762DA	168
1T7762EL	168
1T7763DA	168
1T7763EL	168
1T7764DA	168
1T7764EL	168
1T7765DA	168
1T7765EL	168
1T7766DA	168
1T7766EL	168
1T7767DA	168
1T7767EL	168
1T7768DA	168
1T7768EL	168
1T7769DA	168
1T7769EL	168
1T7770DA	168
1T7770EL	168
1T7771DA	168
1T7771EL	168
1T7772DA	168
1T7772EL	168
1T7773DA	168
1T7773EL	168

COD.	PAG.
1T7774DA	169
1T7774EL	169
1T7775DA	169
1T7775EL	169
1T7776DA	169
1T7776EL	169
1T7777DA	169
1T7777EL	169
1T7778DA	169
1T7778EL	169
1T7779DA	169
1T7779EL	169
1T7780DA	169
1T7780EL	169
1T7781DA	169
1T7781EL	169
1T7782DA	168
1T7782EL	168
1T7783DA	168
1T7783EL	168
1T7784DA	168
1T7784EL	168
1T7785DA	168
1T7785EL	168
1T7786DA	169
1T7786EL	169
1T7787DA	169
1T7787EL	169
1T7788DA	169
1T7788EL	169
1T7789DA	169
1T7789EL	169
1T7790DA	169
1T7790EL	169
1T7791DA	169
1T7791EL	169
1T7792DA	169
1T7792EL	169
1T7793DA	169
1T7793EL	169
1T7794DA	169
1T7794EL	169
1T7795DA	169
1T7795EL	169
1T7796DA	169
1T7796EL	169
1T7797DA	169
1T7797EL	169
1T7798DA	169
1T7798EL	169
1T7799DA	169
1T7799EL	169
1T7800DA	169
1T7800EL	169
1T7801DA	169
1T7801EL	169
1T7802DA	169
1T7802EL	169
1T7803DA	169
1T7803EL	169
1T7804DA	169
1T7804EL	169
1T7805DA	169

INDEX FOR CODE

COD.	PAG.
1T7805EL	169
1T7806DA	169
1T7806EL	169
1T7807DA	169
1T7807EL	169
1T7808DA	169
1T7808EL	169
1T7809DA	169
1T7809EL	169
1T7810DA	169
1T7810EL	169
1T7811DA	169
1T7811EL	169
1T7812DA	169
1T7812EL	169
1T7813DA	169
1T7813EL	169
1T7814DA	169
1T7814EL	169
1T7815DA	169
1T7815EL	169
1T7816DA	169
1T7816EL	169
1T7817DA	169
1T7817EL	169
1T7818DA	173
1T7818EL	173
1T7819DA	173
1T7819EL	173
1T7820DA	173
1T7820EL	173
1T7821DA	173
1T7821EL	173
1T7822DA	173
1T7822EL	173
1T7823DA	173
1T7823EL	173
1T7824DA	173
1T7824EL	173
1T7825DA	173
1T7825EL	173
1T7826DA	173
1T7826EL	173
1T7827DA	173
1T7827EL	173
1T7828DA	173
1T7828EL	173
1T7829DA	173
1T7829EL	173
1T7842DA	173
1T7842EL	173
1T7843DA	173
1T7843EL	173
1T7844DA	173
1T7844EL	173
1T7845DA	173
1T7845EL	173
1T7846DA	174
1T7846EL	174
1T7847DA	174
1T7847EL	174
1T7848DA	174
1T7848EL	174
1T7849DA	174
1T7849EL	174
1T7850DA	174
1T7850EL	174
1T7851DA	174
1T7851EL	174
1T7852DA	174
1T7852EL	174
1T7853DA	174
1T7853EL	174
1T7866DA	174
1T7866EL	174
1T7867DA	174
1T7867EL	174
1T7868DA	174
1T7868EL	174
1T7869DA	174
1T7869EL	174
1T7870DA	174
1T7870EL	174
1T7871DA	174
1T7871EL	174
1T7872DA	174
1T7872EL	174
1T7873DA	174
1T7873EL	174
1T7874DA	174
1T7874EL	174
1T7875DA	174
1T7875EL	174
1T7876DA	174
1T7876EL	174
1T7877DA	174
1T7877EL	174
1T7890DA	473
1T7890EL	473
1T7891DA	473
1T7891EL	473
1T7892DA	473
1T7892EL	473
1T7893DA	473
1T7893EL	473
1T7894DA	473
1T7894EL	473
1T7895DA	473
1T7895EL	473
1T7896DA	473
1T7896EL	473
1T7897DA	473
1T7897EL	473
1T7898DA	473
1T7898EL	473
1T7899DA	473
1T7899EL	473
1T7900DA	473
1T7900EL	473
1T7901DA	473
1T7901EL	473
1T7902DA	473
1T7902EL	473
1T7903DA	473
1T7903EL	473
1T7904DA	473
1T7904EL	473
1T7905DA	473
1T7905EL	473
1T7906DA	473
1T7906EL	473
1T7907DA	473
1T7907EL	473
1T7908DA	473
1T7908EL	473
1T7909DA	473
1T7909EL	473
1T7910DA	473
1T7910EL	473
1T7911DA	473
1T7911EL	473
1T7912DA	473
1T7912EL	473
1T7913DA	473
1T7913EL	473
1T7914DA	473
1T7914EL	473
1T7915DA	473
1T7915EL	473
1T7916DA	473
1T7916EL	473
1T7917DA	473
1T7917EL	473
1T7918DA	474
1T7918EL	474
1T7919DA	474
1T7919EL	474
1T7920DA	474
1T7920EL	474
1T7921DA	474
1T7921EL	474
1T7922DA	474
1T7922EL	474
1T7923DA	474
1T7923EL	474
1T7924DA	474
1T7924EL	474
1T7925DA	474
1T7925EL	474
1T7926DA	473
1T7926EL	473
1T7927DA	473
1T7927EL	473
1T7928DA	473
1T7928EL	473
1T7929DA	473
1T7929EL	473
1T7930DA	474
1T7930EL	474
1T7931DA	474
1T7931EL	474
1T7932DA	474
1T7932EL	474
1T7933DA	474
1T7933EL	474
1T7934DA	474
1T7934EL	474
1T7935DA	474
1T7935EL	474

COD.	PAG.
1T7936DA	474
1T7936EL	474
1T7937DA	474
1T7937EL	474
1T7938	344
1T7939	344
1T7940	344
1T7941	344
1T7942	344
1T7943	344
1T7944	792
1T8172DA	167, 172
1T8172EL	167, 172
1V7213	466
1V7213AB	467
1V7262	467
1V7263	467
1V7264	467
1V7343	467
1V7344	467
1V7345	467
1V7523	466
1V7524	467
323404IP	533
323414IP	533
323424IP	534
323434IP	534
323494IP	533
323900	535
344540	509
349400IP	536
349410IP	536
349420IP	537
349430IP	537
349490IP	536
374404E	539
374404IP	539
374414E	540
374414IP	540
374424E	540
374424IP	540
374604IP	539
38630P	156
38640P	156
47274	130, 130
47282	129, 129
47291	130
47292	130
47293	129
47294	129
47382	130
47385	130
49881	154, 190, 206, 252, 276, 321
49882	154, 190, 206, 252, 252, 276, 276, 321
49886	154, 190, 206, 252, 276, 321
49887	154, 190, 206, 252, 276, 321
49959	154, 190, 206, 252, 276, 321
54091	130
54091L	130
9000-1/B-R	279
9000-1/B-ST	279
9000-1/G-R	279
9000-1/G-ST	279
9000-1/W-R	279
9000-1/W-ST	279
9000-2/B-R	279
9000-2/B-ST	279
9000-2/G-R	279
9000-2/G-ST	279
9000-2/W-R	279
9000-2/W-ST	279
9000-3/B-R	279
9000-3/B-ST	279
9000-3/G-R	279
9000-3/G-ST	279
9000-3/W-R	279
9000-3/W-ST	279
9000/BPU-D-B	228, 231, 232, 249, 262, 270, 273, 505
9000/BPU-D-G	228, 231, 232, 249, 262, 270, 273, 505
9000/BPU-D-W	228, 231, 232, 249, 262, 270, 273, 505
9000/BRU-B	228, 231, 232, 249, 262, 270, 274, 505
9000/BRU-G	228, 231, 232, 249, 262, 270, 274, 505
9000/BRU-W	228, 231, 232, 249, 262, 270, 274, 505
9001/B	280
9001/G	280
9001/W	280
9002/B	280
9002/G	280
9002/W	280
9003/B	281
9003/G	281
9003/W	281
9004-R/B	279
9004-R/G	279
9004-R/W	279
9004/B	279
9004/G	279
9004/W	279
9009/B	282
9009/G	282
9009/W	282
9010/B	281
9010/G	281
9010/W	281
9011/B	281
9011/G	281
9011/W	281
9012/B	281
9012/G	281
9012/W	281
9013/B	281
9013/G	281
9013/W	281
9014/B	281
9014/G	281
9014/W	281
9015/B	281
9015/G	281
9015/W	281
9016/B	281
9016/G	281
9016/W	281
9017/B	282
9017/G	282
9017/W	282
9018/B	281
9018/G	281
9018/W	281
9500-1/B-ST1	365
9500-1/B-ST3	365
9500-1/B-TA1	365
9500-1/W2-ST1	365
9500-1/W2-ST3	365
9500-1/W2-TA1	365
9500-2/B-ST1	365
9500-2/B-ST3	365
9500-2/B-TA1	365
9500-2/W2-ST1	365
9500-2/W2-ST3	365
9500-2/W2-TA1	365
9500-3/B-ST1	365
9500-3/B-ST3	365
9500-3/B-TA1	365
9500-3/W2-ST1	365
9500-3/W2-ST3	365
9500-3/W2-TA1	365
9501-S/B	367
9501-S/W	367
9503-S/B	367
9503-S/W	367
9504/ST1-B	366
9504/ST1-B-F	366
9504/ST1-W2	366
9504/ST1-W2-F	366
9504/ST3-B	366
9504/ST3-W2	366
9511/B	367
9511/W2	367
S-9000/111	280
S-9000/123	280
S-9000/GP-B	282
S-9000/GP-G	282
S-9000/GP-W	282
S-9000/M-B-KIT	282
S-9000/M-G-KIT	282
S-9000/M-W-KIT	282
S-9000/T	281, 367
S-9000KIT	280
S-9001-R/6-B	282
S-9001-R/6-G	282
S-9001-R/6-W	282
S-9001/115-B	280
S-9001/115-W	280
S-9010-R/6-B	282
S-9010-R/6-G	282
S-9010-R/6-W	282
S-9011-R/6-B	282
S-9011-R/6-G	282

INDEX FOR CODE

S-9011-R/6-W	282
S-9013-R/6-B	282
S-9013-R/6-G	282
S-9013-R/6-W	282
S-9017-R/6-B	282
S-9017-R/6-G	282
S-9017-R/6-W	282
S-9500/314-B	367
S-9500/314-W2	367
S-9500/315	366
T1585	577
T1586	577

REQUISITES AND INFORMATION
All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.

CE DIRECTIVES EUROPEAN COUNCIL

All fixtures comply with the following directives:
- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

UNLESS SPECIFIED OTHERWISE
- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- **all fixtures can be supplied, on request, with nominal voltage of 110V and/or 240V.**

The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium. The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

CONSORZIO ECOLIGHT
Targetti Sankey Spa is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.

TARGETTI SANKEY SpA
Certificated ISO 9001 n° 9130. TAR1

The Enec mark, awarding of the ISO9001 certificate and the CE brand all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

LIGHT BEAM APERTURES

from	to	beam	
5°	10°	Narrow Spot	**NSP**
11°	25°	Spot	**SP**
26°	40°	Flood	**FL**
41°	50°	Medium Wide Flood	**MWFL**
51°	70°	Wide Flood	**WFL**
71°	120°	Very Wide Flood	**VWFL**
		Wall Washer	**WW**

SYMBOLS

INSULATION CLASS

Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).

Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.

Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.

Class III luminaire, suitable for connection to very low voltage circuits.

PARTICULAR SYMBOLS

Weight of the single fixture.

Cable length.

DEGREE OF PROTECTION

Protective screen, keeps out solids exceeding 50 mm in size.

Protective screen, keeps out rain and solids exceeding 12 mm in size.

Protective screen, keeps out solids exceeding 1 mm in size.

Protective screen, keeps out rain and solids exceeding 1 mm in size.

Protective screen, keeps out water spray and solids exceeding 1mm in size.

Protective screen, keeps out dust and water spray.

Protected against powerful water jets.

Protected against the effects of temporary immersion in water.

Protected against the effects of continum immersion.

NOTE

Housing degree of protection.

Optic degree of protection.

SAFETY STANDARDS

ENEC
European Norms Electrical Certification.

SUITABLE FOR INFLAMMABLE SURFACE MOUNTING

Luminaire not suitable for direct mounting on normally inflammable surface.

ICONS

Walk-over

Driver-over safe

TARGETTI IN THE WORLD

TARGETTI SANKEY S.p.A.
Via Pratese, 164
50145 Firenze - Italia

Phone 055 3791.1
Fax 055 3791.266
targetti@targetti.com
www.targetti.com

Customer Care
customer@targetti.com

Customer Service
technical@targetti.com

Lighting Consulting
project@targetti.com

China
TARGETTI LIGHTING (BEIJING) CO. LTD
Room 921 Unit 3 Guanghualu SOHO
1, n.22 Guanghua Road, Chaoyang
District, Beijing China 100020.
+86 10 65388956
teresa.yan@targetti.cn

France
TARGETTI FRANCE S.A.S.
2 Rue de la Renaissance, Bâtiment A -
92160 Antony
Paris 75008
+33 (1) 44 29 09 09
targetti.fr@targetti.com

India
TARGETTI INDIA
2nd floor, Teamwork building 18 Chin-
naswamy Mudaliar road Tasker town,
off Queens road - 560051 Bangalore
+91 80 41120016
s.karthik@targetti.com

Italy
TARGETTI SANKEY S.P.A.
Via Pratese, 164
Firenze 50145
+39 055 37911
targetti@targetti.com

Spain
TARGETTI SPAIN S.A.U
Avda. de Roma, n°69,
Barcelona 08029
+34 93 474 61 71
targetti.es@targetti.com

U.A.E.
TARGETTI SANKEY S.P.A. (BRANCH)
Dubai Airport Free Zone Authority -
Bldg.
6 West A - Office 731
Dubai P.O. Box 54744
+9714 6091033
jcoll@targetti.com

UK
TARGETTI UK LIMITED
Coppergate House
Unit 504 10 White's Row
London E1 7NF
+44 (0) 203 051 4650
m.allen@targetti.com

U.S.A.
TARGETTI USA INC.
750-A West 17th Street
Costa Mesa, CA 92626
+1 714 513 1991
targetti.usa@targetti.com

Latin America
TARGETTI LATIN AMERICA
Cra 2 Oeste # 5-262,
Edificio Av. Belalcazar, Apt. 901
Cali, Colombia
+57 3128 317174
l.valdrighi@targetti.com

Other countries www.targetti.com