


Cikkszám: HL0019993

MLX WP OSCAR 1200 LED POR-ÉS PÁRMENTES SOROLHATÓ LÁMPATEST 36W 4320LM 3000K 120° IP65 1200MM OSRAM 3 ÉV



- PC ház
- PC diffúzor
- Gyors telepítés klipszek nélkül
- LG 2835 LED
- OSRAM LED meghajtó
- 120lm/W
- UV-állóság
- Gyorsrögzítő konzolok mellékelve

Felhasználási mód: mennyezeti/oldalfali

Felhasználási terület: beltér

Bemeneti feszültség : 200-240V AC

Frekvencia : 50-60Hz

Gyártó: MLX

Garancia: 3 év

LED típusa: LG 2835

Extrák: OSRAM driver

Érintésvédelem: I. érintésvédelmi osztály

Szín: fehér

Sugárzási szög: 120°

Ház színe: fehér

Színvisszaadási fokozat CRI: CRI>80

Ház anyaga: PC

Fényforrás: LED

Lámpatest fajtája: Por- és páramentes lámpatest

Búra/fedél színe: opál fehér

Búra anyaga: PC

Ütésállóság: IK07

Védettség: IP65

Színhőmérséklet: 3000K

Névleges környezeti hőmérséklet IEC 62722-2-1 szerint: -25°C - +35°C

Névleges üzemidő: 50 000 h

Várható szállítási idő: Rendeléstől számított 5-10 munkanap

Fényforrást tartalmaz?: Igen

UV-védelem: Igen

Fényforrással: Igen

Sorolható: Igen

Fényáram : 4320

Csomagolás szélesség : 77

Csomagolás hosszúság : 1230

Csomagolás magasság : 77

Csomagolási egység : 9

Fényhasznosítás : 120

Teljesítmény : 36.00




Szélesség : 70.00


Hosszúság : 1200.00

Magasság : 68.00

Súly : 0.80

Bruttó súly kg : 0.90

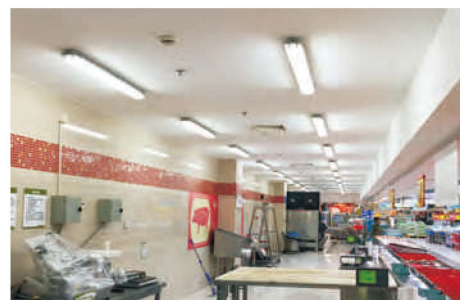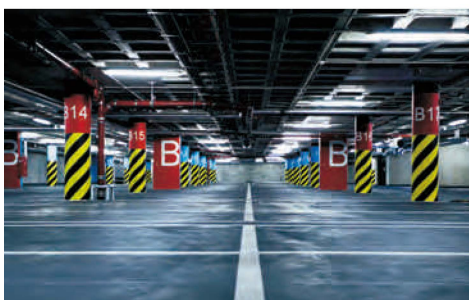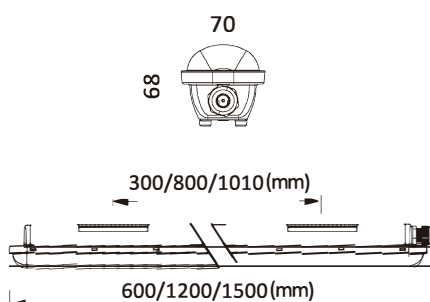




B

① Drill $\varnothing 6\text{mm}$ holes according to below drawing.


Model	Power	Fixing Hole Centre
SR05-15W-630	15W	300mm
SR05-24W-630	24W	
SR05-20W-1230	20W	800mm
SR05-36W-1230	36W	
SR05-30W-1530	30W	1010mm
SR05-50W-1530	50W	

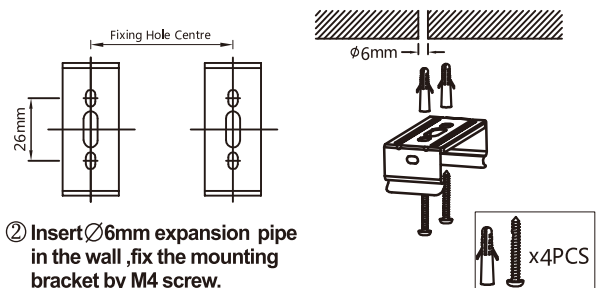

② Insert $\varnothing 6\text{mm}$ expansion pipe in the wall, fix the mounting bracket by M4 screw.


C

Loosen the nut of the cable gland, put the cable through the cable gland.

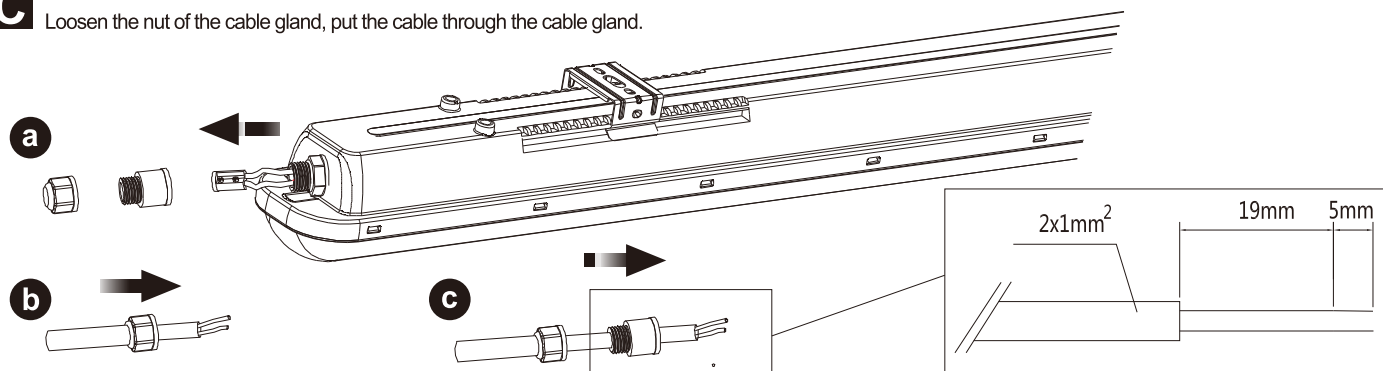


D

Connect the cable on the terminal block as below shown and tighten the cable gland

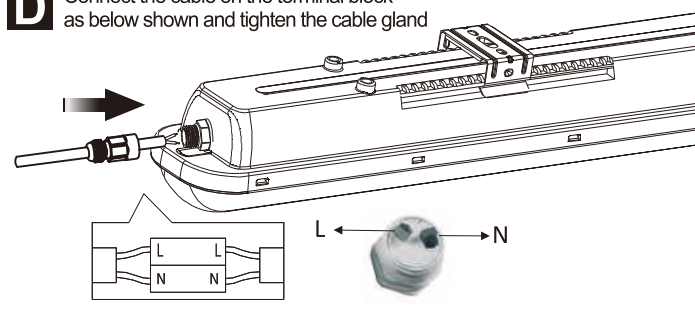


E

Tighten the connector under instruction in turn

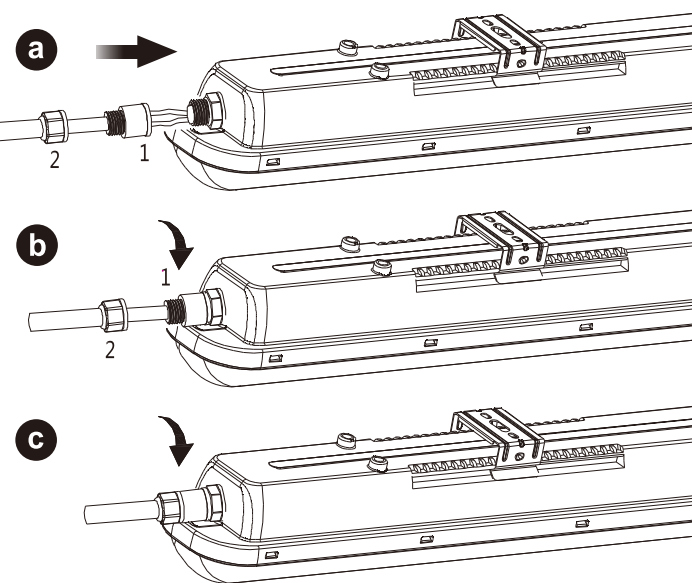


F

Close the diffuser

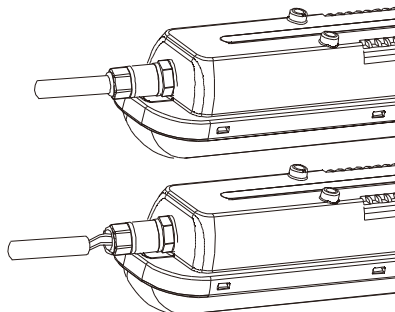


F

Fix the lamp on the wall

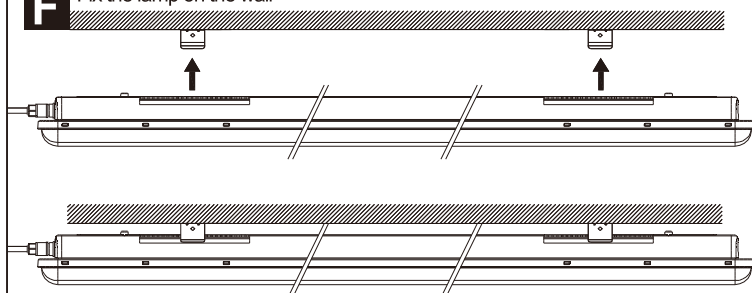

G

Turn on the power.



Safety Notice:

1. Electrical installation should be done by registered electrician only
2. Disconnect the luminaire from supply and wait until luminaire is cooled down, before replacement of the driver
3. Never touch the lamp while luminaire is switched on
4. In any case of malfunction disconnect luminaire from supply immediately, don't try to repair the luminaire yourself, repair should only be done by official service agent.

Contact person: Mr Jason
MOB: 86-13728765409
TEL: 86-796-86780036

Skype: sxfreborn
Email: sharplumi@gmail.com
WEB: <http://www.tsongledlighting.com>