

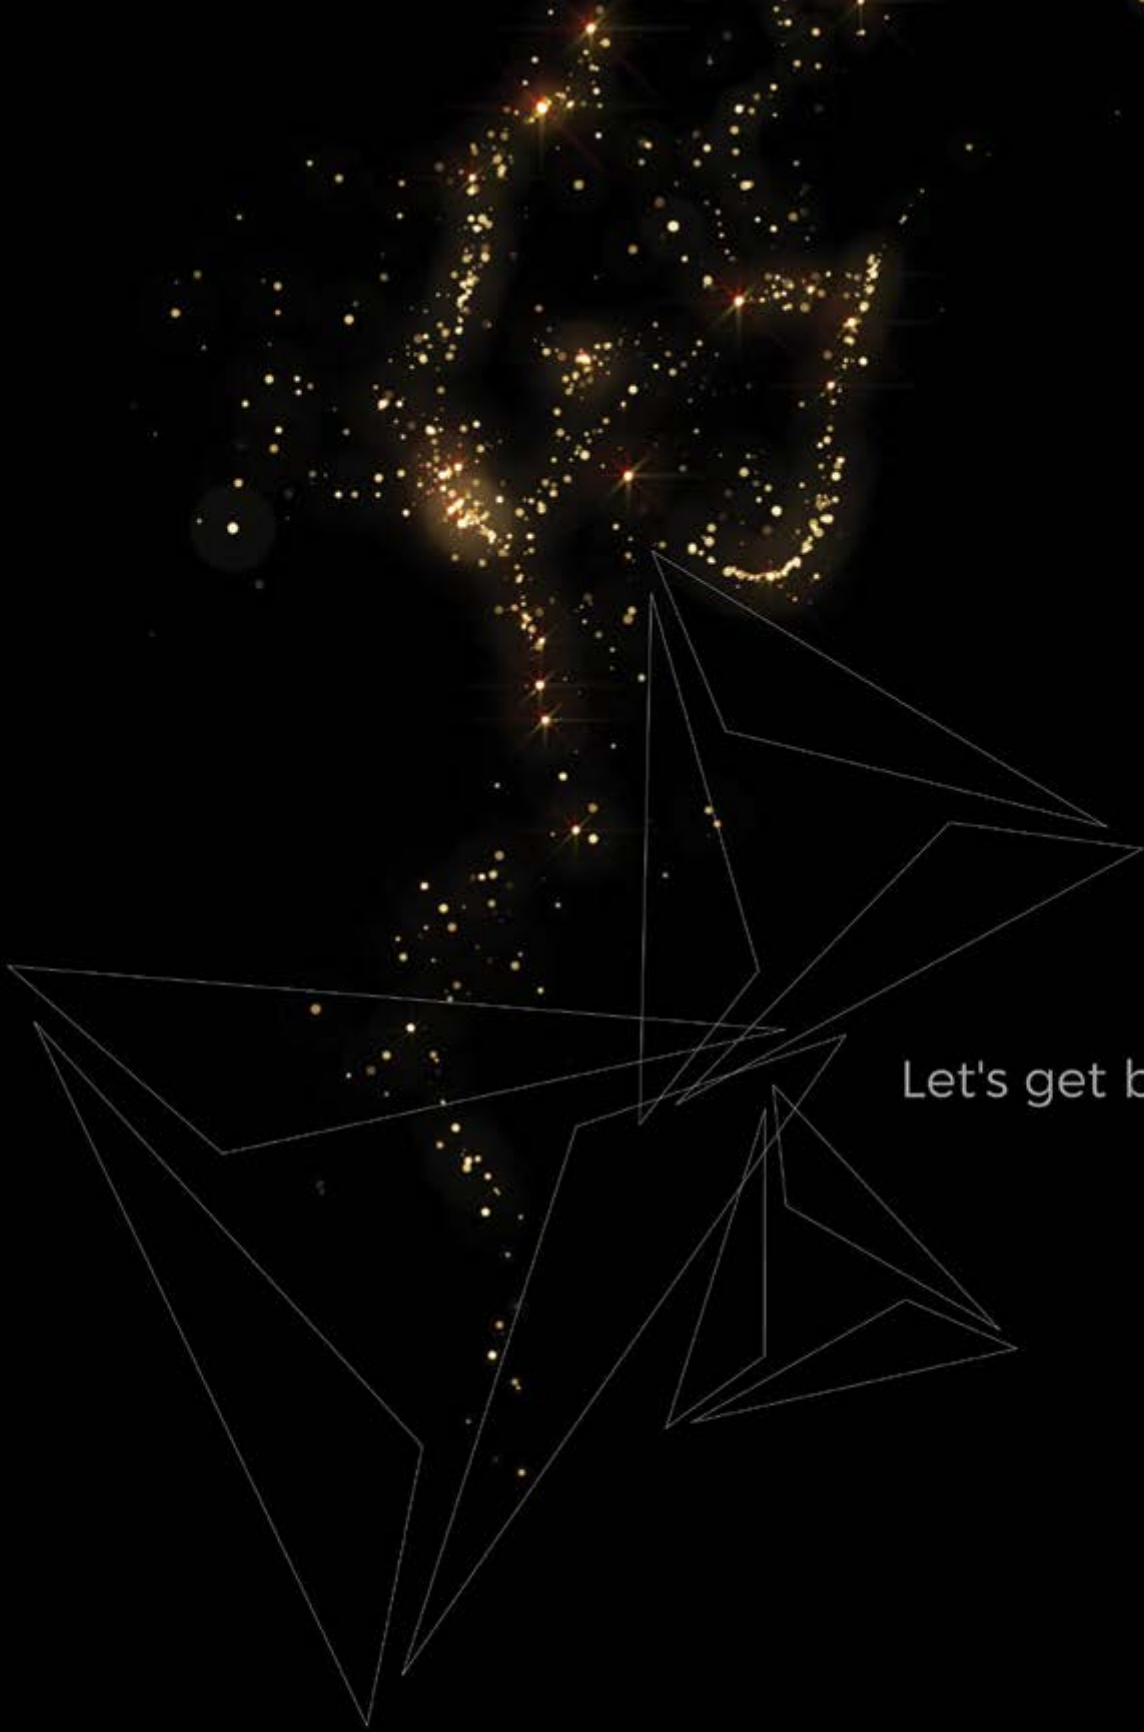


BPMLIGHTING.COM

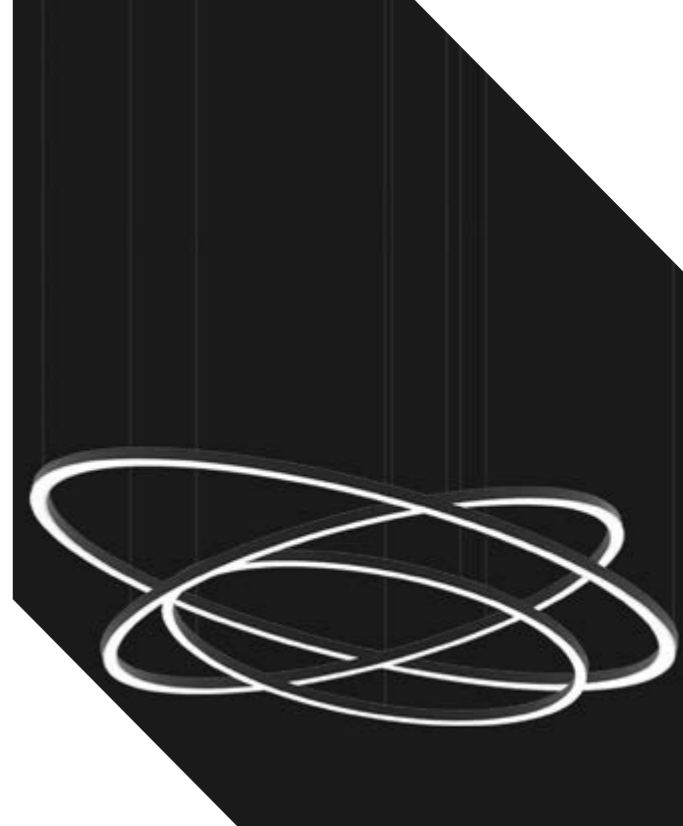

Let's get brighter

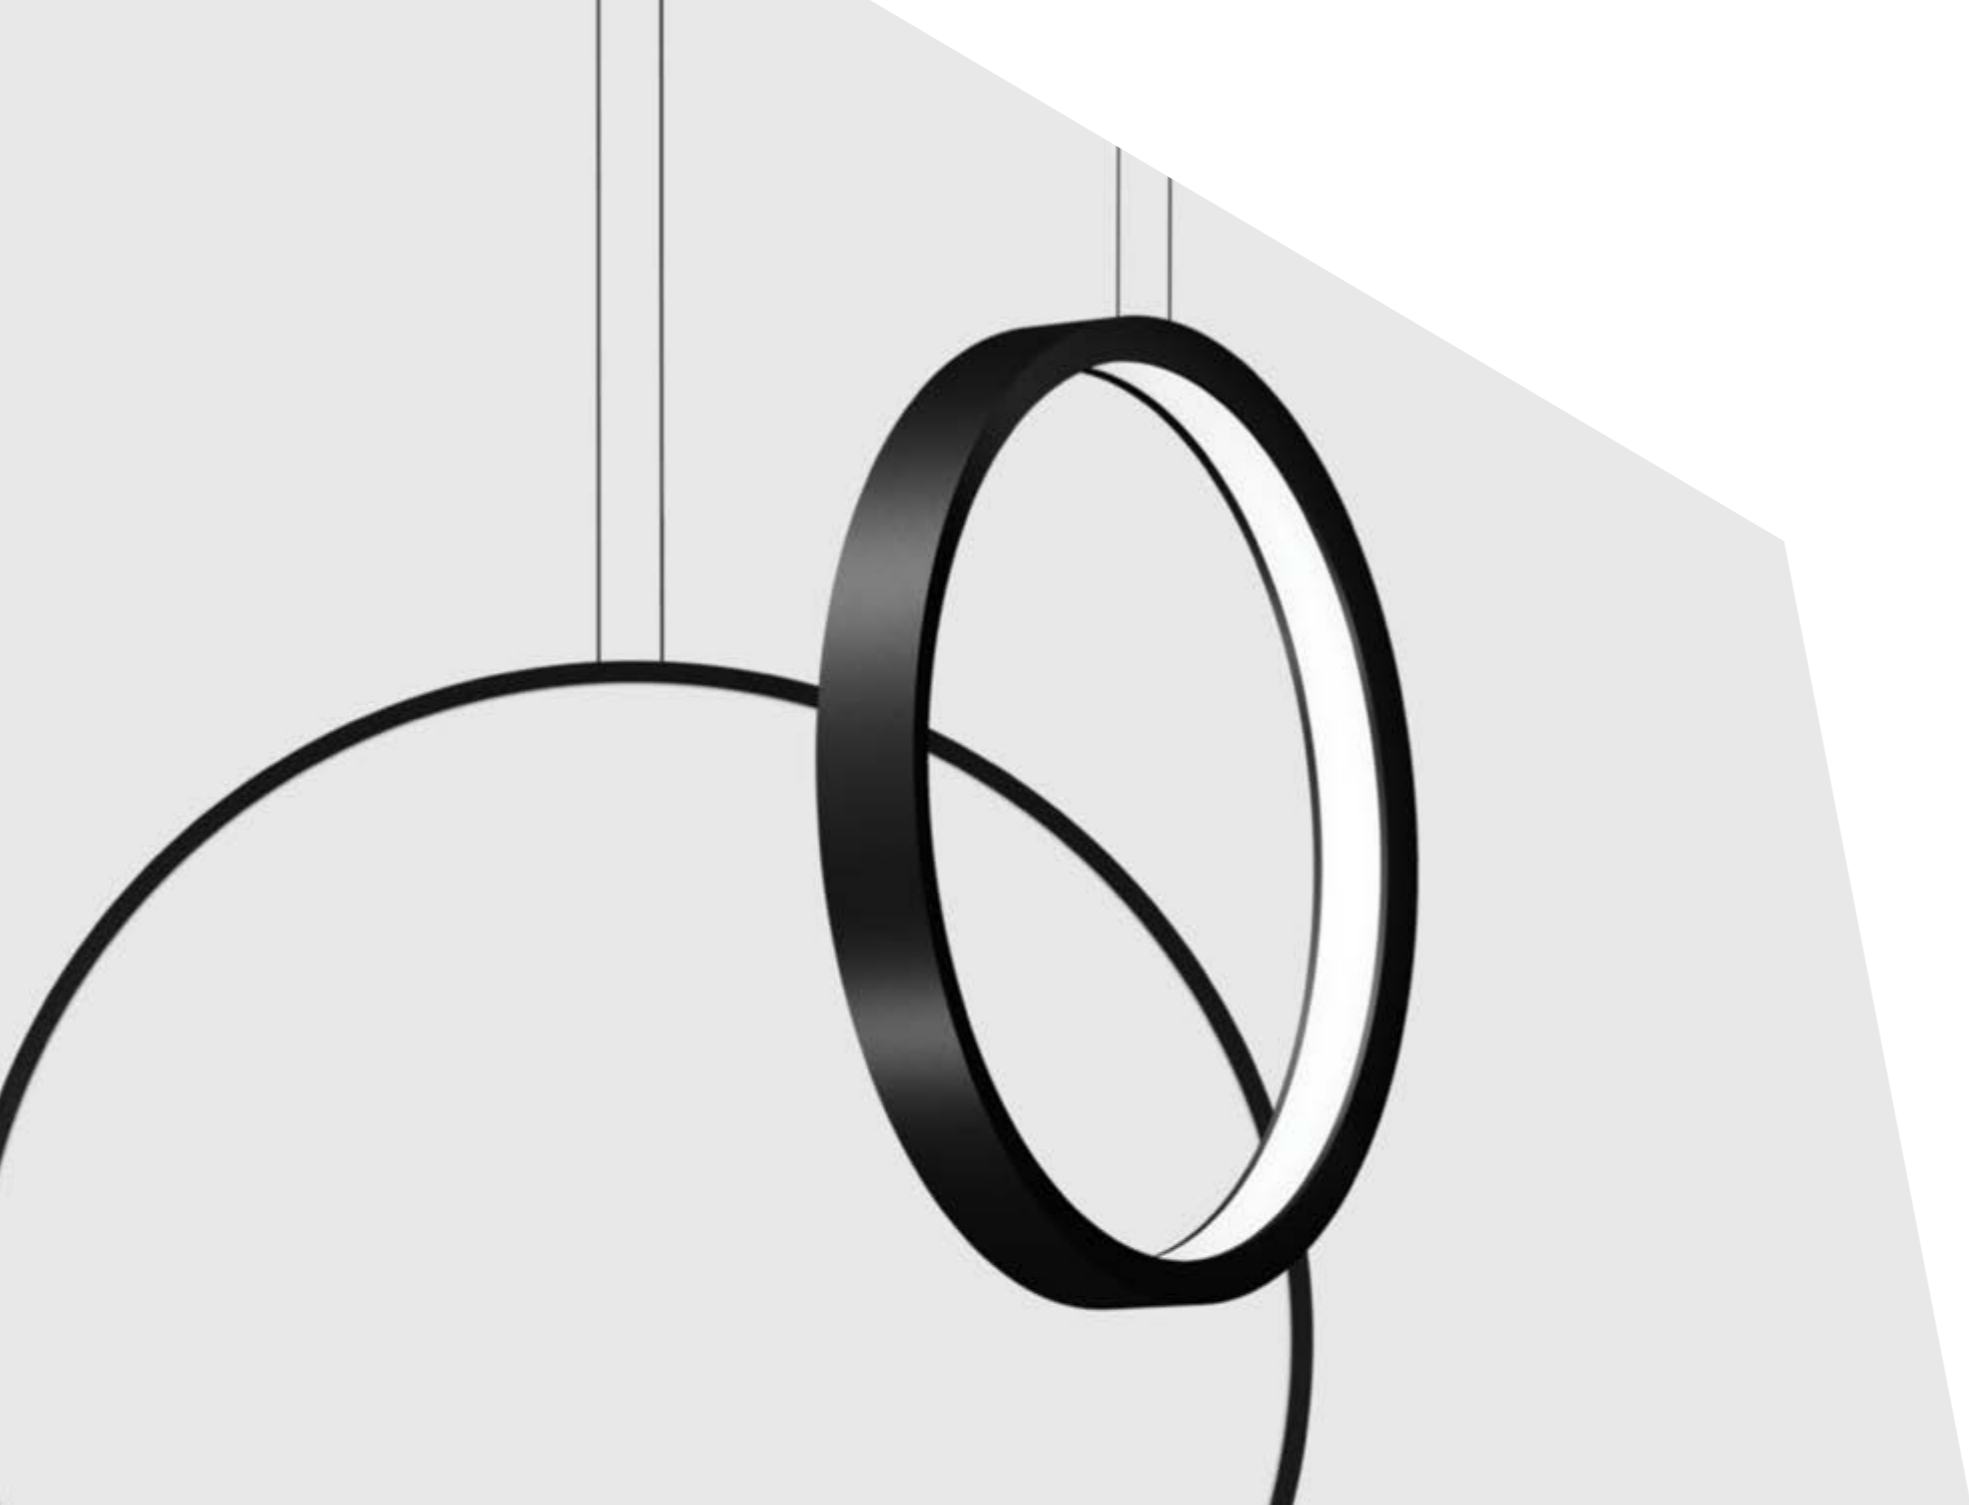

A re-set on principle.
Driven by a nonconformist spirit.

Updated references and new
additions to our catalogue that
cover global projects and unique
collections such as Outdoor
CEM and BPM Acoustic.

That's how we do things. There
is no other option. Developing
increasingly specialised products
and more efficient solutions. So
the future will always be brighter.

*Resetear por principios.
Por impulso y por espíritu
inconformista.*

*Referencias que se actualizan,
familias que se completan para
abarcas proyectos globales
y nuevas colecciones como
Outdoor CEM y BPM Acoustic
que se incorporan a nuestro
catálogo.*

*Ese es el camino. No hay otro.
Evolucionar en productos
cada vez más especializados
y en soluciones más eficientes.
El Futuro será, siempre, más
brillante.*

RE-SET

Bernardo Palomares




We have re-set and regrouped to continue as your lighting partner of choice. With a new brand image, updated virtual channels and a new catalogue concept that makes sure everyone is on the same page.

Sharing the creative process closely, co-creating and making it happen. Giving free rein to creativity, without limits, open to everyone's opinions and desires. At BPM Lighting, we know what we are doing, and the result is brilliant when we do it together. "Let's get brighter."

Reseteamos, reordenamos y estamos listos para seguir siendo su partner industrial de referencia. Imagen de marca renovada, nuestras ventanas virtuales actualizadas y un nuevo concepto de catálogo pensado para un trabajo conjunto más técnico y funcional.

Crear juntos, estar más cerca, compartir, cooperar, sumar. Dar rienda suelta a la creatividad, sin límites, abiertos a cualquier punto de vista. En BPM Lighting lo tenemos claro: Lo haremos juntos, y el resultado será brillante. "Let's get brighter".

RE-ADY

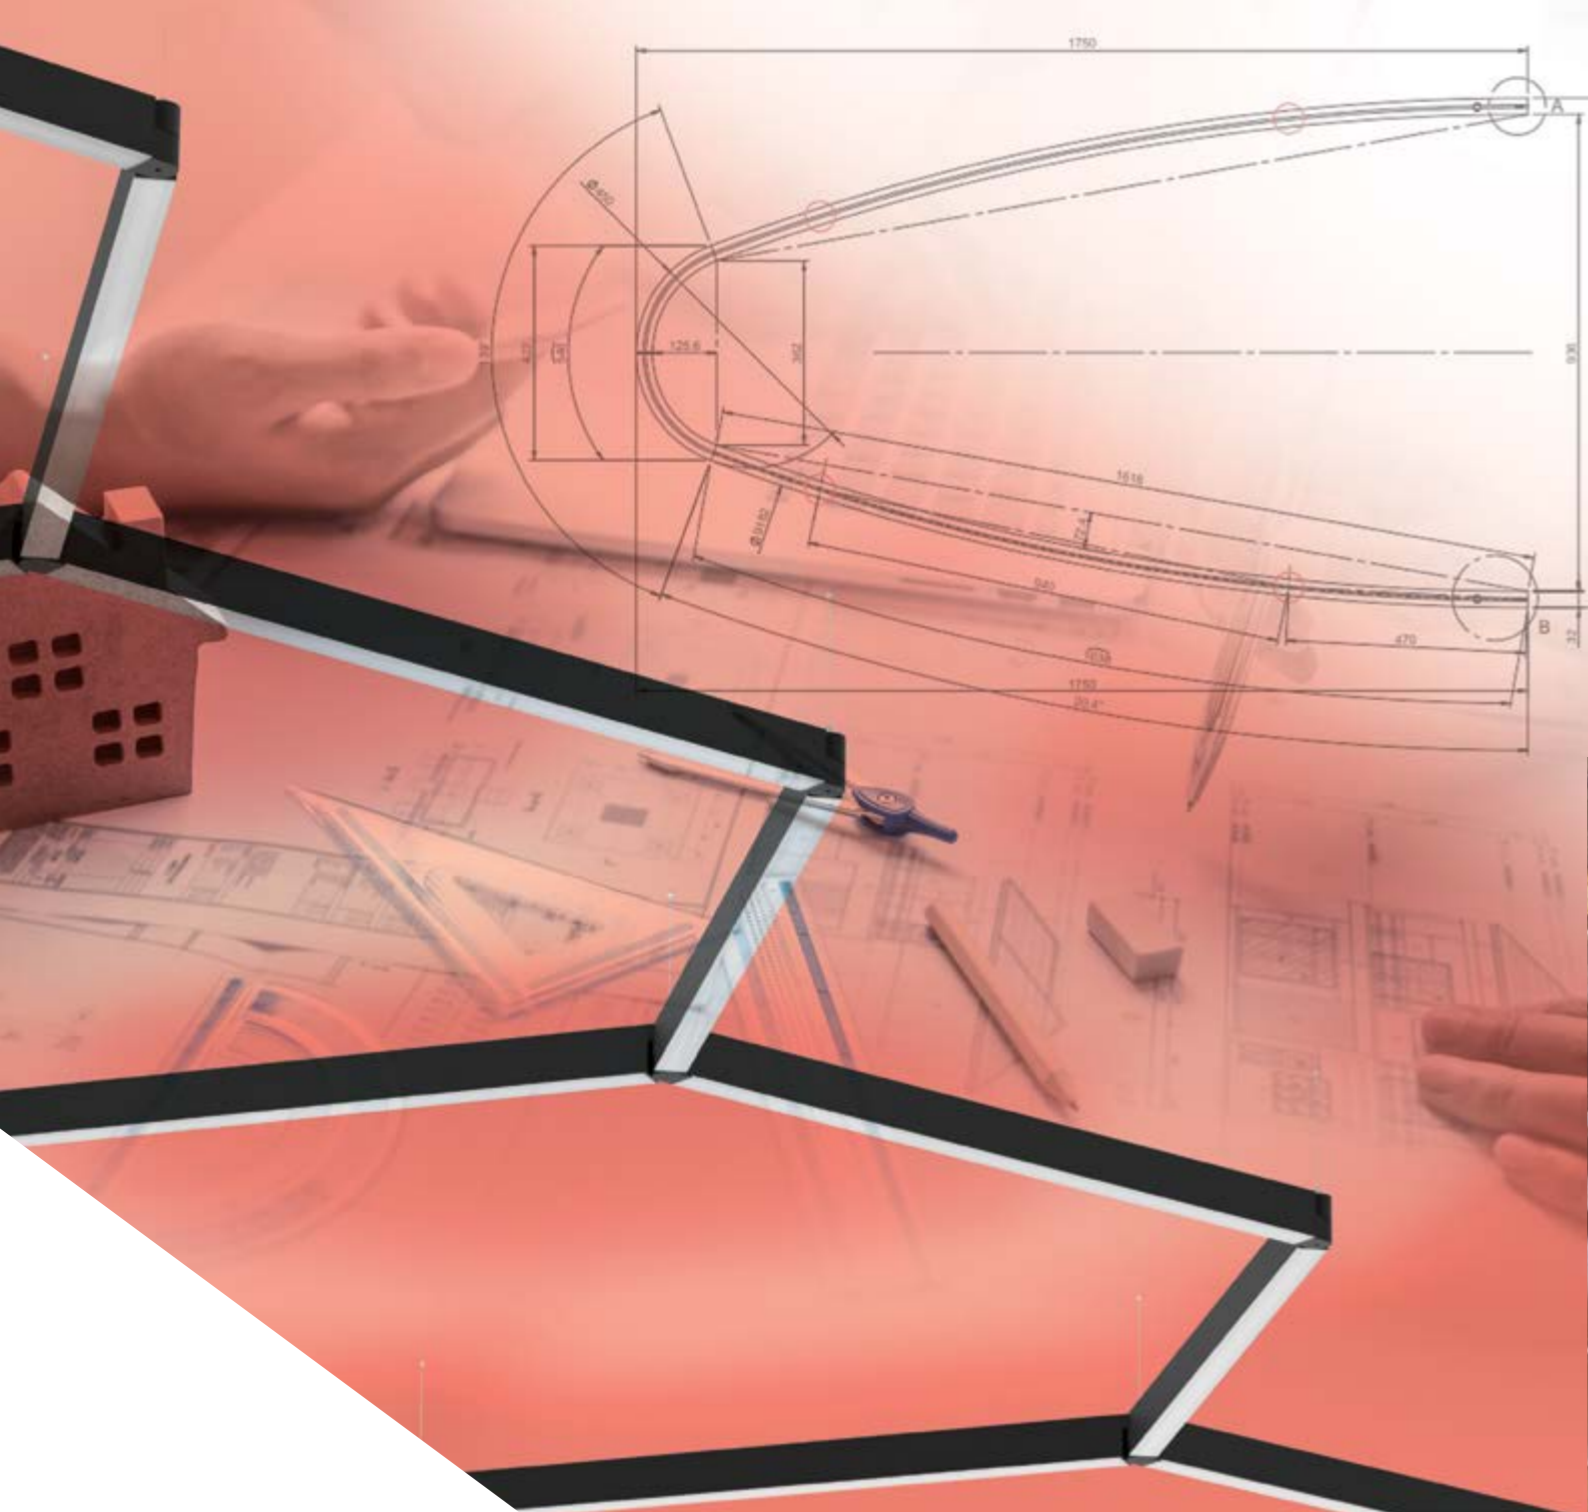

The idea and the result. And avant-garde technology at your service along the way. Our team of experts at BPM Lighting have the experience and resources you need to offer superb lighting products that adapt to every need.

Whatever the project, whether for a small room at home or a large retail establishment, we ensure a perfect combination of design and efficiency, both inseparable qualities for shaping your decorative scheme.

At BPM Lighting, personal service and customisation are among our main strengths: lighter finishes, more colourways, innovative fixtures, and versatile installation systems. Our mission is to satisfy your requirements for a dazzling finish.





La idea y el resultado. Y en el proceso, la tecnología más puntera a su servicio. En BPM Lighting contamos con un equipo profesional altamente especializado, con la experiencia y los recursos que nos permiten ofrecer soluciones lumínicas del más alto nivel y adaptadas a cada necesidad.

En cualquier proyecto, sea para una pequeña estancia del hogar o una gran superficie comercial, diseño y eficiencia han de encajar de manera perfecta, son cualidades inseparables, forman parte de una misma pieza que se amolda a cada instalación.

En BPM Lighting el trabajo personalizado y la customización son pilares fundamentales: acabados más ligeros, mayor gama de colores, apliques innovadores, sistema de instalación versátiles. El objetivo: encajar las posibilidades para conseguir un acabado deslumbrante.

RE-DESIGN

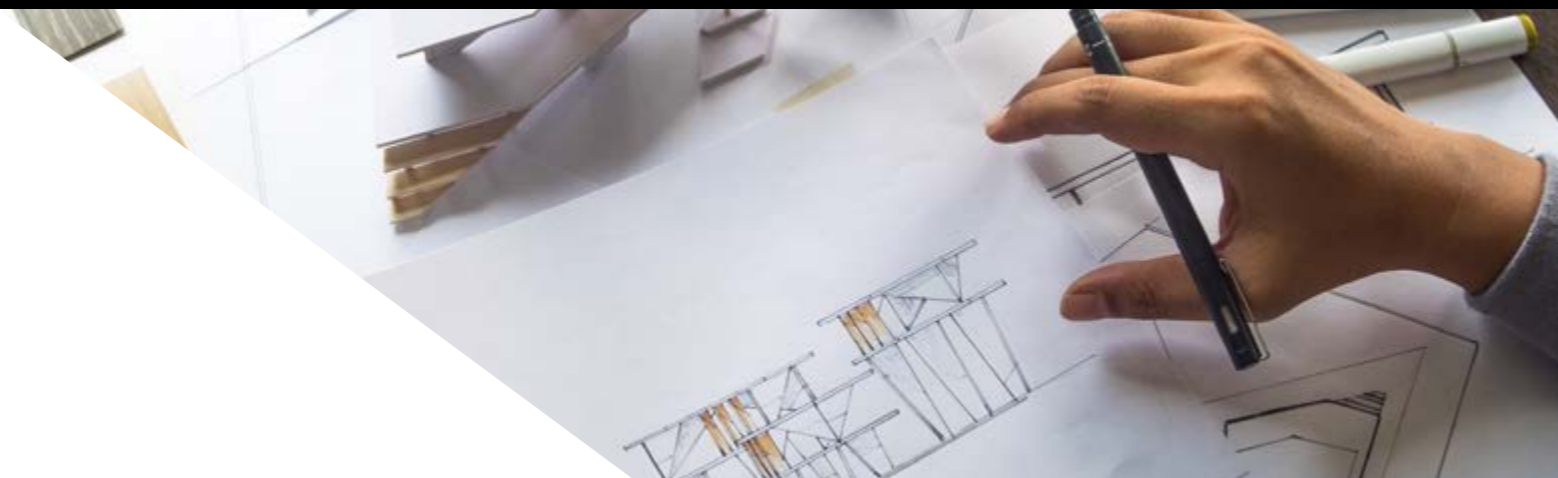

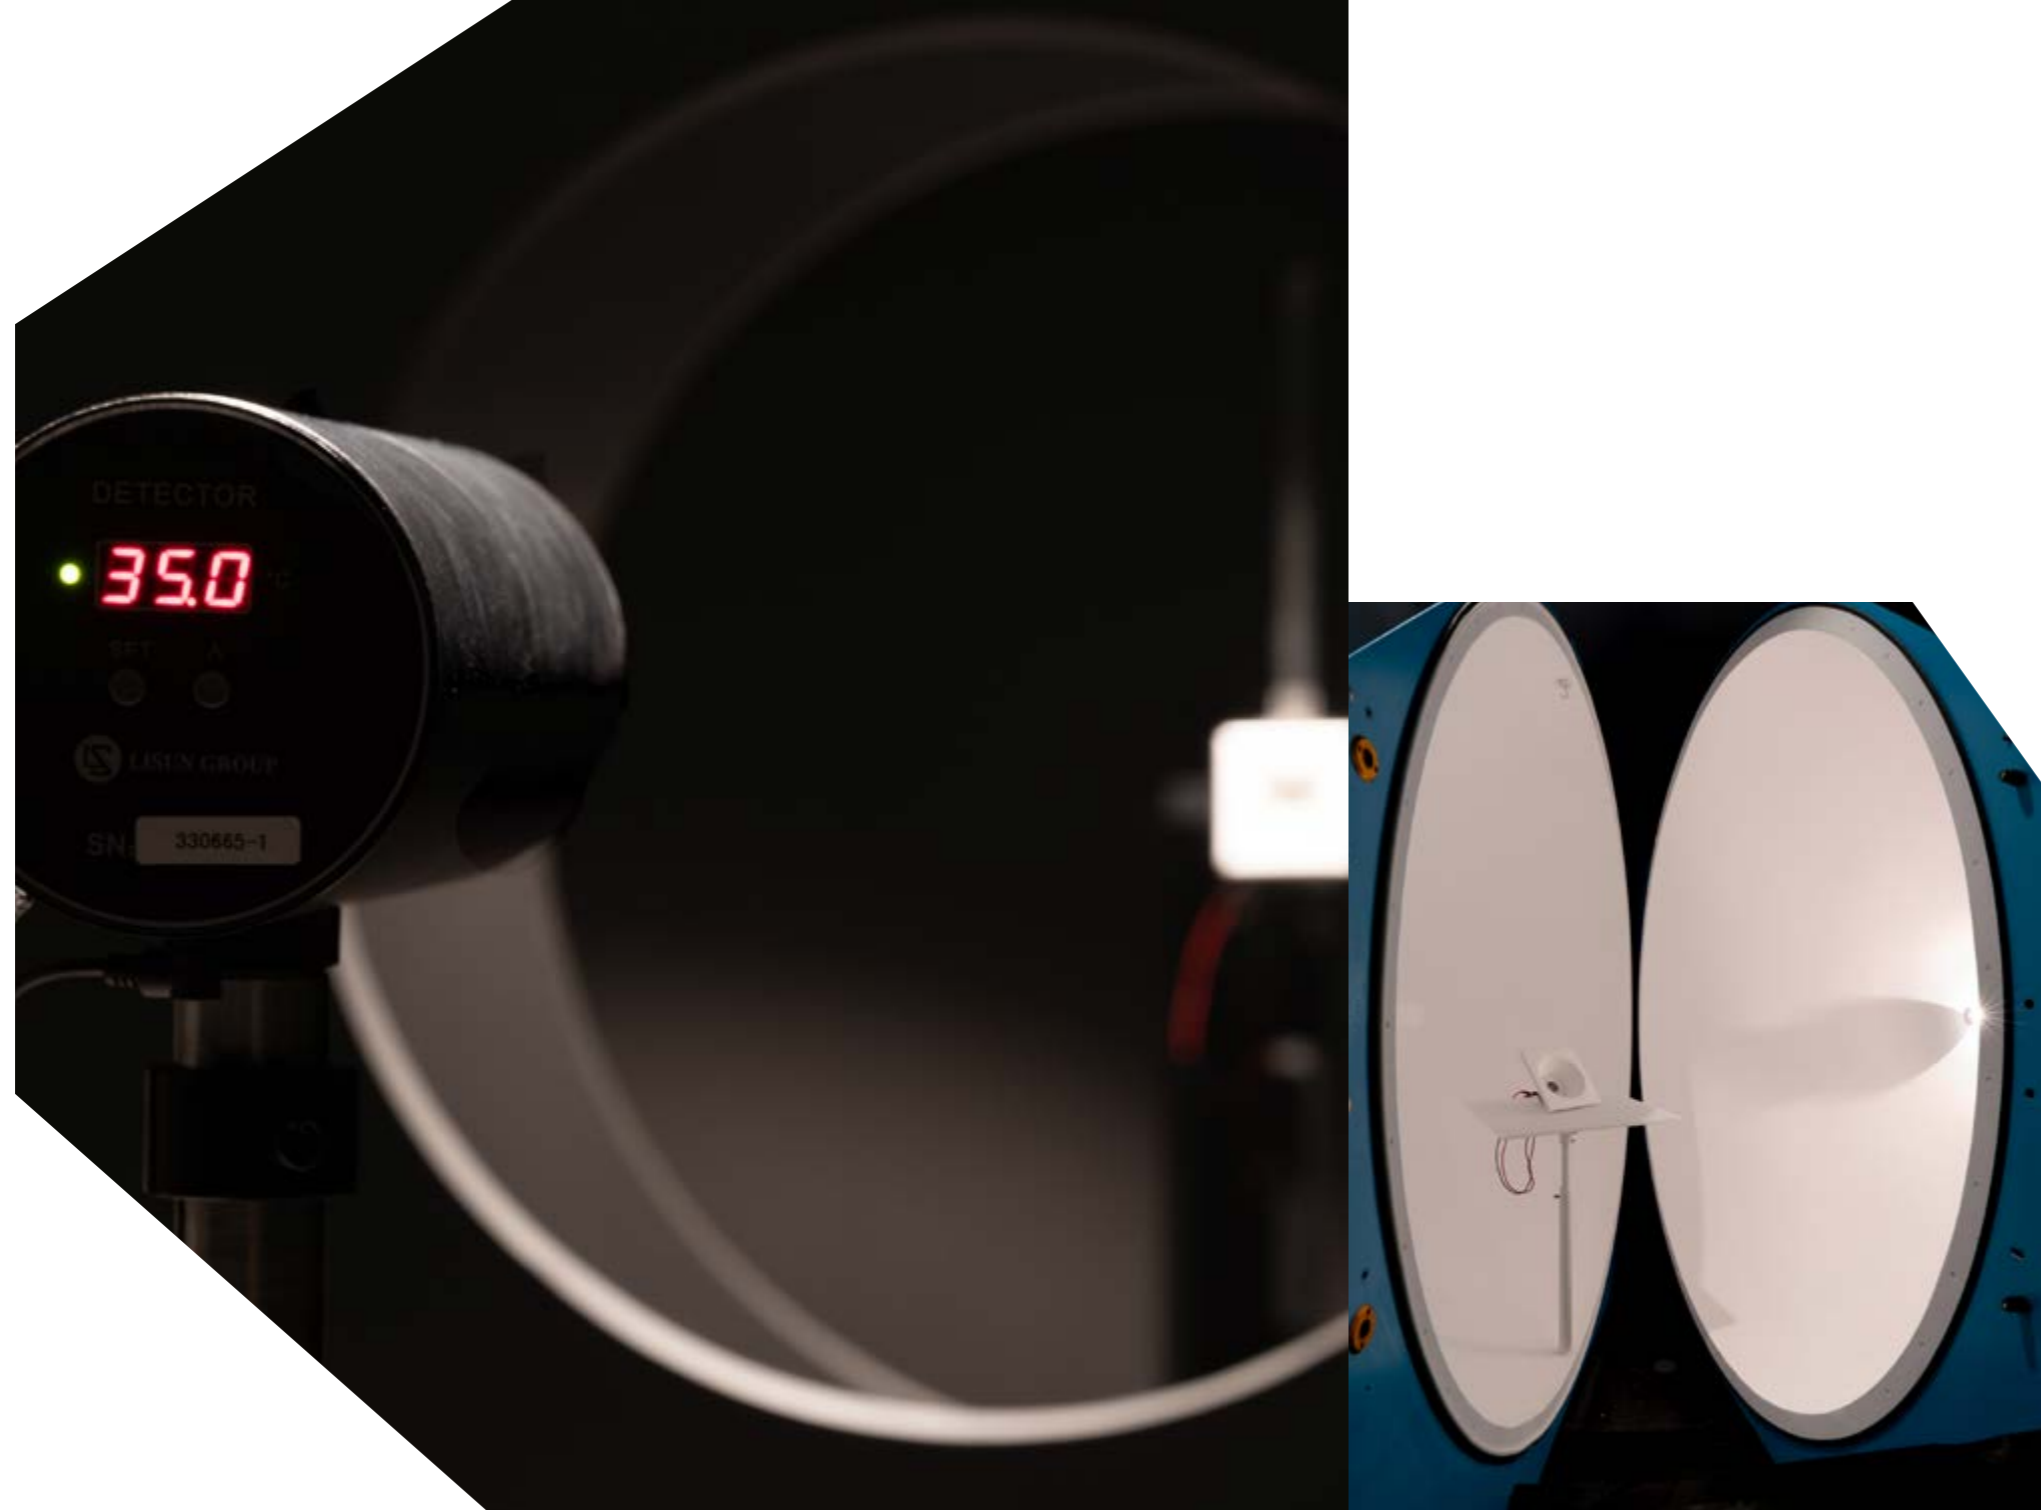

The best of BPM Lighting is yet to come. However, resting on our laurels is not part of our corporate philosophy. We never stop building new families, making improvements and evolving our existing success stories. It is never enough.

That's why we have an R&D+i department with its own laboratory. That's where we design, analyse, test and optimise our designs to create trend-setting advanced lighting solutions.

State-of-the-art technology combined with our expert know gives us a competitive advantage, added value that keeps us at the forefront of the industry to offer stand-out services and products.

Lo mejor de BPM Lighting está aún por llegar. Acomodarse no entra en nuestra filosofía de empresa. Mientras desarrollamos nuevas familias se contemplan sus mejoras y evoluciones. Nunca es suficiente.

Por ello contamos con un departamento de I+D+i dotado de laboratorio propio. En él diseñamos, estudiamos, testamos y optimizamos nuestros productos para obtener como resultado soluciones lumínicas avanzadas que marquen tendencia en nuestro sector.

La tecnología punta, combinada con el know how de nuestros desarrolladores garantizan esa ventaja competitiva, ese valor añadido que nos permite ir por delante en oferta de servicios y productos.


RE-THINK



Bespoke. We co-create to achieve excellence. BPM Bespoke Madrid participates in the global BPM Lighting project as a meeting point for professional lighting experts, creating unique lighting solutions customised and designed for each project. BPM Bespoke London was the first of these spaces to revolutionise ways of working together on projects. The new premises in Las Rozas, Madrid draws on our experiences and is adapted to the needs of the domestic market. Interior designers, architects, and builders are welcomed with open arms to a working forum with an open horizon, without limitations, where dialogue amplifies everyone's capabilities. And the result will be brilliant.

But the revolution will also be taken beyond European borders to the USA, where BPM Lighting is in the throes of making a mark with specific products and sales strategies. A new market is broadening our horizons and will herald a new era for our business project.

BESPOKE LONDON

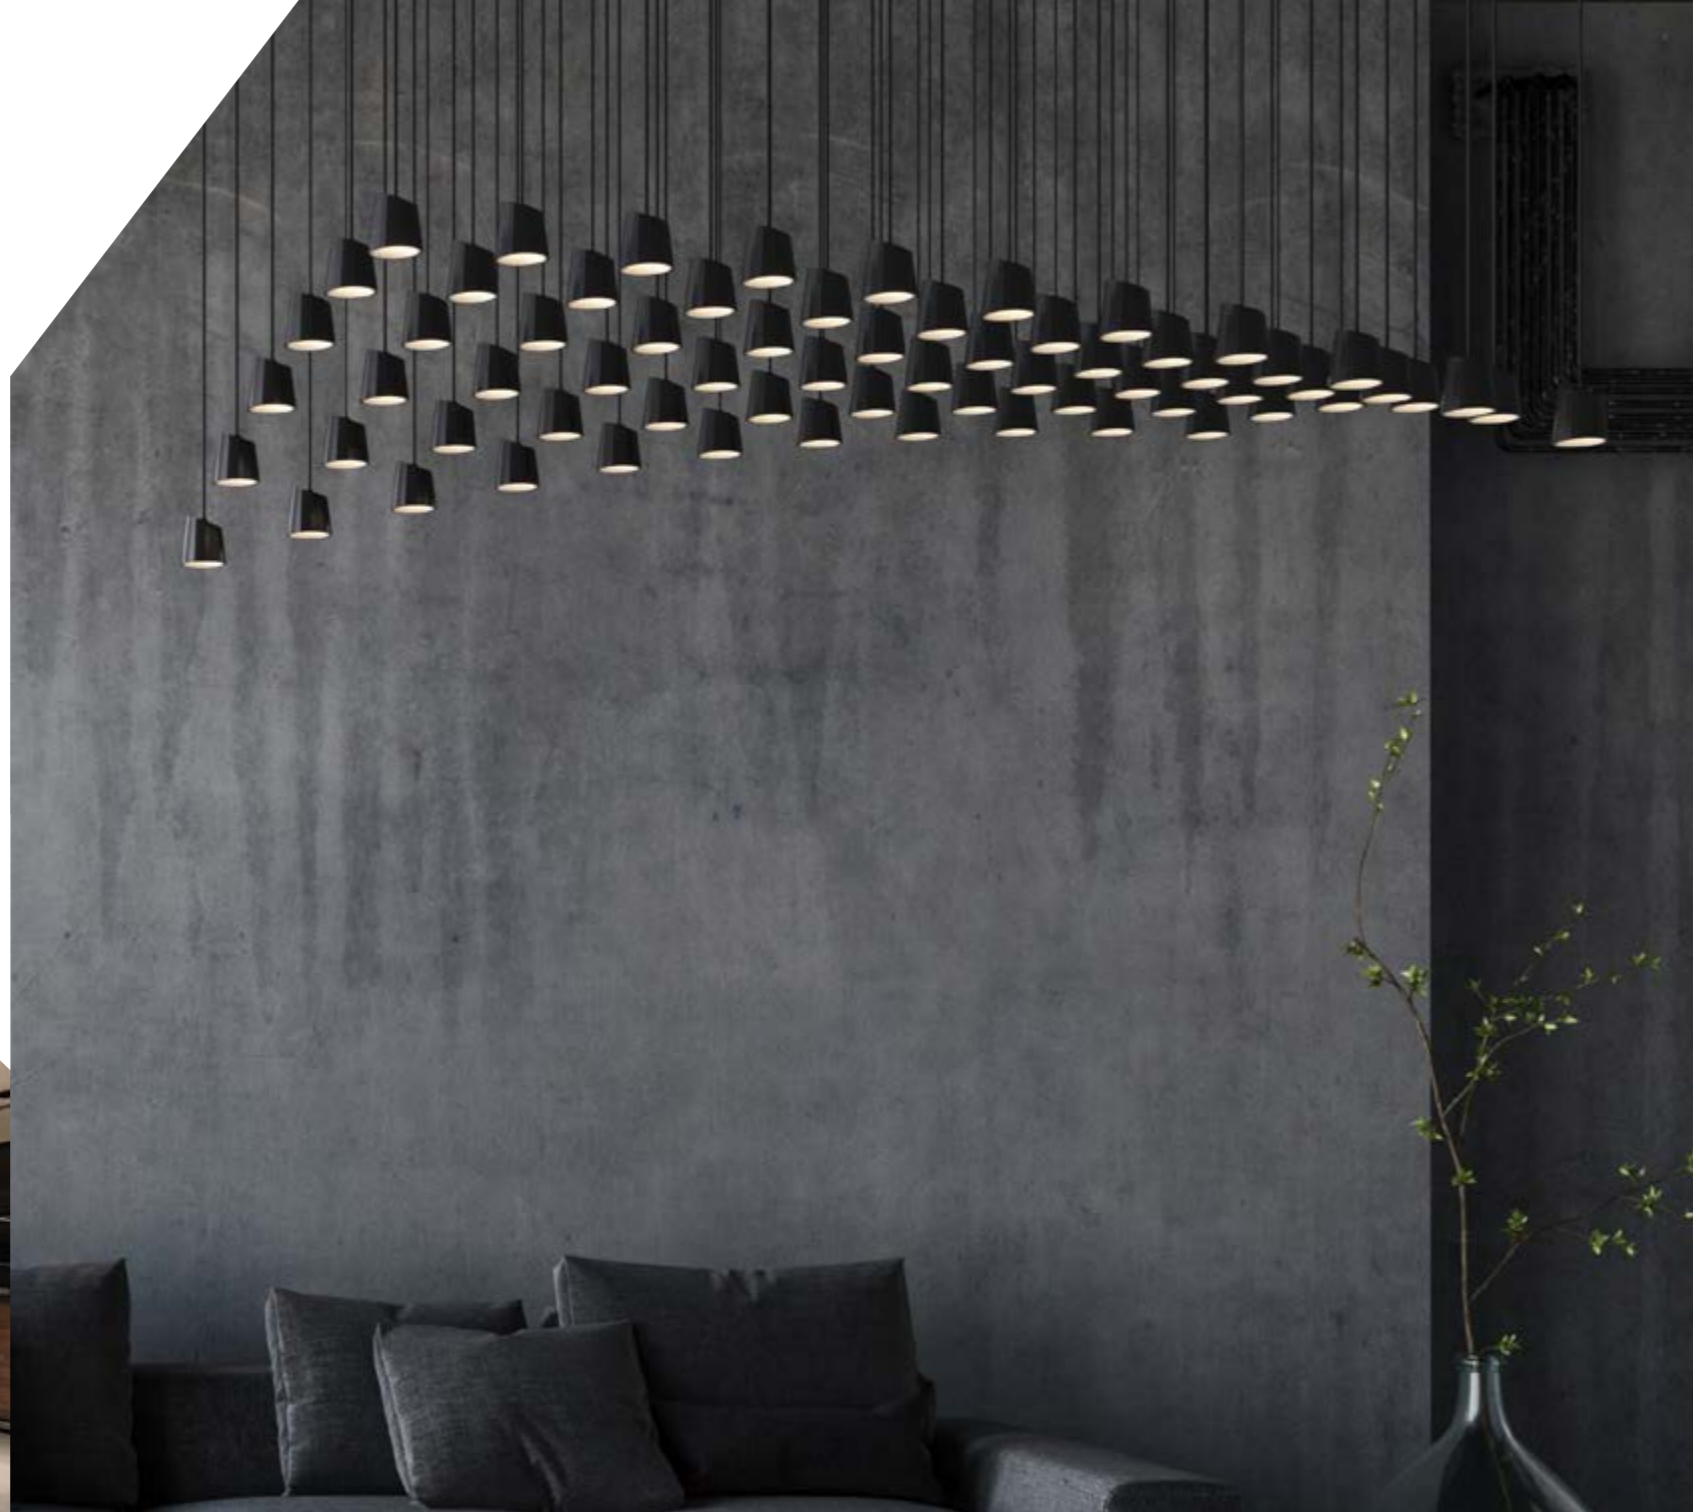

BESPOKE MADRID

Bespoke. O lo que es lo mismo: co-crear para buscar la excelencia. BPM Bespoke Madrid se suma al proyecto global de BPM Lighting para convertirse en un punto de encuentro de profesionales que buscan soluciones lumínicas únicas, personalizadas y pensadas para cada proyecto específico. BPM Bespoke London fue el primer espacio de estas características que supuso una auténtica revolución en la manera de concebir proyectos de forma conjunta. Las nuevas instalaciones de Las Rozas en Madrid se nutren de la experiencia adquirida adaptándose a las necesidades del mercado nacional.

Interioristas, arquitectos, proyectistas, constructores tienen las puertas abiertas de un foro de trabajo en el que todo está por hacer, sin limitaciones, donde diálogo servirá para amplificar capacidades. Y el resultado será brillante.

RE-VOLUTION





Sustainability and health values. Rather than paying lip service to these qualities, we have made a real commitment. At BPM Lighting, we take on our role as manufacturers to endorse our commitment to the environment and people's well-being.

We abide by certifications, standards and guidelines such as the International Association of Lighting Designers (IALD) and Lighting Industry Resource Council (LIRC) for WELL rating systems.

Resources may be limited, but, fortunately, creativity is boundless. Re-think production methods, and offer lighting solutions in line with health and well-being. That's the way we work.

Sostenibilidad y valores de la salud. No es una ambiciosa declaración de intenciones, es la única opción viable. En BPM Lighting asumimos nuestro papel de fabricantes para refrendar el compromiso con el medio ambiente y con el bienestar de las personas.

Para ello nos servimos de pautas y estándares certificados como IALD (Asociación Internacional de Diseñadores de Iluminación) y el LIRC (Consejo de Recursos de la Industria de la Iluminación) para los sistemas de calificación WELL.

Los recursos son limitados, pero por suerte la creatividad no. Repensar las formas de producir, ofrecer soluciones lumínicas en consonancia con la salud y el bienestar. En eso trabajamos.

RE-SPECT





RE-IMAGINE

Our culture balance between tradition, innovation, tech development and industrial engineering where design is translated into a product with the utmost technical precision, lasting good looks and a high standard of technological components.

All this at the service of an idea, because our goal is to help you design the perfect Lighting solution for your project.














Let's get brighter, let's co-create, let us help you with what we do best, light!




Nuestro ADN apuesta por el diseño y la fabricación, una misma cultura que equilibra la tradición, la innovación, el desarrollo tecnológico y la ingeniería industrial. Y todo ello se traduce en un producto que tiene la máxima precisión técnica, una estética duradera y un alto estándar tecnológico.







Todo ello al servicio de una idea, porque nuestro objetivo es diseñar la perfecta solución lumínica para tu proyecto.

¡Co-creemos, brillamos juntos, déjanos ayudarte con lo que mejor sabemos hacer, luz!









VISUAL INDEX

















ALABAMA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALABAMA SUPER SLIM 310001	 <small>new</small> PAG. 58	 <small>new</small> PAG. 58				
ALABAMA SUPER SLIM TILT 310007	 <small>new</small> PAG. 62					
ALABAMA SLIM 310002	 <small>new</small> PAG. 66	 <small>new</small> PAG. 66				
ALABAMA SLIGHT 10192	 PAG. 70	 PAG. 70				
ALABAMA SLIGHT SQ 10194	 PAG. 74	 PAG. 74				
ALABAMA 10158	 PAG. 78	 PAG. 78	 PAG. 396	 PAG. 580		

ALTAIR	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALTAIR 10172	 PAG. 82	 PAG. 82		 PAG. 584		



























OHIO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
OHIO 10188	 <small>new</small> PAG. 86	 <small>new</small> PAG. 86	 PAG. 400	 PAG. 588		
OHIO SQ 10204			 PAG. 404	 PAG. 592		

VISUAL INDEX















FLORIDA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
FLORIDA 10190	 PAG. 90	 PAG. 90	 PAG. 408	 PAG. 596		
FLORIDA SQ 10191	 PAG. 94	 PAG. 94	 PAG. 412	 PAG. 600		

ALBERTA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALBERTA INSIDE 10243	 <small>new</small> PAG. 98	 <small>new</small> PAG. 98				
ALBERTA INSIDE VERTICAL 310008	 <small>new</small> PAG. 102					
ALBERTA INSIDE VTILT 310009	 <small>new</small> PAG. 106					
ALBERTA DUE 10250	 <small>new</small> PAG. 110					
ALBERTA DUE MOVE 310004	 <small>new</small> PAG. 114					
ALBERTA SOFT 10217	 PAG. 118	 PAG. 118	 PAG. 416			
ALBERTA SLIGHT 10193	 PAG. 124	 PAG. 124				
ALBERTA SLIGHT ECCENTRIC 310005	 <small>new</small> PAG. 128	 <small>new</small> PAG. 128				
ALBERTA 10176	 PAG. 132		 PAG. 420	 PAG. 604		










































VISUAL INDEX

OKKO MODULAR	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
OKKO MODULAR 10254	 new PAG. 138	 new PAG. 138				
OKKO PLUS MODULAR 10252	 new PAG. 142	 new PAG. 142				
OKKO PLUS MODULAR	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
OKKO MODULAR LINE 210012 410012	 new PAG. 150	 new PAG. 150	 new PAG. 468			
OKKO PLUS MODULAR LINE 210013 410013	 new PAG. 154	 new PAG. 154	 new PAG. 470			
EYE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
EYE 210016	 new PAG. 158	 new PAG. 158		 new PAG. 610		
ALARIK	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALARIK MINI 210006	 new PAG. 164	 new PAG. 164		 new PAG. 616		
ALARIK MINI ROUND 210004	 new PAG. 170					
ALARIK SLIM 20224	 new PAG. 178	 new PAG. 178	 new PAG. 428	 new PAG. 622		
ALARIK SLIM ROUND 210019	 new PAG. 184	 new PAG. 184				
ALARIK 10225	 new PAG. 190	 new PAG. 190		 new PAG. 628		

















VISUAL INDEX

MODULIGHT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
MODULIGHT 10210	 new PAG. 196	 new PAG. 196	 new PAG. 434	 new PAG. 634		
OKKIA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
OKKIA 210007	 new PAG. 202	 new PAG. 202				
OKKIA PLUS 210017	 new PAG. 206					
LINGGO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
LINGGO MINI 210003	 new PAG. 210	 new PAG. 210				
LINGGO 210002	 new PAG. 214	 new PAG. 214				
BUBBLE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
BUBBLE 210010	 new PAG. 218	 new PAG. 218				
EDGE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
EDGE 210014		 new PAG. 222				


























VISUAL INDEX

ALBA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALBA MINI 10211	 PAG. 226	 PAG. 226	 PAG. 440	 PAG. 640		
ALBA 10160	 PAG. 230	 PAG. 230	 PAG. 444	 PAG. 644	 PAG. 760	 PAG. 786
ALBA NOVUS 210011	 PAG. 234					
ALBA DOUBLE 10215	 PAG. 238					 PAG. 790
ALBA ASIMETRIC 210009	 PAG. 242	 PAG. 242	 PAG. 448	 PAG. 648		 PAG. 794
ALBA PLUS 10178	 PAG. 246	 PAG. 246	 PAG. 452	 PAG. 652	 PAG. 764	
ALBA PLUS ASIMETRIC 210008	 PAG. 250	 PAG. 250	 PAG. 456	 PAG. 656		
BOLD	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
BOLD 210001	 PAG. 254	 PAG. 254	 PAG. 460			
BOLD LINE 210015	 PAG. 254	 PAG. 254	 PAG. 460			
TRIBOLD 210018	 PAG. 258	 PAG. 258				
WING	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
WING 10200	 PAG. 262	 PAG. 262	 PAG. 464	 PAG. 660		
ALZIRA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALZIRA 10169	 PAG. 266					 PAG. 798
























VISUAL INDEX

ACOUSTIC	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ACOUSTIC ALZIRA 230002	 PAG. 272					 PAG. 802
ACOUSTIC ALBA 230004	 PAG. 276	 PAG. 276				
ACOUSTIC LINGGO MINI 230007	 PAG. 280					
ACOUSTIC LAMBDA 230001	 PAG. 284	 PAG. 284				
ACOUSTIC ALBA MINI 230008	 PAG. 288					
ACOUSTIC ALARIK SLIM 230009	 PAG. 292					
ACOUSTIC OKKO 230003	 PAG. 298					
ACOUSTIC ALBERTA SOFT 230010	 PAG. 302					
ACOUSTIC ALABAMA 460001 460003	 PAG. 306					
ACOUSTIC KLIMT FIX 460002 460004	 PAG. 310					
ACOUSTIC ACCESORIES AC RD SQ VT FL MD	 PAG. 314	 PAG. 314				 PAG. 806
























VISUAL INDEX

MARTORELL	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
MARTORELL 20115	 PAG. 322 new	 PAG. 322 new	 PAG. 494	 PAG. 676	 PAG. 744	
MARTORELL MOVE 20110		 PAG. 324 new	 PAG. 496 new			
MARTORELL TUBE MOVE 20138		 PAG. 326		 PAG. 746		
MARTORELL MINI CRATE 20175		 PAG. 328	 PAG. 502			
MARTORELL CRATE 20176		 PAG. 330	 PAG. 504			
MARTORELL SQ 20132		 PAG. 332				
MARTORELL SQ2 20133		 PAG. 332				
MARTORELL TARREGA 20117			 PAG. 498	 PAG. 678		
MARTORELL TARREGA SQ 20116			 PAG. 500	 PAG. 678		
MARTORELL TARREGA SQ2 20119			 PAG. 500			
MARTORELL TUBULAR 40 20192	 PAG. 334	 PAG. 334				
MARTORELL TUBULAR 60 20196	 PAG. 334	 PAG. 334				
MARTORELL TUBULAR TILT 20195		 PAG. 336				












VISUAL INDEX

PATRICIA TK	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
PATRICIA TK 30514					 PAG. 738 new	
KLIMT GEO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
GEO 30511		 PAG. 342 new	 PAG. 512 new		 PAG. 750 new	
KLIMT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
KLIMT 20134		 PAG. 338	 PAG. 508		 PAG. 748	
KLIMT FIX 20135		 PAG. 340 new	 PAG. 510 new			
LUK	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
LUK FREIR 20018		 PAG. 344	 PAG. 514	 PAG. 680		
LUK FREIR 2 20019		 PAG. 344	 PAG. 514	 PAG. 680		
LUK 20028			 PAG. 516			
LUK 2 20071			 PAG. 516			
LUK CRUSADER 20082		 PAG. 346			 PAG. 752	
LUK HAWKEYE 20083		 PAG. 348			 PAG. 754	
LUK HAWKEYE 2 20084		 PAG. 348			 PAG. 754	













VISUAL INDEX

CUBE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
CUBE SQ 8201		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE SQ2 8202		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE SQ3 8203		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE TUBE 9050 9052	 PAG. 350	 PAG. 350			 PAG. 756	
CUBE TUBE MOVE 9051 9053	 PAG. 352	 PAG. 352				
CUBE SPOT 3120			 PAG. 522			
CUBE SPOT 2 3131			 PAG. 522			
CUBE SPOT MOVE 3121			 PAG. 524			
CUBE SPOT 2 MOVE 3136			 PAG. 524			
CUBE SPOT SQ MOVE 3134			 PAG. 526			
CUBE SPOT SQ 2 MOVE 3135			 PAG. 526			
ORACLE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ORACLE 20087	 PAG. 358	 PAG. 358			 PAG. 758	









VISUAL INDEX

FACE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
FACE TUBULAR 20205	 PAG. 364	 PAG. 360	 PAG. 506			
FACE TUBULAR SPAC 20207	 PAG. 366					
FACE KIERA 20204	 PAG. 368					
FACE KIERA CEMENT 20208	 PAG. 370					
FACE IRIS 20203	 PAG. 372					
SUBLIM	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
SUBLIM 20206	 PAG. 374					
GALANTA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
GALANTA DEEP 410001			 PAG. 492			
GALANTA BONETE 20222	 PAG. 376					
VENISE	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
VENISE 410011	 PAG. 378					














VISUAL INDEX

LENT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
LENT MODULAR 10216			 PAG. 472	 PAG. 666		
LENT MOTION 10212			 PAG. 474			
SASSY	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
SASSY 410002			 PAG. 476	 PAG. 668		
SASSY SQ 410003			 PAG. 482	 PAG. 672		
VADI	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
VADI 3177			 PAG. 534			
ROY	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ROY 20154			 PAG. 538			
CAN REVIEW	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
CAN REVIEW 20149			 PAG. 528			
ALDAIA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ALDAIA 20157			 PAG. 530			
ALDAIA SQ 20120			 PAG. 532			




VISUAL INDEX








VIO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
VIO 20185			 PAG. 488			
VIO DEEP 20186			 PAG. 488			
VIO DOME 20183			 PAG. 488			
VIO SQ 20181			 PAG. 488			
VIO MOVE 20184			 PAG. 488			
VIO DEEP MOVE 20187			 PAG. 488			
VIO DOME MOVE 20182			 PAG. 488			
VIO SQ MOVE 20180			 PAG. 488			

VISUAL INDEX

CATLI	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
CATLI 3010		 PAG.362	 PAG.560			
CATLI SQ 3011		 PAG.362	 PAG.562			
CATLI SQ2 3012			 PAG.564			
CATLI SQ3 3013			 PAG.566			
CATLI HALKA 3017			 PAG.568			
CATLI HALKA SQ 3021			 PAG.568			
CATLI ODALKI 3018			 PAG.570			
CATLI CLASSIC 3005			 PAG.572			
CATLI CLASSIC SQ 3006			 PAG.574			
CATLI CARE 3000			 PAG.576			
CATLI CARE 2 3001			 PAG.576			

VISUAL INDEX

SU	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
SU 3149			 PAG.540			
SU SQ 3150			 PAG.540			
SU OTIS 3234			 PAG.542			













BASIT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
BASIT 8012			 PAG.544			
BASIT MOVE 8013			 PAG.544			
BASIT MONET 20130			 PAG.546			
BASIT MONET 2 20131			 PAG.546			
BASIT LLORENS 20140			 PAG.548			
BASIT LLORENS SQ 20144			 PAG.548			
BASIT DERIN 8010			 PAG.550			

VISUAL INDEX





KONI	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
KONI 3161			 PAG. 552			
KONI SQ 3169			 PAG. 554 new			
KONI DEEP 3171			 PAG. 556 new			
KONI TURTA 3156			 PAG. 558			


CASTEJON	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
CASTEJON 20074			 PAG. 536			
CASTEJON SQ 20073			 PAG. 536			



VISUAL INDEX

ACOUSTIC	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
HURY 10251						 PAG. 772 new
GLIM 410004						 PAG. 774 new
KUU 410014						 PAG. 776 new
KAPI 9000						 PAG. 778
IKI 9011						 PAG. 780
OKUMA 8105						 PAG. 782
ELENA 8106						 PAG. 784
MAGRIT 20127						 PAG. 824
KLEE 20128						 PAG. 824
KLEE SQ 20129						 PAG. 824
ADIMA 8104						 PAG. 826
ADIMA SQ 8103						 PAG. 826







VISUAL INDEX

NOCTUA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
NOCTUA 10103		 PAG. 384				
NOCTUA SQ 10099		 PAG. 386				
NOCTUA DEEP 10100		 PAG. 388				
NOCTUA VENUS 10102		 PAG. 390				











VITA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
VITA 30007				 PAG. 688		


VOLCANO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
VOLCANO 10062				 PAG. 690		
VOLCANO DEEP 10063				 PAG. 692		

VISUAL INDEX









ESPIGA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	TRACK .TK	WALL SURFACE .WS
ESPIGA 10086				 PAG. 694		
ESPIGA SQ 10083				 PAG. 696		
ESPIGA SIRIO 10077				 PAG. 698		
ESPIGA SIRIO TWINS 30000				 PAG. 700		
ESPIGA ORIONIS 10080				 PAG. 702		
ESPIGA ORIONIS TWINS 30001				 PAG. 704		

VISUAL INDEX







ZENIT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
ZENIT 10123				 PAG. 707		
ZENIT SQ 30002				 PAG. 706		
ZENIT DEEP 30004				 PAG. 708		
ZENIT DEEP TWINS 30005				 PAG. 709		
ZENIT MOVE 10125				 PAG. 710		
ZENIT MOVE SQ 30003				 PAG. 711		
ZENIT ORTO 10126				 PAG. 712		
ZENIT SIDEREA 10050				 PAG. 713		
ZENIT ZUBIA 10122				 PAG. 714		
ZENIT ZUBIA SQ 10121				 PAG. 715		




SUNSET	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
SUNSET 10124				 PAG. 716		






VISUAL INDEX





VEGA	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
VEGA ADHARA 10016				 PAG. 718		
VEGA ADHARA TWINS 10066				 PAG. 720		
VEGA 10028				 PAG. 722		
VEGA TWINS 10070				 PAG. 724		
VEGA ZETA 10001				 PAG. 726		
VEGA ZETA SQ 10019				 PAG. 728		
ZETA SQ TWINS 10072				 PAG. 730		
CENTAURO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
CENTAURO 10109				 PAG. 732		

VISUAL INDEX








WALL	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
WALL METIS 10098						 PAG. 810
WALLELARA 10097						 PAG. 812
WALL TEBE 10096						 PAG. 814
WALL LEDA 10051						 PAG. 816
WALL ARCE 10055						 PAG. 818
WALL CARPO 10059						 PAG. 820

FLOOR WASHER	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
LYRA 10560						 PAG. 830
TYRA 10561						 PAG. 828
MYRA 10564						 PAG. 832

ORBIT	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
ORBIT 10091						 PAG. 834
ORBIT SQ 10090						 PAG. 835
ORBIT NADIR 10113						 PAG. 836
ORBIT NADIR SQ 10114						 PAG. 838
ORBIT ARA 10006						 PAG. 840

DRACO	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
DRACO 10119						 PAG. 842
DRACO TUCANA 10008						 PAG. 845
DRACO ZAHARA 10009						 PAG. 846
DRACO ORION 10011						 PAG. 848

VISUAL INDEX

OUTDOOR	PENDANT .PN	SURFACE .SR	RECESSED FRAME .RF	TRIMLESS .TR	WALL RECESSED .WR	WALL SURFACE .WS
WALL ZEN OUT 11600						 IP65 new
WALL ZEN SQ OUT 11601						 IP65 new PAG. 852
WALL ARA OUT 10006					 IP65 new	
WALL ZAHARA OUT 10009					 IP65 new PAG. 856	
WALL DRACO OUT 10119					 IP65 new PAG. 857	
NOCTUA OUT 10099		 IP65 new PAG. 860				
					 IP65 new PAG. 858	

INDEX

TRIMLESS | pag 578 to 733

TRACKLIGHT | pag 734 to 769

WALL SURFACE | pag 770 to 821

WALL RECESSED | pag 822 to 849

































OUTDOOR | pag 850 to 861

TECHNICAL INFO | pag 862 to 877

































USEFUL PAGES

· Round Profile Overview & Accesories	pag 52
· Lines Profile Overview	pag 148
· Track Accesories	pag 768
· Reference Order	pag 862
· Finishes	pag 864
· Icon Flash	pag 865
· Tech Recommendations	pag 868
· Sales Conditions	pag 874

PENDANT

ALABAMA	 new ALABAMA SUPER SLIM 310001 PAG. 58	 new ALABAMA SUPER SLIM TILT 310007 PAG. 62	 new ALABAMA SLIM 310002 PAG. 66	 ALABAMA SLIGHT 10192 PAG. 70	 ALABAMA SLIGHT SQ 10194 PAG. 74	 ALABAMA 10158 PAG. 78
ALTAIR	 ALTAIR 10172 PAG. 82	OHIO		 new OHIO 10188 PAG. 86		
FLORIDA	 FLORIDA 10190 PAG. 90	 FLORIDA SQ 10191 PAG. 94				
ALBERTA	 new ALBERTA INSIDE 10243 PAG. 98	 new ALBERTA INSIDE VERTICAL 310008 PAG. 102	 new ALBERTA INSIDE V-TILT 310009 PAG. 106	 new ALBERTA DUE 10250 PAG. 110	 new ALBERTA DUE MOVE 310004 PAG. 114	 ALBERTA SOFT 10217 PAG. 118
	 ALBERTA SLIGHT 10193 PAG. 124	 new ALBERTA SLIGHT ECCENTRIC 310005 PAG. 128	 ALBERTA 10176 PAG. 132			
OKKO MODULAR	 new OKKO MODULAR 10254 PAG. 138	 new OKKO PLUS MODULAR 10252 PAG. 142				
OKKO MODULAR LINE	 new OKKO MODULAR LINE 210012 PAG. 150	 new OKKO PLUS MODULAR LINE 210013 PAG. 154	EYE		 new EYE 210016 PAG. 158	
ALARIK	 new ALARIK MINI 210006 PAG. 164	 new ALARIK MINI ROUND 210004 PAG. 170	 new ALARIK SLIM 20224 PAG. 178	 new ALARIK SLIM ROUND 210019 PAG. 184	 ALARIK 10225 PAG. 190	
MODULIGHT	 MODULIGHT 10210 PAG. 196	OKKIA		 new OKKIA 210007 PAG. 202	 new OKKIA PLUS 210017 PAG. 206	

VISUAL INDEX


LINGGO	 new LINGGO MINI 210003 PAG. 210	 new LINGGO 210002 PAG. 214	BUBBLE			 new BUBBLE 210010 PAG. 216	
ALBA	 ALBA MINI 10211 PAG. 226	 new ALBA 10160 PAG. 230	 ALBA NOVUS 210011 PAG. 234	 new ALBA DOUBLE 10215 PAG. 238	 ALBA ASIMETRIC 210009 PAG. 242	 ALBA PLUS 10178 PAG. 246	
	 new ALBA PLUS ASIMETRIC 210008 PAG. 250						
BOLD	 new BOLD 210001 PAG. 254	 new BOLD LINE 210015 PAG. 256	 new TRIBOLD 210018 PAG. 258	WING		 WING 10200 PAG. 262	
ALZIRA	 ALZIRA 10169 PAG. 266						
ACOUSTIC	 new AC. ALZIRA 230002 PAG. 272	 new AC. ALBA 230004 PAG. 276	 new AC. LINGGO MINI 230007 PAG. 280	 new AC. LAMBDA 230001 PAG. 284	 new AC. ALBA MINI 230008 PAG. 288	 new AC. ALARIK 230009 PAG. 292	
	 new AC. OKKO 230003 PAG. 298	 new AC. ALBERTA SOFT 230010 PAG. 302	 new AC. ALABAMA 460001 3 PAG. 306	 new AC. KLIMT 460002 4 PAG. 310	 new AC. ACCESSORIES RD SQ VT FL PAG. 314		
MARTORELL	 MARTORELL 20115 PAG. 322	 MARTORELL TUBULAR 40 20192 PAG. 334	 MARTORELL TUBULAR 60 20196 PAG. 334				
CUBE	 CUBE TUBE 9050-9052 PAG. 350	 CUBE TUBE MOVE 9051-9053 PAG. 352	ORACLE				 ORACLE 20087 PAG. 358

PENDANT


FACE



SUBLIM

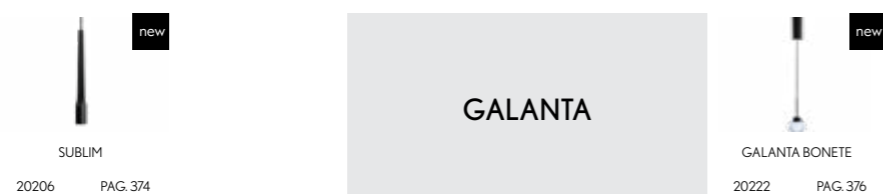



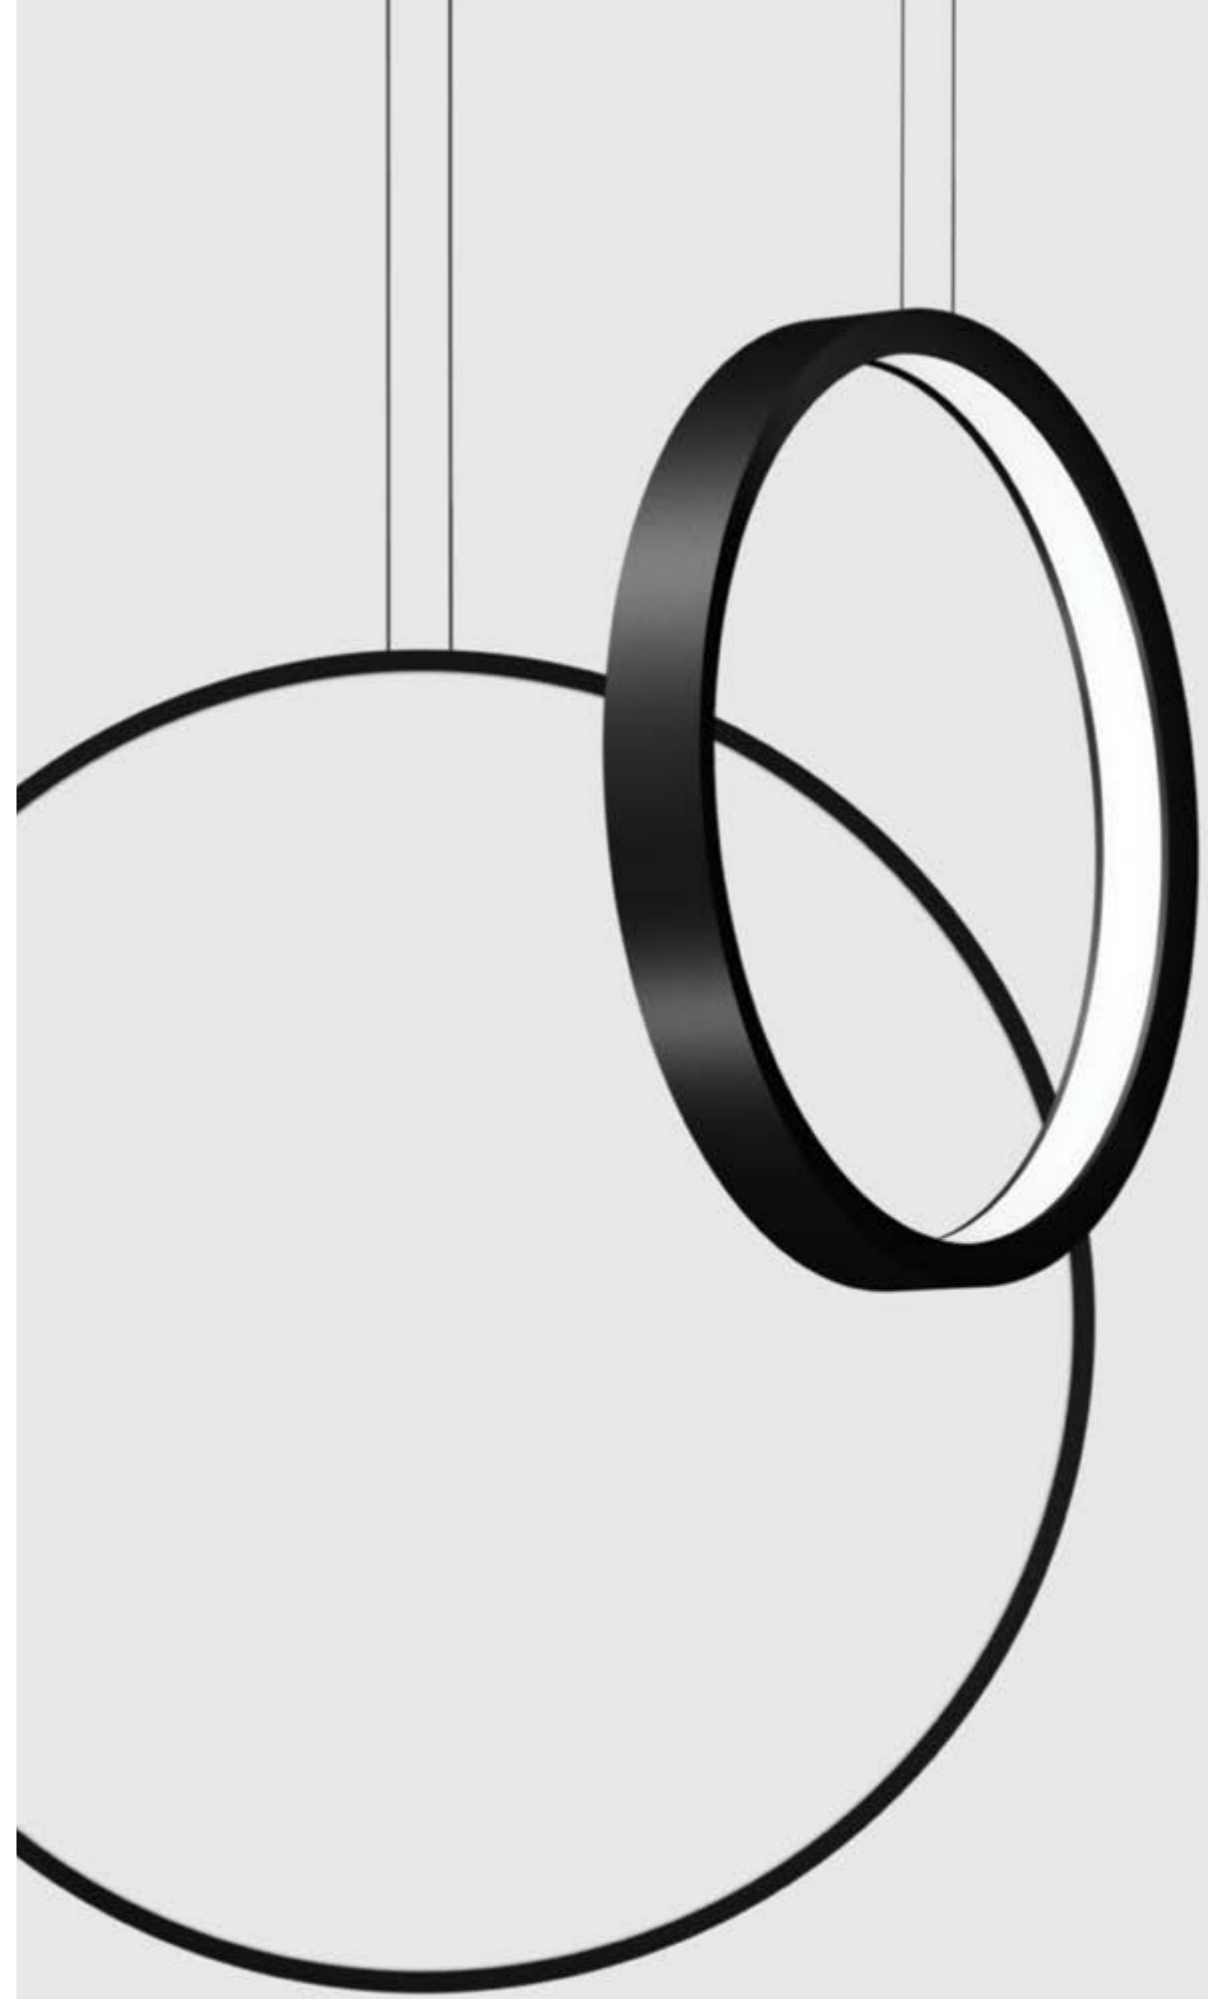

























VENISE



SURFACE

VISUAL INDEX

ALABAMA	 <small>new</small> ALABAMA SUPER SLIM 310001 PAG. 58	 <small>new</small> ALABAMA SLIM 310002 PAG. 66	 ALABAMA SLIGHT 10192 PAG. 70	 ALABAMA SLIGHT SQ 10194 PAG. 74	 ALABAMA 10158 PAG. 78
ALTAIR	 ALTAIR 10172 PAG. 82	OHIO			 <small>new</small> OHIO 10188 PAG. 86
FLORIDA	 FLORIDA 10190 PAG. 90	 FLORIDA SQ 10191 PAG. 94			
ALBERTA	 <small>new</small> ALBERTA INSIDE 10243 PAG. 98	 ALBERTA SOFT 10217 PAG. 118	 ALBERTA SLIGHT 10193 PAG. 124	 <small>new</small> ALBERTA SLIGHT ECCENTRIC 310005 PAG. 128	
OKKO MODULAR	 <small>new</small> OKKO MODULAR 10254 PAG. 138	 <small>new</small> OKKO PLUS MODULAR 10252 PAG. 142	OKKO PLUS MODULAR		
			 <small>new</small> OKKO MODULAR LINE 210012 PAG. 150	 <small>new</small> OKKO PLUS MODULAR LINE 210013 PAG. 154	
EYE	 <small>new</small> EYE 210016 PAG. 158				
ALARIK	 ALARIK MINI 210006 PAG. 164	 <small>new</small> ALARIK SLIM 20224 PAG. 170	 <small>new</small> ALARIK SLIM ROUND 210019 PAG. 184	 <small>new</small> ALARIK 10225 PAG. 190	
MODULIGHT	 MODULIGHT 10210 PAG. 196	OKKIA			 <small>new</small> OKKIA 210007 PAG. 202
LINGGO	 <small>new</small> LINGGO MINI 210003 PAG. 210	 <small>new</small> LINGGO 210002 PAG. 214	BUBBLE	 <small>new</small> BUBBLE 210010 PAG. 218	EDGE
				 <small>new</small> EDGE 210014 PAG. 222	

ALBA	 ALBA MINI 10211 PAG. 226	 ALBA 10160 PAG. 230	 <small>new</small> ALBA ASIMETRIC 210009 PAG. 242	 ALBA PLUS 10178 PAG. 246	 <small>new</small> ALBA PLUS ASIMETRIC 210008 PAG. 250
BOLD	 <small>new</small> BOLD 210001 PAG. 254	 <small>new</small> BOLD LINE 210015 PAG. 256	 <small>new</small> TRIBOLD 210018 PAG. 258	WING	
				 WING 10200 PAG. 262	
ACOUSTIC	 <small>new</small> AC ALBA 230004 PAG. 276	 <small>new</small> AC LAMBDA 230001 PAG. 284	 <small>new</small> ACOUSTIC ACCESSORIES RD SQ VT FL PAG. 314		
MARTORELL	 MARTORELL 20115 PAG. 322	 MARTORELL MOVE 20110 PAG. 324	 MARTORELL TUBE MOVE 20138 PAG. 326	 MARTORELL SQ 20132 PAG. 328	 MARTORELL SQ2 20133 PAG. 328
	 MARTORELL TUBULAR 40 20192 PAG. 330	 MARTORELL TUBULAR 60 20196 PAG. 330	 MARTORELL TUBULAR TILT 20195 PAG. 332	 MARTORELL MINI CRATE 20175 PAG. 334	 MARTORELL CRATE 20176 PAG. 336
KLIMT	 KLIMT 20134 PAG. 338	 <small>new</small> KLIMT FIX 20135 PAG. 340	GEO		
			 <small>new</small> GEO 30511 PAG. 342		
LUK	 LUK FREIR 20018 PAG. 344	 LUK FREIR 2 20019 PAG. 344	 LUK CRUSADER 20082 PAG. 346	 LUK HAWKEYE 20083 PAG. 348	 LUK HAWKEYE 2 20084 PAG. 348
CUBE	 CUBE TUBE 9050-9052 PAG. 350	 CUBE TUBE MOVE 9051-9053 PAG. 352	 CUBE 8201 PAG. 354	 CUBE SQ2 8202 PAG. 354	 CUBE SQ3 3012 PAG. 354
ORACLE	 ORACLE 20087 PAG. 358	FACE			 FACE TUBULAR MOVE 20205 PAG. 360

SURFACE

CATLI



CATLI
3010 PAG. 362



CATLI SQ
3011 PAG. 362

NOCTUA



NOCTUA
10103 PAG. 384



NOCTUA SQ
10099 PAG. 386



NOCTUA DEEP
10100 PAG. 388



NOCTUA VENUS
10102 PAG. 390



A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of our Alabama, Altair, Alberta, Ohio and Florida luminaires. Square or round, whose minimalism conceals an enormous potential to create unique environments.

All these luminaires feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman las familias Alabama, Altair, Alberta, Ohio y Florida. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfiles de aluminio extruido y difusores opales o microprismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.



LARGE LUMINAIRES

LUMINARIAS DE GRAN FORMATO

PENDANT | SURFACE

PROFILE

OVERVIEW



ALBERTA
REF.10176



ALBERTA SLIGHT
REF.10193



ALBERTA SLIGHT ECCENTRIC
REF.310005



ALBERTA SOFT
REF.10217



ALBERTA INSIDE | VERTICAL | VTILT
REF.10243 | 310008 | 310009




ALBERTA DUE | MOVE
REF.10250 | 310004




OKKO MODULAR
REF.10254




OKKO PLUS MODULAR
REF.10252

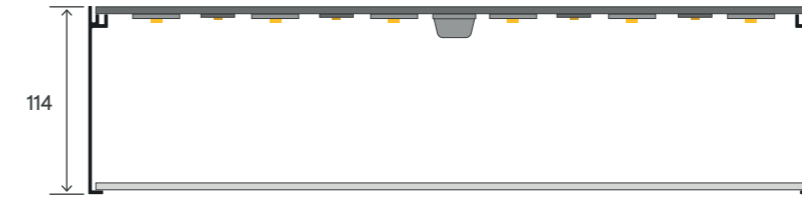


ALABAMA
REF.10158

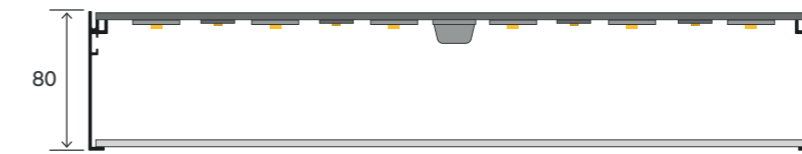


ALABAMA SLIGHT | SQ
REF.10192 | 10194

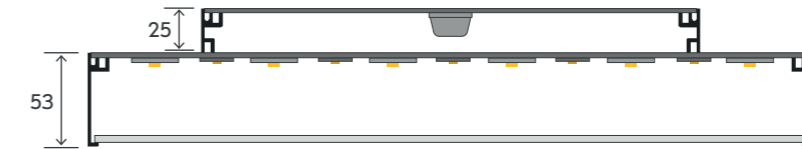


ALABAMA SLIM
REF.310002

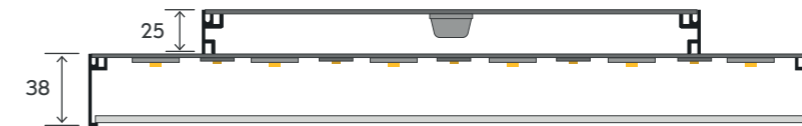


ALABAMA SUPER SLIM | TILT
REF.310001 | 310007

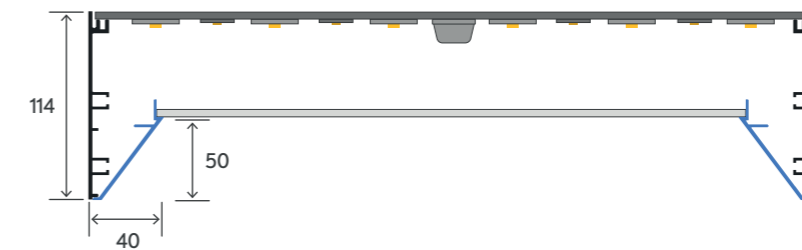

FLORIDA | SQ
REF.10190 | 10191

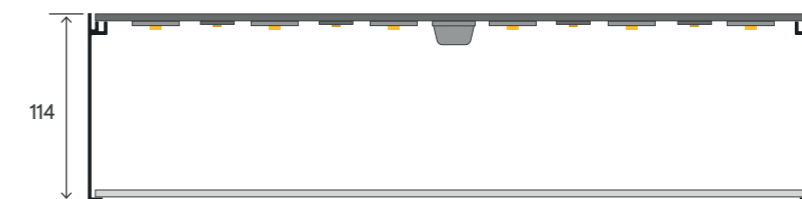

ALTAIR
REF.10172

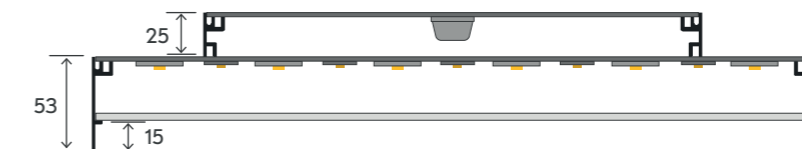

OHIO PN-SR
REF.10188


PENDANT | SURFACE

SR


PN

PENDANT | SURFACE

CONNECTION BOXES

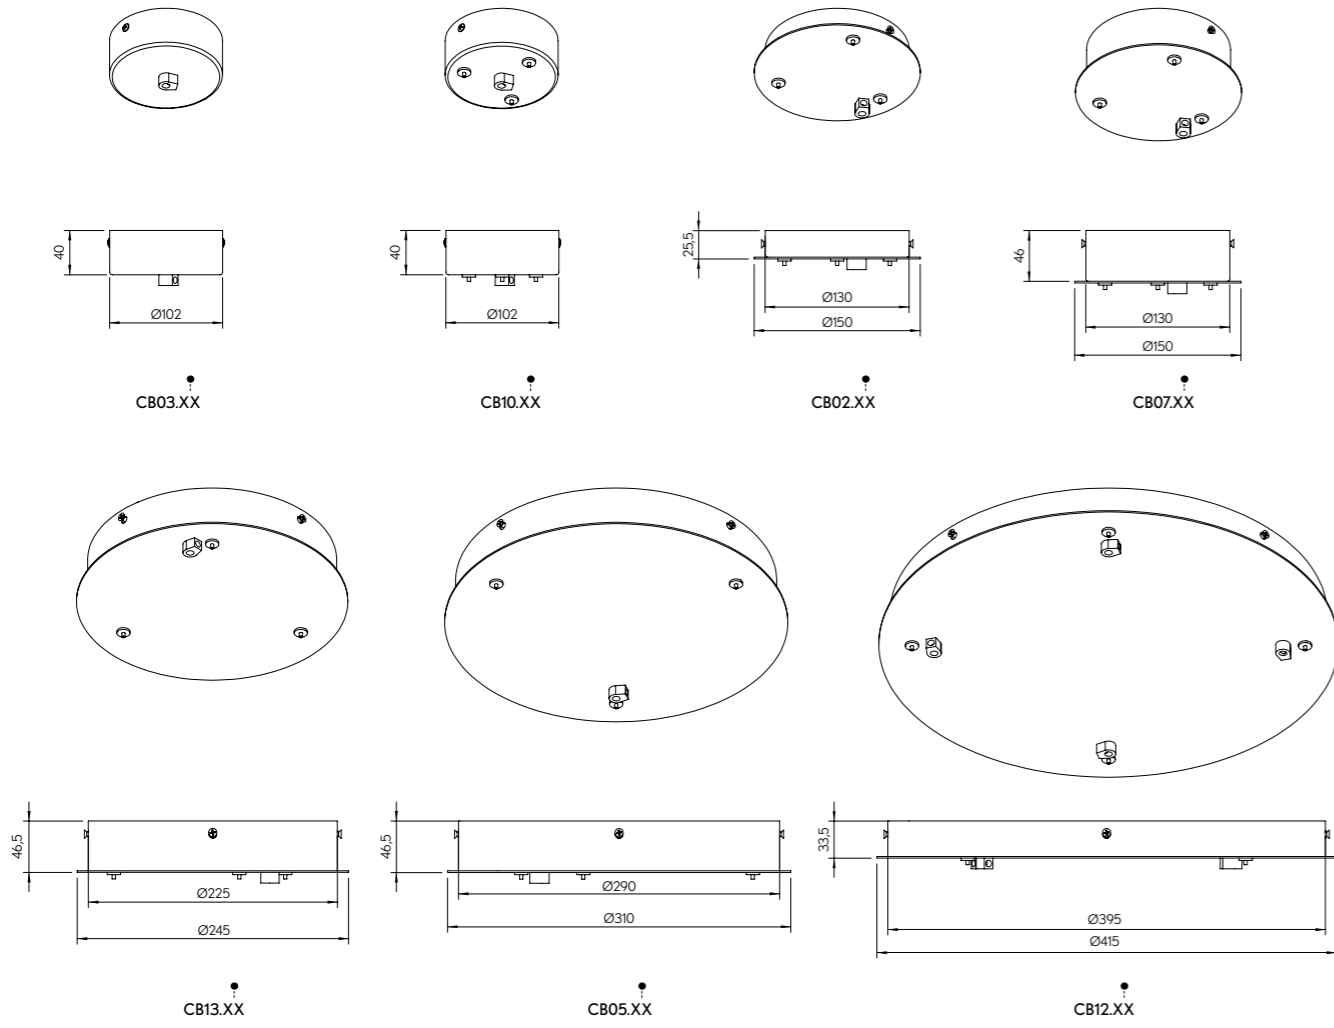

CONNECTION & DRIVER BOXES

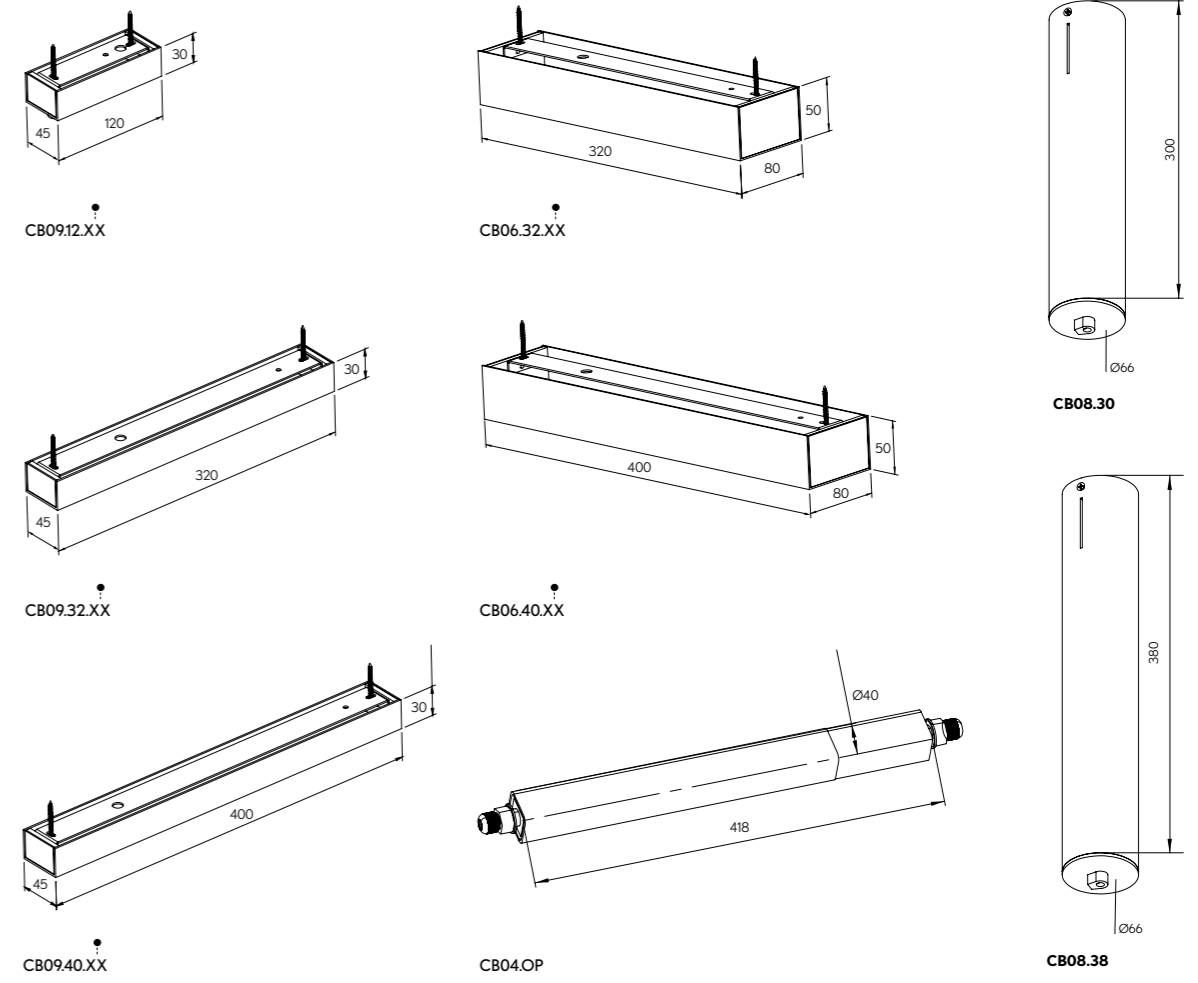


Select finishes




ACCESORIES

SUSPENSION ACCESORIES

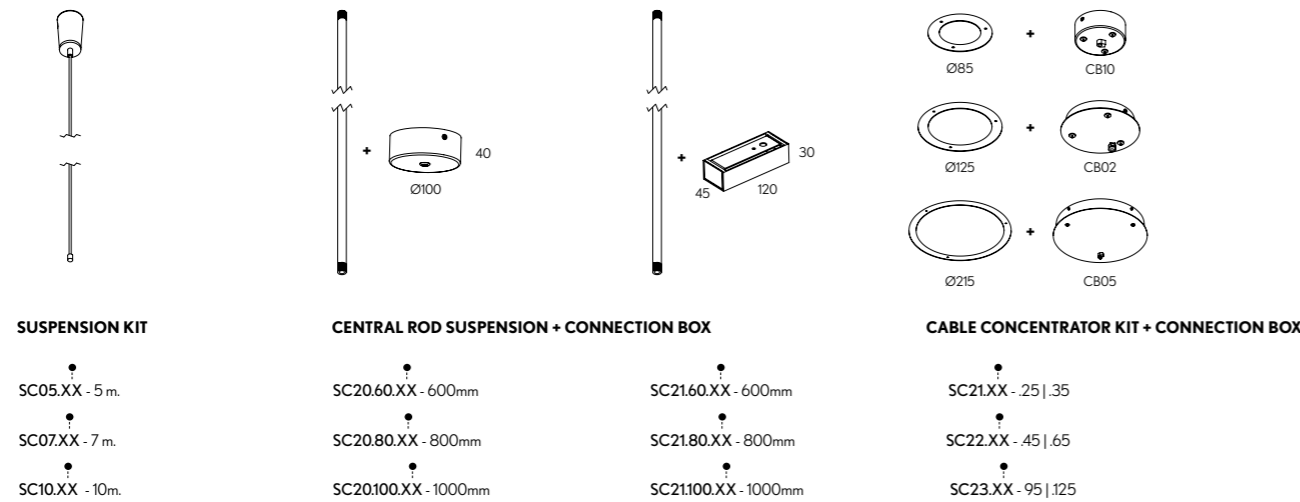

INDIVIDUAL CEILING RECESSED ACCESORIES

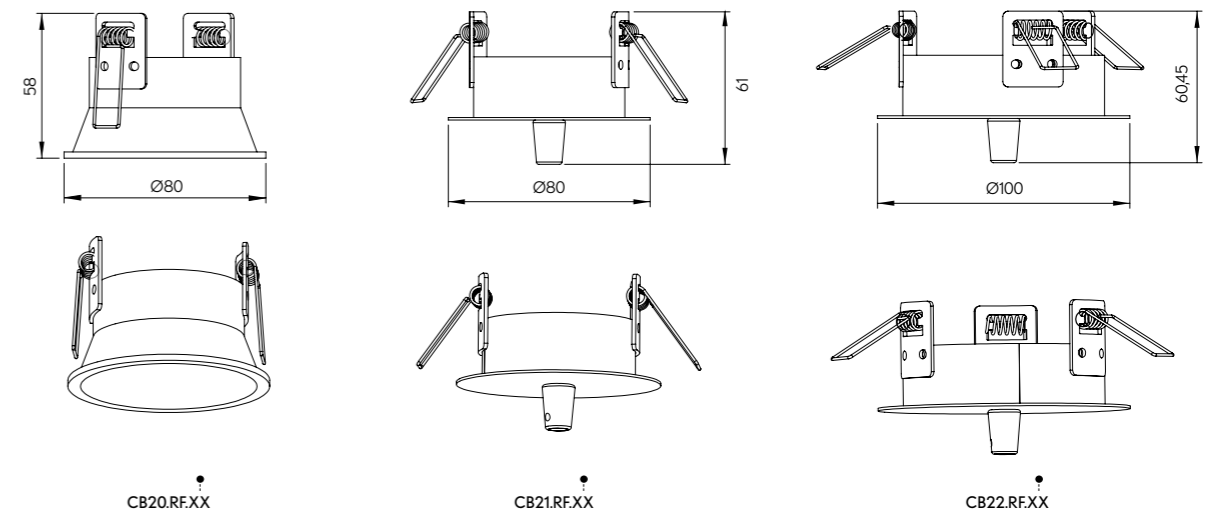

* Check luminaire's compatibility. Consultar compatibilidad con la luminaria.

ALABAMA SUPER SLIM



new

A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of the Alabama family. Square or round, whose minimalism conceals an enormous potential to create unique environments.

Alabama luminaries feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman la familia Alabama. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfiles de aluminio extruido y difusores opales o microprismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.



new



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 38 mm
250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA SUPER SLIM

REF 310001.PN | 310001.SR



.PN
PENDANT

·310001 ALABAMA SUPER SLIM
| PN Pag. 58



.SR
SURFACE

·310001 ALABAMA SUPER SLIM
| SR Pag. 58



PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

ALABAMA SUPER SLIM	REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	310001	.25 *2	●	.OP .MP	.ST	.9	.27	1735	13	250	310	.DA .PU .D1		
								1540			321			5
								1425			408			
	310001	.35	●	.OP .MP	.ST	.9	.27	2416	19	250	458	.DA .PU .D1		
								2392			474			7
								2697			603			
	310001	.45	●	.OP .MP	.ST	.9	.27	4832	37	250	605	.DA .PU .D1		
								4784			627			10
								5394			797			
	310001	.65	●	.OP .MP	.ST	.9	.27	10572	82	250	901	.DA .PU .D1		
								10704			933			13
								12484			1186			
	310001	.95	●	.OP .MP	.ST	.9	.27	21598	168	250	1344	.DA .PU .D1		
								21976			1392			20
								25816			1770			
	310001	.125	●	.OP .MP	.ST	.9	.27	36308	282	250	1787	.DA .PU .D1		
								36848			1851			27
								43124			2353			

Reference order | 310001.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.
*2 Remote Driver. Driver en remoto.

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

Select finishes



ALABAMA SUPER SLIM

REF 310001.PN | 310001.SR

SUSPENSION OPTIONS (.PN)




DEFAULT

CABLE CONCENTRATOR

CABLE CONCENTRATOR KIT

CENTRAL ROD SUSPENSION


PHOTOMETRY

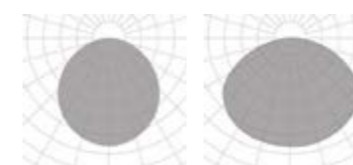

OPAL

MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



38

.SR

.PN

PENDANT | SURFACE



new

FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS




ALABAMA SUPER SLIM TILT

REF310007 .PN



.PN
PENDANT

-310007 ALABAMA SUPER SLIM TILT
| PN - Pag. 62



PENDANT .PN

ALABAMA SUPER SLIM TILT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	310007	.35	●	.OP .MP	.ST	.9	.27	2350	26	250	.DA .PU .D1	
							.30	2392				
							.40	2697				
	310007	.45	●	.OP .MP	.ST	.9	.27	4700	40	250	.DA .PU .D1	
							.30	4784				
							.40	5394				
	310007	.65	●	.OP .MP	.ST	.9	.27	10572	72	250	.DA .PU .D1	
							.30	10704				
							.40	12484				

Reference order | 310007.XX.PN.XX.XX.ST.9.XX.XX




• Select finishes



ALABAMA SUPER SLIM TILT


REF 310007.PN

PHOTOMETRY

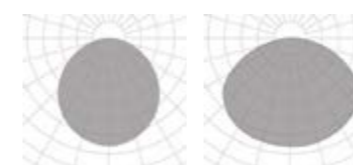


OPAL MICROPRISMATIC

INCLUDED



SUSPENSION ROD

PROFILE



.PN

PENDANT

new



FINISHES

● COLORS



DIMENSIONS

DIAMETERS mm.	HEIGHT	53 mm
250 350 450 650 950 1250		

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
 DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit




ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)

* Delivered separately (not installed in luminaire).

INSTALLATIONS

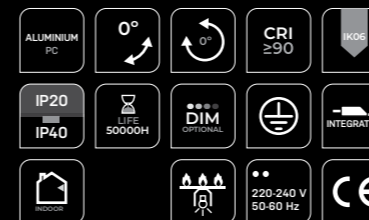

ALABAMA SLIM

REF 310002.PN | 310002.SR



.PN
PENDANT

·310002 ALABAMA SLIM | PN
Pag.66



.SR
SURFACE

·310002 ALABAMA SLIM | SR
Pag.66



PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

ALABAMA SLIM	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	310002	.25 *2	●	.OP .MP	.ST	.9	.27	1735	13	250	310	.DA .PU .D1		
								1540			321			5
								1425			408			
	310002	.35	●	.OP .MP	.ST	.9	.27	2416	19	250	458	.DA .PU .D1		
								2392			474			7
								2697			603			
	310002	.45	●	.OP .MP	.ST	.9	.27	4832	37	250	605	.DA .PU .D1		
								4784			627			9
								5394			797			
	310002	.65	●	.OP .MP	.ST	.9	.27	10572	82	250	901	.DA .PU .D1		
								10704			933			13
								12484			1186			
	310002	.95	●	.OP .MP	.ST	.9	.27	21598	168	250	1344	.DA .PU .D1		
								21976			1392			20
								25816			1770			
	310002	.125	●	.OP .MP	.ST	.9	.27	36308	282	250	1787	.DA .PU .D1		
								36848			1851			27
								43124			2353			

Reference order **310002.XX.SR.XX.XX.ST9.XX.XX.XX**

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.
 *2 Remote Driver: Driver en remoto.
 *3 Remote Driver for uplight. Driver en remoto para luz indirecta.

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order **CBXX.XX**

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order **SCXX.XX**

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order **SCXX.SA**

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
 Luminarias .95 y .125 requieren 3 tijas.

Reference order **SC20.XX.XX**

Select finishes




- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IP20
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- 220-240 V 50-60 Hz
- CE


ALABAMA SLIM

REF 310002.PN | 310002.SR


SUSPENSION OPTIONS (.PN)

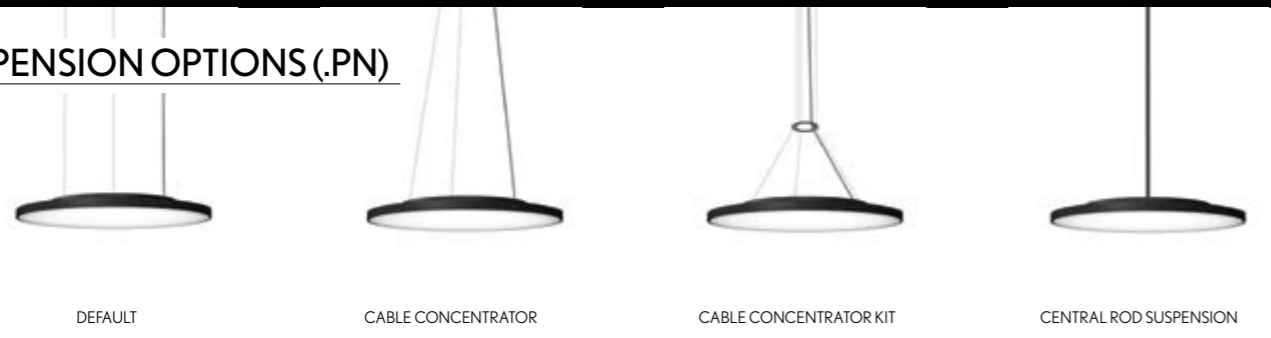


PHOTOMETRY

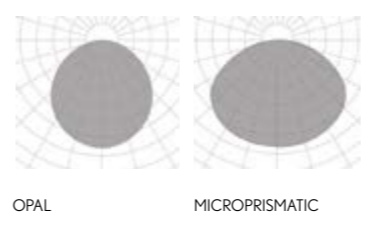

INCLUDED (.PN)



PROFILE





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 80 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 1 circuit, 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALABAMA SLIGHT


REF 10192.PN | 10192.SR

.PN
PENDANT

10192 ALABAMA SLIGHT | PN
Pag. 70

.SR
SURFACE

10192 ALABAMA | SR
Pag. 70



PENDANT | SURFACE
 .SR
 .PN

ALABAMA SLIGHT	REF.	DIMEN- SION ●	FINISH	DIFFUS- ER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10192	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	458	7	.DA .PU .D1	
								2940			474			
								3000			603			
	10192	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	605	9	.DA .PU .D1	
								4900			627			
								5000			797			
	10192	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	901	13	.DA .PU .D1	
								11760			933			
								12000			1186			
	10192	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	1344	20	.DA .PU .D1	
								21560			1392			
								22000			1770			
	10192	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	1787	27	.DA .PU .D1	
								34300			1851			
								35000			2353			

Reference order | 10192.XX.SR | .XX.XX.ST9.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.


• Select finishes

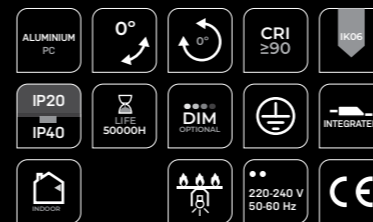


ALABAMA SLIGHT

REF 10192.PN | 10192.SR


SUSPENSION OPTIONS (.PN)

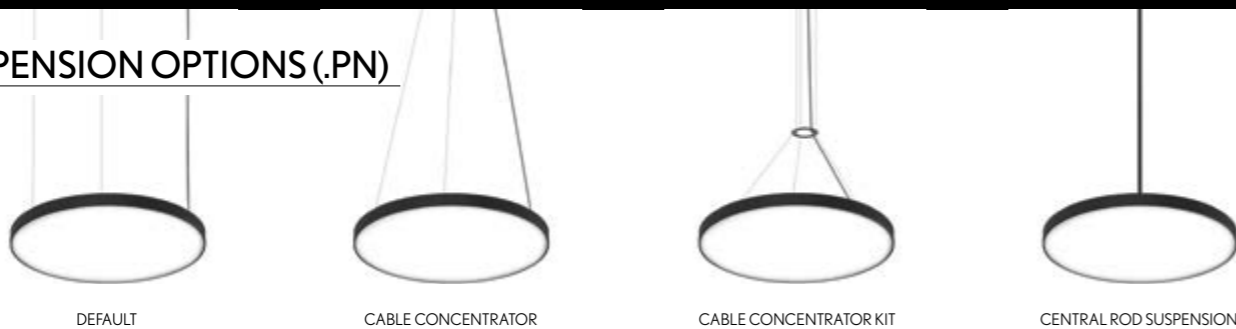


PHOTOMETRY

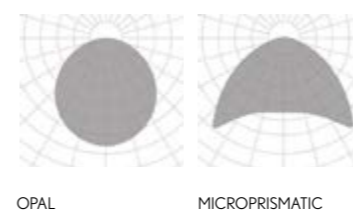

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE

.SR
.PN



FINISHES

● COLORS



DIMENSIONS

● SIZES mm. | HEIGHT 80 mm

350 | 450 | 650 | 950 | 1250

300 x 650 | 300 x 950 | 300 x 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

4 x Suspension cables 3m

NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²


DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm²

DIM DOWN-UP (only): 1x Feed Hose 5 x 0,75mm²

Connection box CB09.12 with luminaire's finish

.SR

Surface mounting kit

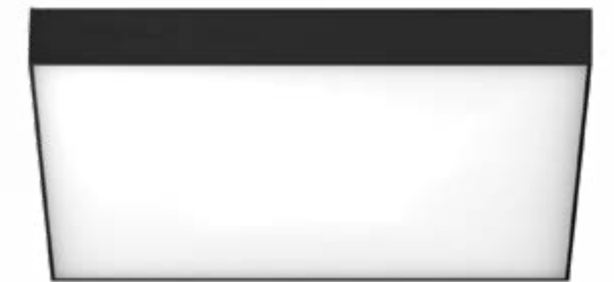

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA SLIGHT SQ


REF 10194.PN | 10194.SR

.PN
PENDANT

10194 ALABAMA SLIGHT SQ | PN
Pag. 74

.SR
SURFACE

10194 ALABAMA SLIGHT SQ | SR
Pag. 74

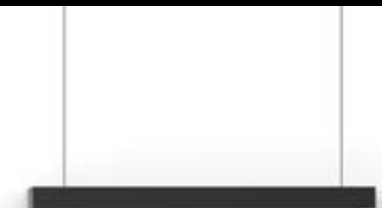

.SR
.PN
PENDANT | SURFACE

ALABAMA SLIGHT SQ	REF.	DIMEN-SION	FINISH	DIFFUS-ER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10194	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	470	7	.DA .PU .D1	
								2940			487			
								3000			619			
	10194	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	658	10	.DA .PU .D1	
								5880			682			
								6000			867			
	10194	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	1034	15	.DA .PU .D1	
								11760			1071			
								12000			1362			
	10194	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	1598	24	.DA .PU .D1	
								23520			1656			
								24000			2105			
	10194	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	2162	32	.DA .PU .D1	
								39200			2240			
								40000			2847			

Reference order 10194.XX.SR.PN.XX.XX.ST9.XX.XX.XX

ALABAMA SLIGHT SQ	REF.	DIMEN-SION	FINISH	DIFFUS-ER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10194	.30-65	●	.OP .MP	.ST	.9	.27	3608	36	700	705	11	.DA .PU .D1	
								3920			731			
								4000			929			
	10194	.30-95	●	.OP .MP	.ST	.9	.27	5412	55	700	987	15	.DA .PU .D1	
								5880			1023			
								6000			1300			
	10194	.30-125	●	.OP .MP	.ST	.9	.27	7216	73	700	1269	19	.DA .PU .D1	
								7840			1315			
								8000			1671			

OPTIONS (.PN)

Reference order 10194.XX.PN.XX.XX.XX.XX.XX.XX

CENTRAL ROD SUSPENSION	CONNECTION BOX	REF.	DIMEN-SIONS	FINISH
		SC21	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 2 rod suspensions.
Luminarias .95 y .125 requieren 2 tijas.

Reference order SC21.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

Select finishes



ALABAMA SLIGHT SQ

REF 10194.PN | 10194.SR


SUSPENSION OPTIONS (.PN)



DEFAULT

CENTRAL ROD SUSPENSION


PHOTOMETRY

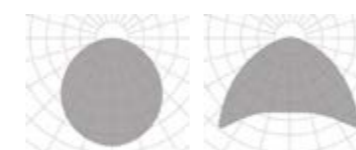

OPAL

MICROPRISMATIC


INCLUDED (.PN)



CB0912 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



10

.SR

.PN

PENDANT | SURFACE



FINISHES

● COLORS



DIMENSIONS

DIAMETERS mm.	HEIGHT	114 mm
350 450 650 950 1250		

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 CRI 80
 Motion Detection
 RGB
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



REF 10158.PN | 10158.SR

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 78

.SR
SURFACE


·10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP *2 *3		DIMM ▼	SKETCH							
								LUMEN	WATT	mA	LUMEN	WATT									
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	-	7	.DA .PU .D1								
								2385			474										
								2475			603										
								.8	TW *1	-	-	-	-		-	-	-	-	-	-	-
										.27	.9	-	35		500	-	15	.DA .PU .D1			
												4767				1016					
4956	1291																				
	10158	.45	●	.OP .MP	.ST	.9	.27			4590	35	500	605	9	.DA .PU .D1						
										4770			627								
								4950	797												
								.8	TW *1	11400-11820	76	700	-	-	-		-	-	-	-	-
										.27	.9	9180	71	500	1298		19	.DA .PU .D1			
												9534			1343						
9912	1708																				
	10158	.65	●	.OP .MP	.ST	.9	.27			9180	71	500	901	13	.DA .PU .D1						
										9540			933								
								9900	1186												
								.8	TW *1	22800-23640	152	700	-	-	-		-	-	-	-	-
										.27	.9	18360	142	500	1932		29	.DA .PU .D1			
												19068			1999						
19824	2541																				
	10158	.95	●	.OP .MP	.ST	.9	.27			16830	130	500	1344	20	.DA .PU .D1						
										17490			1392								
								18150	1770												
								.8	TW *1	41800-43340	279	700	-	-	-		-	-	-	-	-
										.27	.9	33660	260	500	2882		43	.DA .PU .D1			
												34958			2982						
36344	3791																				
	10158	.125	●	.OP .MP	.ST	.9	.27			27540	212	500	1787	27	.DA .PU .D1						
										28620			1851								
								29700	2353												
								.8	TW *1	68400-70920	457	700	-	-	-		-	-	-	-	-
										.27	.9	55080	425	500	3832		57	.DA .PU .D1			
												57204			3965						
59472	5041																				

Reference order | 10158.XX | .SR | .PN | .XX.XX.XX.XX.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX


SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.


Reference order | SC20.XX.XX

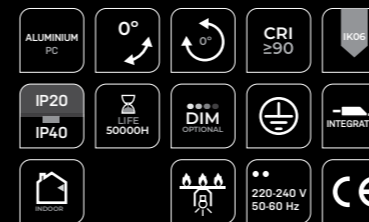

ALABAMA

REF 10158.PN | 10158.SR

● Select finishes




*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
-TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.


*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.

*3 Uplight (.UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. La luz indirecta (.UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.

PHOTOMETRY

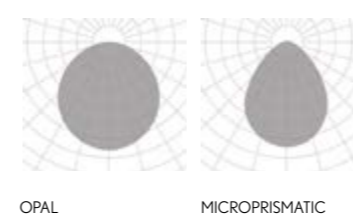

INCLUDED (.PN)



PROFILE





FINISHES

● COLORS



DIMENSIONS

SIZES mm.	HEIGHT	114 mm
450 650 950 1250		

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

4 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB09.12 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 CRI 80
 Motion Detection
 RGB
 Wireless Control Options (Casambi)


* Delivered separately
 (not installed in luminaire).

INSTALLATIONS




ALTAIR

REF 10172.PN | 10172.SR




.PN
PENDANT

·10172 ALTAIR | PN
Pag. 82




.SR
SURFACE

·10172 ALTAIR | SR
Pag. 82



.TR
TRIMLESS

·10172 ALTAIR | TR
Pag. 584

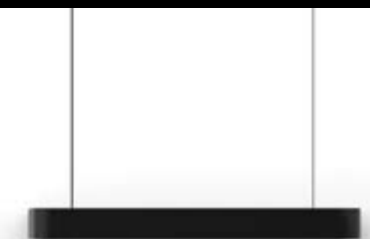

PENDANT | SURFACE
 .SR
 .PN


ALTAIR	REF.	DIMENSIONS ▲	FINISH ●	DIFFUSER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲ .UP *2 *3		DIMM ▼	SKETCH		
								LUMEN	WATT	mA	LUMEN	WATT				
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	564	8	.DA .PU .D1			
							.30	3180			584					
							.40	3300			743					
							.HI	.9	.27	7600 - 7880	51	700	-		-	.DA
									.30	6120	47	500	1210			
									.40	6356			1252			
		.40	6608			1591										
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	940	14	.DA .PU .D1			
							.30	6360			974					
							.40	6600			1238					
							.HI	.9	.27	15200 - 15760	102	700	-		-	.DA
									.30	12240	94	500	2016			
									.40	12712			2086			
		.40	13216			2652										
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	1504	22	.DA .PU .D1			
							.30	11925			1558					
							.40	12375			1981					
							.HI	.9	.27	28500 - 29550	191	700	-		-	.DA
									.30	22950	177	500	3226			
									.40	23835			3338			
		.40	24780			4243										
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	2068	31	.DA .PU .D1			
							.30	19080			2143					
							.40	19800			2724					
							.HI	.9	.27	45600 - 47280	305	700	-		-	.DA
									.30	36720	283	500	4435			
									.40	38136			4589			
		.40	39648			5834										

Reference order | 10172.XX | .SR | .PN | .XX.XX.XX.XX.XX.XX.XX



.SR
.PN
PENDANT | SURFACE


• Select finishes

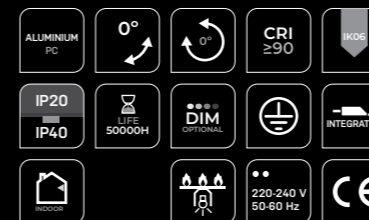


ALTAIR

REF 10172.PN | 10172.SR

PHOTOMETRY

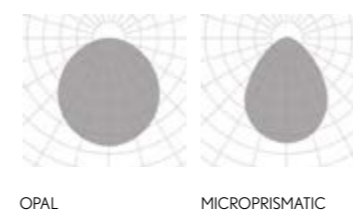

INCLUDED (.PN)



PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.

*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

*3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 53 mm
350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



OHIO

REF 10188.PN | 10188.SR

.PN
PENDANT

·10188 OHIO | PN
Pag. 86

.SR
SURFACE


·10188 OHIO | SR
Pag. 86

.RF
RECESSED FRAME

·10188 OHIO | RF
Pag. 400

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 588



OHIO	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲ Up *1*2		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10188	.35	●	.OP .MP	.ST	.9	.27	2416	19	250	458	7	.DA .PU .D1	
								2392			474			
								2697			603			
	10188	.45	●	.OP .MP	.ST	.9	.27	4832	37	250	605	10	.DA .PU .D1	
								4784			627			
								5394			797			
	10188	.65	●	.OP .MP	.ST	.9	.27	10572	82	250	901	13	.DA .PU .D1	
								10704			933			
								12484			1186			
	10188	.95	●	.OP .MP	.ST	.9	.27	21598	153	250	1344	20	.DA .PU .D1	
								21976			1392			
								25816			1770			
	10188	.125	●	.OP .MP	.ST	.9	.27	36308	252	250	1787	27	.DA .PU .D1	
								36848			1851			
								43124			2353			

Reference order | 10188.XX | .SR | .PN | .XX.XX | .ST9.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Reference order | SC20.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.
*2 Remote Driver for uplight. Driver en remoto para luz indirecta.

Select finishes



OHIO


REF 10188.PN | 10188.SR

SUSPENSION OPTIONS (.PN)




DEFAULT CABLE CONCENTRATOR CABLE CONCENTRATOR KIT CENTRAL ROD SUSPENSION

PHOTOMETRY

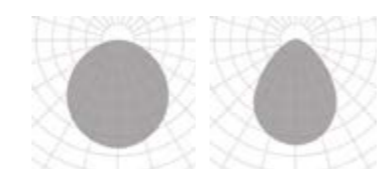


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm. | HEIGHT 114 mm

450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)


* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



FLORIDA

REF 10190.PN | 10190.SR




.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90




.SR
SURFACE

·10190 FLORIDA | SR
Pag. 90




.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408



.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596

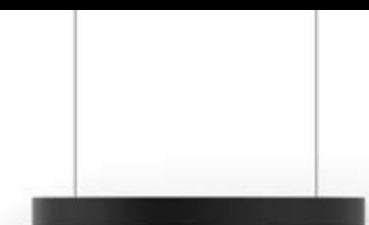

PENDANT | SURFACE
 .SR
 .PN

FLORIDA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	MA	LUMEN	WATT		
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	605	9	.DA .PU .D1	
								4900			627			
								5000			797			
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	901	13	.DA .PU .D1	
								11760			933			
								12000			1186			
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	202	700	1344	20	.DA .PU .D1	
								21560			1392			
								22000			1770			
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	1787	27	.DA .PU .D1	
								34300			1851			
								35000			2353			

Reference order | 10190.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Reference order | SC20.XX.XX

* Luminaire .95 and .125 require 3 rod suspensions. Luminarias .95 y .125 requieren 3 tijas.

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.


• Select finishes




FLORIDA

REF 10190.PN | 10190.SR


SUSPENSION OPTIONS (.PN)

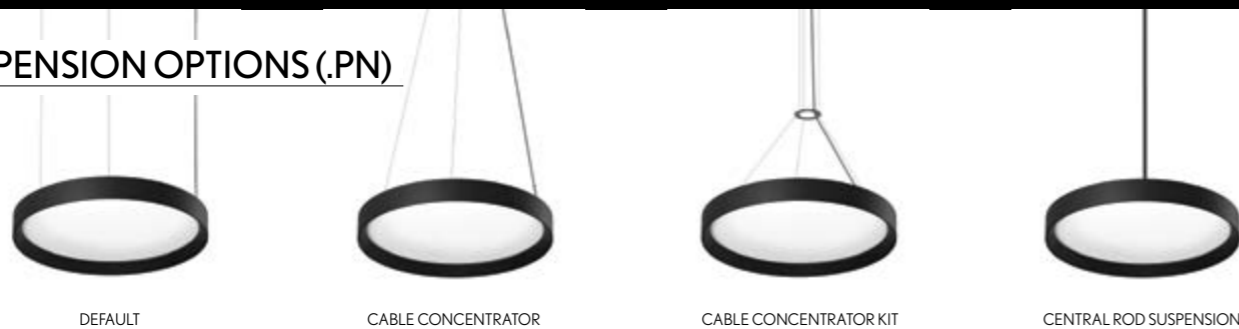


PHOTOMETRY

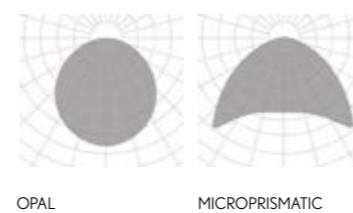

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE

.SR
.PN

PENDANT | SURFACE



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

SIZES mm.	HEIGHT	114 mm
350 450 650 950 1250		

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

4 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB09.12 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)



* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



FLORIDA SQ

REF 10191.PN | 10191.SR

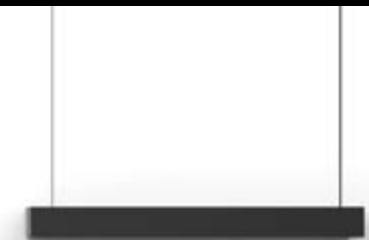

PENDANT | SURFACE
 .SR
 .PN

FLORIDA SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	470	7	.DA .PU .D1	
							.30	2940			487			
							.40	3000			619			
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	658	10	.DA .PU .D1	
							.30	5880			682			
							.40	6000			867			
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	1034	15	.DA .PU .D1	
							.30	11760			1071			
							.40	12000			1362			
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	1598	24	.DA .PU .D1	
							.30	23520			1656			
							.40	24000			2105			
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	2162	32	.DA .PU .D1	
							.30	39200			2240			
							.40	40000			2847			

Reference order | 10191.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX



PENDANT | SURFACE

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.


• Select finishes




FLORIDA SQ

REF 10191.PN | 10191.SR


PHOTOMETRY

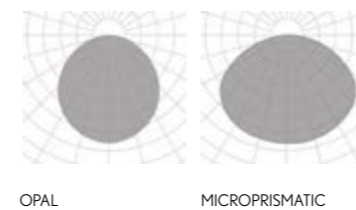

INCLUDED (.PN)



PROFILE



new



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 50 mm
250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit




ON DEMAND

Special RAL Color
Tunable White
RGB
Other Dimensions



PENDANT | SURFACE
SR
PN

INSTALLATIONS

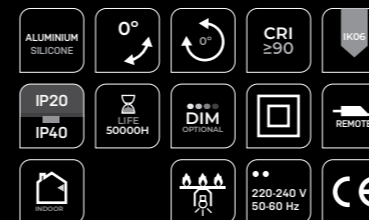

ALBERTA INSIDE



REF 10243.PN | 10243.SR

.PN
PENDANT

· 10243 ALBERTA INSIDE | PN
Pag. 98

.SR
SURFACE

· 10243 ALBERTA INSIDE | SR
Pag. 98

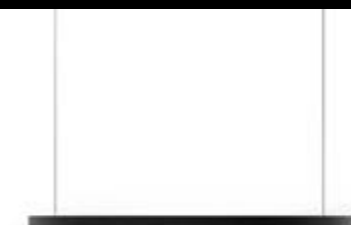

ALBERTA INSIDE	REF.	DIMENSION	FINISH	DIFFUSER OPTIONS	POWER	CRI	K	LUMEN MAX.	WATT	VdC	DIMM OPT.	SKETCH
	10243	.25	●	.SI	.ST	.9	.27	6098	23	24	.DA .PU .D1	
							.30	6315				
							.40	6497				
	10243	.35	●	.SI	.ST	.9	.27	8537	32	24	.DA .PU .D1	
							.30	8840				
							.40	9096				
	10243	.45	●	.SI	.ST	.9	.27	10976	41	24	.DA .PU .D1	
							.30	11366				
							.40	11694				
	10243	.65	●	.SI	.ST	.9	.27	15854	59	24	.DA .PU .D1	
							.30	16418				
							.40	16892				
	10243	.95	●	.SI	.ST	.9	.27	23172	86	24	.DA .PU .D1	
							.30	23996				
							.40	24688				
	10243	.125	●	.SI	.ST	.9	.27	30489	113	24	.DA .PU .D1	
							.30	31573				
							.40	32484				

Reference order | 10243.XX | .SR | .PN | .XX.SI.ST9.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


BOXES (.PN)

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
						●
CB03	CB04.OP*	CB08.30	CB06.32	CB08.38	CB06.40	

*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX


Select finishes

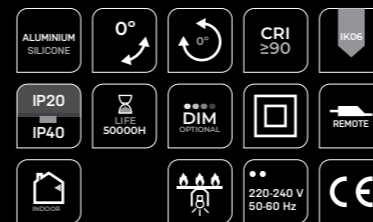

ALBERTA INSIDE

REF 10243.PN | 10243.SR

SUSPENSION OPTIONS (.PN)

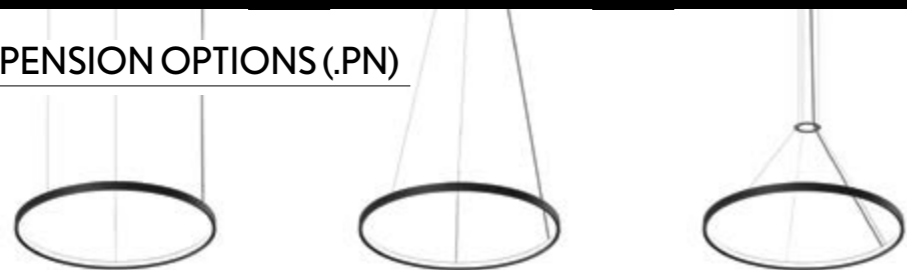


DEFAULT

CABLE CONCENTRATOR


CABLE CONCENTRATOR KIT

PHOTOMETRY



SILICONE


INCLUDED



(PN) SC03.SA
WIRE 3M.

(SR) INSTALLATION KIT

PROFILE



21



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 50 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

2 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²
Connection box CB03 with luminaire's finish + CB04




ON DEMAND
Special RAL Color
Number of switches
Tunable White
RGB



.PN

PENDANT

INSTALLATIONS

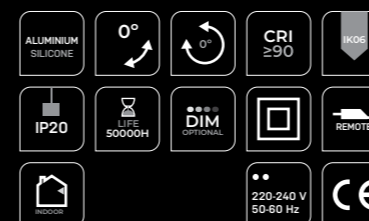

ALBERTA INSIDE VERTICAL

REF. 310008.PN

.PN
PENDANT

310008 ALBERTA INSIDE VERTICAL | PN
Pag. 102




ALBERTA INSIDE VERTICAL	REF.	DIMENSION	FINISH	DIFFUSER OPTIONS	POWER	CRI	K	LUMEN	WATT	V/C	DIMM OP.	SKETCH
	310008	.35	●	.SI	.ST	.9	.27	8537	32	24	.DA .PU .D1	
							.30	8840				
							.40	9096				
	310008	.45	●	.SI	.ST	.9	.27	10976	41	24	.DA .PU .D1	
							.30	11366				
							.40	11694				
	310008	.65	●	.SI	.ST	.9	.27	15854	59	24	.DA .PU .D1	
							.30	16418				
							.40	16892				
	310008	.95	●	.SI	.ST	.9	.27	23172	86	24	.DA .PU .D1	
							.30	23996				
							.40	24688				
	310008	.125	●	.SI	.ST	.9	.27	30489	113	24	.DA .PU .D1	
							.30	31573				
							.40	32484				

Reference order | 310008.XX.PN.XX.SI.ST9.XX.XX



.PN
PENDANT


• Select finishes

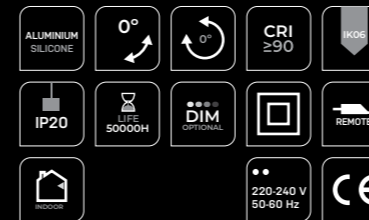

ALBERTA INSIDE VERTICAL


REF. 310008.PN

PHOTOMETRY




SILICONE

INCLUDED



SC03.SA
WIRE 3M.

PROFILE



21

new



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 50 mm

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

SIDE

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.



ON DEMAND
Special RAL Color
Number of switches
Tunable White
RGB



.PN
PENDANT

INSTALLATIONS







ALBERTA INSIDE VTILT

REF. 310009.PN

.PN
PENDANT

310009 ALBERTA INSIDE VTILT
Pag. 106



ALBERTA INSIDE VTILT	REF.	DIMENSION	FINISH	DIFFUSER OPTIONS	POWER	CRI	K	LUMEN	WATT	Vdc	DIMM*	SKETCH
	310009	.35	●	.SI	.ST	.9	.27	8537	32	24	.DA .PU .D1	
							.30	8840				
							.40	9096				
	310009	.45	●	.SI	.ST	.9	.27	10976	41	24	.DA .PU .D1	
							.30	11366				
							.40	11694				

Reference order | 310009.XX.PN.XX.SI.ST9.XX.XX



PENDANT

• Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

- ALUMINUM SILICONE
- 45°
- 0°
- CRI ≥90
- IP20
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- 220-240 V 50-60 Hz
- CE

ALBERTA INSIDE VTILT

REF. 310009.PN

PHOTOMETRY




SILICONE

INCLUDED



SUSPENSION ROD

PROFILE



21



new

FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 30 mm

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²



ON DEMAND
Special RAL Color
Number of switches
Tunable White
RGB



.PN
PENDANT

INSTALLATIONS



ALBERTA DUE

REF 10250.PN

.PN
PENDANT

10250 ALBERTA DUE | PN
Pag. 110



ALBERTA DUE	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN MAX.	WATT	Vdc	DIMM OP.	SKETCH
	10250	.25	●	.SI	.ST	.9	.27	2637	24	24V	.DA .PU .D1	
							.30	2639				
							.40	2641				
	10250	.35	●	.SI	.ST	.9	.27	3692	33	24V	.DA .PU .D1	
							.30	3695				
							.40	3697				
	10250	.45	●	.SI	.ST	.9	.27	4747	42	24V	.DA .PU .D1	
							.30	4750				
							.40	4753				
	10250	.65	●	.SI	.ST	.9	.27	6857	61	24V	.DA .PU .D1	
							.30	6861				
							.40	6856				
	10250	.95	●	.SI	.ST	.9	.27	10022	90	24V	.DA .PU .D1	
							.30	10028				
							.40	10034				
	10250	.125	●	.SI	.ST	.9	.27	131187	118	24V	.DA .PU .D1	
							.30	13195				
							.40	13203				

Reference order | **10250.XX.PN.XX.SI.ST9.XX.XX**

OPTIONS

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | **CBXX.XX**

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | **SCXX.XX**

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | **SCXX.SA**

BOXES

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
						●
CB03	CB04.OP*	CB08.30	CB06.32	CB08.38	CB06.40	

*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | **CBXX.XX**

• Select finishes



ALBERTA DUE

REF 10250.PN

SUSPENSION OPTIONS




DEFAULT

CABLE CONCENTRATOR


CABLE CONCENTRATOR KIT

PHOTOMETRY




SILICONE

INCLUDED



SC03.SA
WIRE 3M.

PROFILE



40

PENDANT .PN

new



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 30 mm

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

Connection box with luminaire's finish



ON DEMAND
Special RAL Color
Number of switches
Tunable White
RGB



.PN
PENDANT

INSTALLATIONS



ALBERTA DUE MOVE

REF 310004.PN

.PN PENDANT

310004 ALBERTA DUE MOVE | PN
Pag. 114



ALBERTA DUE MOVE	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN MAX.	WATT	Vdc	DIMM OP.	SKETCH
	310004	.35	●	.SI	.ST	.9	.27	3692	33	24	.DA .PU .D1	
							.30	3695				
							.40	3697				

	310004	.45	●	.SI	.ST	.9	.27	4747	42	24	.DA .PU .D1	
							.30	4750				
							.40	4753				

Reference order | 310004.XX.PN.XX.XX.ST9.XX.XX



PENDANT


• Select finishes



ALBERTA DUE MOVE


REF 310004.PN

PHOTOMETRY




SILICONE

INCLUDED




PLATEN

PROFILE



40

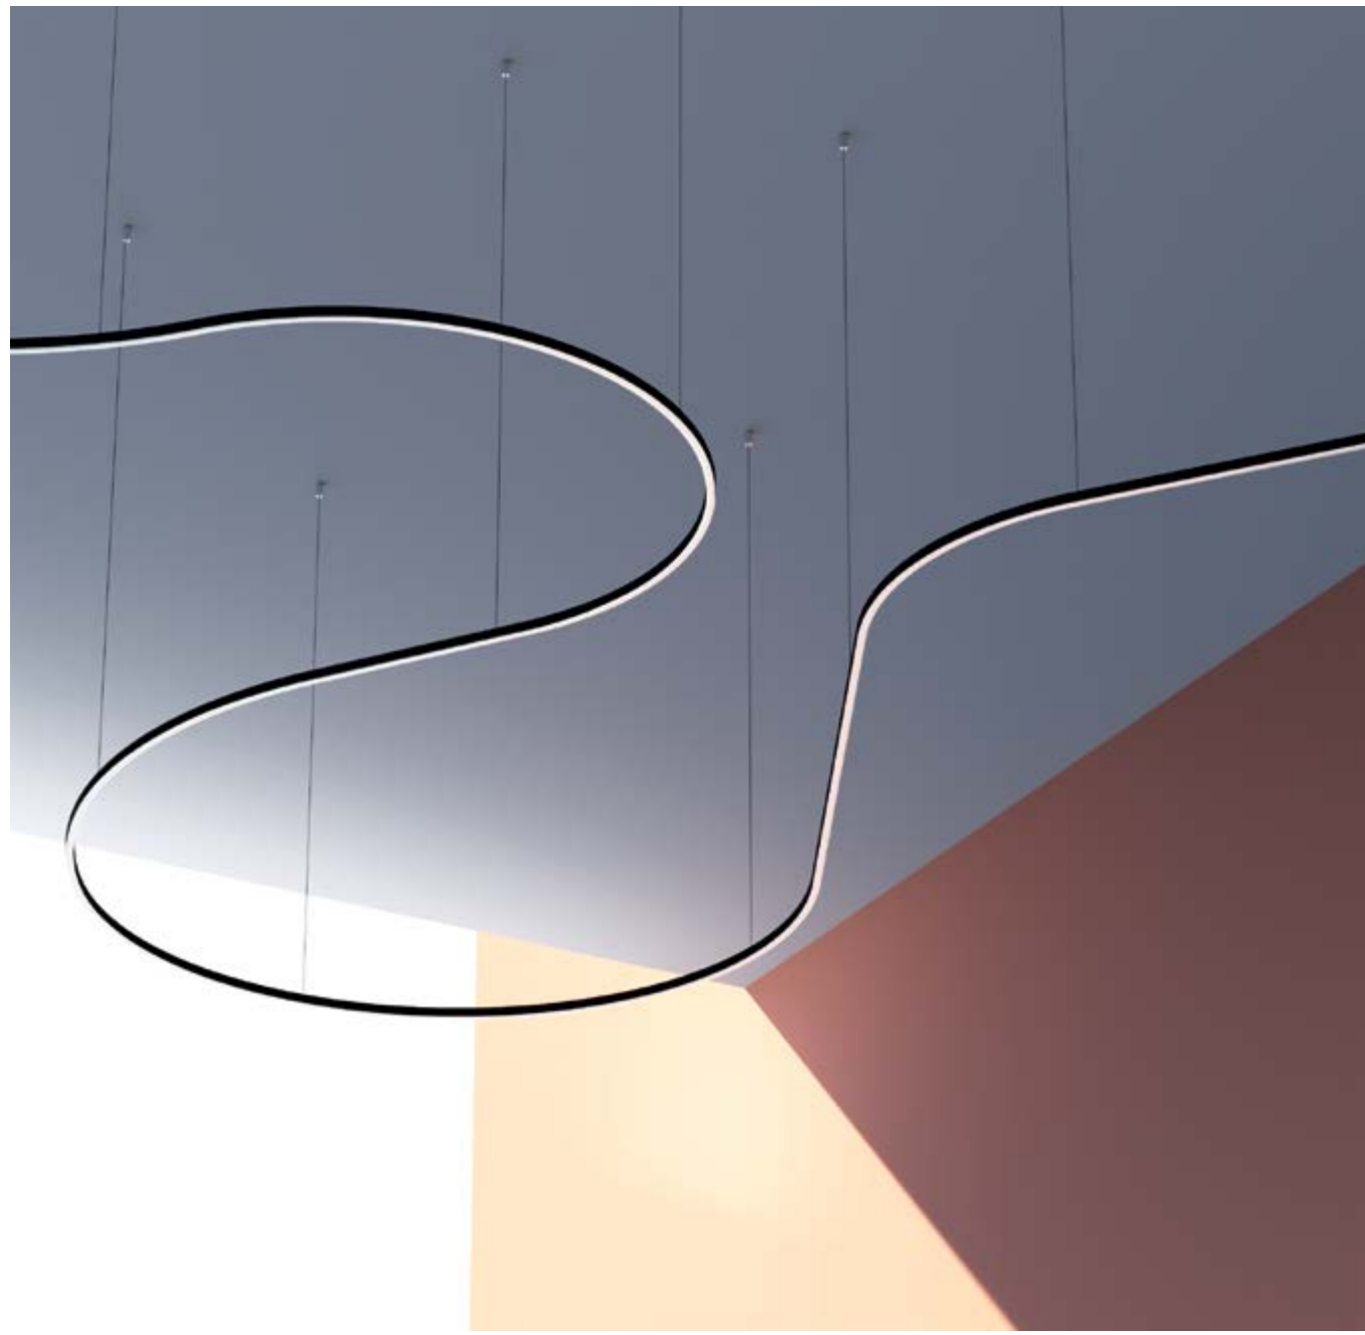

FINISHES

● COLORS



DIMENSIONS

DIAMETERS mm.	HEIGHT	38 mm
350 450 650 950 1250 1500		
2000 2500 3000 3500 4000 5000 6000		

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

For feed hoses and suspension details refer to mapping table in page 123

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 118

.SR
SURFACE

·10217 ALBERTA SOFT | SR
Pag. 118


.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 416









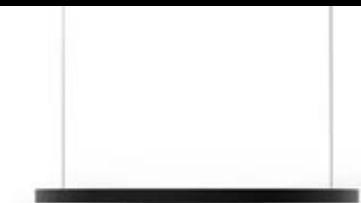







ALBERTA SOFT













REF 10217.PN | 10217.SR



.SR
.PN
PENDANT | SURFACE

ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*1		DIMM ▼	SKETCH	
								LUMEN	WATT	mA	LUMEN	WATT			
	10217	.35	●	.SI	.HI	.9	.27	5280	56	700	458	.DA .PU .D1			
								.30			5316			474	13
								.40			5844			603	13
	10217	.45	●	.SI	.HI	.9	.27	7086	70	700	605	.DA .PU .D1			
								.30			7121			627	16
								.40			7747			797	16
	10217	.65	●	.SI	.HI	.9	.27	8785	86	700	901	.DA .PU .D1			
								.30			9040			933	24
								.40			9687			1186	24
	10217	.95	●	.SI	.HI	.9	.27	13298	129	700	1344	.DA .PU .D1			
								.30			13519			1392	35
								.40			14703			1770	35
	10217	.125	●	.SI	.HI	.9	.27	17816	172	700	1787	.DA .PU .D1			
								.30			18135			1851	47
								.40			18118			2353	47
	10217	.150	●	.SI	.HI	.9	.27	-	185	500	-	.DA .PU .D1			
								.30			25326			12490	56
								.40			26901			11010	56
	10217	.200	●	.SI	.HI	.9	.27	-	253	500	-	.DA .PU .D1			
								.30			34185			16654	75
								.40			35475			14680	75

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*		DIMM ▼	SKETCH	
								LUMEN	WATT	mA	LUMEN	WATT			
	10217	.250	●	.SI	.HI	.9	.27	-	318	500	-	.DA .PU .D1			
								.30			42930			20814	94
								.40			44550			18348	94
	10217	.300	●	.SI	.HI	.9	.27	-	383	500	-	.DA .PU .D1			
								.30			51675			24978	113
								.40			53625			22018	113
	10217	.350	●	.SI	.HI	.9	.27	-	433	700	-	.DA .PU .D1			
								.30			59875			33304	136
								.40			62843			29358	136
	10217	.400	●	.SI	.HI	.9	.27	-	513	500	-	.DA .PU .D1			
								.30			69165			33304	150
								.40			71775			29358	150
	10217	.500	●	.SI	.HI	.9	.27	-	643	500	-	.DA .PU .D1			
								.30			86655			41628	188
								.40			89925			36694	188
	10217	.600	●	.SI	.HI	.9	.27	-	772	500	-	.DA .PU .D1			
								.30			104145			49954	226
								.40			108075			44034	226

Reference order | 10217.XX | .SR | .PN | .XX.XX.HI9.XX.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.


• Select finishes




ALBERTA SOFT

REF 10217.PN | 10217.SR


SUSPENSION OPTIONS (.PN)

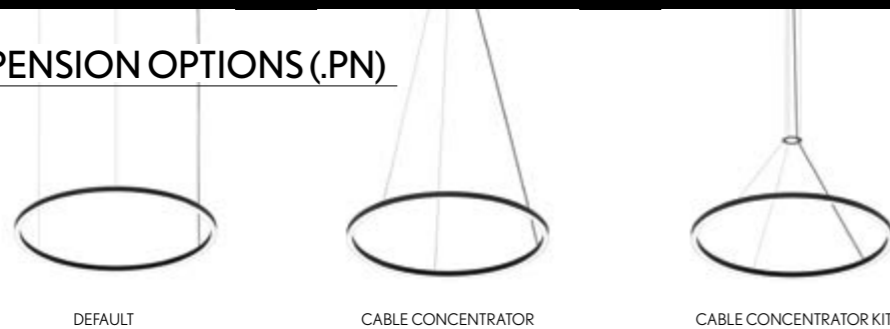


PHOTOMETRY







INCLUDED (.PN)







PROFILE




OPTIONS (.PN) Only for .35 .45 .65 .95 .125 .150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	 40 Ø102	CB10	●
	 26 Ø150	CB02	
	 47 Ø310	CB05	

Reference order | **CBXX.XX**

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	SC21	.35	●
	 Ø125 + CB02	SC22	.45 .65	
	 Ø215 + CB05	SC23	.95 .125	







Reference order | **SCXX.XX**

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | **SCXX.SA**



BOXES (.PN)

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
 40 Ø102	 418	 30 45	 300 Ø66	 30 45	 380 Ø66	●
CB03	CB04.OP*	CB09.32	CB08.30	CB09.40	CB08.38	

*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | **CB09.XX.XX**

LUMINAIRE INCLUDES (.PN)

LUMINAIRE'S DIMENSION	FEED HOSES		SUSPENSIONS
	DOWN	DOWN + UP	
.35	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.45	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.65	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.95	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.125	1 Feed Hose 5 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ² 1 Feed Hose 3 x 0,75mm ²	3
.150	1 Feed Hose 5 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ² 1 Feed Hose 3 x 0,75mm ²	3
.200	2 Feed Hose 3 x 0,75mm ²	2 Feed Hose 5 x 0,75mm ²	6
.250	3 Feed Hose 3 x 0,75mm ²	3 Feed Hose 5 x 0,75mm ²	9
.300	4 Feed Hose 3 x 0,75mm ²	4 Feed Hose 5 x 0,75mm ²	12
.400	5 Feed Hose 3 x 0,75mm ²	5 Feed Hose 5 x 0,75mm ²	15
.500	7 Feed Hose 3 x 0,75mm ²	7 Feed Hose 5 x 0,75mm ²	21
.600	8 Feed Hose 3 x 0,75mm ²	8 Feed Hose 5 x 0,75mm ²	24

• Select finishes



**ALBERTA
SOFT**

REF 10217.PN | 10217.SR

PENDANT | SURFACE
SR
PN



FINISHES

● COLORS



DIMENSIONS

DIAMETERS mm.		HEIGHT
450	650 950 1250 1500 2000	80 mm
2500	3000 4000 5000 6000	

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 Motion Detection
 Tunable White
 Wireless Control Options (Casambi)
 Other Dimensions

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBERTA SLIGHT


REF 10193.PN | 10193.SR

.PN
PENDANT

10193 ALBERTA SLIGHT | PN
Pag. 124

.SR
SURFACE

10193 ALBERTA SLIGHT | SR
Pag. 124



.SR
.PN
PENDANT | SURFACE

ALBERTA SLIGHT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10193	.45	●	.OP .MP	.ST	.9	.27 .30 .40	3157	32	700	605	9	.DA .PU .D1	
								3430			627			
								3500			797			
	10193	.65	●	.OP .MP	.ST	.9	.27 .30 .40	3608	36	700	901	13	.DA .PU .D1	
								3920			933			
								4000			1186			
	10193	.95	●	.OP .MP	.ST	.9	.27 .30 .40	7216	73	700	1344	20	.DA .PU .D1	
								7840			1392			
								8000			1770			
	10193	.125	●	.OP .MP	.ST	.9	.27 .30 .40	10824	109	700	1787	27	.DA .PU .D1	
								11760			1851			
								12000			2353			
	10193	.150	●	.OP .MP	.ST	.9	.27 .30 .40	13530	136	700	2156	32	.DA .PU .D1	
								14700			2234			
								15000			2839			
	10193	.200	●	.OP .MP	.ST	.9	.27 .30 .40	18942	191	700	2894	43	.DA .PU .D1	
								20580			2999			
								21000			3812			
	10193	.250	●	.OP .MP	.ST	.9	.27 .30 .40	28864	291	700	3632	54	.DA .PU .D1	
								31360			3764			
								32000			4784			
	10193	.300	●	.OP .MP	.ST	.9	.27 .30 .40	30668	309	700	4371	65	.DA .PU .D1	
								33320			4529			
								34000			5756			
	10193	.400	●	.OP .MP	.ST	.9	.27 .30 .40	37884	382	700	5847	87	.DA .PU .D1	
								41160			6059			
								42000			7701			

ALBERTA SLIGHT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10193	.500	●	.OP .MP	.ST	.9	.27 .30 .40	46904	473	700	7324	109	.DA .PU .D1	
								50960			7589			
								52000			9645			
	10193	.600	●	.OP .MP	.ST	.9	.27 .30 .40	54120	546	700	8800	131	.DA .PU .D1	
								58800			9119			
								60000			11590			

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.65	●
		SC23	.95 .125	


Reference order CBXX.XX

Reference order SCXX.XX


SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order SCXX.SA


Reference order 10193.XX .PN .SR .XX.XX .ST9.XX.XX.XX

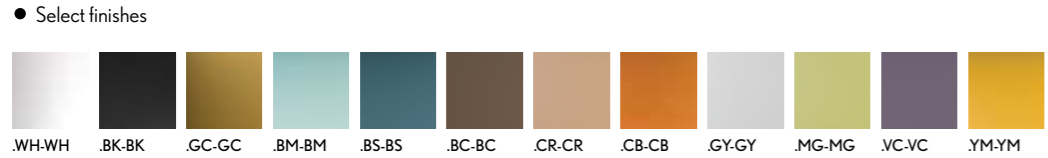


PHOTOMETRY

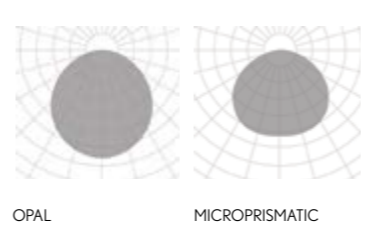

INCLUDED (.PN)



PROFILE



*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 80 mm
650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CBO3 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

.PN
PENDANT

·310005 ALBERTA SLIGHT
ECCENTRIC | PN - Pag. 128

.SR
SURFACE

·310005 ALBERTA SLIGHT
ECCENTRIC | SR - Pag. 128



PENDANT | SURFACE
SR
PN

ALBERTA SLIGHT ECCENTRIC	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	310005	.65	●	.OP .MP	.ST	.9	.27	10373	104	700	901	13	.DA .PU .D1	
								11270			933			
								11500			1186			
	310005	.95	●	.OP .MP	.ST	.9	.27	19393	195	700	1344	20	.DA .PU .D1	
								21070			1392			
								21500			1770			
	310005	.125	●	.OP .MP	.ST	.9	.27	28864	291	700	1787	27	.DA .PU .D1	
								31360			1851			
								32000			2353			

Reference order | 310005.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH	CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB10	●			SC22	.65	●
		CB02				SC23	.95 .125	
		CB05						

Reference order | CBXX.XX

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	●
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.


• Select finishes



ALBERTA SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

SUSPENSION OPTIONS (.PN)

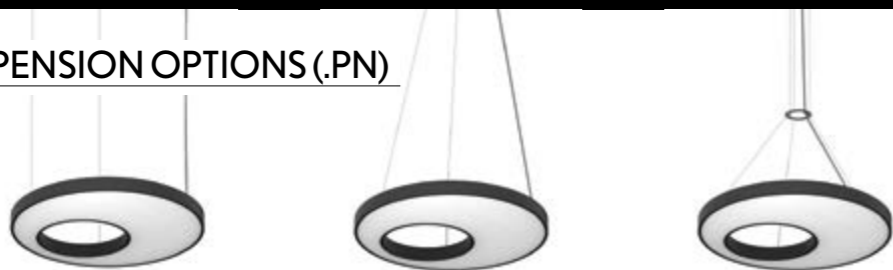


DEFAULT

CABLE CONCENTRATOR

CABLE CONCENTRATOR KIT


PHOTOMETRY

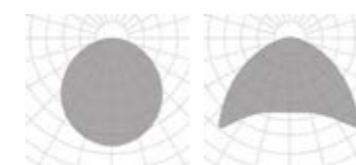

OPAL

MICROPRISMATIC


INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



80

10



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 114 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 CRI 80
 Motion Detection
 RGB
 Wireless Control Options (Casambi)
 Other Dimensions

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBERTA

REF 10176.PN

.PN
PENDANT



·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604

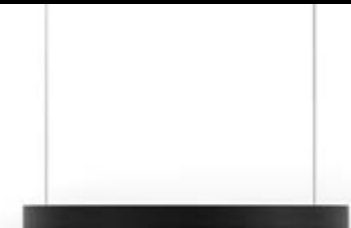

ALBERTA	REF.	DIMENSION ●	FINISH	DIFFUSER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP *2*3		DIMM OP. ▼	SKETCH																														
								LUMEN	WATT	mA	LUMEN	WATT																																
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	901	13	.DA .PU .D1																															
								-			933																																	
								-			1186																																	
									10176	.95	●	.OP .MP			.ST	.9	.27	6120	47	500	1347	20	.DA .PU .D1																					
																		6360			1392																							
																		6600			1770																							
																			10176	.125	●	.OP .MP			.ST	.9	.27	9180	71	500	1787	27	.DA .PU .D1											
																												9540			1851													
																												9900			2353													
																													10176	.125	●	.OP .MP			.HI	.9	.27	15200-15760	102	700	-	-	.DA .PU .D1	
																																						12240			2882			
																																						12712			2982			
	10176	.125	●	.OP .MP	.HI	.9	.27						18360	142																								500	3832	57	.DA .PU .D1			
													19068																										3965					
													19824																										5041					

Reference order | 10176.XX.PN.XX.XX.XX.XX.XX.XX.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.65	●
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


● Select finishes




ALBERTA

REF 10176.PN


PHOTOMETRY

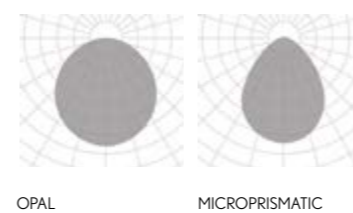

INCLUDED (.PN)



PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. - TW solo está disponible con protocolo DALI (DA), CRI 80 (.8) 700mA.
 *2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.
 *3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.



OKKO

Guaranteed success for your lighting projects.

The answer is always yes. There are no limits. Excellent, customisable designs that enhance any architectural and design project. A tasteful, versatile choice that never disappoints.

OK a todas tus propuestas de iluminación.

Ok a todo. Sin límites. Y con gran capacidad de personalización de los embellecedores, para integrarse en proyectos globales de arquitectura y decoración. Sin duda, una elección segura, versátil y que no defrauda.



new



FINISHES

● COLORS



DIMENSIONS

◆ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

10254 OKKO MODULAR | PN
Pag. 138


.SR
SURFACE

10254 OKKO MODULAR | SR
Pag. 138



OKKO MODULAR

REF 10254.PN | 10254.SR

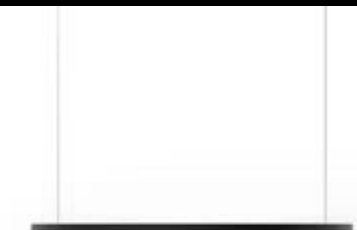

PENDANT | SURFACE


.SR

.PN

PENDANT | SURFACE

OKKO	REF.	DIMENSION	FINISH	POSITIONS
	10254	.65	●	10
		.95		15
		.125		20

Configure your OKKO combining LED modules and OPAQUE as you wish.
Configura tu OKKO combinando los módulos LED y OPAQUES que desees.

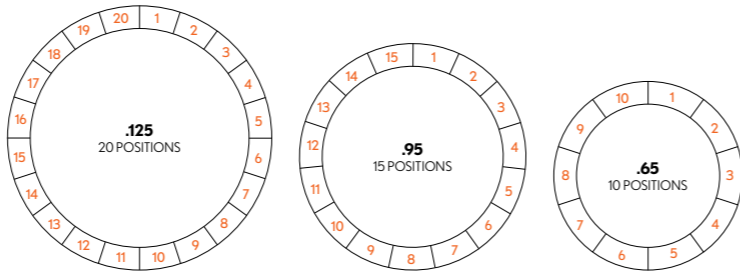

Reference order | 10254.XX | .SR | .PN | .XX

OKKO LED MODULES	REF.	DIMENSION	POSITION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	SKETCH	
	110003	.65	.01 ~ .10	●	.20 .40 .60	.ST	.9	.27	.30	.40	541 586 671 7 500	
		.95	.01 ~ .15					.27	.30	.40		
		.125	.01 ~ .20					.27	.30	.40		

Reference order | 110003.XX.XX.XX.ST9.XX

OKKO OPAQUE	REF.	DIMENSION	FINISH
	ACC10254	.65	●
		.95	
		.125	

Reference order | ACC10254.XX.XX

OKKO DRIVER	DIMENSION *	DIMM	
DR10254	.01	1 - 4 modules	.DA .PU .D1
	.02	5 - 10 modules	
	.03	11 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	

Reference order | DR10254.XX.XX

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SC20.XX

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB03	CB04.OP *	CB05	


* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE EJEMPLO DE REFERENCIA



Create an OKKO like the one in the example. Crea un OKKO como el del ejemplo:

- Select PROFILE . Selecciona PERFIL. 10254.95.PN.XX
- Confirm LED MODULES position. Confirma posición de los módulos LED. 110003.95.01.XX.XX.ST9.XX.XX
110003.95.02.XX.XX.ST9.XX.XX
110003.95.03.XX.XX.ST9.XX.XX
110003.95.06.XX.XX.ST9.XX.XX
110003.95.07.XX.XX.ST9.XX.XX
110003.95.08.XX.XX.ST9.XX.XX
110003.95.11.XX.XX.ST9.XX.XX
110003.95.12.XX.XX.ST9.XX.XX
110003.95.13.XX.XX.ST9.XX.XX
- Add number of OPAQUE diffusers. Añade el número de difusores OPAQUE. ACC10254.95.XX (6 uds.)
- Verify DRIVER depending on the number of LED modules. Verifica el DRIVER dependiendo del número de módulos LED. DR10254.02.XX

Select finishes




OKKO MODULAR


REF 10254.PN | 10254.SR

Let's create


Give full rein to your imagination. Configure your Okko Modular to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu Okko Modular según las necesidades de tu proyecto

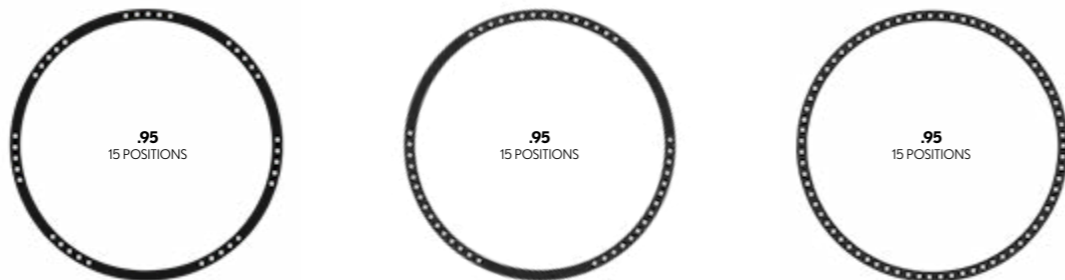


PHOTOMETRY

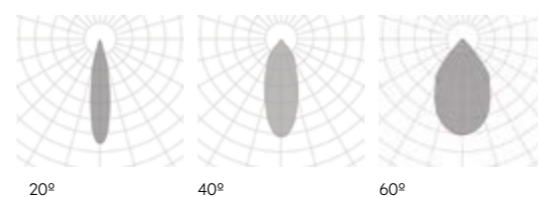

INCLUDED (.PN)



PROFILE





FINISHES

● COLORS



DIMENSIONS

◆ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES



.PN

3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit

new

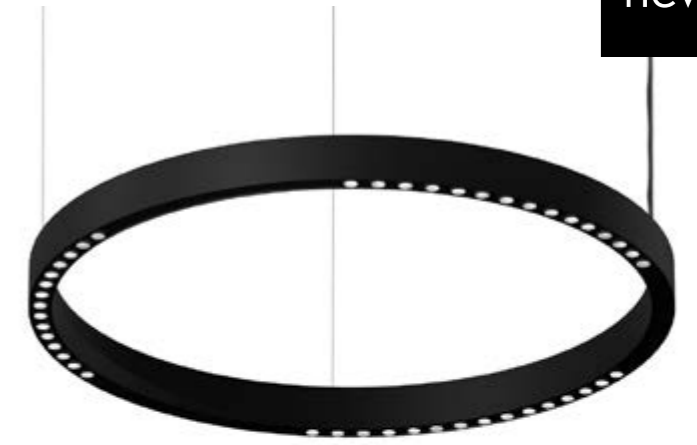


ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

INSTALLATIONS

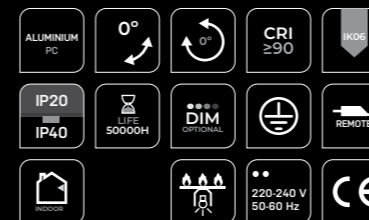

OKKO PLUS MODULAR

REF 10252.PN | 10252.SR

.PN
PENDANT

10252 OKKOPLUSMODULAR|PN
Pag. 142

.SR
SURFACE

10252 OKKO PLUS MODULAR|SR
Pag. 142



PENDANT | SURFACE

.SR


.PN

PENDANT | SURFACE

OKKO PLUS	REF.	DIMENSION	FINISH	POSITIONS
	10252	.65	●	10
		.95		15
		.125		20

Reference order | 10252.XX | .SR | .PN | .XX

Configure your OKKO PLUS combining LED modules and OPAQUE as you wish.
Configura tu OKKO PLUS combinando los módulos LED y OPAQUES que desees.

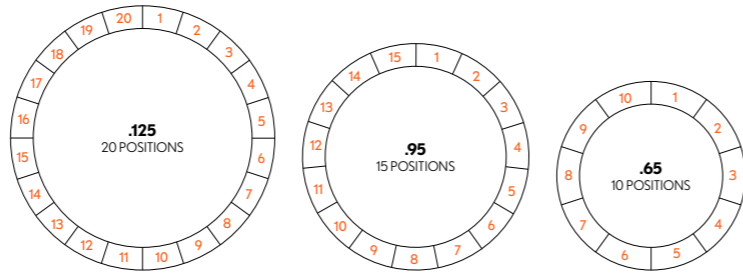

OKKO PLUS LED MODULES	REF.	DIMENSION	POSITION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	SKETCH	
	110002	.65	.01 ~ .10	●	.20 .40 .60	.ST	.9	.27	.30	.40		
		541	586					671	7	500		
		541	586					671	7	500		
		.95	.01 ~ .15					541	586	671	7	500
		.125	.01 ~ .20					541	586	671	7	500

Reference order | 110002.XX.XX.XX.XX.ST9.XX

OKKO PLUS OPAQUE	REF.	DIMENSION	FINISH	SKETCH
	ACC10252	.65	●	
		.95		
		.125		

Reference order | ACC10252.XX.XX

OKKO PLUS DRIVER	DIMENSION	DIMM
DR10252	.01	1 - 4 modules
	.02	5 - 10 modules
	.03	11 - 13 modules
	.04	14 - 17 modules
	.05	18 - 20 modules

Reference order | DR10252.XX.XX

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
		CB10	●
		CB02	
		CB05	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.65	●
		SC23	.95 .125	

Reference order | SC20.XX

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB03	CB04.OP*	CB05	
			CB12


*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE EJEMPLO DE REFERENCIA



Create an OKKO PLUS like the one in the example. Crea un OKKO PLUS como el del ejemplo:

- Select PROFILE. *Selecciona PERFIL.* 10252.95.PN.XX
- Confirm LED MODULES position. *Confirma posición de los módulos LED.* 110002.95.01.XX.XX.ST9.XX.XX
110002.95.02.XX.XX.ST9.XX.XX
110002.95.03.XX.XX.ST9.XX.XX
110002.95.06.XX.XX.ST9.XX.XX
110002.95.07.XX.XX.ST9.XX.XX
110002.95.08.XX.XX.ST9.XX.XX
110002.95.11.XX.XX.ST9.XX.XX
110002.95.12.XX.XX.ST9.XX.XX
110002.95.13.XX.XX.ST9.XX.XX
- Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.* ACC10252.95.XX (6 uds.)
- Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.* DR10252.02.XX

Select finishes




OKKO PLUS MODULAR


REF 10252.PN | 10252.SR

Let's create


Give full rein to your imagination. Configure your OKKO PLUS MODULAR to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu OKKO PLUS MODULAR según las necesidades de tu proyecto

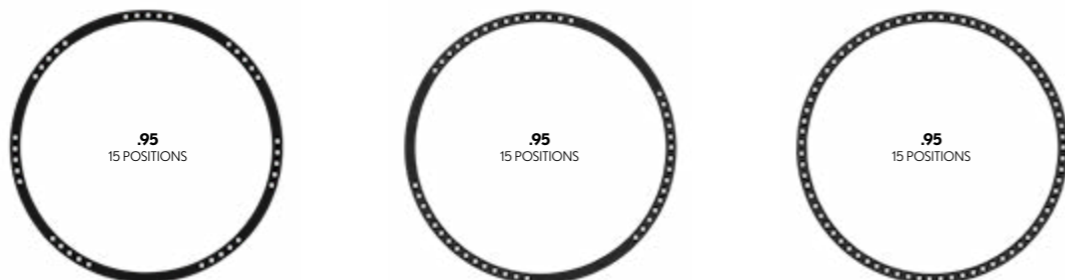


PHOTOMETRY

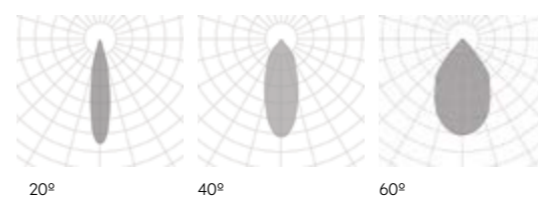

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE
SR
PN

PENDANT | SURFACE

PENDANT | SURFACE

PENDANT | SURFACE

A blank canvas.

Imagination, illumination. Limitless light. If that sounds good to you, meet our Line Profiles! Extensive, versatile, with reliable technology and features.

It comes with a wide variety of high quality extruded aluminium profiles with opal, microprismatic or silicone diffusers: Alba, Wing, Alzira, Edge, Linggo, Okkia, Bubble and Bold, for the most daring.

Un lienzo en blanco.


Imaginar, proyectar, iluminar. Sin condicionantes. Si eso es lo que se pretende, nuestros perfiles lineales y curvos son la familia de productos ideal. Por extensa, por versátil, por tecnología y prestaciones.

Se presentan en una amplia gama de perfiles de aluminio extruido de alta calidad y con difusores opal, microprismático o silicona: Alba, Wing, Alzira, Edge, Linggo, Okkia, Bubble y Bold, para los más atrevidos.




LINES

PENDANT | SURFACE

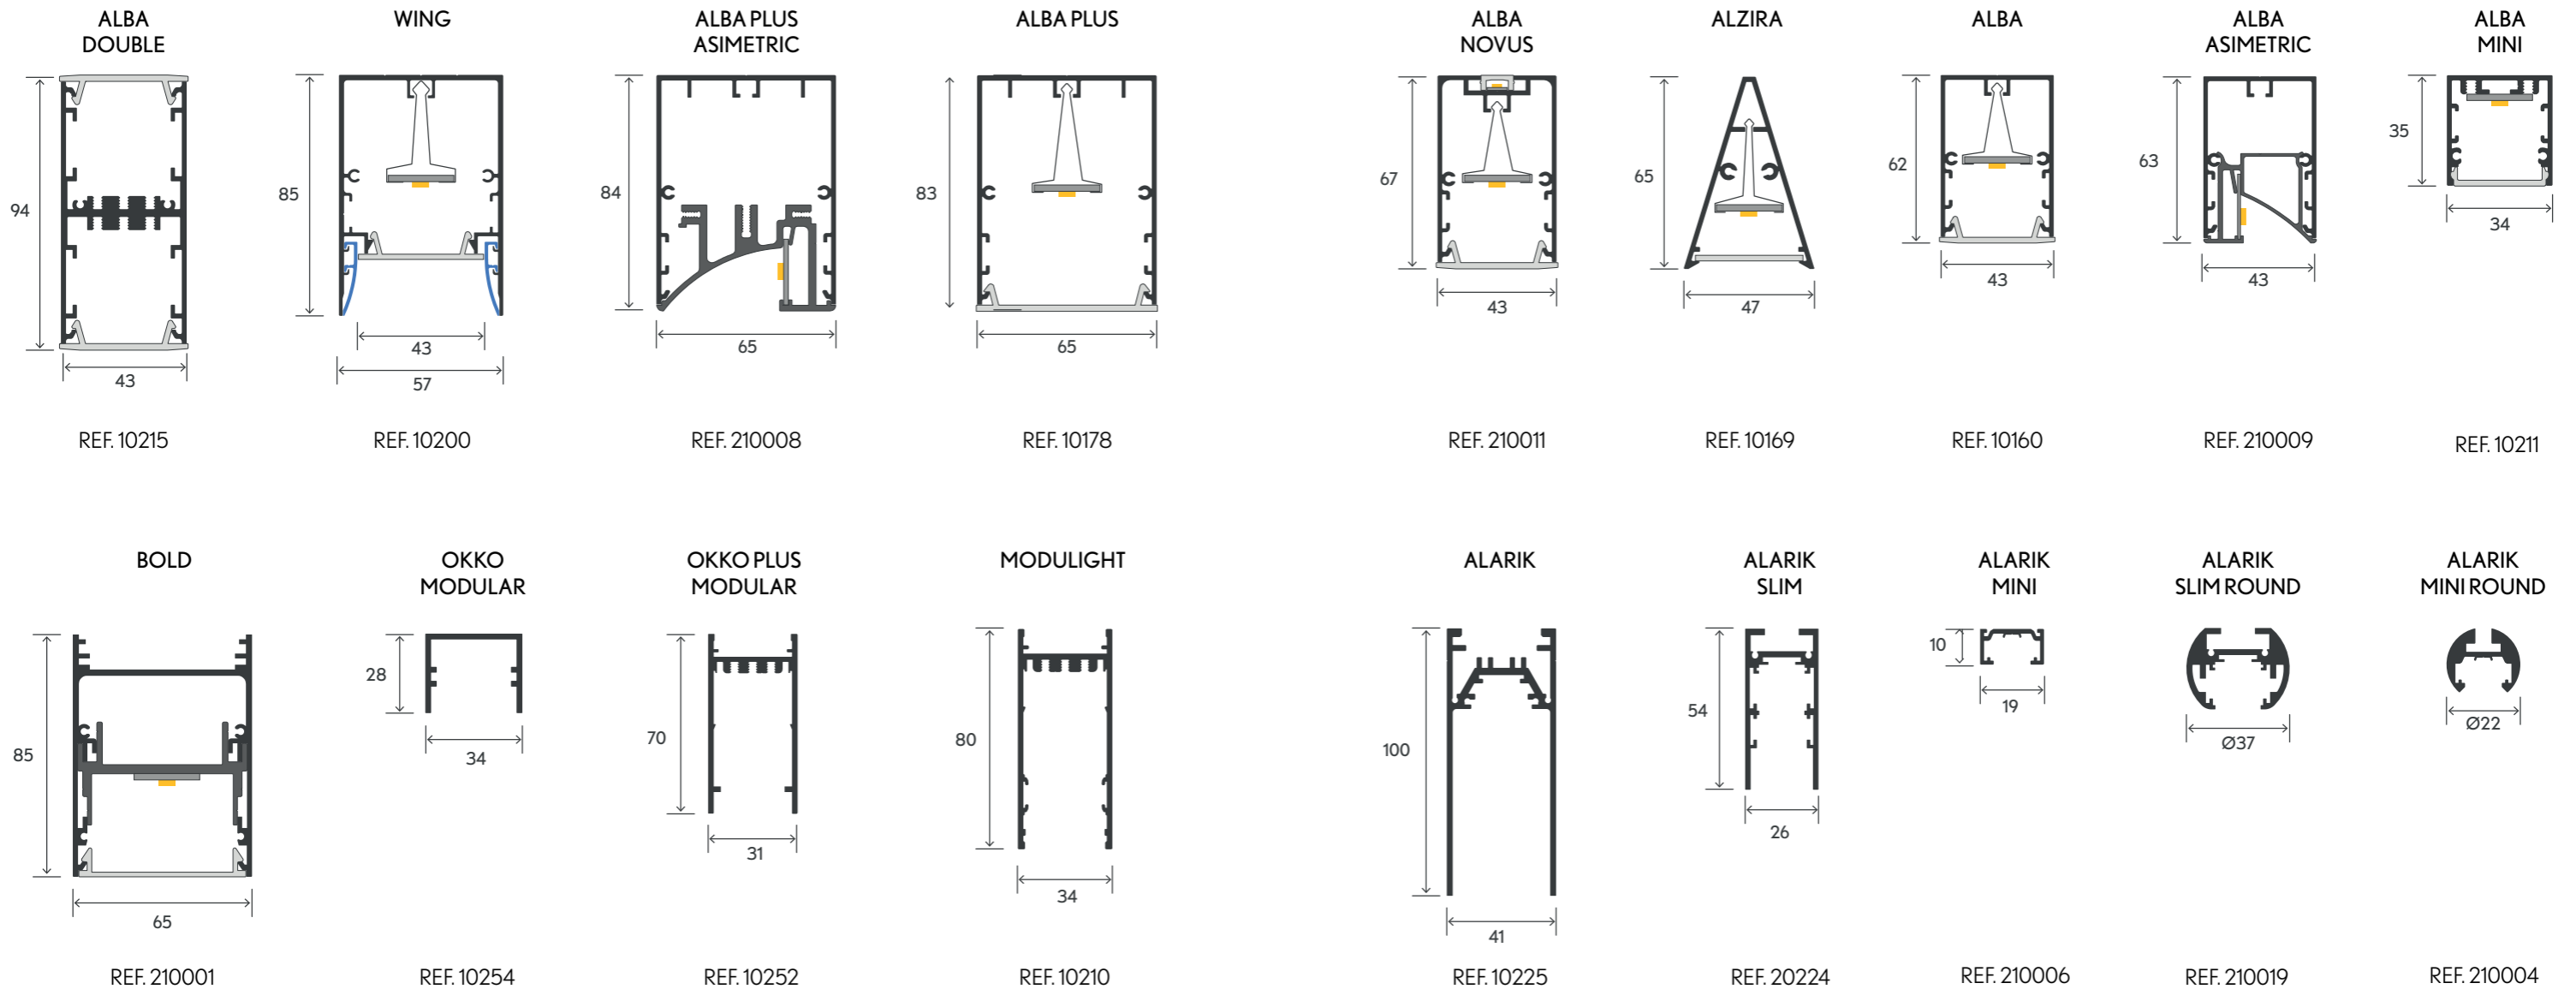

PROFILE OVERVIEW

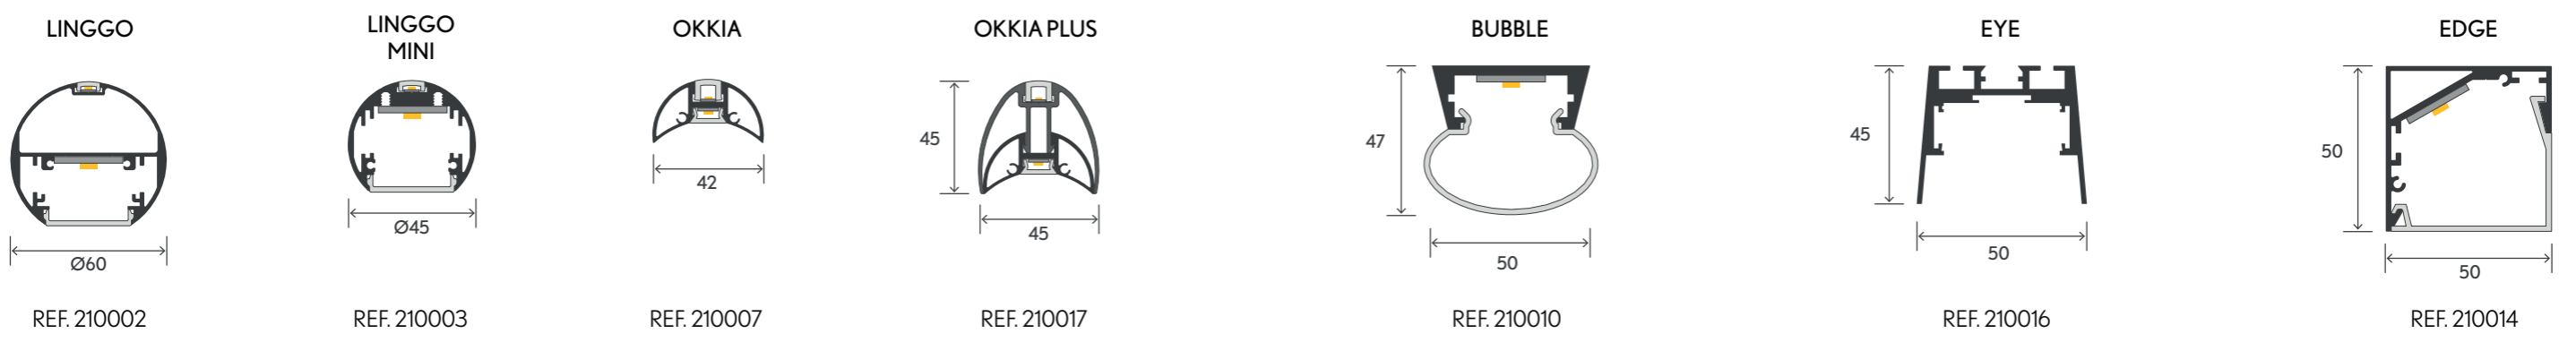



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

790 | 1185 | 1580 | 1975

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN


2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit



new



ON DEMAND

Emergency Lighting *
Custom dimensions
Motion Detection
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

INSTALLATIONS



OKKO MODULAR LINE

REF 210012.PN | 210012.SR

.PN
PENDANT



·210012 OKKO MODULAR LINE|
PN - Pag. 150

.SR
SURFACE


·210012 OKKO MODULAR LINE|
SR - Pag. 150

.RF
RECESSED FRAME

·210012 OKKO MODULAR | RF-Pag.
468

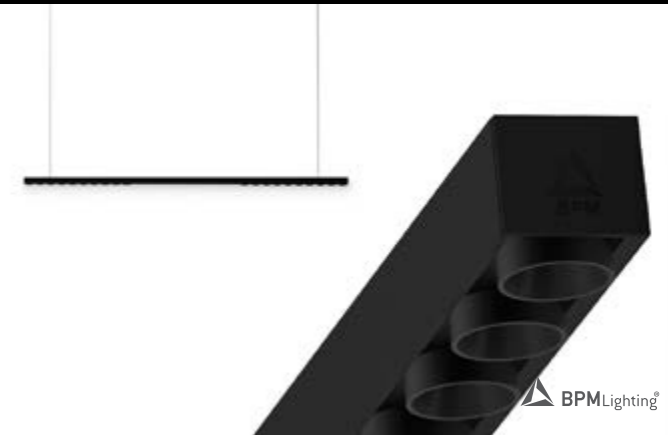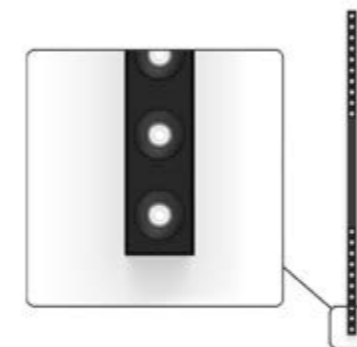

OKKO LINE	REF.	DIMENSION	FINISH	POSITIONS
	210012	.02	●	2
		.03		3
		.04		4
		.05		5

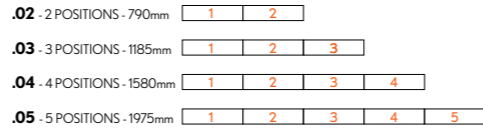

Reference order | 210012.XX.SR.PN.XX

OKKO LED MODULES	REF.	DIMENSION	POSITION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	SKETCH	
	110004	.10	.01	●	■	.20 .40 .60	.ST	.9	1114 1245 1320	11.5	500	
			.02									
			.03									
			.04									
			.05									

Reference order | 110004.XX.XX.XX.ST9.XX

OPAQUE	REF.	DIMENSION	FINISH	SKETCH
	ACC210012	.10	●	


Reference order | ACC210012.XX.XX

OKKO LINE DRIVER	DIMENSION	DIMM
DR210012	.01	1 - 5 modules
	.02	6 - 9 modules
	.03	10 - 13 modules
	.04	14 - 17 modules
	.05	18 - 20 modules

Reference order | DR210012.XX.XX

COVERT KIT	REF.	FINISH
	TF24	●

Reference order | TF24.SR.PN.XX

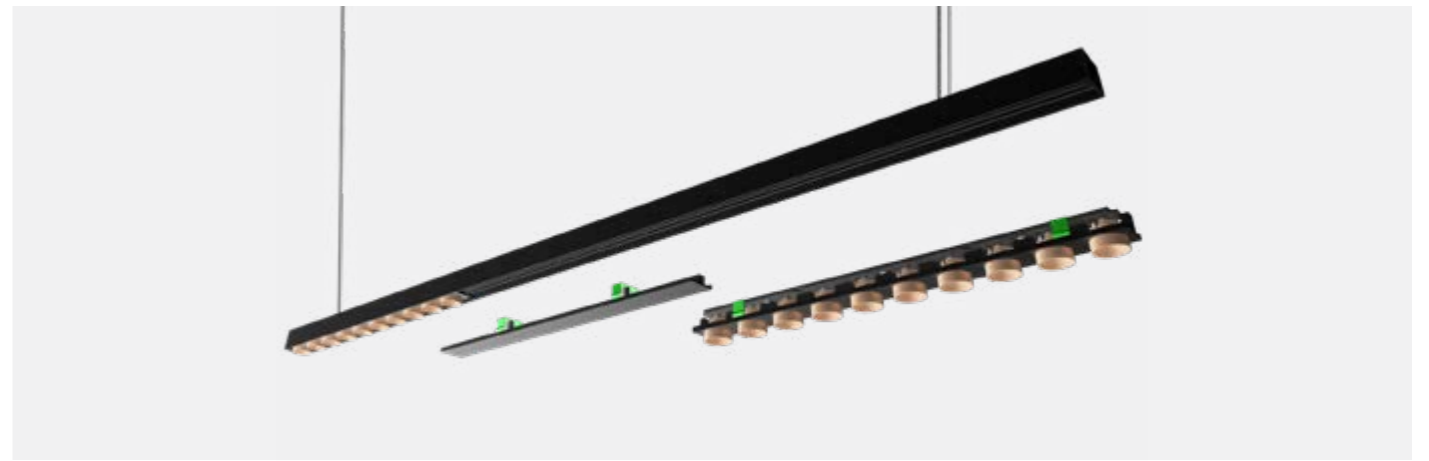

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB04.OP*	CB09.32	


* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE EJEMPLO DE REFERENCIA



Create an OKKO like the one in the example. Crea un OKKO como el del ejemplo:

- Select PROFILE. *Selecciona PERFIL.* 210012.05.PN.XX
- Confirm LED MODULES position. *Confirma posición de los módulos LED.* 110004.10.01.XX.XX.ST9.XX.XX
110004.10.02.XX.XX.ST9.XX.XX
110004.10.04.XX.XX.ST9.XX.XX
110004.10.05.XX.XX.ST9.XX.XX
- Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.* ACC210012.10.XX (1ud.)
- Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.* DR210012.01.XX

Select finishes




OKKO MODULAR LINE


REF 210012.PN | 210012.SR




PHOTOMETRY

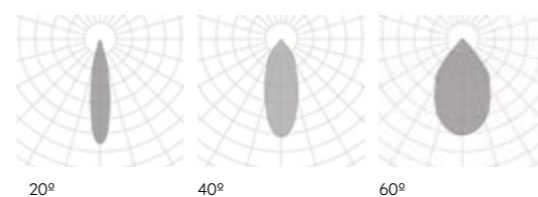

INCLUDED (.PN)



PROFILE



SR
PN
PENDANT | SURFACE



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

790 | 1185 | 1580 | 1975

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit



ON DEMAND

Emergency Lighting*
Custom dimensions
Motion Detection
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·210013 OKKO PLUS MODULAR
LINE | PN - Pag. 154

.SR
SURFACE

·210013 OKKO PLUS MODULAR
LINE | SR - Pag. 154


.RF
RECESSED FRAME

·210012 OKKO PLUS MODULAR |
RF - Pag. 470



OKKO PLUS MODULAR LINE

REF 210013.PN | 210013.SR

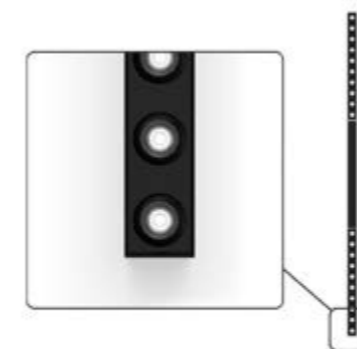

PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

OKKO PLUS LINE	REF.	DIMENSION	FINISH	POSITIONS
	210013	.02		2
		.03		3
		.04		4
		.05		5



Reference order | 210013.XX | .SR | .PN | .XX

OKKO PLUS LED MODULES	REF.	DIMENSION	POSITION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	SKETCH
	110005	.10	.01		.20 .40 .60	.ST	.9	1114 1245 1320	11.5	500	
			.02								
			.03								
			.04								
			.05								

Reference order | 110005.XX.XX.XX | .ST9.XX

OKKO PLUS OPAQUE	REF.	DIMENSION	FINISH
	ACC210013	.10	


Reference order | ACC210013.XX.XX

OKKO PLUS LINE DRIVER	DIMENSION	DIMM
DR210013	.01	1 - 5 modules
	.02	6 - 9 modules
	.03	10 - 13 modules
	.04	14 - 17 modules
	.05	18 - 20 modules

Reference order | DR210013.XX.XX

COVERT KIT	REF.	FINISH
	TF25	

Reference order | TF25 | .SR | .PN | .XX

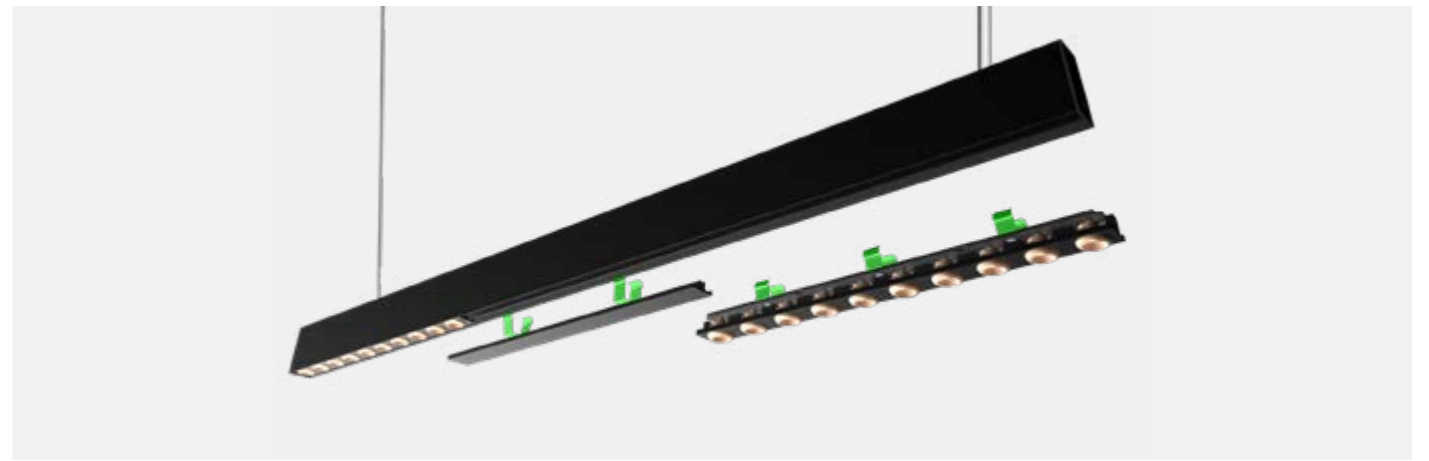

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
CB09.12	CB04.OP *	CB09.32	

* No finish color, use this reference as it is (CB04.OP). Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE EJEMPLO DE REFERENCIA

Create an OKKO PLUS like the one in the example. Crea un OKKO PLUS como el del ejemplo:



.05 - 5 POSITIONS

- Select PROFILE. *Selecciona PERFIL.* 21001305.PN.XX
- Confirm LED MODULES position. *Confirma posición de los módulos LED.* 110005.10.01.XX.XX.ST9.XX.XX
110005.10.02.XX.XX.ST9.XX.XX
110005.10.04.XX.XX.ST9.XX.XX
110005.10.05.XX.XX.ST9.XX.XX
- Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.* ACC210013.10.XX (1ud.)
- Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.* DR210013.01.XX


Select finishes




OKKO PLUS MODULAR LINE

REF 210013.PN | 210013.SR


PHOTOMETRY

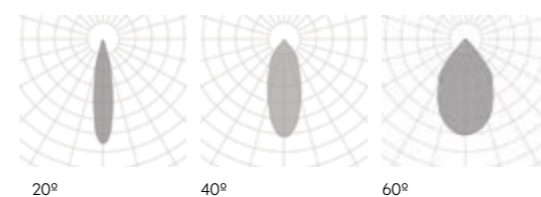

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE

.SR
.PN



FINISHES

● PROFILE COLORS



● EYE COLORS



DIMENSIONS

● LENGTHS

1m

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)

NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit



.SR
.PN

PENDANT | SURFACE

INSTALLATIONS

.PN
PENDANT

·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158


.TR
TRIMLESS

·210016 EYE|TR
Pag. 610



EYE

REF 210016.PN | 210016.SR

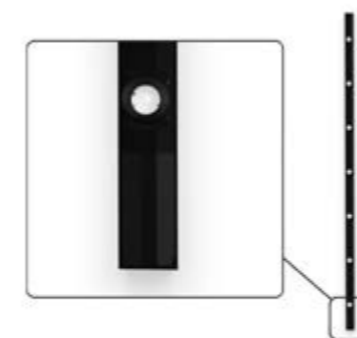

EYE	REF.	DIMENSION	FINISH	SKETCH
	210016	.01 1m.	.BK-BK .WH-WH	

Reference order | 210016.XX | .SR | .PN | .XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

EYE MODULE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	Vdc	DIMM	SKETCH
	20210	.01	●	.AC	.ST	.9	419 474 510	5	48	-	

Reference order | 20210.01.XX.AC.ST9.XX



OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

BOXES (.PN)

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF16	●

Reference order | TF16 | .SR | .PN | .XX

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH
	●
	.BK-BK .WH-WH

Reference order | UR16.XX

POWER FEEDER UNIT	FINISH
	●
	.BK-BK .WH-WH

Reference order | ACC210016.CA.XX

Select profile finishes




.WH-WH .BK-BK

Select eye finishes



.WH-WH .BK-BK .GC-GC

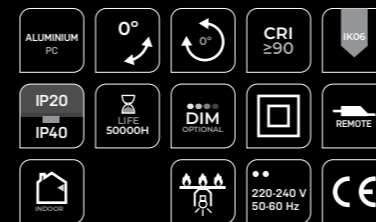

EYE


REF 210016.PN | 210016.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



50

PENDANT | SURFACE

.SR
.PN

PENDANT | SURFACE

MINI
PATRICIA ROUND LENSES

MINI
PATRICIA ZOOM

MINI
PATRICIA .02

MINI
PATRICIA .01

MINI
PATRICIA FLAT

MINI
PATRICIA LOL

MINI
MOTION LENSES

MINI LED
MODULES

ALARIK MINI

Mastering light has never been so easy

Magnetic. That's the look of lighting with the Alarik family. Incredibly dynamic, it features a magnetic application system and a choice of finishes, sizes and profiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round make up a collection of almost gadget-like models with an important mission, to get the absolute best from a lighting system.

Jugar con luz nunca ha sido tan fácil

Puro magnetismo. Así es la atracción que provoca iluminar con la familia Alarik. Extremadamente dinámica gracias a su sistema de aplicación imantado y a sus diferentes acabados, tamaños y perfiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round, un conjunto de modelos que casi parecen gadgets al servicio de una "importante misión": sacar todo el jugo posible a una instalación de luminarias.

new



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

- MINI PATRICIA
- MINI PATRICIA LOL
- MINI PATRICIA ZOOM
- MINI MOTION LENSES
- MINI LENSES
- MINI LED MODULES
- MINI PATRICIA FLAT
- MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 2m

.SR

Surface mounting kit

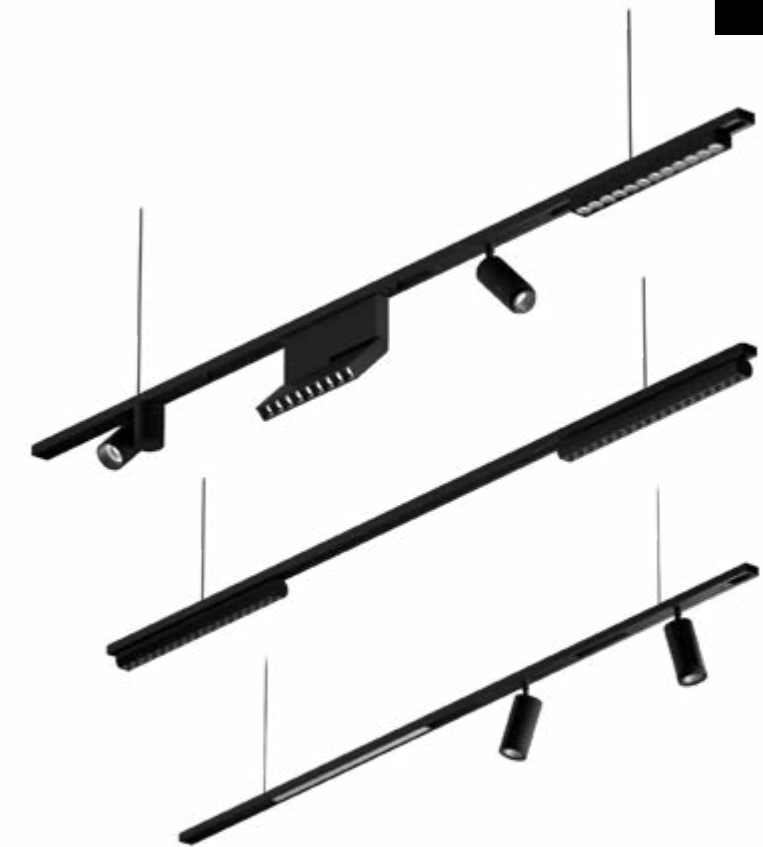

ON DEMAND
Custom dimensions



PENDANT | SURFACE

INSTALLATIONS



.PN
PENDANT

·210006 ALARIK MINI | PN
Pag. 164




.SR
SURFACE

·210006 ALARIK MINI | SR
Pag. 164




.TR
TRIMLESS

·210006 ALARIK MINI | TR
Pag. 616

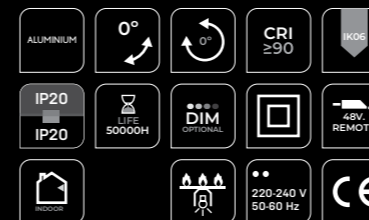

ALARIK MINI

REF 210006.PN | 210006.SR

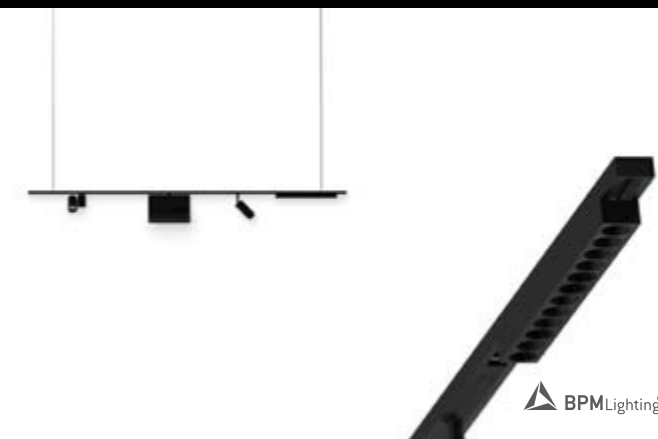

ALARIK MINI	DIMENSION	FINISH	SKETCH
	210006 .01 1m	●	

Reference order | 210006.XX | .SR | .PN | .XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH	SKETCH
	ACC210006.CA	● .BK-BK .WH-WH	

Reference order | ACC210006.CA.XX

MINI PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	519	6	48	-	
							.30	557				
							.40	583				

Reference order | 450003.XX.XX.XX.ST9.XX.XX

MINI PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450001	.01	●	.15 .24 .30	.ST	.9	.27	519	3	48	-	
							.30	557				
							.40	583				
	450001	.02	●	.15 .24 .30	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST9.XX.XX

MINI PATRICIA LOL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450002	.01	●	.15 .24 .36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.XX.XX.XX.ST9.XX.XX


MINI PATRICIA FLAT	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	548	6	48	-	
							.30	588				
							.40	616				

Reference order | 450007.XX.XX.XX.ST9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450008	.01	●	.30 .36 .60	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order | 450008.XX.XX.XX.ST9.XX.XX

• Select finishes








- ALUMINIUM
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- 48V. REMOTE
- RECOOL
- 220-240 V 50-60 Hz
- CE

ALARIK MINI

REF 210006.PN | 210006.SR

PHOTOMETRY

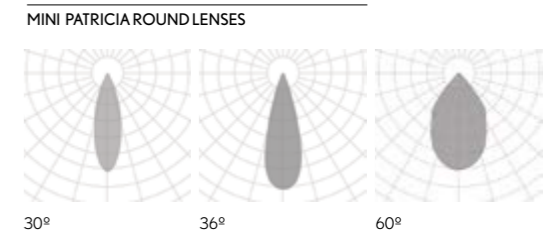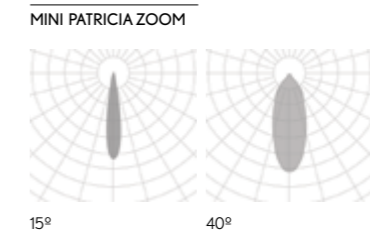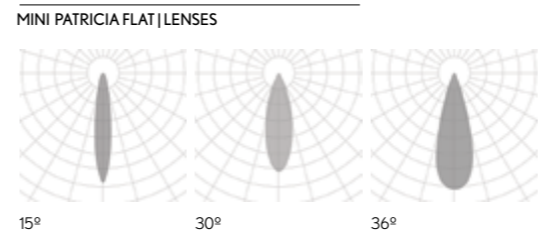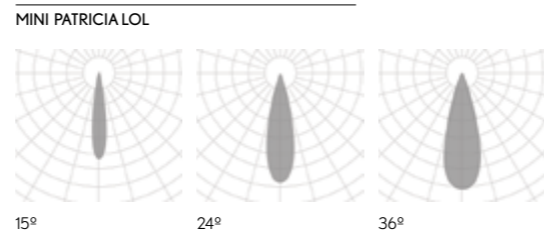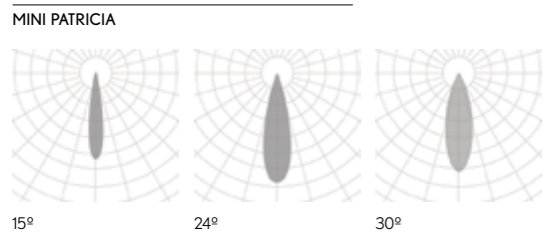

PENDANT | SURFACE

.SR
.PN

PENDANT | SURFACE

MINI LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order 450005.XX.XX.XX.ST9.XX.XX

MINI MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	833	9	48	-	
							.30	892				
							.40	935				

Reference order 450004.XX.XX.XX.ST9.XX.XX

MINI LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	948	6	48	-	
							.30	960				
							.40	990				
	450006	.02	●	.OP	.ST	.9	.27	1896	12	48	-	
							.30	1920				
							.40	1980				
	450006	.03	●	.OP	.ST	.9	.27	3792	24	48	-	
							.30	3840				
							.40	3960				

Reference order 450006.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●

Reference order TF21.SR.PN.XX

SUSPENSION KIT	REF.
	ACC210006.SC

Reference order ACC210006.SC

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	WALL-CEILING JOINT	FINISH
					● .BK .WH
UR21	UL21	UC21	UT21	UV21	


BOXES (.PN)

CONNECTION BOX FOR ELECTRIC CONVERTER	ELECTRIC CONVERTER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order XXXX.XX

Reference order XX.XX

● Select finishes




ALARIK MINI

REF 210006.PN | 210006.SR

PHOTOMETRY

MINI LENSES

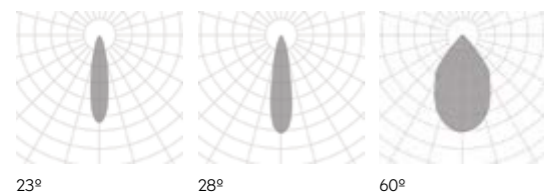


PHOTOMETRY

MINI LED MODULES



INCLUDED (.PN)

PROFILE



new



FINISHES

• COLORS



DIMENSIONS

• LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K


▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m

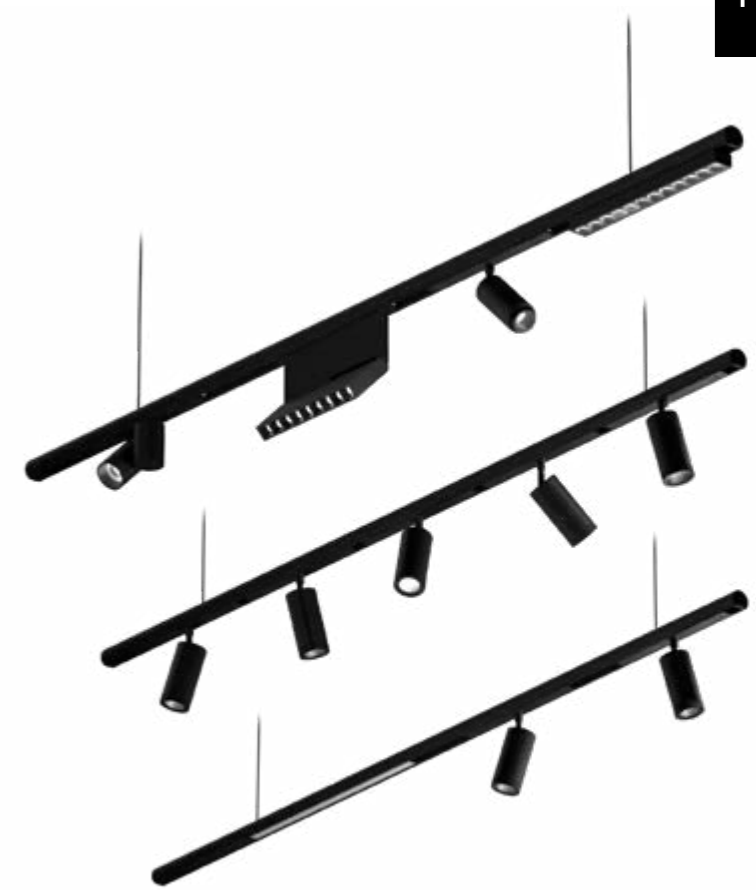

ON DEMAND
Custom dimensions




PENDANT

INSTALLATIONS




.PN
PENDANT

210004 ALARIK MINIROUND | PN
Pag. 170

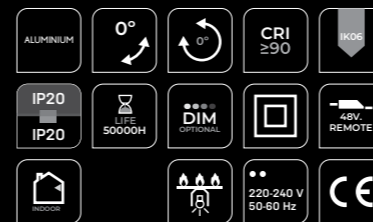

ALARIK MINIROUND

REF 210004.PN

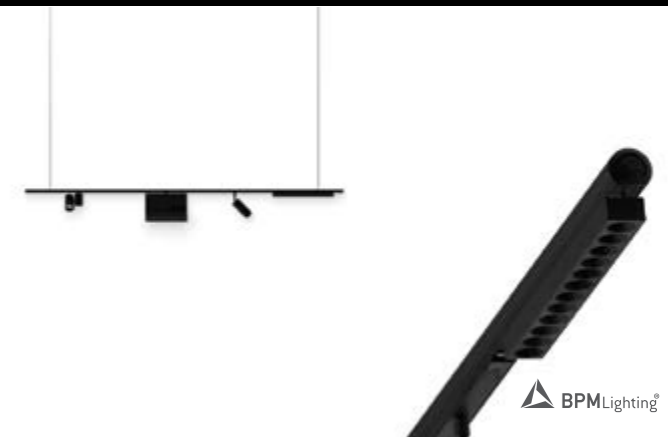

ALARIK MINI ROUND	REF.	DIMENSION	FINISH	SKETCH
	210004	.01 1m.	●	

Reference order | 210004.XX.PN.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH	SKETCH
	ACC210004.CA	● .BK-BK .WH-WH	

Reference order | ACC210004.CA.XX

MINI PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH	
	450003	.01	●	■	.15-40	.ST	.9	.27	576	6	48	-	
								.30	607				
								.40	695				

Reference order | 450003.XX.XX.XX.ST9.XX.XX

MINI PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450001	.01	●	■	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02	●	■	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST9.XX.XX

MINI PATRICIA LOL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450002	.01	●	■	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.XX.XX.XX.ST9.XX.XX



MINI PATRICIA FLAT	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450007	.01	●	■	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.XX.XX.XX.ST9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450008	.01	●	■	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.XX.XX.XX.ST9.XX.XX






• Select finishes

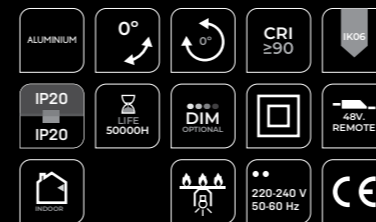

ALARIK MINI ROUND

REF 210004.PN

PHOTOMETRY

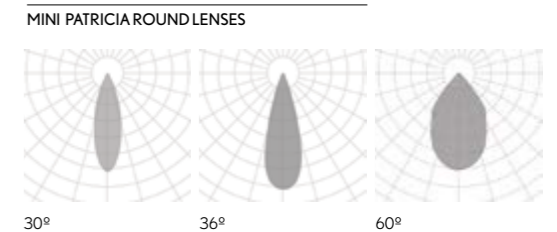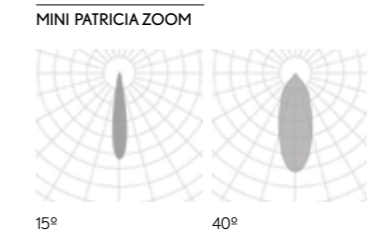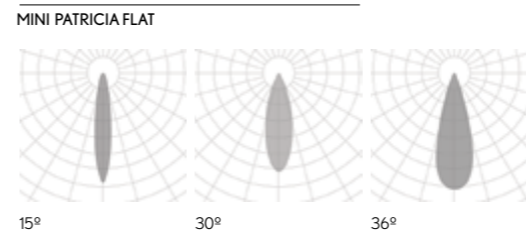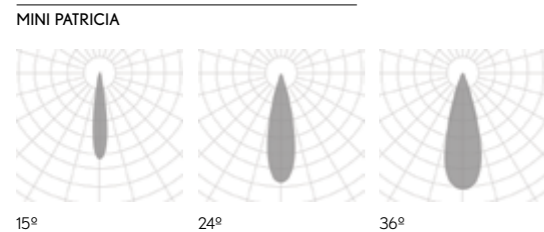

PENDANT

.PN

MINI LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	558	12	48	-	
							.30	560				
							.40	604				

Reference order | 450005.XX.XX.XX.ST9.XX.XX

MINI MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	576	9	48	-	
							.30	607				
							.40	695				

Reference order | 450004.XX.XX.XX.ST9.XX.XX

MINI LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	558	6	48	-	
							.30	560				
							.40	604				
	450006	.02	●	.OP	.ST	.9	.27	1115	12	48	-	
							.30	1120				
							.40	1208				
	450006	.03	●	.OP	.ST	.9	.27	1670	24	48	-	
							.30	1680				
							.40	1812				

Reference order | 450006.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF22	●

Reference order | TF22.PN.XX

SUSPENSION KIT	REF.
	ACC210004.SC

Reference order | ACC210004.SC

JOINTS & CONNECTORS

LINEAR JOINT	FINISH
	●
	.BK .WH
ACC210004.UL	


Reference order | ACC210004.UL

BOXES (.PN)

CONNECTION BOX FOR ELECTRIC CONVERTER	ELECTRIC CONVERTER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes




ALARIK MINI ROUND

REF 210004.PN


PHOTOMETRY

MINI LENSES

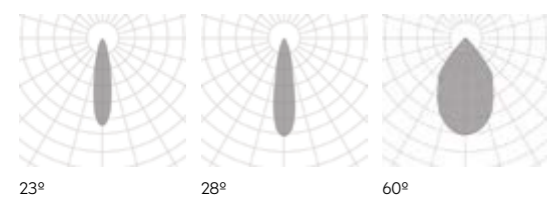


PHOTOMETRY

MINI LED MODULES



INCLUDED

PROFILE



22

PENDANT

Mastering light has never been so easy

It's playtime! Lighting design with Alarik family is an exercise of creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

¡Que empiece el juego! Iluminar con la familia Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

ALARIK SLIM

new



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m

.SR

Surface mounting kit

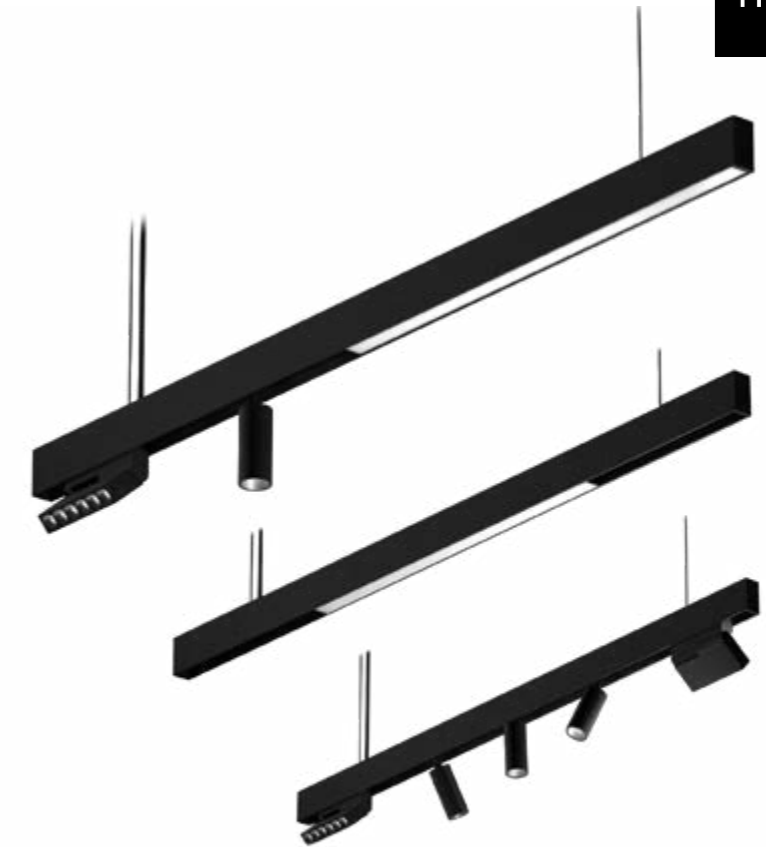

ON DEMAND
Custom dimensions



PENDANT | SURFACE

INSTALLATIONS



.PN
PENDANT

·20224 ALARIK SLIM |PN
Pag. 178

.SR
SURFACE


·20224 ALARIK SLIM |SR
Pag. 178

.RF
RECESSED FRAME

·20224 ALARIK SLIM |RF
Pag. 428

.TR
TRIMLESS

·20224 ALARIK SLIM |TR
Pag. 622

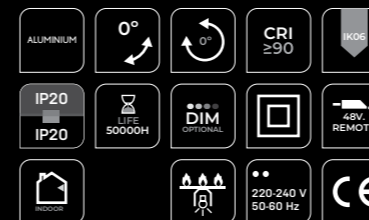

ALARIK SLIM

REF 20224.PN | 20224.SR



ALARIK SLIM	REF.	DIMENSION	FINISH	SKETCH
	20224	.01 1m	●	

Reference order | 20224.XX | .SR | .PN | .XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				

Reference order | 11546.XX.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11551	.01	.BK-BK .WH-WH	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				

Reference order | 11551.XX.XX.XX.ST9.XX.XX

SLIM LED TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST9.XX.XX



SLIM WALL WASHER	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST9.XX.XX


● Select finishes

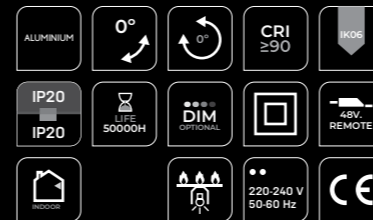


ALARIK SLIM

REF 20224.PN | 20224.SR


PHOTOMETRY

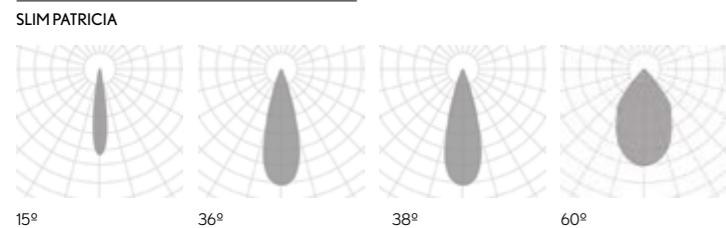

PHOTOMETRY

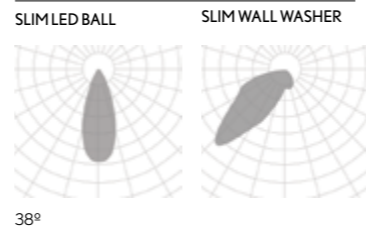


PHOTOMETRY

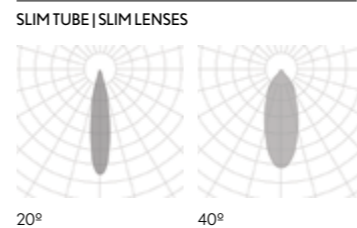

INCLUDED (.PN)

PROFILE



PENDANT | SURFACE

.SR
.PN

SLIM MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order | TF19.SR.PN.XX


SUSPENSION KIT	REF.
	ACC20224.SC

Reference order | ACC20224.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC20224.PKDB

Reference order | ACC20224.PKDB

● Select finishes



.WH-WH .BK-BK

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH	ANGLE JOINT CONNECTOR	FINISH	POWER FEEDER UNIT	FINISH
	● .BK-BK .WH-WH		● .BK-BK .WH-WH		● .BK-BK .WH-WH

ACC20224.UR.XX

ACC20224.UL.XX

ACC20224.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT

UR19

UL19

UV19


CURVE JOINT KIT *1	REF.	DIMENSION	DEGREE	FINISH	SKETCH
	ACC.20224	.01	45°	● .BK-BK .WH-WH	

Reference order | ACC20224.XX.45.XX

CURVE JOINT KIT *1	REF.	DIMENSION	DEGREE	FINISH	SKETCH
	ACC.20224	.01	90°	● .BK-BK .WH-WH	

Reference order | ACC20224.XX.90.XX

*1 LED components can not be installed in curve joints. Los componentes LED no se pueden instalar en las uniones curvas.

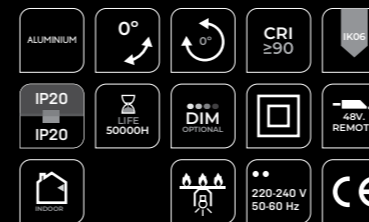


ALARIK SLIM

REF 20224.PN | 20224.SR

PHOTOMETRY

SLIM MOTION LENSES

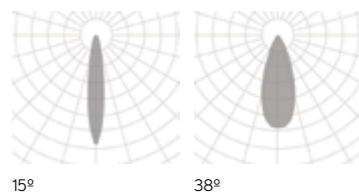


15°

38°

PHOTOMETRY

SLIM LED MODULES



OPAL

SR
PN
PENDANT | SURFACE

new



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM MODULES
SLIM LENSES
SLIM MOTION LENSES
SLIM WALL WASHER

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m

.SR

Surface mounting kit

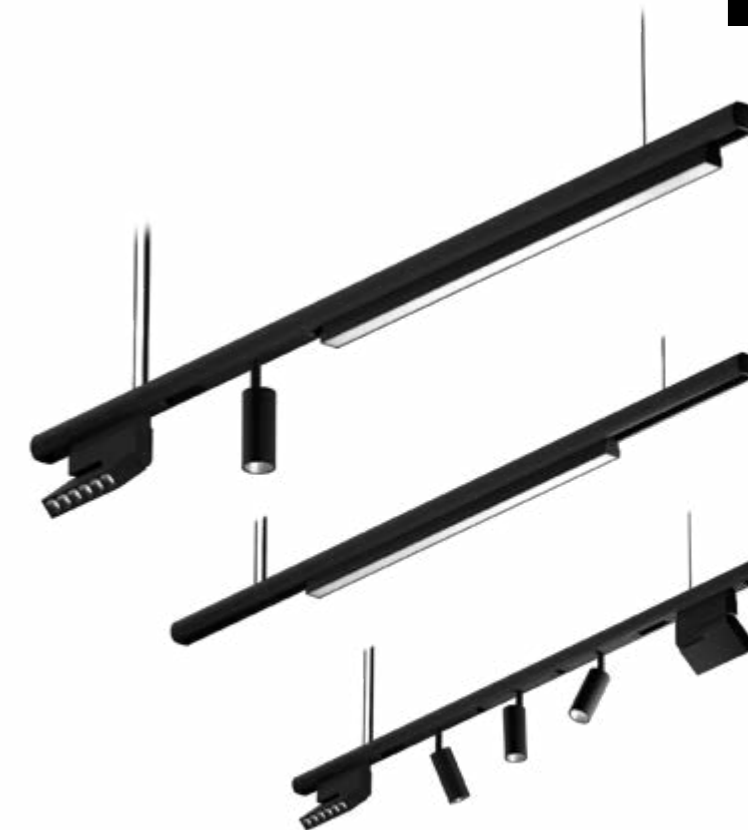

ON DEMAND
Custom dimensions

INSTALLATIONS



.PN
PENDANT

·210019 ALARIK SLIM ROUND | PN
Pag. 184




.SR
SURFACE

·210019 ALARIK SLIM ROUND | SR
Pag. 184





ALARIK SLIM ROUND

REF 210019.PN | 210019.SR

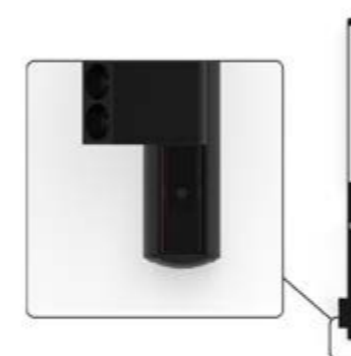


PENDANT | SURFACE
SR
PN

ALARIK SLIM ROUND	REF.	DIMENSION	FINISH	SKETCH
	210019	.01 1m	●	





Reference order | 210019.XX | .SR | .PN | .XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200



Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	10246.DR	200W



Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				





Reference order | 11544.XX.XX.XX.ST9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				



Reference order | 11546.XX.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11551	.01	●	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				





Reference order | 11551.XX.XX.XX.ST9.XX.XX

SLIM TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST9.XX.XX



SLIM WALL WASHER	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11550	.06	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11548	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.12	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST9.XX.XX

● Select finishes

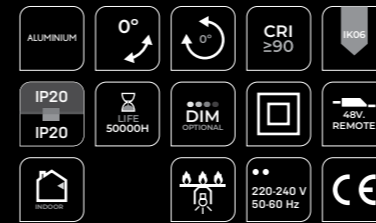


ALARIK SLIM ROUND

REF 210019.PN | 210019.SR


PHOTOMETRY

SLIM PATRICIA

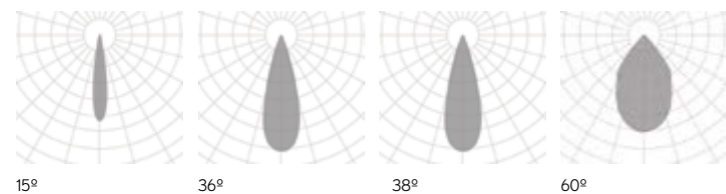


PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER

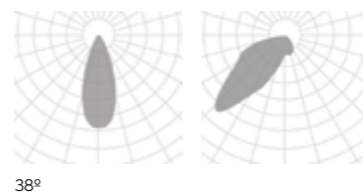


PHOTOMETRY

SLIM TUBE | SLIM LENSES

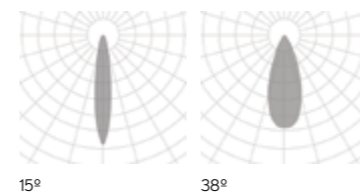

INCLUDED (.PN)

PROFILE



SR
PN
PENDANT | SURFACE

SLIM MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VaC	DIMM	SKETCH
	11547	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VaC	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF20	•

Reference order | TF20.SR.PN.XX


SUSPENSION KIT	REF.
	ACC210019.SC

Reference order | ACC210019.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC210019.PKDB

Reference order | ACC210019.PKDB

• Select finishes



JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH	ANGLE JOINT CONNECTOR	FINISH	POWER FEEDER UNIT	FINISH
	• .BK-BK .WH-WH		• .BK-BK .WH-WH		• .BK-BK .WH-WH

ACC210019.UR.XX

ACC210019.UL.XX

ACC210019.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT
		X

UR20


UL20



PENDANT | SURFACE

PHOTOMETRY

SLIM MOTION LENSES

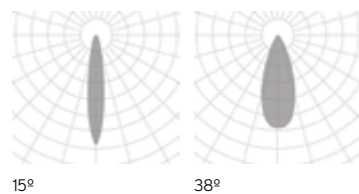


15°

38°

PHOTOMETRY

SLIM LED MODULES



OPAL

JOINTS CONNECTORS



LINEAR JOINT CONNECTOR



FLEXIBLE JOINT CONNECTOR



POWER FEEDER UNIT

ALARIK SLIM ROUND

REF 210019.PN | 210019.SR



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

Suspension cables

NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²

DIM DOWN: 1x Feed Hose 5 x 0,75mm²

.SR

Surface mounting kit



ON DEMAND
Custom dimensions

INSTALLATIONS



.PN
PENDANT

·10225 ALARIK | PN
Pag. 190



.SR
SURFACE

·10225 ALARIK | SR
Pag. 190





.TR
TRIMLESS



·10225 ALARIK | TR
Pag. 628



ALARIK

REF 10225.PN | 10225.SR

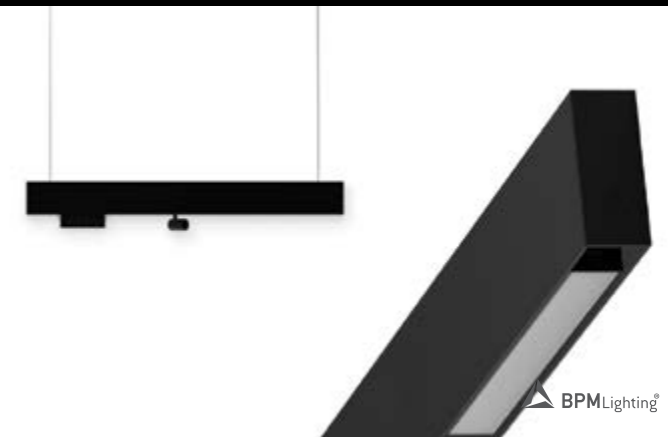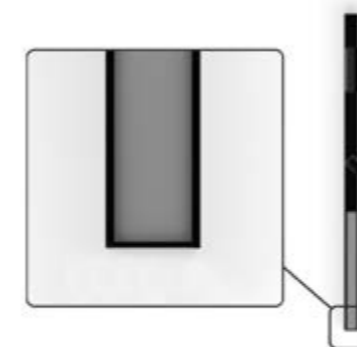



ALARIK	REF.	DIMENSION	FINISH	SKETCH
	10225	.01 1m	●	



48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | 10225.XX | .SR | .PN | .XX







Reference order | DR48.XX

PATRICIA S	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	20146	.01	●	.15 .24 .38	.ST	.9	.27	576	8	48	.DA	
							.30	607				
							.40	695				



Reference order | 20146.XX.XX.XX.ST9.XX.XX



PATRICIA M	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	20193	.01	●	.15 .24 .38	.ST	.9	.27	1173	13	48	.DA	
							.30	1181				
							.40	1207				


Reference order | 20193.XX.XX.XX.ST9.XX.XX

LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11542	.01	.BK-BK	.OP	.ST	.9	.27	765	6	48	.DA	
							.30	795				
							.40	825				
	11542	.02	.BK-BK	.OP	.ST	.9	.27	1530	12	48	.DA	
							.30	1590				
							.40	1650				
	11542	.03	.BK-BK	.OP	.ST	.9	.27	2295	18	48	.DA	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST9.XX.XX


LENSES	REF.	DIMENSION	SHAPE	FINISH	OPTIC OP.	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11534	.05	.RD .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				

	11534	.05F	.RD .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				



Reference order | 11534.XX.XX.XX.XX.ST9.XX.XX

• Select finishes



.WH-WH .BK-BK




ALARIK

REF 10225.PN | 10225.SR

PHOTOMETRY

PATRICIA

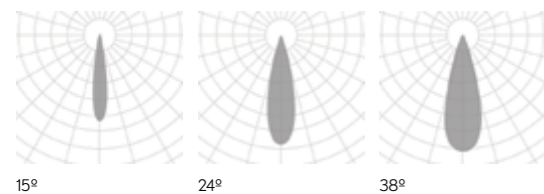


15°

24°

38°

PHOTOMETRY

LENSES

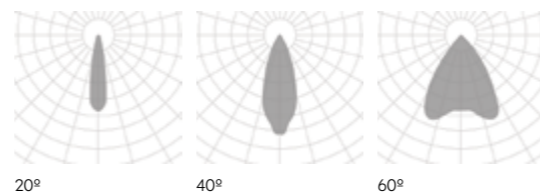


20°

40°

60°

PHOTOMETRY


LED MODULES

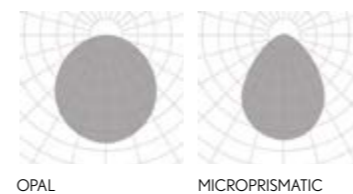

OPAL

MICROPRISMATIC

PROFILE



41


PENDANT | SURFACE

.SR

.PN


PENDANT | SURFACE

COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	•





Reference order | TF18 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA



JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
				X	•
UR18	UL18	UT18	UC18	X	

* Each angle joint requires an additional driver to that of the luminaire. Cada esquina requiere de un driver adicional al de la luminaria.

Reference order | XX18 | .SR | .PN | .XX

BOXES (.PN)


DRIVER BOX	FINISH
 50 400 80	•
CB06.40	
 380 Ø66	•
Cb08.38	

Reference order | XXXX.XX




PENDANT | SURFACE
SR
PN

• Select finishes




.WH-WH .BK-BK

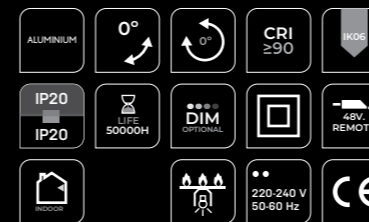

ALARIK


REF 10225.PN | 10225.SR

INCLUDED (.SR)




SR MOUNTING KIT

INCLUDED (.PN)



SB0912 CONNECTION BOX
SC03.SA WIRE 3M.

PROFILE



41



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)

NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²

DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²

.SR

Surface mounting kit




ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special RAL Color
Tunable White
Up Light

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

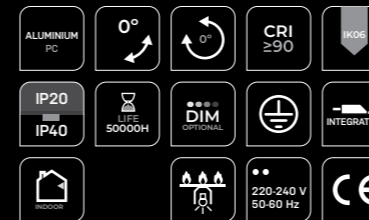

MODULIGHT

REF 10210.PN | 10210.SR



.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 196



.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 196




.RF
RECESSED FRAME

·10210 MODULIGHT | RF
Pag. 434



.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 634

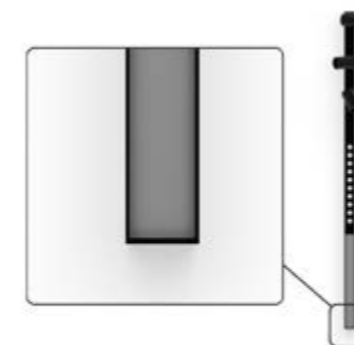

MODULIGHT*1	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	

Reference order | 10210.XX.SR.PN.XX

DRIVER	DIMENSION*	DIMM
DR10210	.01 0 - 15 W	.DA .PU .D1
	.02 16 - 30 W	
	.03 31 - 65 W	
	.04 66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			




Reference order | 11538.XX.XX.XX.ST9.XX

LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVERT	REF.	FINISH
	ACC10210.01	.WH-WH .BK-BK

Reference order | ACC10210.01.XX



*1 Modular system that requires a technical drawing. Sistema modular que requiere de un plano técnico.

*2 Driver power must be at least 15% higher than the sum of the power of selected LED modules. La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.

• Select lens finishes




MODULIGHT

REF 10210.PN | 10210.SR


PHOTOMETRY

MINI TUBE

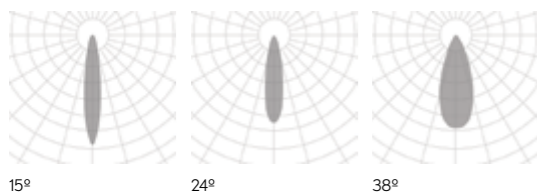

PHOTOMETRY


MINI LENSES

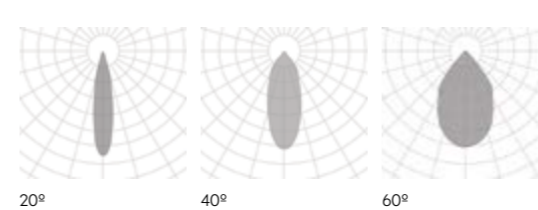

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE

SR
PN

PENDANT | SURFACE

LED MODULES	REF.	DIMEN- SION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.BK-BK	.OP .MP	.HI	.9	.27	953	12	700	
							.30	972			
							.40	1141			
	11524	.02 562mm.	.BK-BK	.OP .MP	.HI	.9	.27	1906	24	700	
							.30	1944			
							.40	2282			
	11524	.03 843mm.	.BK-BK	.OP .MP	.HI	.9	.27	2859	36	700	
							.30	2916			
							.40	3423			
	11524	.04 1124mm.	.BK-BK	.OP .MP	.HI	.9	.27	3812	48	700	
							.30	3888			
							.40	4564			
	11524	.05 1405mm.	.BK-BK	.OP .MP	.HI	.9	.27	4765	60	700	
							.30	4860			
							.40	5705			
	11524	.06 1686mm.	.BK-BK	.OP .MP	.HI	.9	.27	5718	72	700	
							.30	5832			
							.40	6846			

Reference order | 11524.XX.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	

Reference order | TF23..SR..PN..XX

BOXES (.PN)

CONNECTION BOX
CB09.12

Reference order | CB09.12.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		
UR23	UL23	X	X	UV23	

Reference order | XX23..SR..PN..XX

Select finishes




MODULIGHT

REF 10210.PN | 10210.SR

PHOTOMETRY


LED MODULES

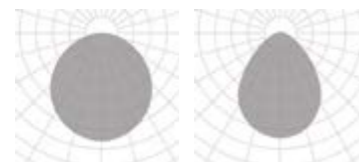

OPAL


MICROPRISMATIC

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE





FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

860 | 1120 | 1420 | 1690 | 1980 | 2250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

.PN


2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN-UP: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN-UP: Cabling 1 circuits, 1 x Feed Hose 3 x 0,75mm²
 Diffuser

.SR

Surface mounting kit



new



ON DEMAND

RGB
 TW
 Number switches



INSTALLATIONS

.PN
 PENDANT

·210007 OKKIA|PN
 Pag. 202


.SR
 SURFACE

·210007 OKKIA|SR
 Pag. 202



OKKIA

REF 210007.PN | 210007.SR

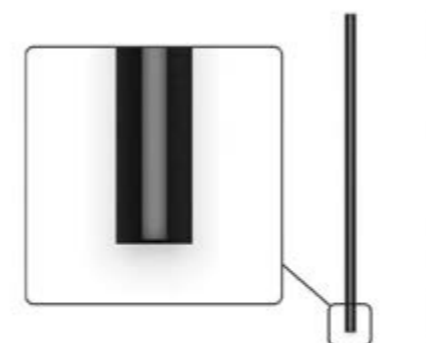

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	UPLIGHT ▲ UP *1 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		K	.27	.30		
210007	.03	860	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1120					3882	4020	4136	29	385	399	508	6	
	.05	1420					5435	5628	5790	40	526	545	693	8	
	.06	1690					6483	6713	6907	48	653	677	860	10	
	.07	1980					7609	7879	8107	56	790	818	1040	12	
	.08	2250					8657	8965	9223	64	917	959	1208	14	

Reference order | 210007.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF11	●

Reference order | TF11 | .SR | .PN | .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB06.32	CB06.40	

Reference order | CB09.XX.XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX


Select finishes



OKKIA


REF 210007.PN | 210007.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



42

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

LENGTHS mm.

860 | 1120 | 1420 | 1690 | 1980 | 2250

LIGHTING OPTIONS

DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser

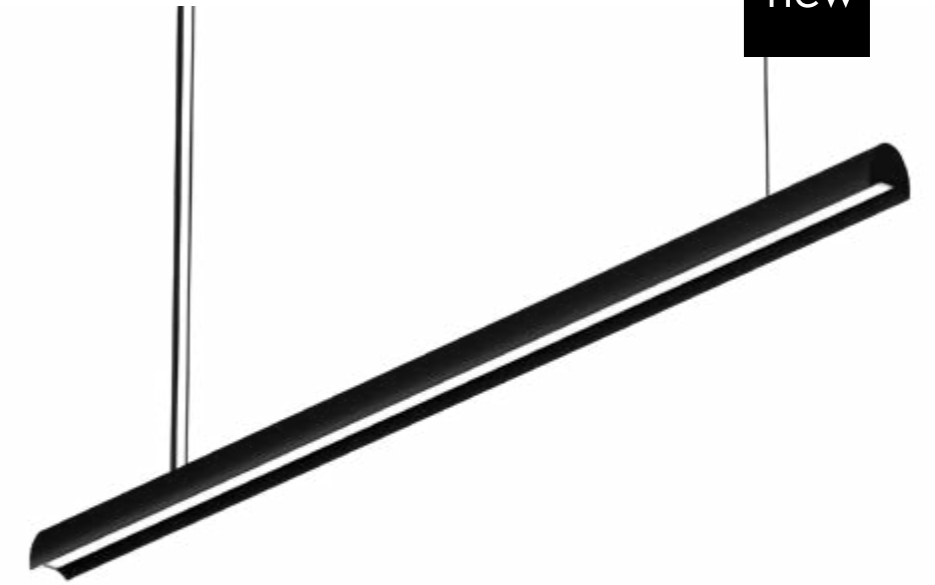

ON DEMAND

RGB
Tunable White




INSTALLATIONS




.PN
PENDANT

·210017 OKKIA PLUS | PN
Pag. 206

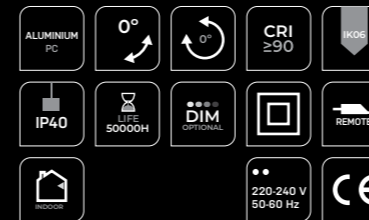

OKKIA PLUS

REF 210017.PN

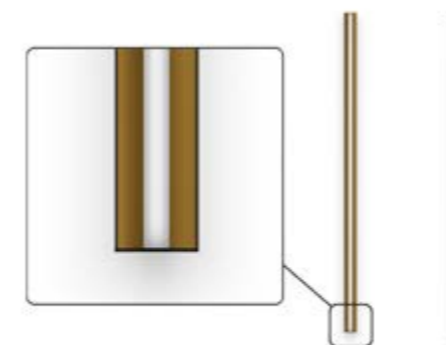

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT*2 LUMEN			WATT	UPLIGHT ▲.UP*1 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		K	.27	.30		
210017	.03	860	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1120					3882	4020	4136	29	385	399	508	6	
	.05	1420					5435	5628	5790	40	526	545	693	8	
	.06	1690					6483	6713	6907	48	653	677	860	10	
	.07	1980					7609	7879	8107	56	790	818	1040	12	
	.08	2250					8657	8965	9223	64	917	959	1208	14	

Reference order | \uparrow \downarrow \bullet \blacksquare \blacktriangledown \blacktriangleup
 210017.XX | .SR | .PN | .XX.XX | .ST.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF12	●

Reference order | TF12.PN.XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	


Reference order | CBXXXX.XX

OPTIONS

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


Select finishes

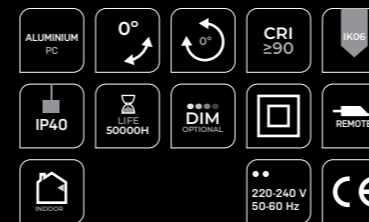

OKKIA PLUS

REF 210017.PN

PHOTOMETRY




OPAL

INCLUDED



SC03.SA
WIRE 3M.

PROFILE



45



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN


2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 NON-DIM DOWN-UP or DIM DOWN-UP (only): 1 x Feed
 Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

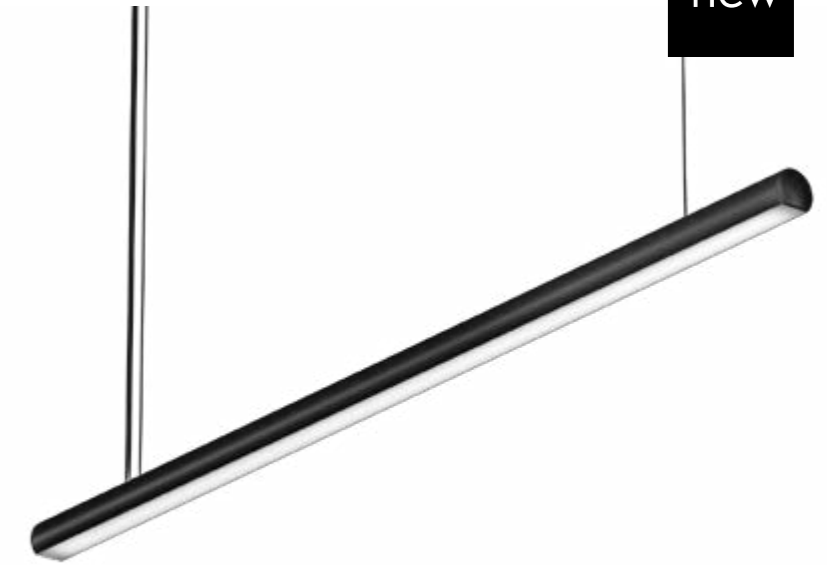

new



ON DEMAND

Emergency Lighting *
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80



* Delivered separately
 (not installed in luminaire).

INSTALLATIONS

.PN
 PENDANT

·210003 LINGGO MINI | PN
 Pag. 210


.SR
 SURFACE

·210003 LINGGO MINI | SR
 Pag. 210



LINGGO MINI

REF 210003.PN | 210003.SR

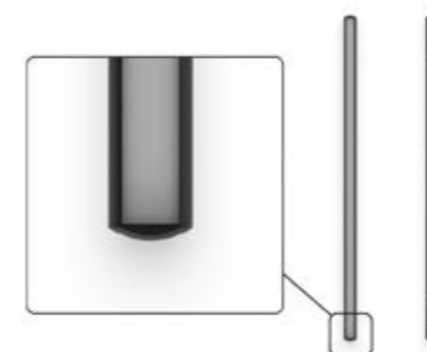

PENDANT | SURFACE
 .SR
 .PN

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *4 LUMEN				WATT		UPLIGHT ▲ .UP *2 LUMEN			WATT		DIMM ▼
	▲	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	TW	
210003	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *4 LUMEN			UPLIGHT ▲ .UP *2 LUMEN			WATT		DIMM ▼
	▲	MM					.27	.30	.40	.27	.30	.40	K	TW	
210003	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210003.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF10	●

Reference order | TF10 | .SR | .PN | .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CB09.XX.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X	X	●
UR10	UL10	X	X	X	

Reference order | XX10 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


● Select finishes



LINGGO MINI


REF 210003.PN | 210003.SR

PHOTOMETRY

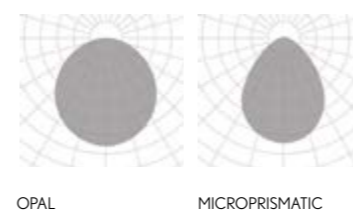


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



45

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.
 *2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.
 *3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.
 *4 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

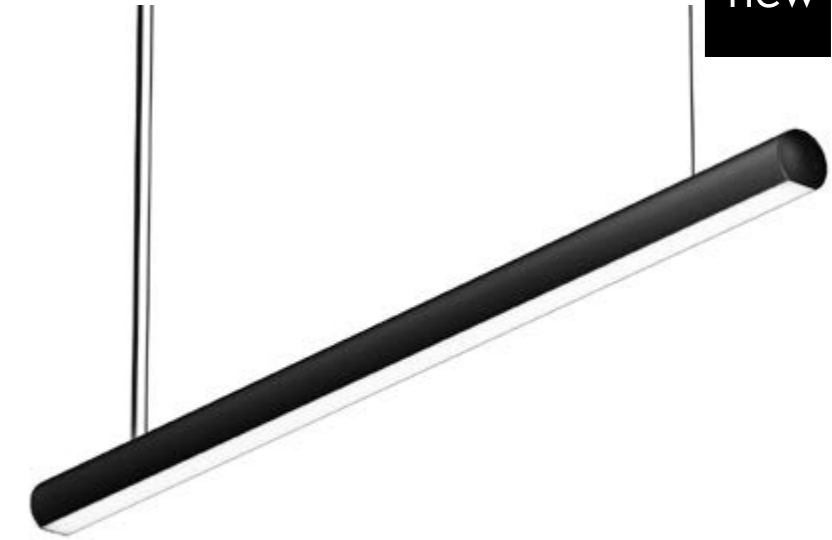

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



LINGGO


REF 210002.PN | 210002.SR

.PN
PENDANT

·210002 LINGGO | PN
Pag. 214

.SR
SURFACE

·210002 LINGGO | SR
Pag. 214

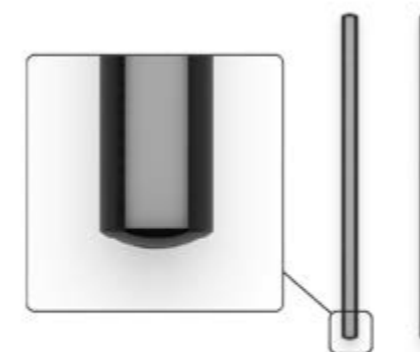

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5				WATT		UPLIGHT .UP *3 LUMEN			WATT		DIMM OP.
	MM						.27	.30	.40	.TW *2	K	TW	.27	.30	.40	K		
210002	.03	863	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5 LUMEN			UPLIGHT ▲.UP *3 LUMEN			WATT		DIMM OP.
	MM						.27	.30	.40	.27	.30	.40	K	TW	
210002	.03	863	●	.OP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA *1 .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order 210002.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF09	●

Reference order TF09 | .SR | .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X	X	●
UR09	UL09	X	X	X	

Reference order XX09 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order SCXX.SA


SUSPENSION ROD	REF.	DIMEN-SIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order CB09.12.XX


● Select finishes

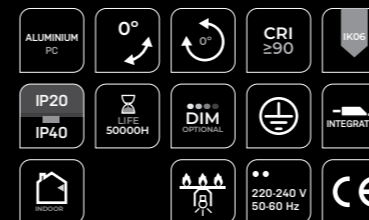

LINGGO


REF 210002.PN | 210002.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



60

*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
 *2 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. *TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.*
 *3 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.*
 *4 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. *La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.*
 *5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS



DIMENSIONS

● LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)


NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²

Diffuser

.SR

Surface mounting kit

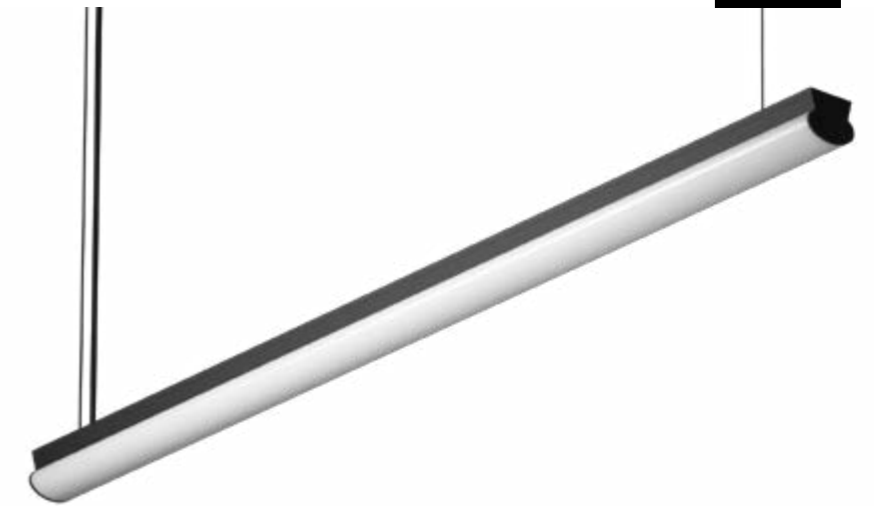

new



ON DEMAND

Emergency Lighting *
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).



INSTALLATIONS



BUBBLE



REF 210010.PN | 210010.SR

.PN
PENDANT

·210010 BUBBLE | PN
Pag. 218


.SR
SURFACE

·210010 BUBBLE | SR
Pag. 218

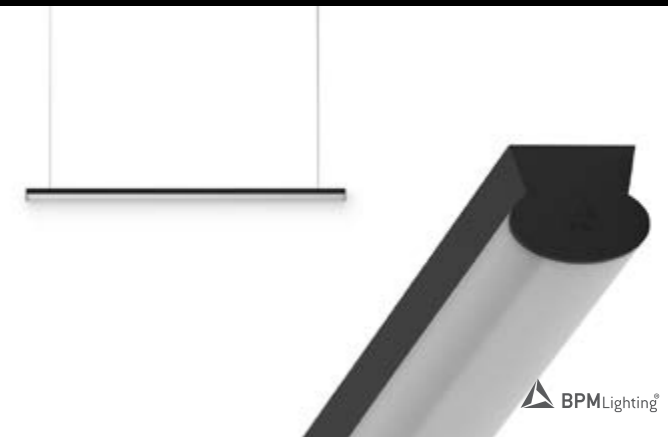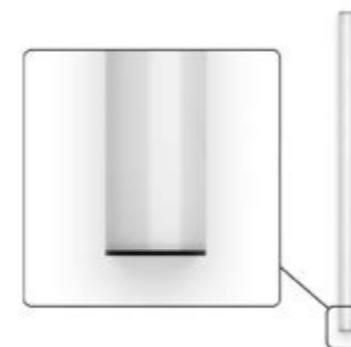

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT K	DIMM ▼
	●	MM					.27	.30	.40		
210010	.03	863	●	.OP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
	.04	1144					3060	3180	3300	24	
	.05	1425					3825	3975	4125	30	
	.06	1706					4590	4770	4950	35	
	.07	1987					5355	5565	5775	41	
	.08	2268					6120	6360	6600	47	

Reference order | 210010.XX | .SR | .PN | .XX.XX | .ST9.XX.XX



COMPONENTS

COVERT KIT	REF.	FINISH
	TF15	●

Reference order | TF15 | .SR | .PN | .XX

JOINTS

LINEAR JOINT
UR15

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX




● Select finishes



BUBBLE

REF 210010.PN | 210010.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



*1 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Surface mounting kit

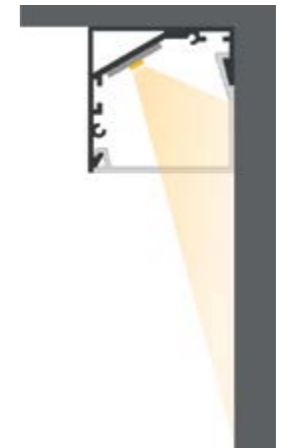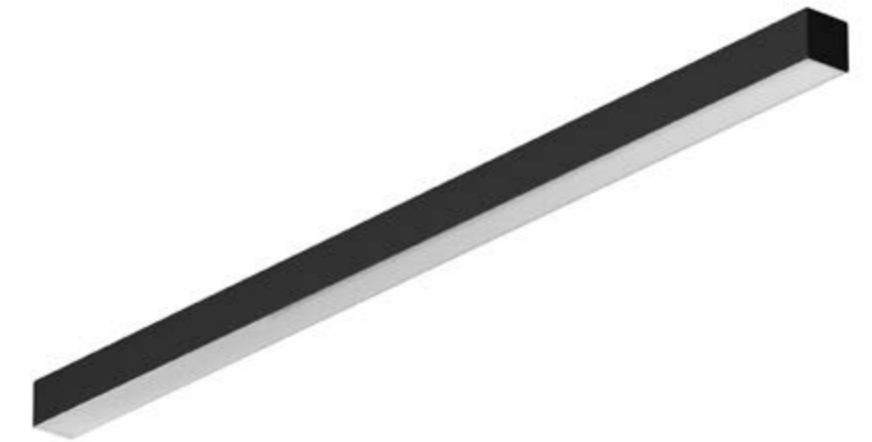

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80



* Delivered separately
(not installed in luminaire).

.SR

SURFACE

INSTALLATIONS




EDGE

REF 210014.SR

.SR
SURFACE

·210014 EDGE | SR
Pag. 222

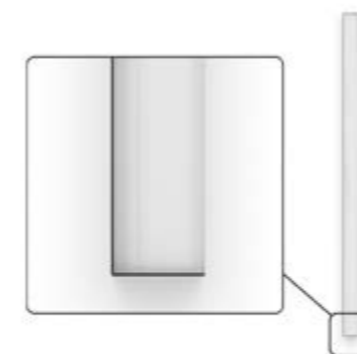

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
210014	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210014	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	



Reference order | 210014.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS


COVER KIT	REF.	FINISH
	TF08	●

Reference order | TF08.SR.XX

JOINTS

LINEAR JOINT
UR08

● Select finishes



- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP40
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- REcessed
- 220-240 V 50-60 Hz
- CE

EDGE

REF 210014.SR


PHOTOMETRY

INCLUDED



SR INSTALLATION KIT

PROFILE



SR SURFACE



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

868 | 1149 | 1430 | 1711 | 1992 | 2273

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

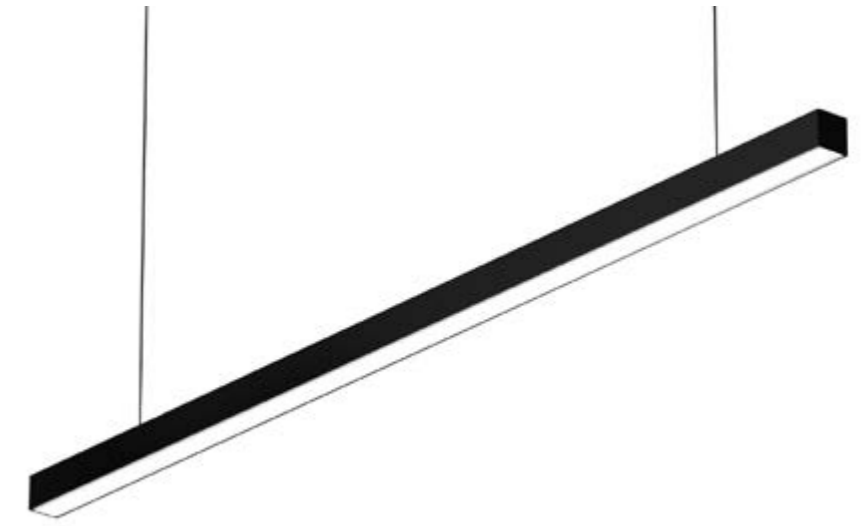

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80



* Delivered separately
 (not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

10211 ALBA MINI | RF
Pag. 440


.TR
TRIMLESS

10211 ALBA MINI | TR
Pag. 640



ALBA MINI

REF 10211.PN | 10211.SR

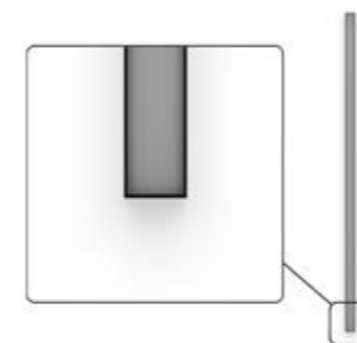

.SR

.PN

PENDANT | SURFACE

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *4 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	.27	.30	.40	K	TW	
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1149					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1430					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1711					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1992					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2273					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *4 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	.27	.30	.40	K	TW	
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956		35		568	587	747	8	.DA .PU .D1	
	.04	1149					6120	6356	6608		47		851	880	1119	13		
	.05	1430					7650	7945	8260		59		1134	1173	1492	17		
	.06	1711					9180	9534	9912		71		1417	1466	1864	21		
	.07	1992					10710	11123	11564		83		1701	1760	2237	25		
	.08	2273					12240	12712	13216		94		1984	2053	2610	30		

Reference order | 10211.XX | .SR | .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF03	●

Reference order | TF03 | .SR | .PN | .XX

BOXES

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CB09.XX.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX


● Select finishes



ALBA MINI


REF 10211.PN | 10211.SR

PHOTOMETRY

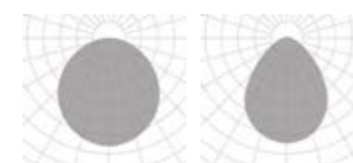


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both require 24VdC and remote driver with connection box CB09.12. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas requieren 24Vd y driver en remoto con la caja de conexión CB09.12.

*3 Uplight (.UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. La luz indirecta (.UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.

*4 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Some product variations require an IP Box, seek advice from our technical team. Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico



FINISHES

● COLORS



DIMENSIONS

● LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN



LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

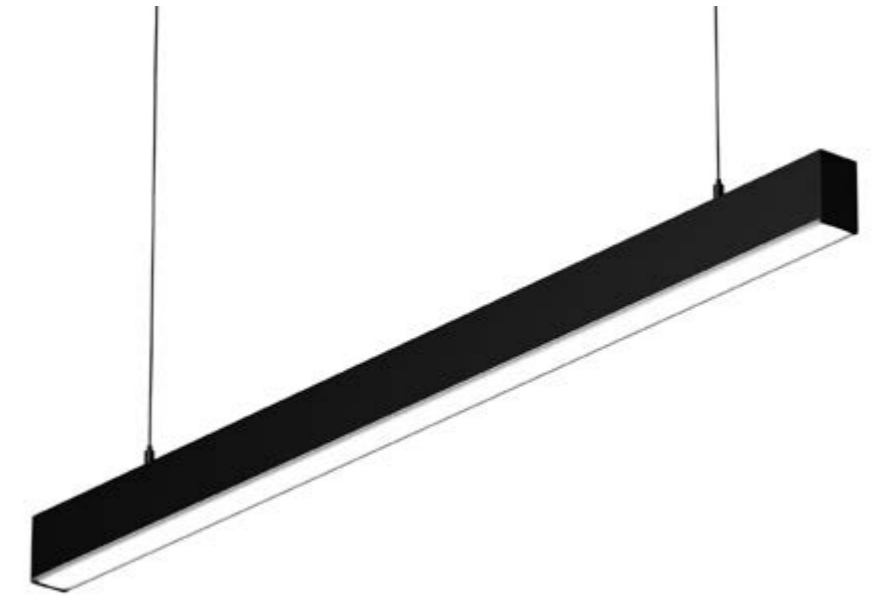

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.PN | 10160.SR

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE


·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644

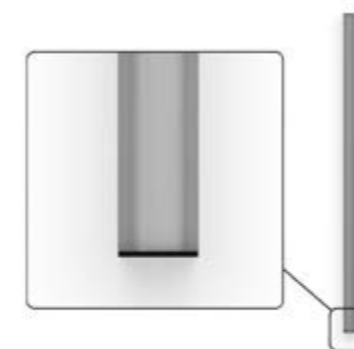

REF.	DIMENSIONS		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *4 LUMEN				WATT		UPLIGHT UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	TW	
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	529	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSIONS		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *4 LUMEN			UPLIGHT ▲ UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.27	.30	.40	K	TW	
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10160.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF02	●

Reference order | TF02 | .SR | .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UL02	UT02	UC02	UV02	

Reference order | XX02 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX


● Select finishes



ALBA

REF 10160.PN | 10160.SR

PHOTOMETRY

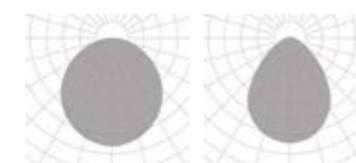


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.

*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.

*3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (.DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (.DA), consultar con el equipo comercial.

*4 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Some product variations require an IP Box, seek advice from our technical team. Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
 Diffuser

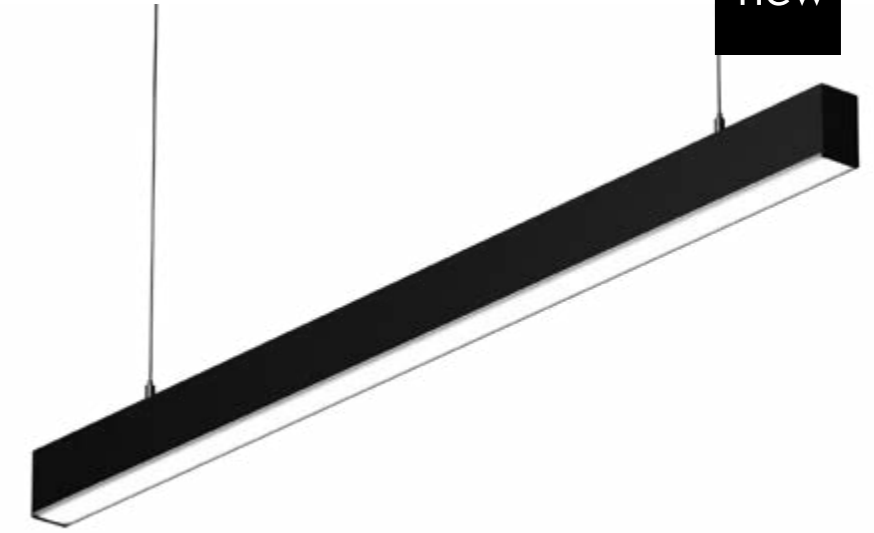

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS





ALBA NOVUS

REF 210011.PN

.PN
PENDANT

210011 ALBA NOVUS | PN
Pag. 234

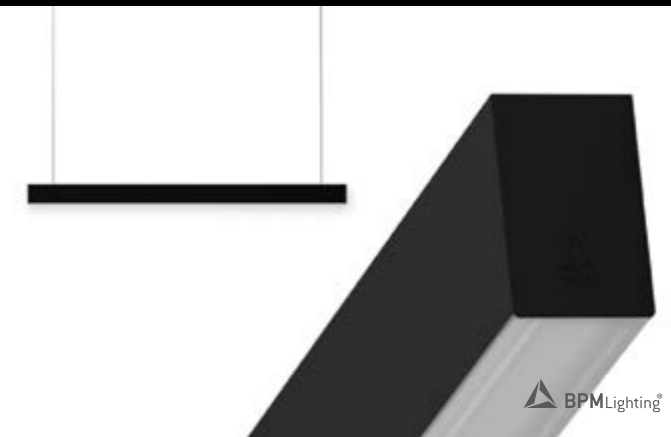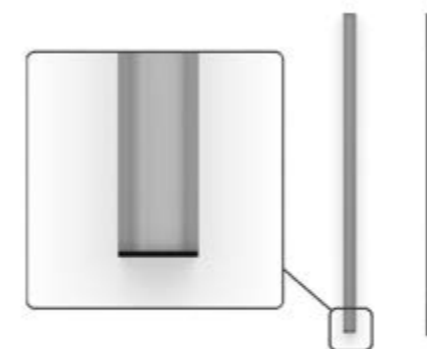

PENDANT

.PN

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5 LUMEN				WATT		UPLIGHT ▲.UP *3 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *2	K	TW	.27	.30	.40	K	TW	
210011	.03	863	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5 LUMEN				WATT		UPLIGHT ▲.UP *3 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *2	K	TW	.27	.30	.40	K	TW	
210011	.03	863	●	.OP	.HI	.9	4590	4767	4956		35		568	587	747	8	.DA *1 .PU .D1	
	.04	1144					6120	6356	6608		47		851	880	1119	13		
	.05	1425					7650	7945	8260		59		1134	1173	1492	17		
	.06	1706					9180	9534	9912		71		1417	1466	1864	21		
	.07	1987					10710	11123	11564		83		1701	1760	2237	25		
	.08	2268					12240	12712	13216		94		1984	2053	2610	30		

Reference order **210011.XX.PN.XX.XX.XX.9.XX.XX.XX**

COMPONENTS

COVER KIT	REF.	FINISH
	TF07	●

Reference order **TF07.PN.XX**

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order **ACC.RG.XX**

JOINTS

LINEAR JOINT	ANGLE JOINT 2 LINES	ANGLE JOINT 3 LINES	CROSS JOINT	WALL-CEILING JOINT	FINISH
			X	X	●
UR07	AM07	AMY07	X	X	

Reference order **XX07.SR.PN.XX**

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order **SCXX.SA**


SUSPENSION ROD	REF.	DIMEN-SIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order **SC21.XX.XX**

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order **CB09.12.XX**


● Select finishes

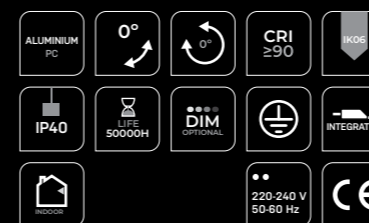


ALBA NOVUS

REF 210011.PN


PHOTOMETRY

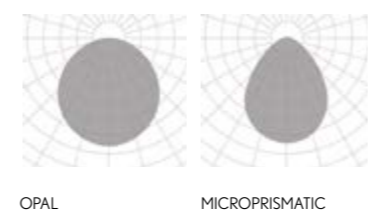

INCLUDED



PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
 *2 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. *TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.*
 *3 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.*
 *4 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. *La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.*
 *5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

883 | 1164 | 1445 | 1726 | 2007 | 2288

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
 Diffuser

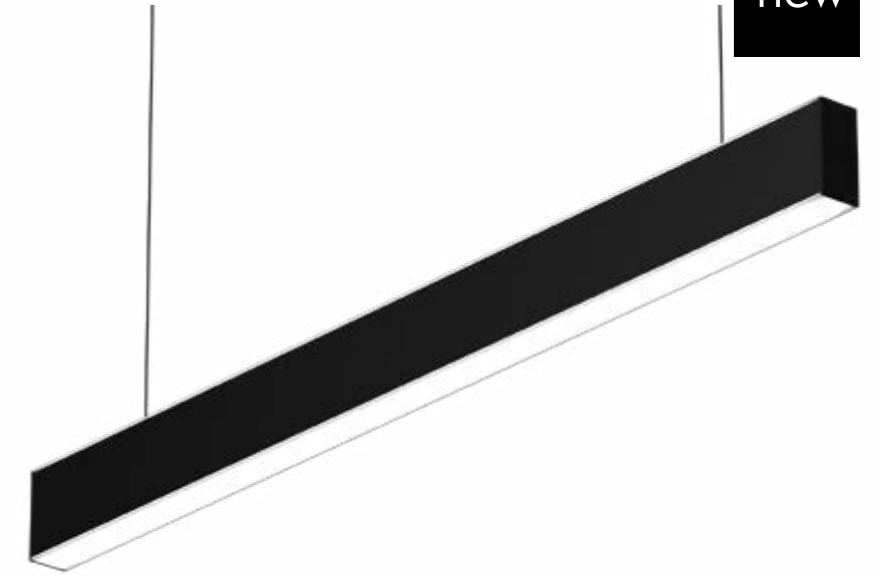

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80
 HI power

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBA DOUBLE

REF 10215.PN

.PN
PENDANT

10215 ALBA DOUBLE | PN
Pag. 238

.WS
WALL SURFACE

10215 ALBA DOUBLE | WS
Pag. 790



REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	.TW *1	K	TW	
10215	.03	883	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1164					3060	3180	3300	7600-7880	24	51	3060	3180	3300	7600-7880	24	51	
	.05	1445					3825	3975	4125	9500-9850	30	64	3825	3975	4125	9500-9850	30	64	
	.06	1726					4590	4770	4950	11400-11820	35	76	4590	4770	4950	11400-11820	35	76	
	.07	2007					5355	5565	5775	13300-13790	41	89	5355	5565	5775	13300-13790	41	89	
	.08	2288					6120	6360	6600	15200-15760	47	102	6120	6360	6600	15200-15760	47	102	

Reference order | 10215.XX.PN.XX.XX.ST9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF04	●

Reference order | TF04.SR.PN.XX

JOINTS

LINEAR JOINT
UR04



OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



ALBA DOUBLE


REF 10215.PN

PHOTOMETRY

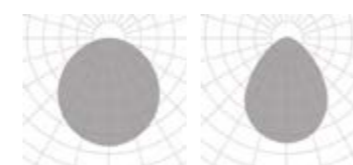


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.

*2 Down light (direct light) and up light (UP) work at 500mA. La luz directa e indirecta (UP) trabaja a 500mA.

PENDANT .PN



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)

NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²

DIM DOWN: 1x Feed Hose 5 x 0,75mm²

.SR

Surface mounting kit

new



Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.



ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALBA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448


.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648

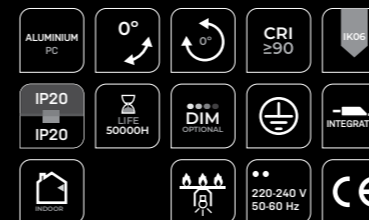

ALBA ASIMETRIC

REF 210009.PN | 210009.SR

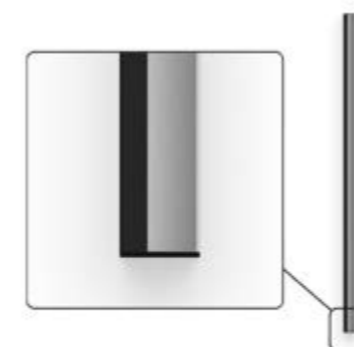

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX | .SR | .PN | .XX.XX.XX | .9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF06	●

Reference order | TF06 | .SR | .PN | .XX

JOINTS

LINEAR JOINT
UR06

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes



ALBA ASIMETRIC

REF 210009.PN | 210009.SR

PHOTOMETRY




TRANSPARENT PC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

● LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN



LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

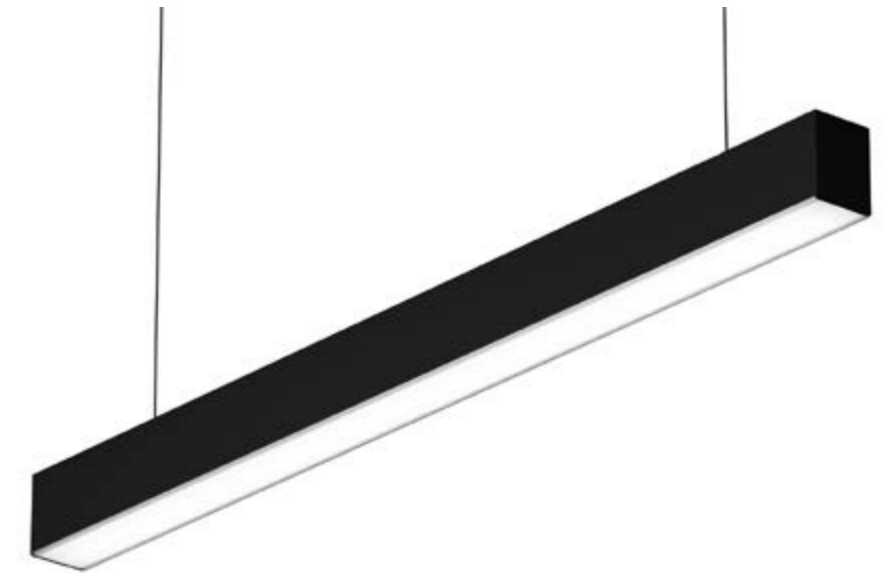

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBA PLUS

REF 10178.PN | 10178.SR

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE



·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS|TR
Pag. 652

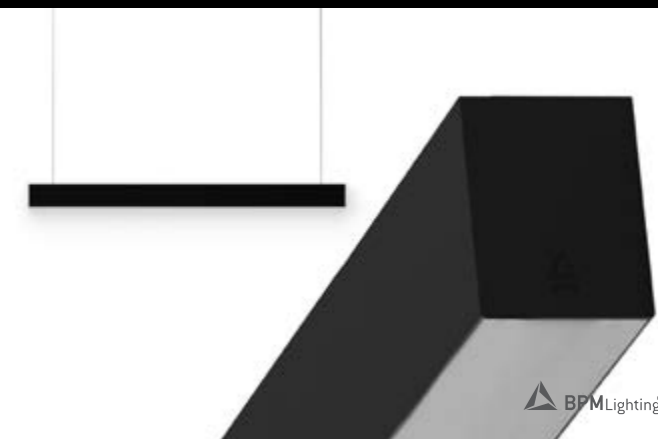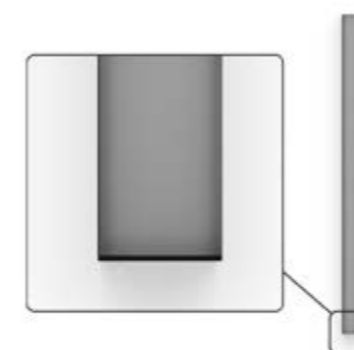

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *4 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	TW	
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *4 LUMEN			UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.27	.30	.40	K	TW	
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1144					6120	6356	6608	47	851	880	1119	13	
	.05	1425					7650	7945	8260	59	1134	1173	1492	17	
	.06	1706					9180	9534	9912	71	1417	1466	1864	21	
	.07	1987					10710	11123	11564	83	1701	1760	2237	25	
	.08	2268					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10178.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF01	●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | TF01.SR | .PN | .XX

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Reference order | XX01.SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX


● Select finishes




ALBA PLUS

REF 10178.PN | 10178.SR


PHOTOMETRY

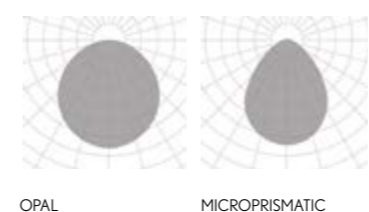

INCLUDED (.PN)



PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.
 *2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.
 *3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.
 *4 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN


LUMINAIRE INCLUDES

.PN


2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
 Connection box SB0912

.SR

Surface mounting kit

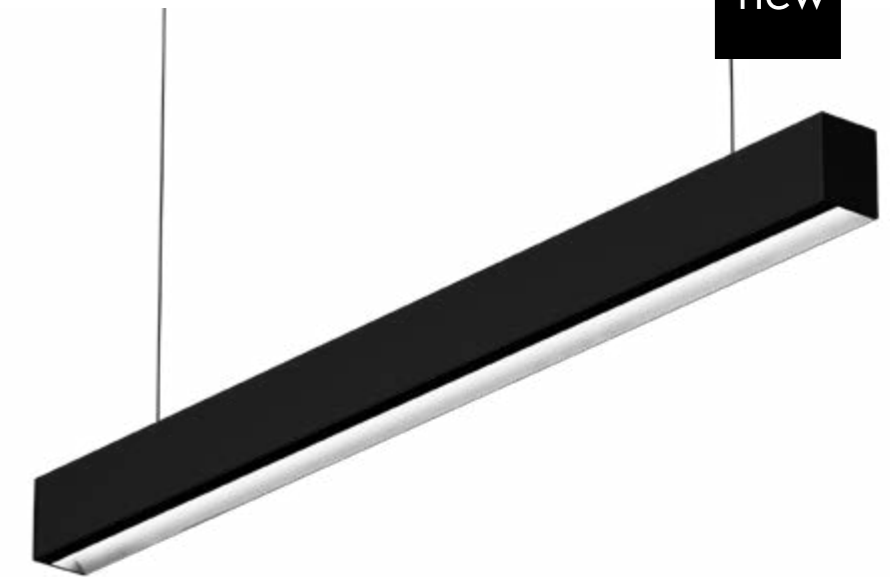

Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.



ON DEMAND

Emergency Lighting*
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80
 Motion Detection

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS

.PN PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 250

.SR SURFACE


·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 250

.RF RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 456


.TR TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 656

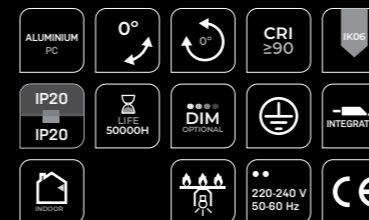

ALBA PLUS ASIMETRIC

REF 210008.PN | 210008.SR

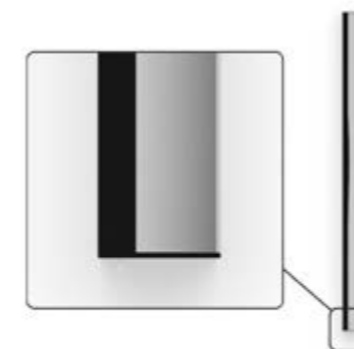

PENDANT | SURFACE
 .SR
 .PN

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210008.XX | .SR | .PN | .XX.XX.XX | .9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF05	●

Reference order | TF05 | .SR | .PN | .XX

JOINTS

LINEAR JOINT
UR05

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes



ALBA PLUS ASIMETRIC


REF 210008.PN | 210008.SR

PHOTOMETRY




TRANSPARENT PC

INCLUDED (.PN)




SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
-TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

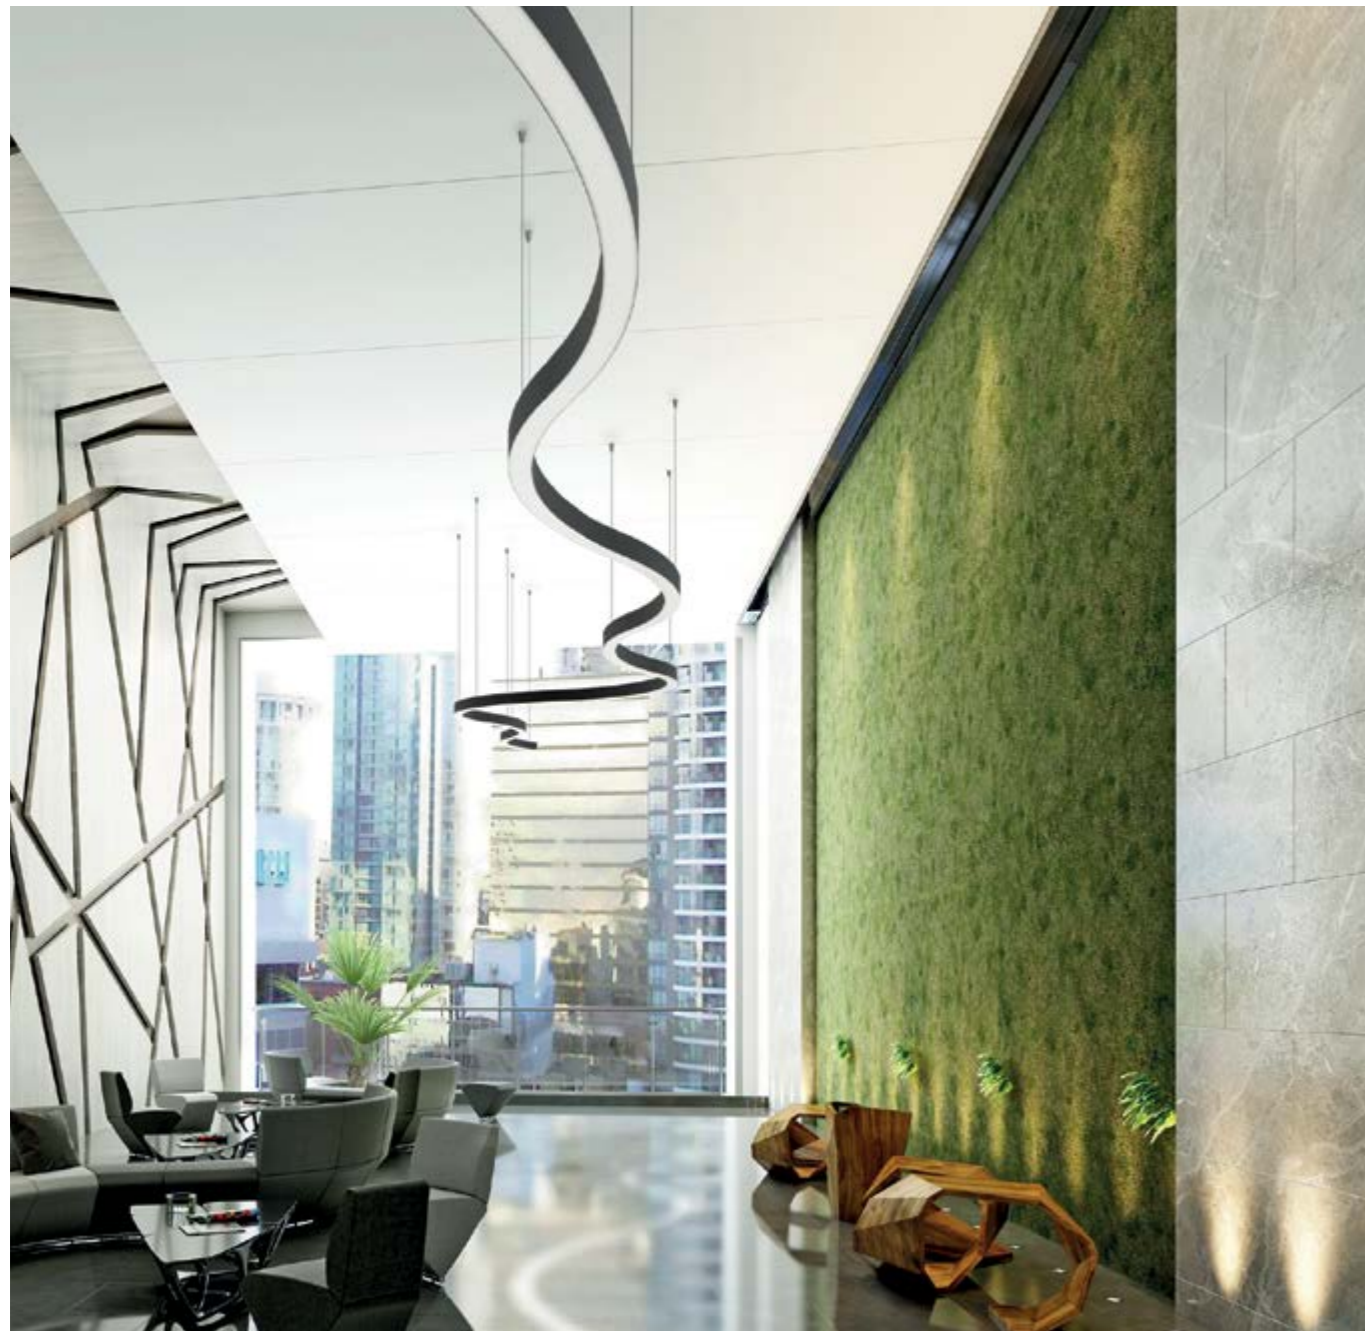

new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863	1144	1425	1706
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m or each shape)


NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

DIM DOWN: 1 x Feed Hose 5 x 0,75mm²

Diffuser

.SR

Surface mounting kit

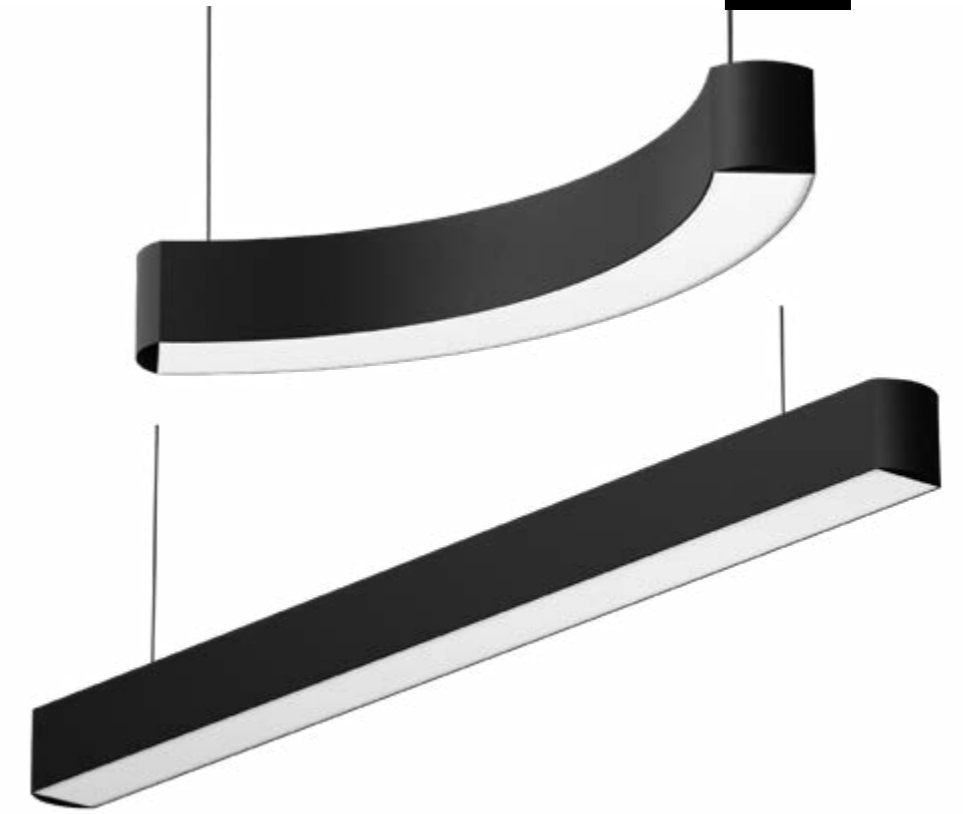

ON DEMAND

- Emergency Lighting *
- Motion Detection
- Custom dimensions
- Special Color Temperature
- RGB
- Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

.PN
PENDANT


·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE | RF
Pag. 460

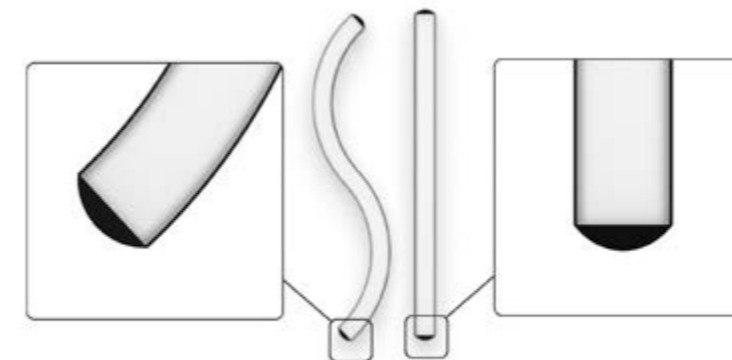

PENDANT | SURFACE

.SR
.PN

BOLD						
.01	.02	.03	.04	.05	.06	.07
800 mm 45°	800 mm 90°	1520 mm 45°	1520 mm 90°	2950 mm 45°	2950 mm 90°	5100 mm 45°

REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM
						.27	.30	.40		
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	.07					5355	5565	5775	41	

REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM
						.27	.30	.40		
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	.07					10710	11123	11564	83	

Reference order | 210001.XX | .SR | .PN | .XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM	
		MM	MM					.27	.30	.40			
	210015	●	.OP	.MP	.ST	.9	.03	863	2295	2385	2475	18	.DA .PU .D1
							.04	1144	3060	3180	3300	24	
							.05	1425	3825	3975	4125	30	
							.06	1706	4590	4770	4950	35	


BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM	
		MM	MM					.27	.30	.40			
	210015	●	.OP	.MP	.ST	.9	.03	863	4590	4767	4956	35	.DA .PU .D1
							.04	1144	6120	6356	6608	47	
							.05	1425	7650	7945	8260	59	
							.06	1706	9180	9534	9912	71	

Reference order | 210015.XX | .SR | .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	TF17

Reference order | TF17.PN.XX

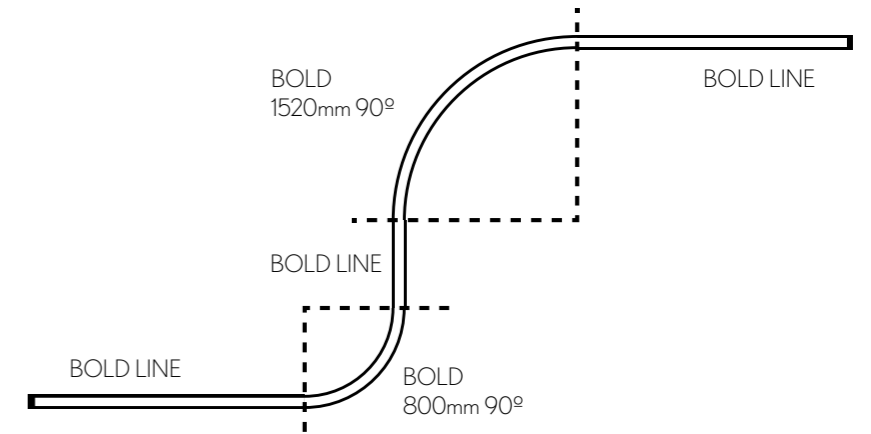

Select lens finishes




- ALUMINUM PC
- 0°
- 360°
- CRI ≥90
- IP20
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- 220-240 V 50-60 Hz
- CE

BOLD | BOLD LINE


REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE




85

65


PENDANT | SURFACE

.SR

.PN

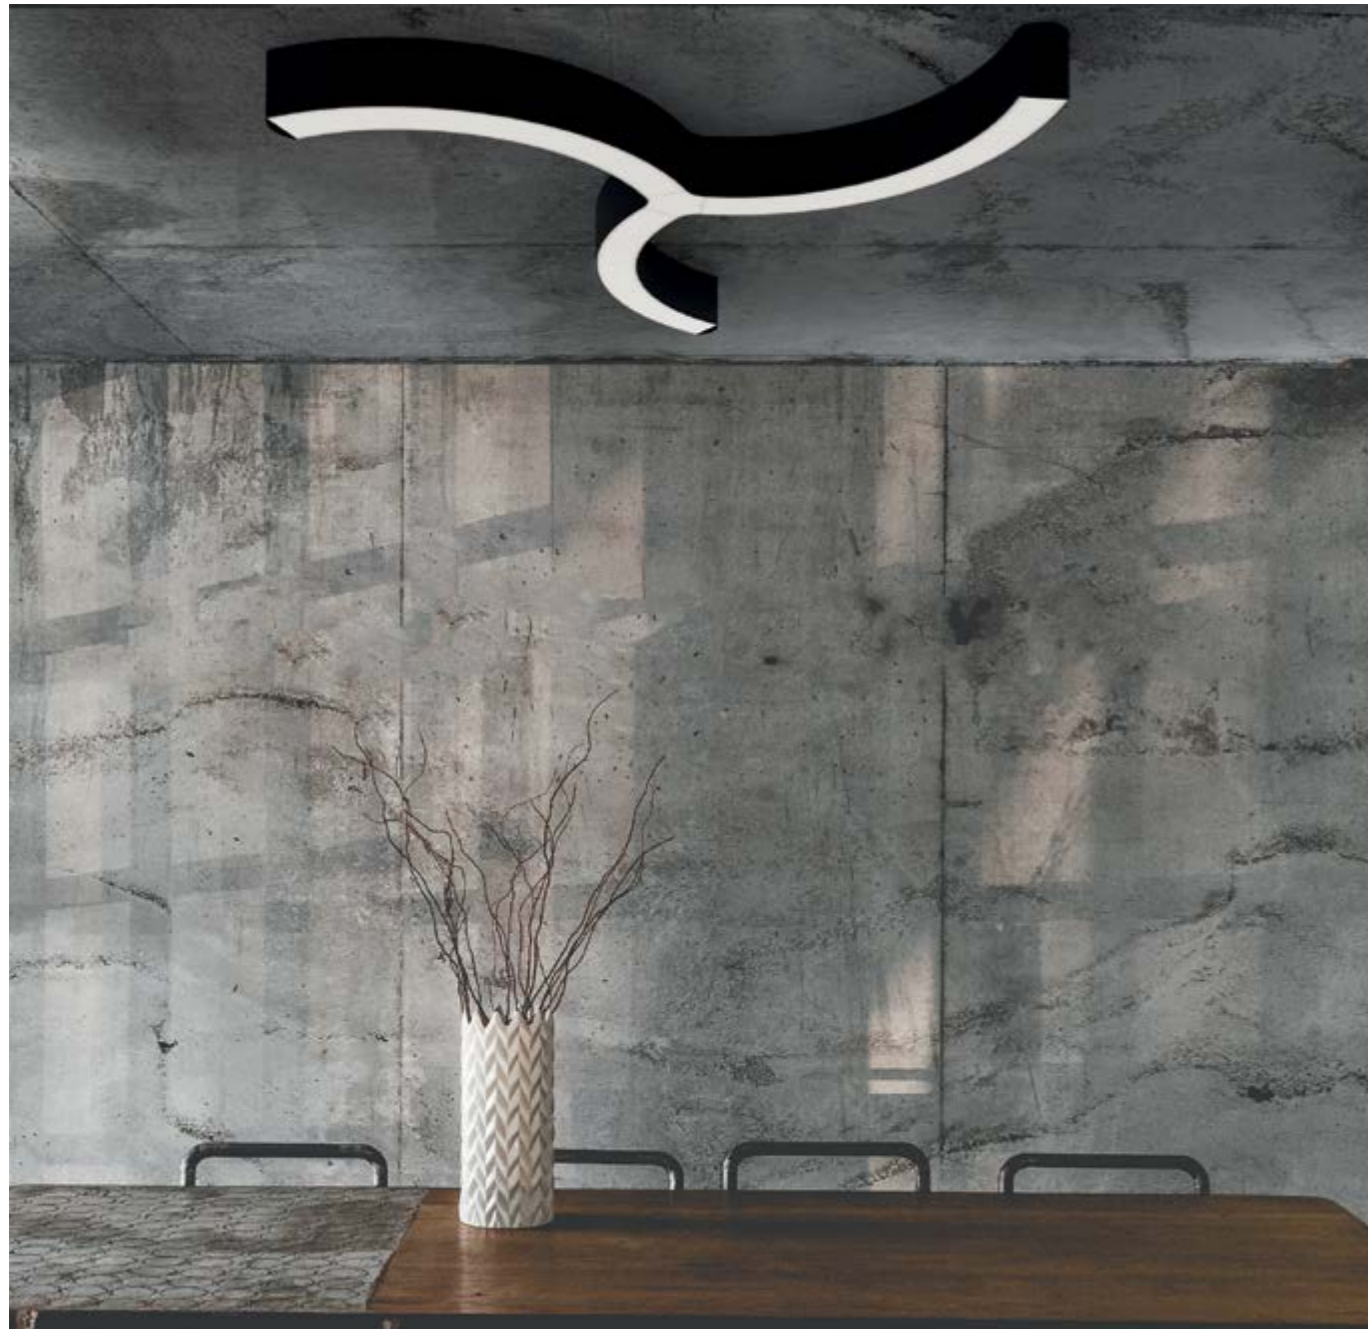

new

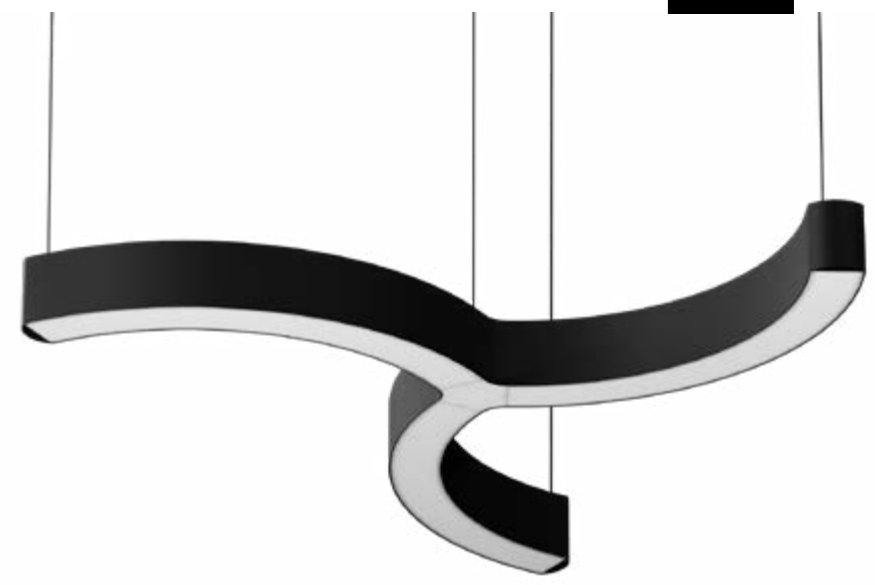

FINISHES

● COLORS



DIMENSIONS

● LENGTHS

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

4 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

ON DEMAND

Emergency Lighting *
 Motion Detection
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



TRIBOLD



REF 210018.PN | 210018.SR

.PN
 PENDANT

·210018 TRIBOLD | PN
 Pag. 258

.SR
 SURFACE

·210018 TRIBOLD | SR
 Pag. 258

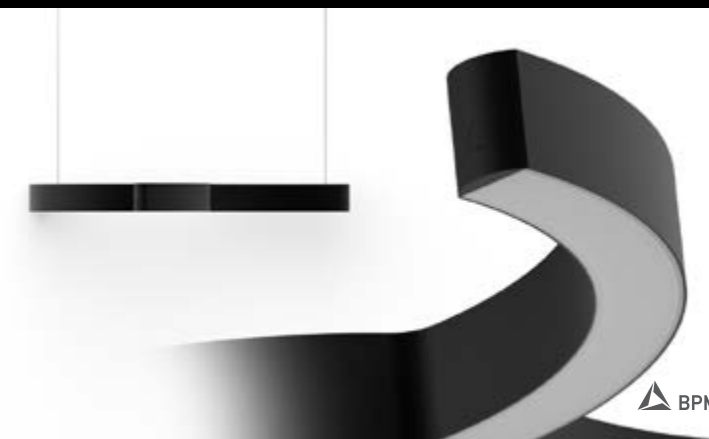



PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

TRIBOLD	REF.	DIMENSION ♦	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT K	DIMM ▼	SKETCH
							.27	.30	.40			
	210018	.01	●	.OP	.ST	.9	4781	4969	5156	37	.DA .PU .D1	 Ø 1143 85
					.HI		9563	9931	10325	74		

Reference order | 210018.XX | .SR | .PN | .XX.OP.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF17	●

Reference order | TF17 | .SR | .PN | .XX



PENDANT | SURFACE


• Select lens finishes



TRIBOLD


REF 210018.PN | 210018.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



85

*1 Uplight (UP) only for ON-OFF and DALI dimmable (DA) options.
*2 Tunable White (TW) must be DALI dimmable (DA). Only CRI 80. 700mA



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)

NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²


DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²

DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²

Diffuser & Electric system

.SR

Surface mounting kit

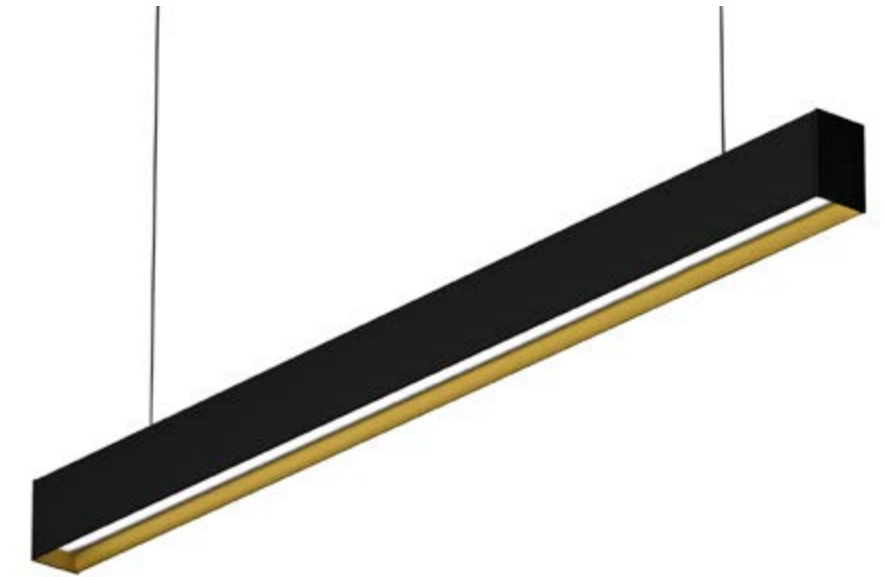


ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

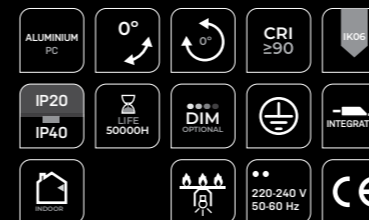

WING

REF 10200.PN | 10200.SR



.PN
PENDANT

10200 WING | PN
Pag. 262

.SR
SURFACE


10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

10200 WING | RF
Pag. 464

.TR
TRIMLESS

10200 WING | TR
Pag. 660

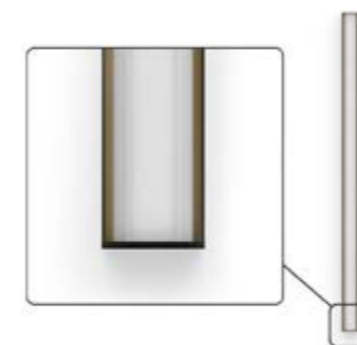

PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5 LUMEN				WATT		UPLIGHT ▲ .UP *3 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *2	K	TW	.27	.30	.40	K	TW	
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA*1 .PU .D1	
	.04	1144					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1425					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1706					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1987					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2268					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT *5 LUMEN				WATT		UPLIGHT ▲ .UP *3 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *2	K	TW	.27	.30	.40	K	TW	
10200	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956		35		568	587	747	8	.DA*1 .PU .D1	
	.04	1144					6120	6356	6608		47		851	880	1119	13		
	.05	1425					7650	7945	8260		59		1134	1173	1492	17		
	.06	1706					9180	9534	9912		71		1417	1466	1864	21		
	.07	1987					10710	11123	11564		83		1701	1760	2237	25		
	.08	2268					12240	12712	13216		94		1984	2053	2610	30		

Reference order | 10200.XX | .SR | .PN | .XX.XX.XX | .9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF13	●

Reference order | TF13 | .SR | .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT
UR13

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX


Select finishes



WING

REF 10200.PN | 10200.SR


PHOTOMETRY

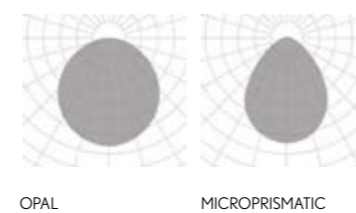

INCLUDED (.PN)



PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
 *2 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. *Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.*
 *3 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.*
 *4 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. *La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.*
 *5 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
Diffuser
Connection Box

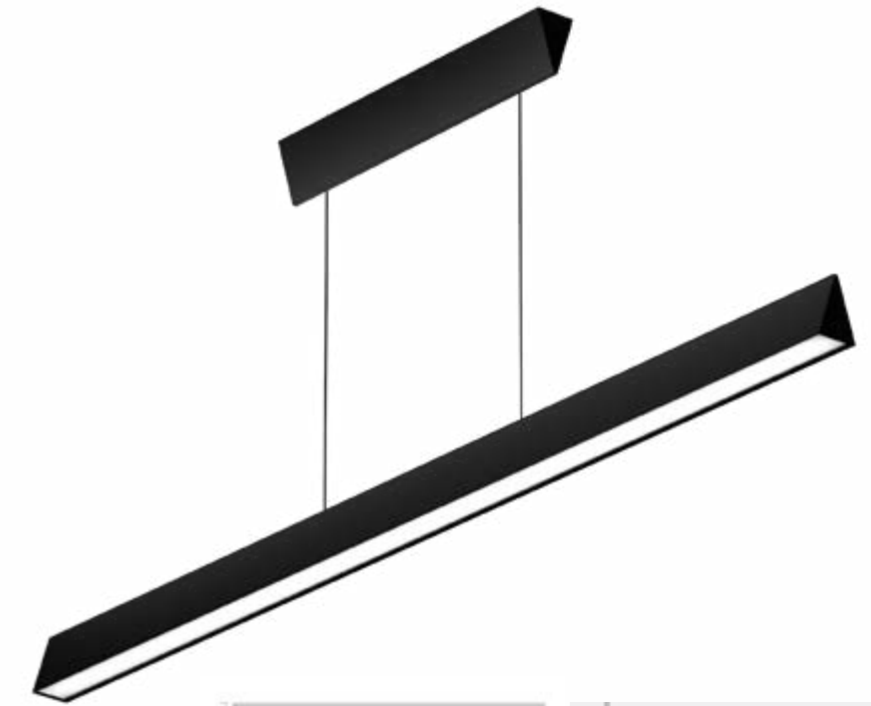

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).


INSTALLATIONS

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266


.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798

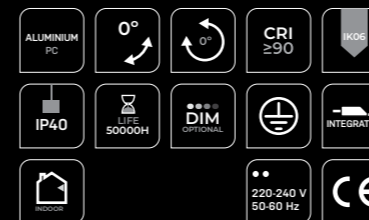

ALZIRA

REF 10169.PN

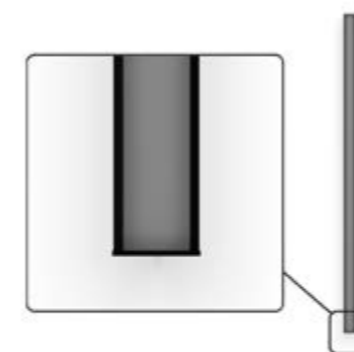

PENDANT

.PN

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
10169	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	


Reference order | 10169.XX.PN.XX.XX.XX.9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF14	●

Reference order | TF14.PN.XX


Select finishes

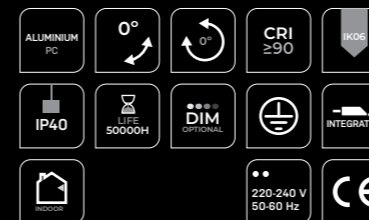

ALZIRA


REF 10169.PN

PHOTOMETRY

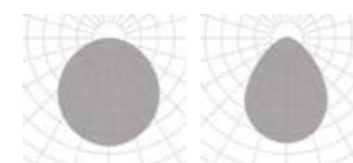


OPAL MICROPRISMATIC

INCLUDED (.PN)



CONNECTION BOX SC03.SA WIRE 3M.

PROFILE



47

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 - TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



ACOUSTIC

SYSTEM

Sustainability, acoustics & lighting in one solution

Pleasing lighting and sound solutions. Everything in perfect harmony. That's BPM Acoustic, an innovative response to specific lighting for noisy areas and when peace and quiet are essential. BPM Acoustic also features avant-garde panel design, with a hidden lighting solution to achieve a quiet environment in an unobtrusive way. And another plus point is sustainability.

Sostenibilidad, acústica e iluminación en una solución

Soluciones lumínicas, acústicas y estéticas. Todo a la vez, y todo en armonía. Así es BPM Acoustic, una respuesta innovadora a necesidades específicas de iluminación en espacios de gran carga sonora o donde se requiere de un ambiente de silencio.

BPM Acoustic es además una propuesta vanguardista en cuanto a diseño de panel, con una solución de iluminación oculta para incidir en el concepto de discreción y tranquilidad con el valor incorporado de la sostenibilidad.

 **BPM**Lighting®

Let's get brighter

new

FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

LENGTHS mm.

1200

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI

1.10


PUSH

LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Connection Box (CB09.32)
Cover Kit
Diffuser

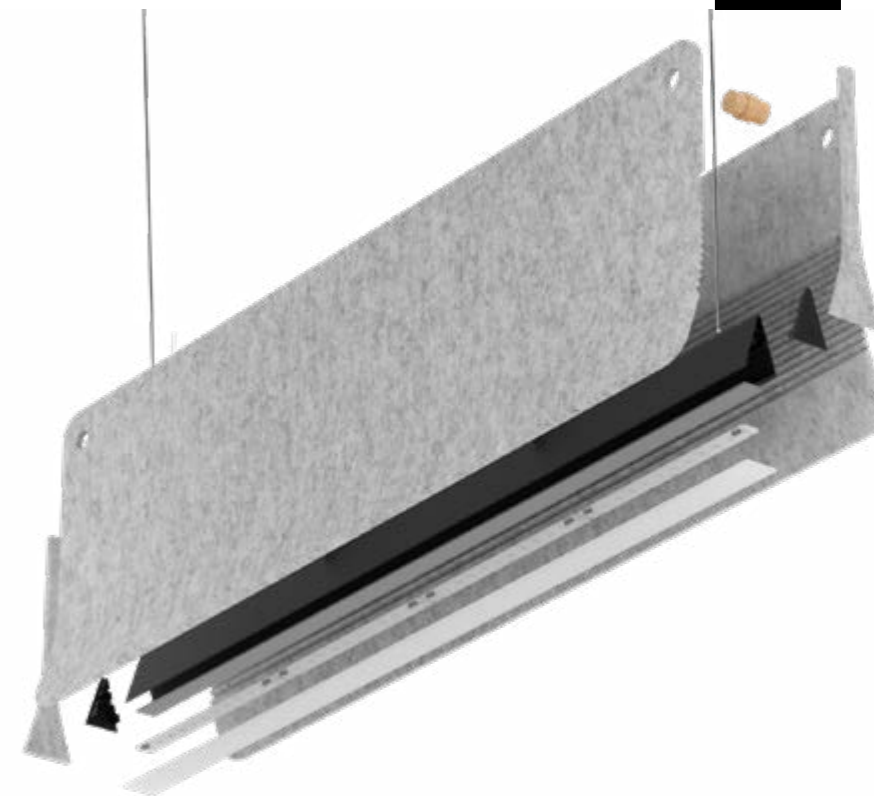


ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).


PENDANT

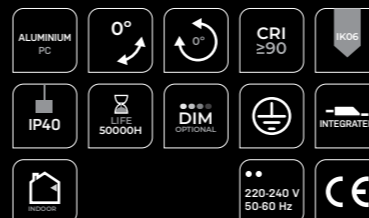

ACOUSTIC ALZIRA

Designed by Rafa Ortega

REF 230002.PN

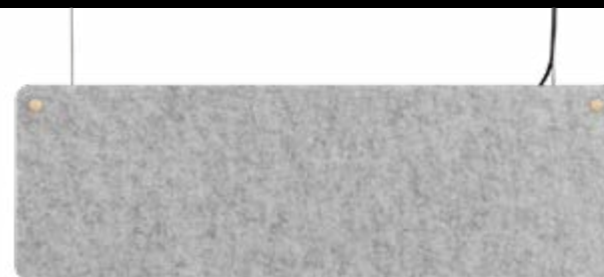


Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.

Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.




REF.	DIMENSION ●	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT K	DIMM ▼
		.27	.30				.40				
230002	.01 1200mm	.50 .51	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	.DA .PU .D1

Reference order | 230002.XX.PN.XX.XX.XX.XX.9.XX.XX

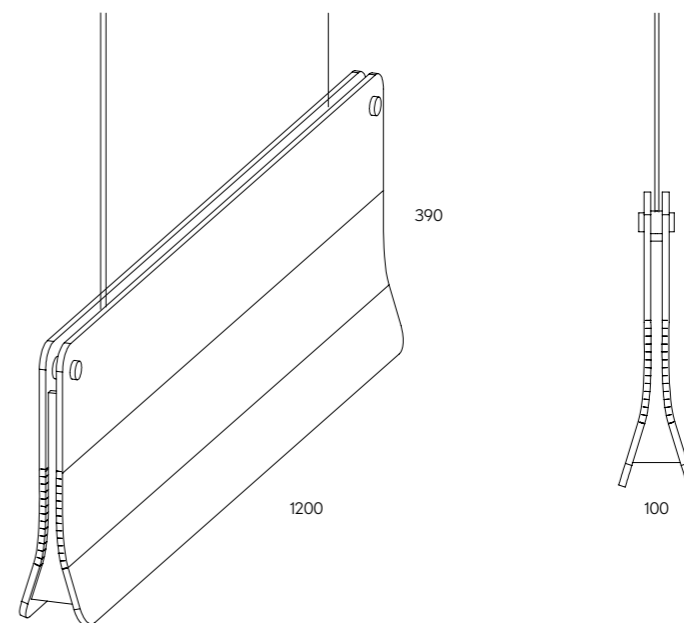


* Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Select Acoustic finishes



Select Profile finishes



ACOUSTIC ALZIRA

Designed by Rafa Ortega


REF 230002.PN

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**


Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED

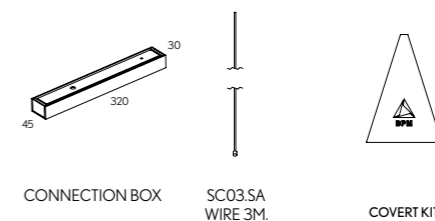

CONNECTION BOX SC03.SA WIRE 3M. COVER KIT

PROFILE



65 47

PENDANT



FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

LENGTHS mm.

1200

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI

1.10

PUSH

LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
 Diffuser - Cover Kit
 Connection Box CB09:12

.SR

Surface mounting kit

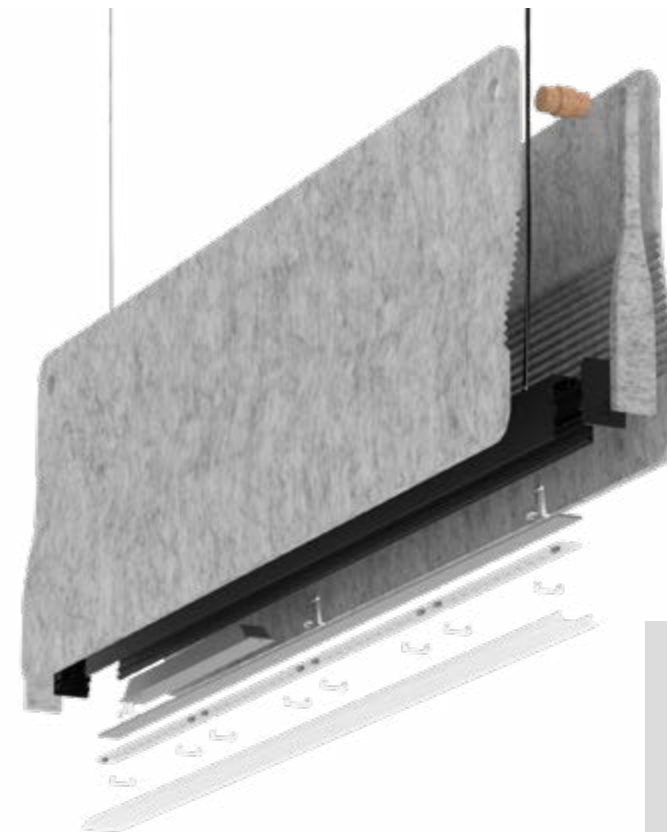

ON DEMAND

Emergency Lighting*
 Motion Detection
 Well-Certified LED Boards
 Special Color Temperature
 RGB
 TW
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80


* Delivered separately
 (not installed in luminaire).



ACOUSTIC ALBA

Designed by Rafa Ortega

REF 230004.PN | 230004.SR

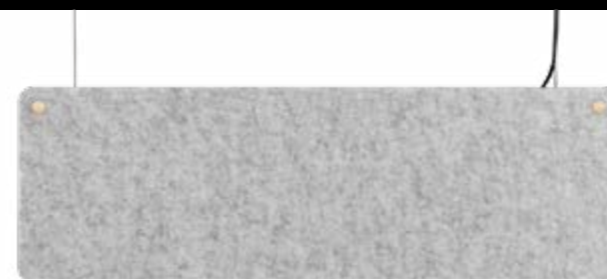



Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
 Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

PENDANT | SURFACE
 .SR
 .PN



REF.	DIMENSION ●	FINISH		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT	DIMM ▼
		●	●				.27	.30	.40		
230004	.01 1200mm	.50 .51	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	.DA .PU .D1


Reference order | ▲ .SR | ● .PN | ■ .XX-XX.XX | ▼ .ST9.XX.XX

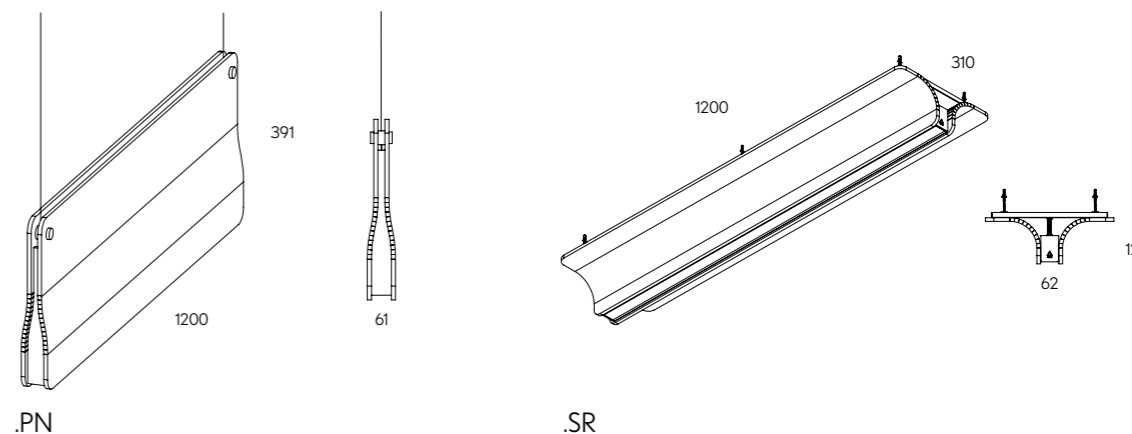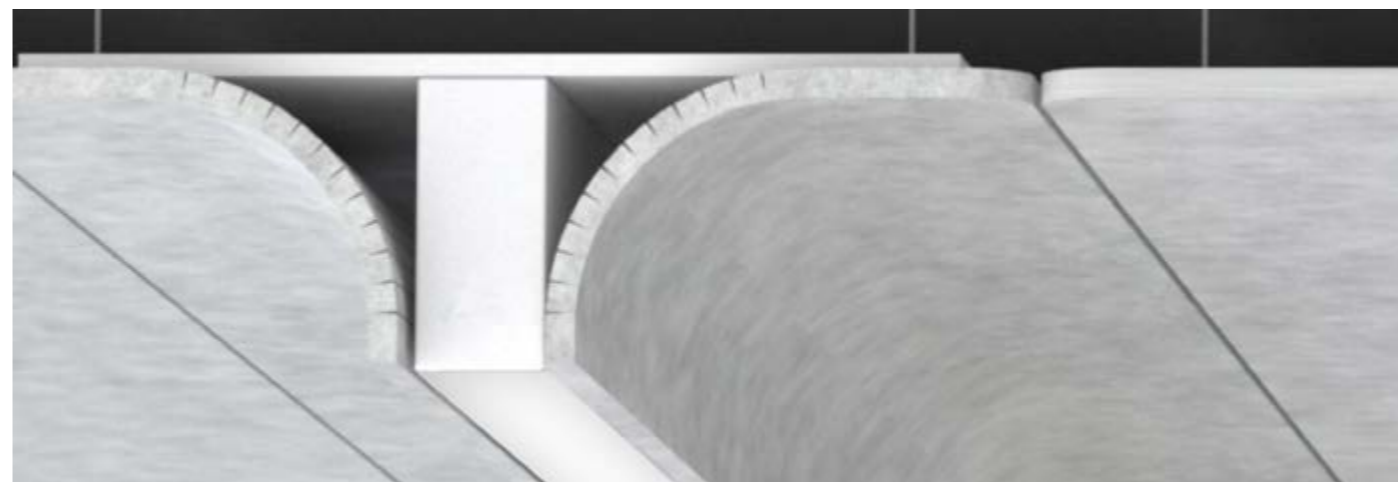

* Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

● Select Acoustic finishes

● Select Profile finishes



ACOUSTIC ALBA

Designed by Rafa Ortega


REF 230004.PN | 230004.SR

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**


Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED

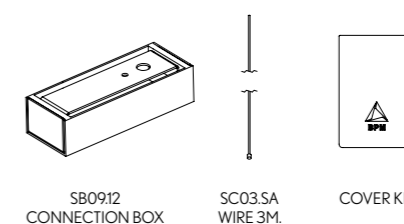

SB0912 CONNECTION BOX SC03.SA WIRE 3M COVER KIT

PROFILE



FINISHES

● ACOUSTIC COLORS



● PROFILE COLORS



DIMENSIONS

● LENGTHS mm.

1163

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
 NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 Diffuser
 Cover Kit
 Connection Box (CB09.32)

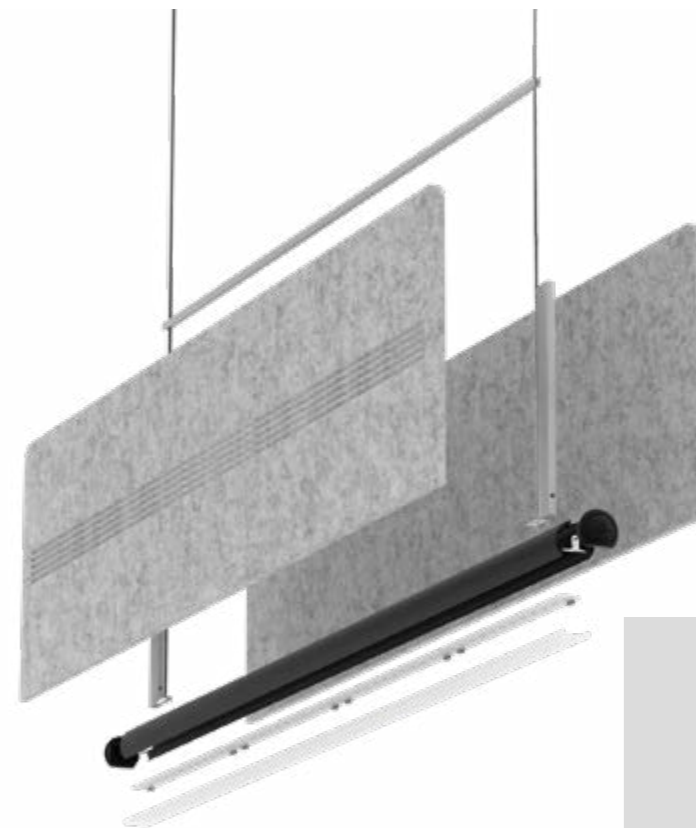

ON DEMAND

Emergency Lighting*
 Motion Detection
 Well-Certified LED Boards
 Special Color Temperature
 RGB
 TW
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

PENDANT



ACOUSTIC LINGGO MINI


REF 230007.PN






REF.	DIMENSION ●	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT K	DIMM ▼
		.27	.30				.40				
230007	.01 1163mm	.50 .51	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	.DA .PU .D1

Reference order | 230007.XX.PN.XX-XX.XX.ST9.XX.XX

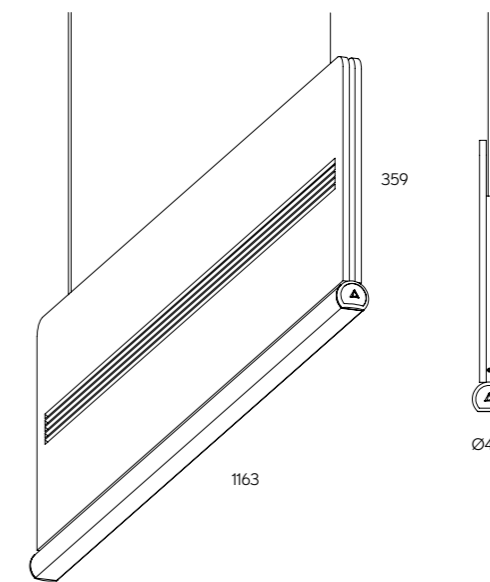


* Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

● Select Acoustic finishes



● Select Profile finishes



ACOUSTIC LINGGO MINI


REF 230007.PN

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**


Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 α_w

PHOTOMETRY



OPAL

INCLUDED

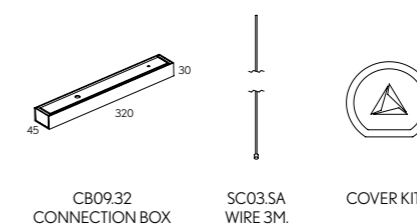


CB09.32 CONNECTION BOX

SC03.SA WIRE 3M.


COVER KIT

PROFILE



45

PENDANT

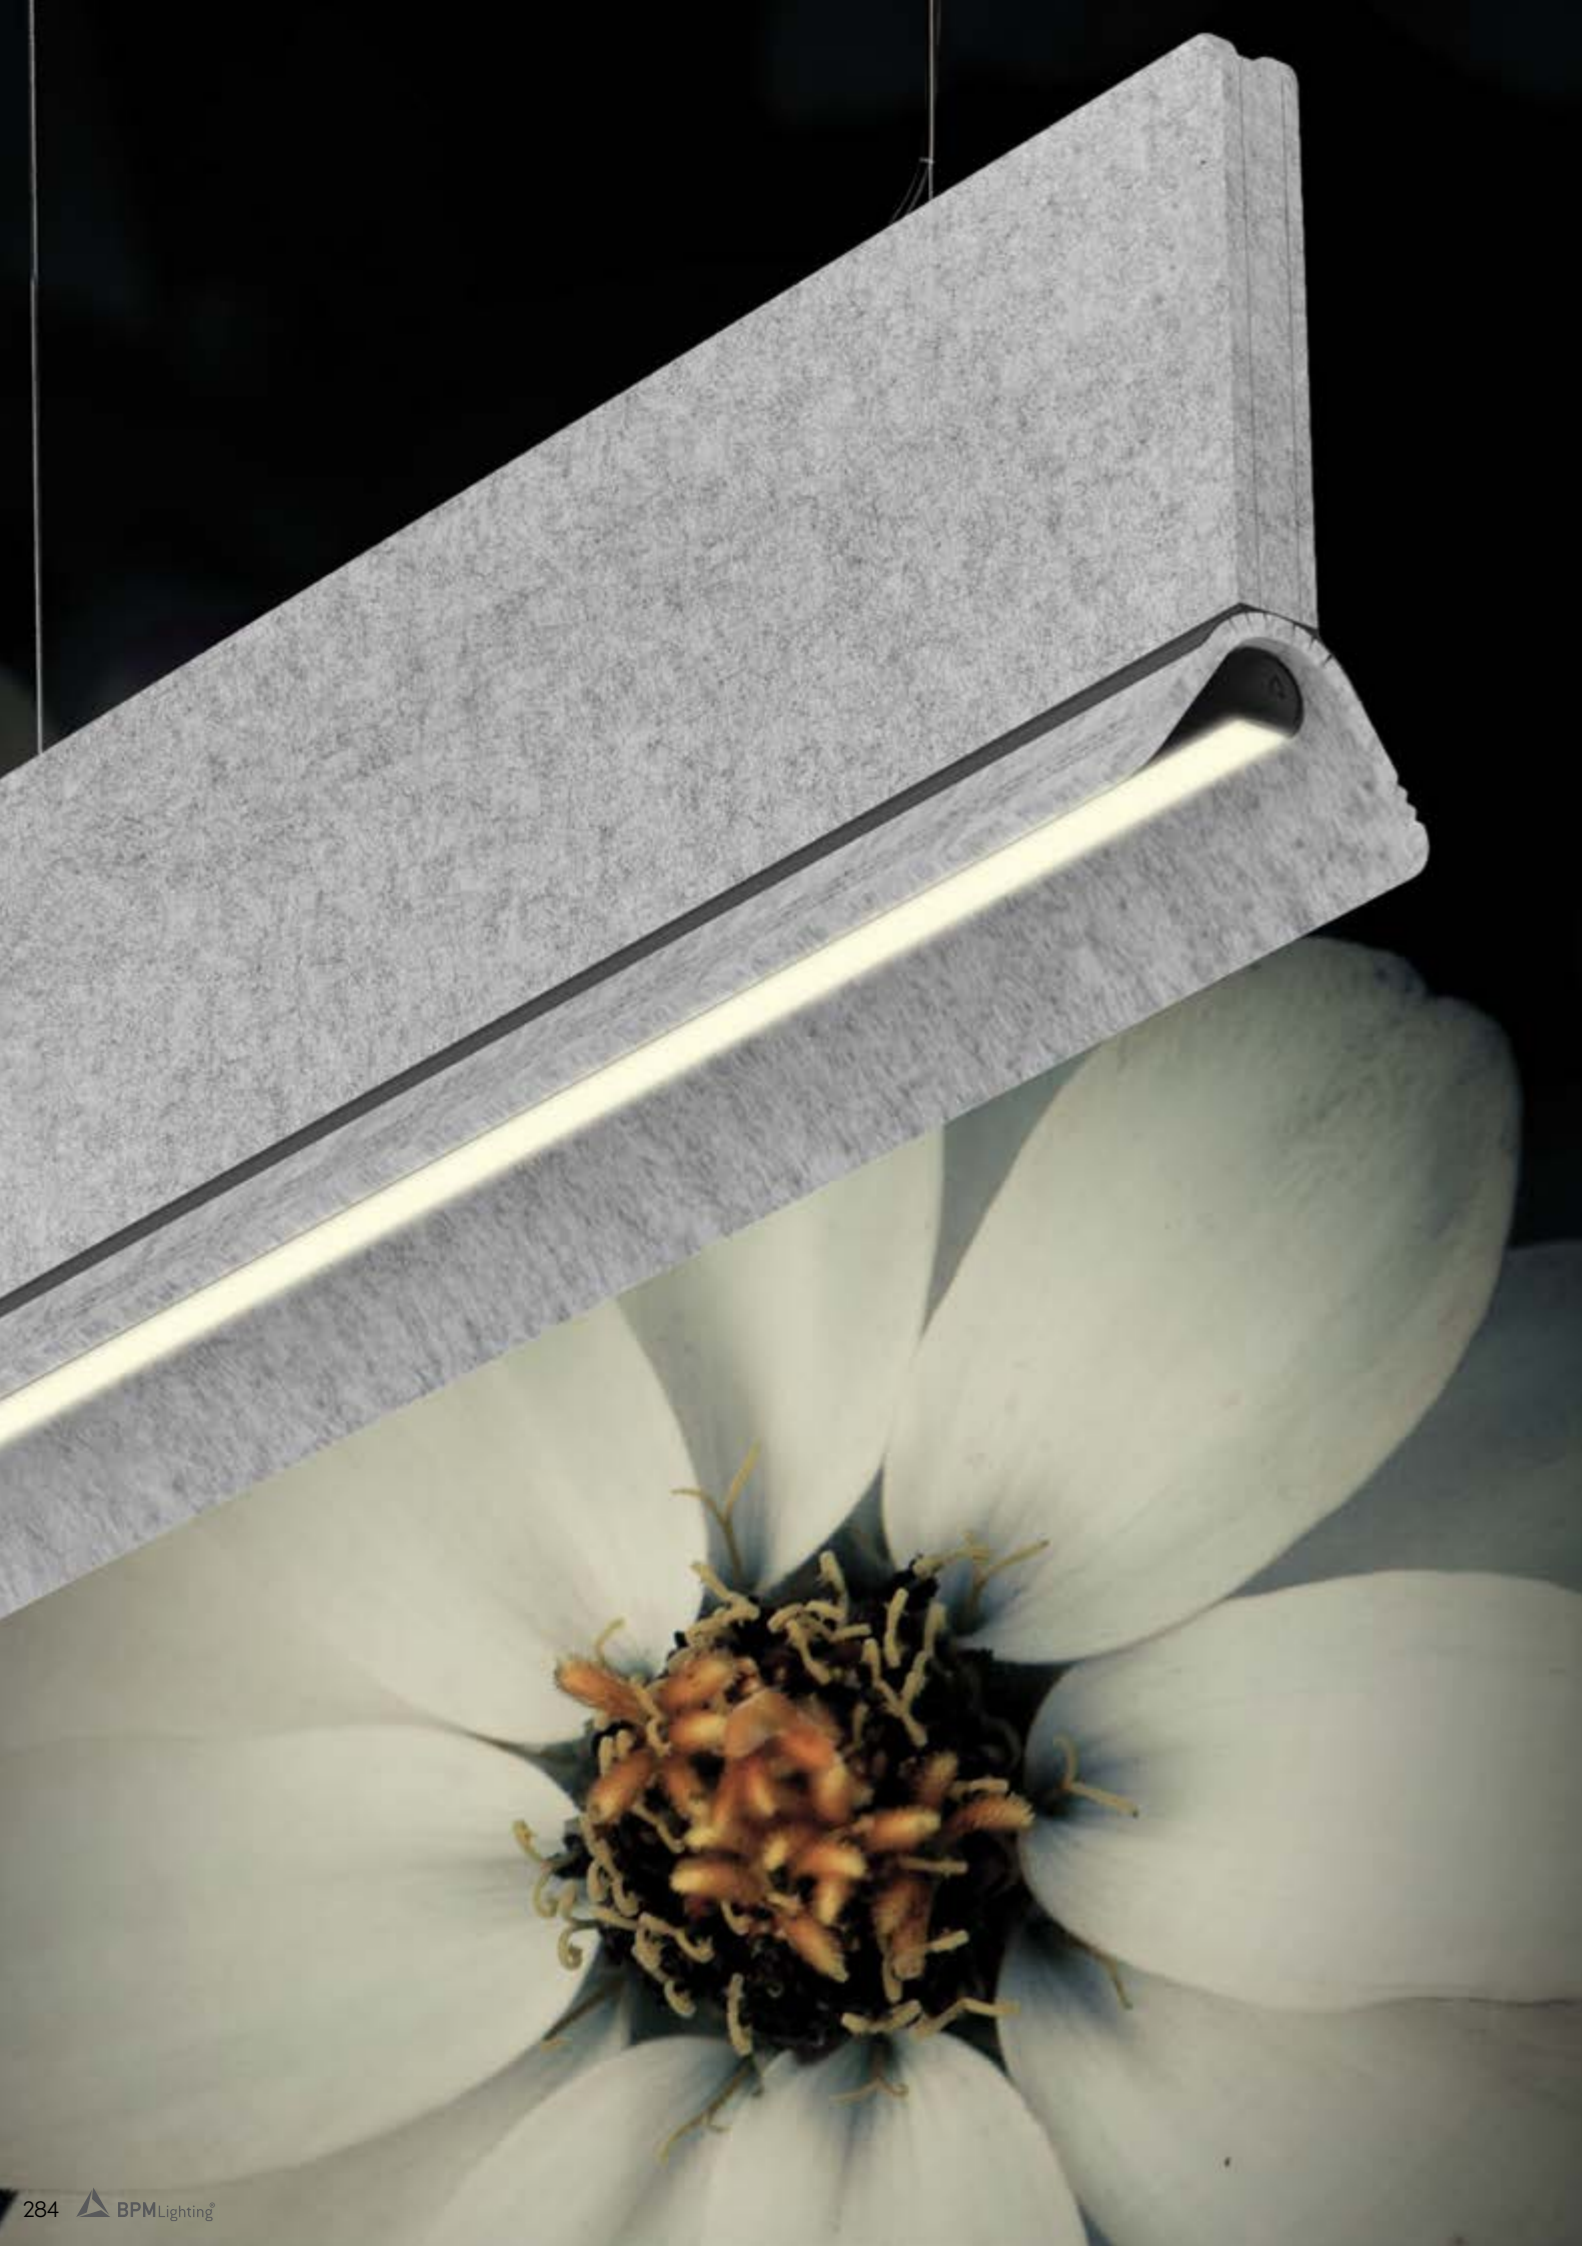

FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

LENGTHS mm.

1170

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI

1.10

PUSH

LIGHT DISTRIBUTION

DOWN



LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm² Diffuser
 Cover Kit
 Connection Box CB09:12

.SR

Surface mouting kit

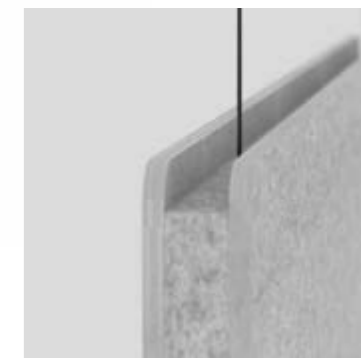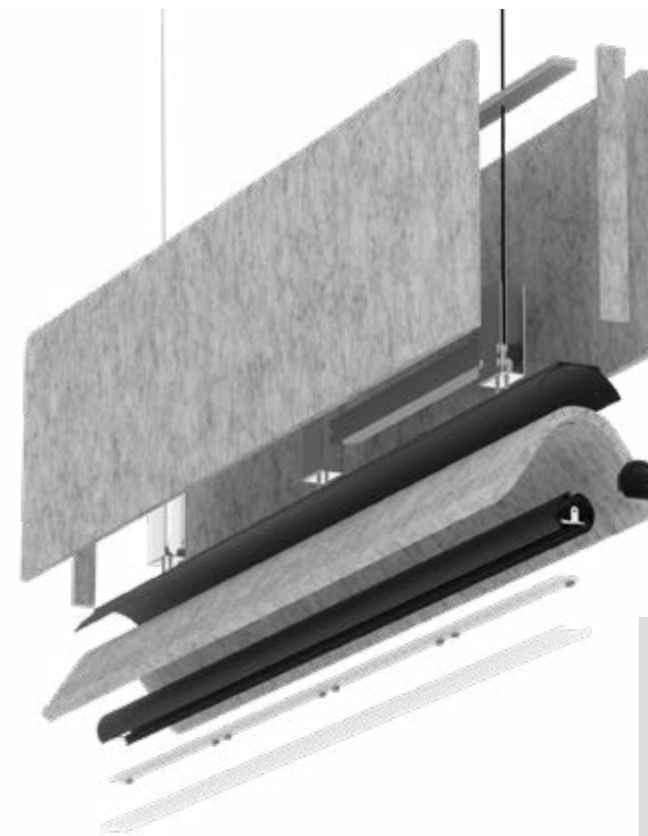

ON DEMAND

Emergency Lighting*
 Motion Detection
 Well-Certified LED Boards
 Special Color Temperature
 RGB
 TW
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).



ACOUSTIC LAMBDA

REF 230001.PN | 230001.SR





PENDANT | SURFACE
 .SR
 .PN




REF.	DIMENSION ●	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT	DIMM ▼
							.27	.30	.40		
230001	.01 1170mm	.50 .51 .52	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	.DA .PU .D1

Reference order | 230001.01 | .SR | .PN | .XX-XX.XX.ST9.XX.XX

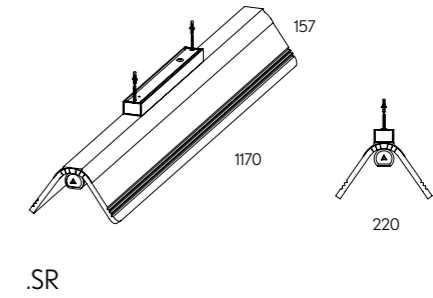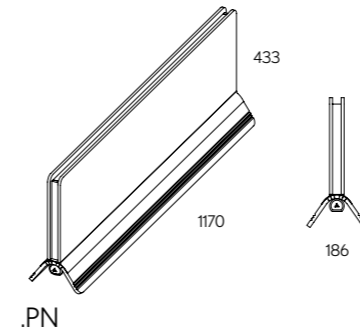


* Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Select Acoustic finishes



Select Profile finishes



ACOUSTIC LAMBDA


REF 230001.PN | 230001.SR

ACOUSTIC PROPERTIES


- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 α_w


PHOTOMETRY

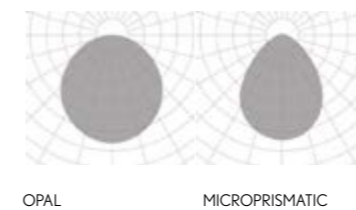

INCLUDED (.PN)

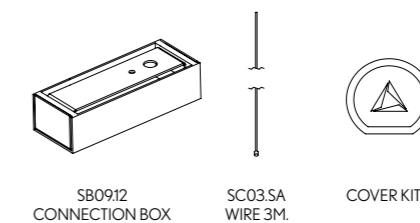

PROFILE



PENDANT | SURFACE

.SR
.PN



FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

LENGTHS mm.

1190

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI

1.10


PUSH

LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
 Diffuser
 Cover Kit
 Connection Box CB09:12

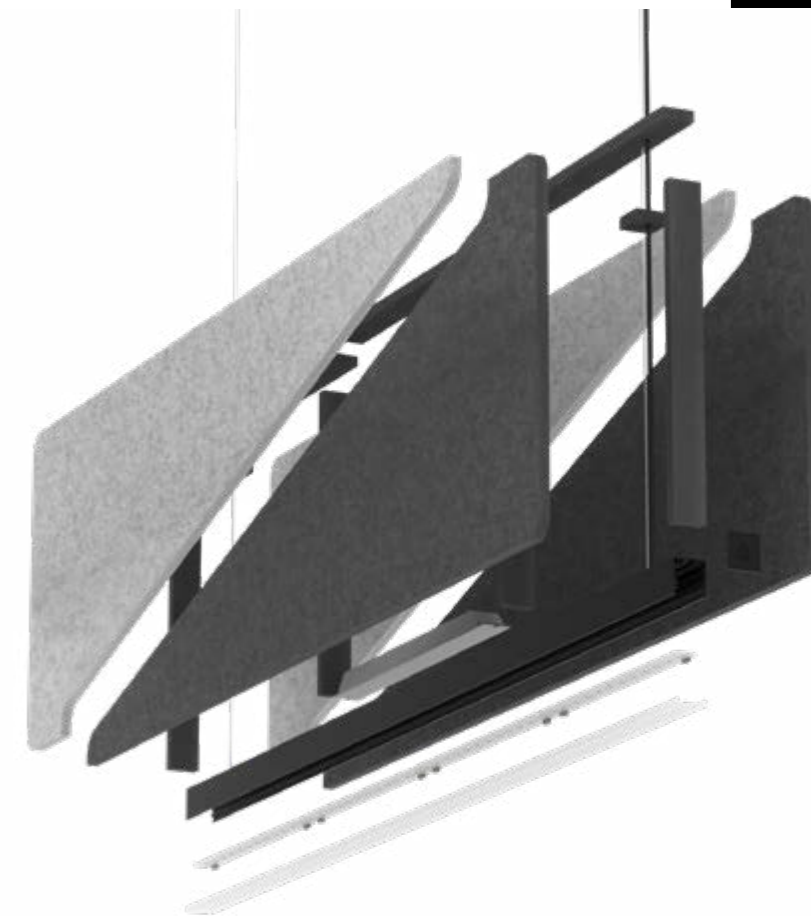

ON DEMAND

Emergency Lighting*
 Motion Detection
 Well-Certified LED Boards
 Special Color Temperature
 RGB
 TW
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

ACOUSTIC ALBA MINI

REF 230008.PN




PENDANT .PN



REF.	DIMENSION ●	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT	DIMM ▼
							.27	.30	.40		
230008	.01 1190mm	.50-51 .53-54 .50-53	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	.DA .PU .D1


Reference order | 230008.01.PN.XX-XX.XX.ST9.XX.XX

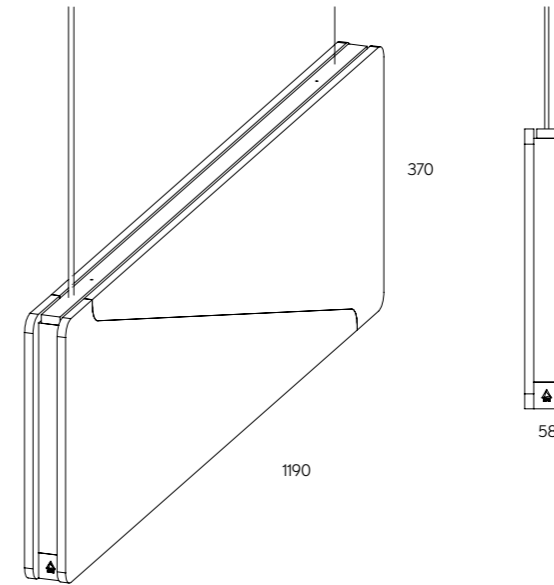

* Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

● Select acoustic finishes

● Select profile finishes



ACOUSTIC ALBA MINI

REF 230008.PN


PENDANT

ACOUSTIC PROPERTIES


- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BAFFLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 190Kg/m³
 12mm
 0,92 α_w


PHOTOMETRY

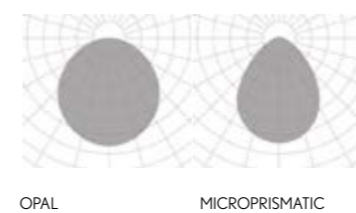


INCLUDED

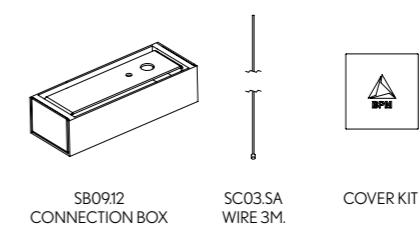

PROFILE



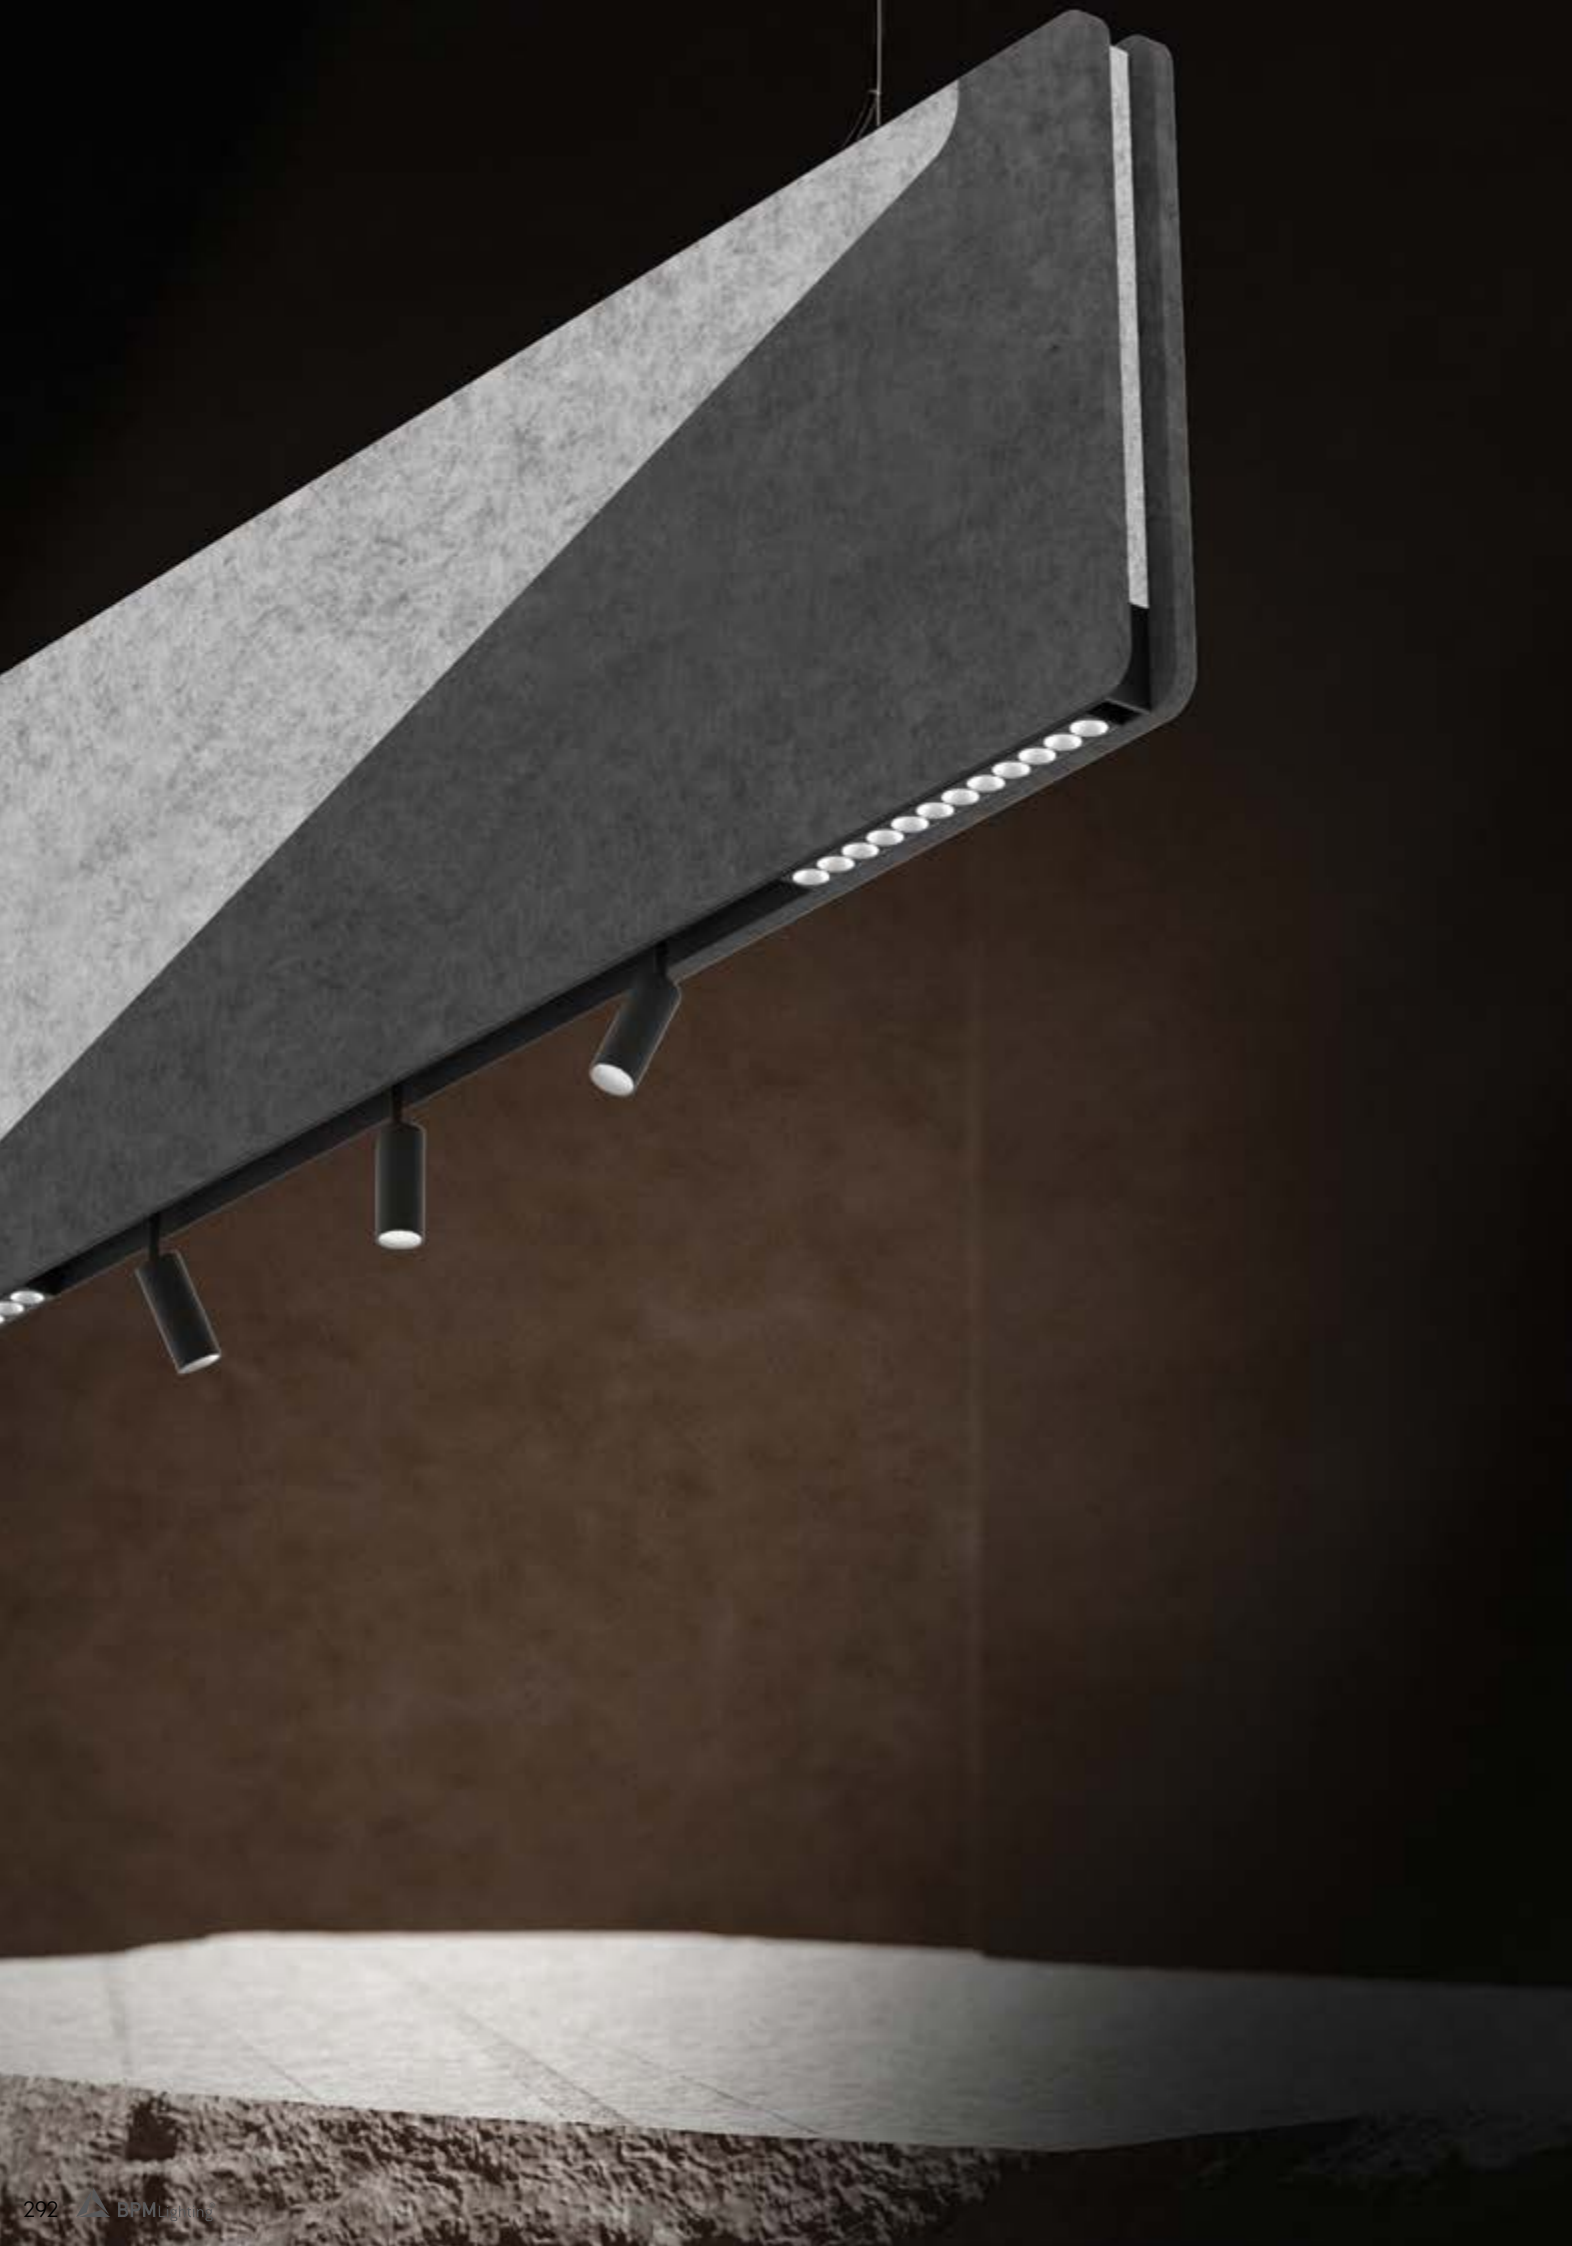

new

FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

LENGTHS MM.

1190

COMPONENTS

- SLIM PATRICIA
- SLIM LED BALL
- SLIM TUBE
- SLIM WALL WASHER
- SLIM LENSES
- SLIM MOTION LENSES
- SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS



DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

- Suspension cables
- NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²
- DIM DOWN: 1x Feed Hose 5 x 0,75mm²
- Cover Kit
- Connection Box CB09.12

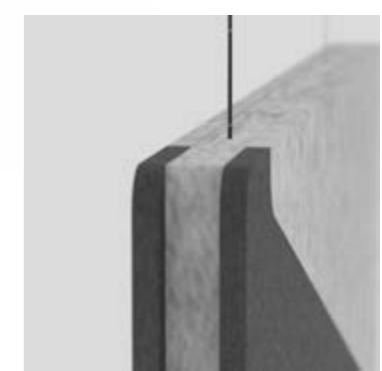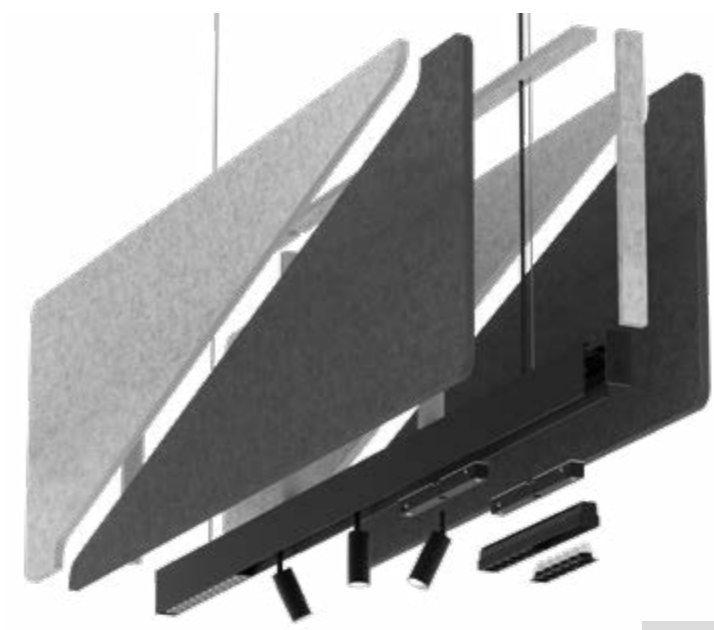


.PN



PENDANT



ACOUSTIC ALARIK SLIM

REF 230009.PN

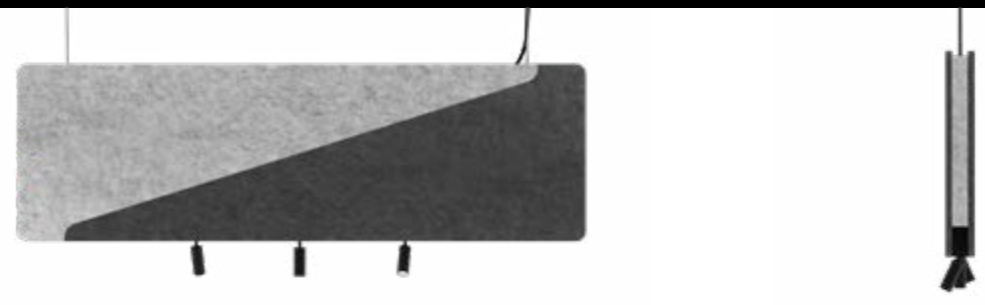





ALARIK SLIM	REF.	DIMENSION	FINISH	SKETCH
	230009	.01 1190mm.	●	



48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75

Reference order 230009.XX.PN.XX-XX-XX



Reference order DR48.XX

SLIM PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order 11544.XX.XX.XX.ST9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				





Reference order 11546.XX.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11551	.01	.BK-BK .WH-WH	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				



Reference order 11551.XX.XX.XX.ST9.XX.XX

- Select Acoustic finishes
- Select Profile finishes







SLIM LED TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA .D1	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA .D1	
							.30	1716				
							.40	1729				

Reference order 11552XX.XX.XX.ST9.XX.XX

SLIM WALL WASHER	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				


Reference order 11550.XX.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order 11548.XX.XX.XX.ST9.XX.XX


ACOUSTIC ALARIK SLIM

REF 230009.PN

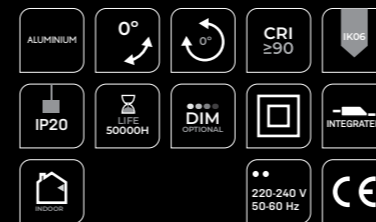


PHOTOMETRY

PATRICIA

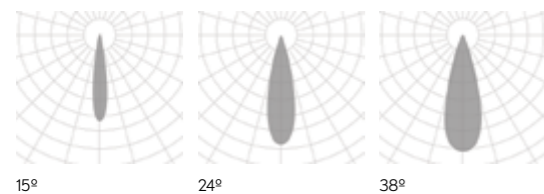


PHOTOMETRY

LENSES

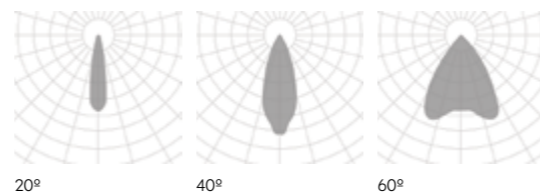


PHOTOMETRY


LED MODULES

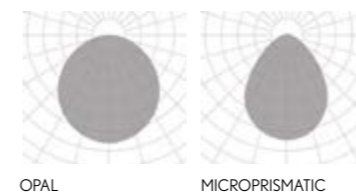

INCLUDED

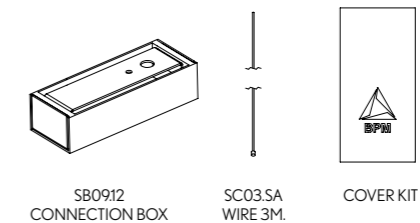

PROFILE






SLIM MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11547	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.XX.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				


Reference order | 11549.XX.XX.XX.ST9.XX.XX

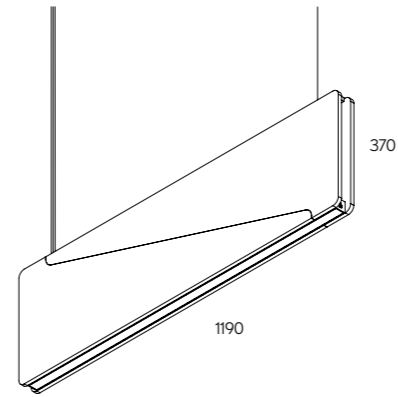

Select Acoustic finishes



Select Profile finishes



ACOUSTIC ALARIK SLIM


REF 230009.PN

ACOUSTIC PROPERTIES


- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 190 Kg/m³
 12mm
 0,92 α_w


PHOTOMETRY

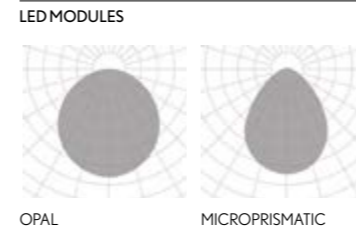

INCLUDED

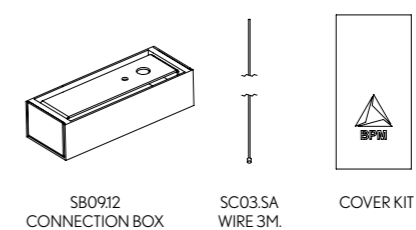


PROFILE



PENDANT

.PN

new

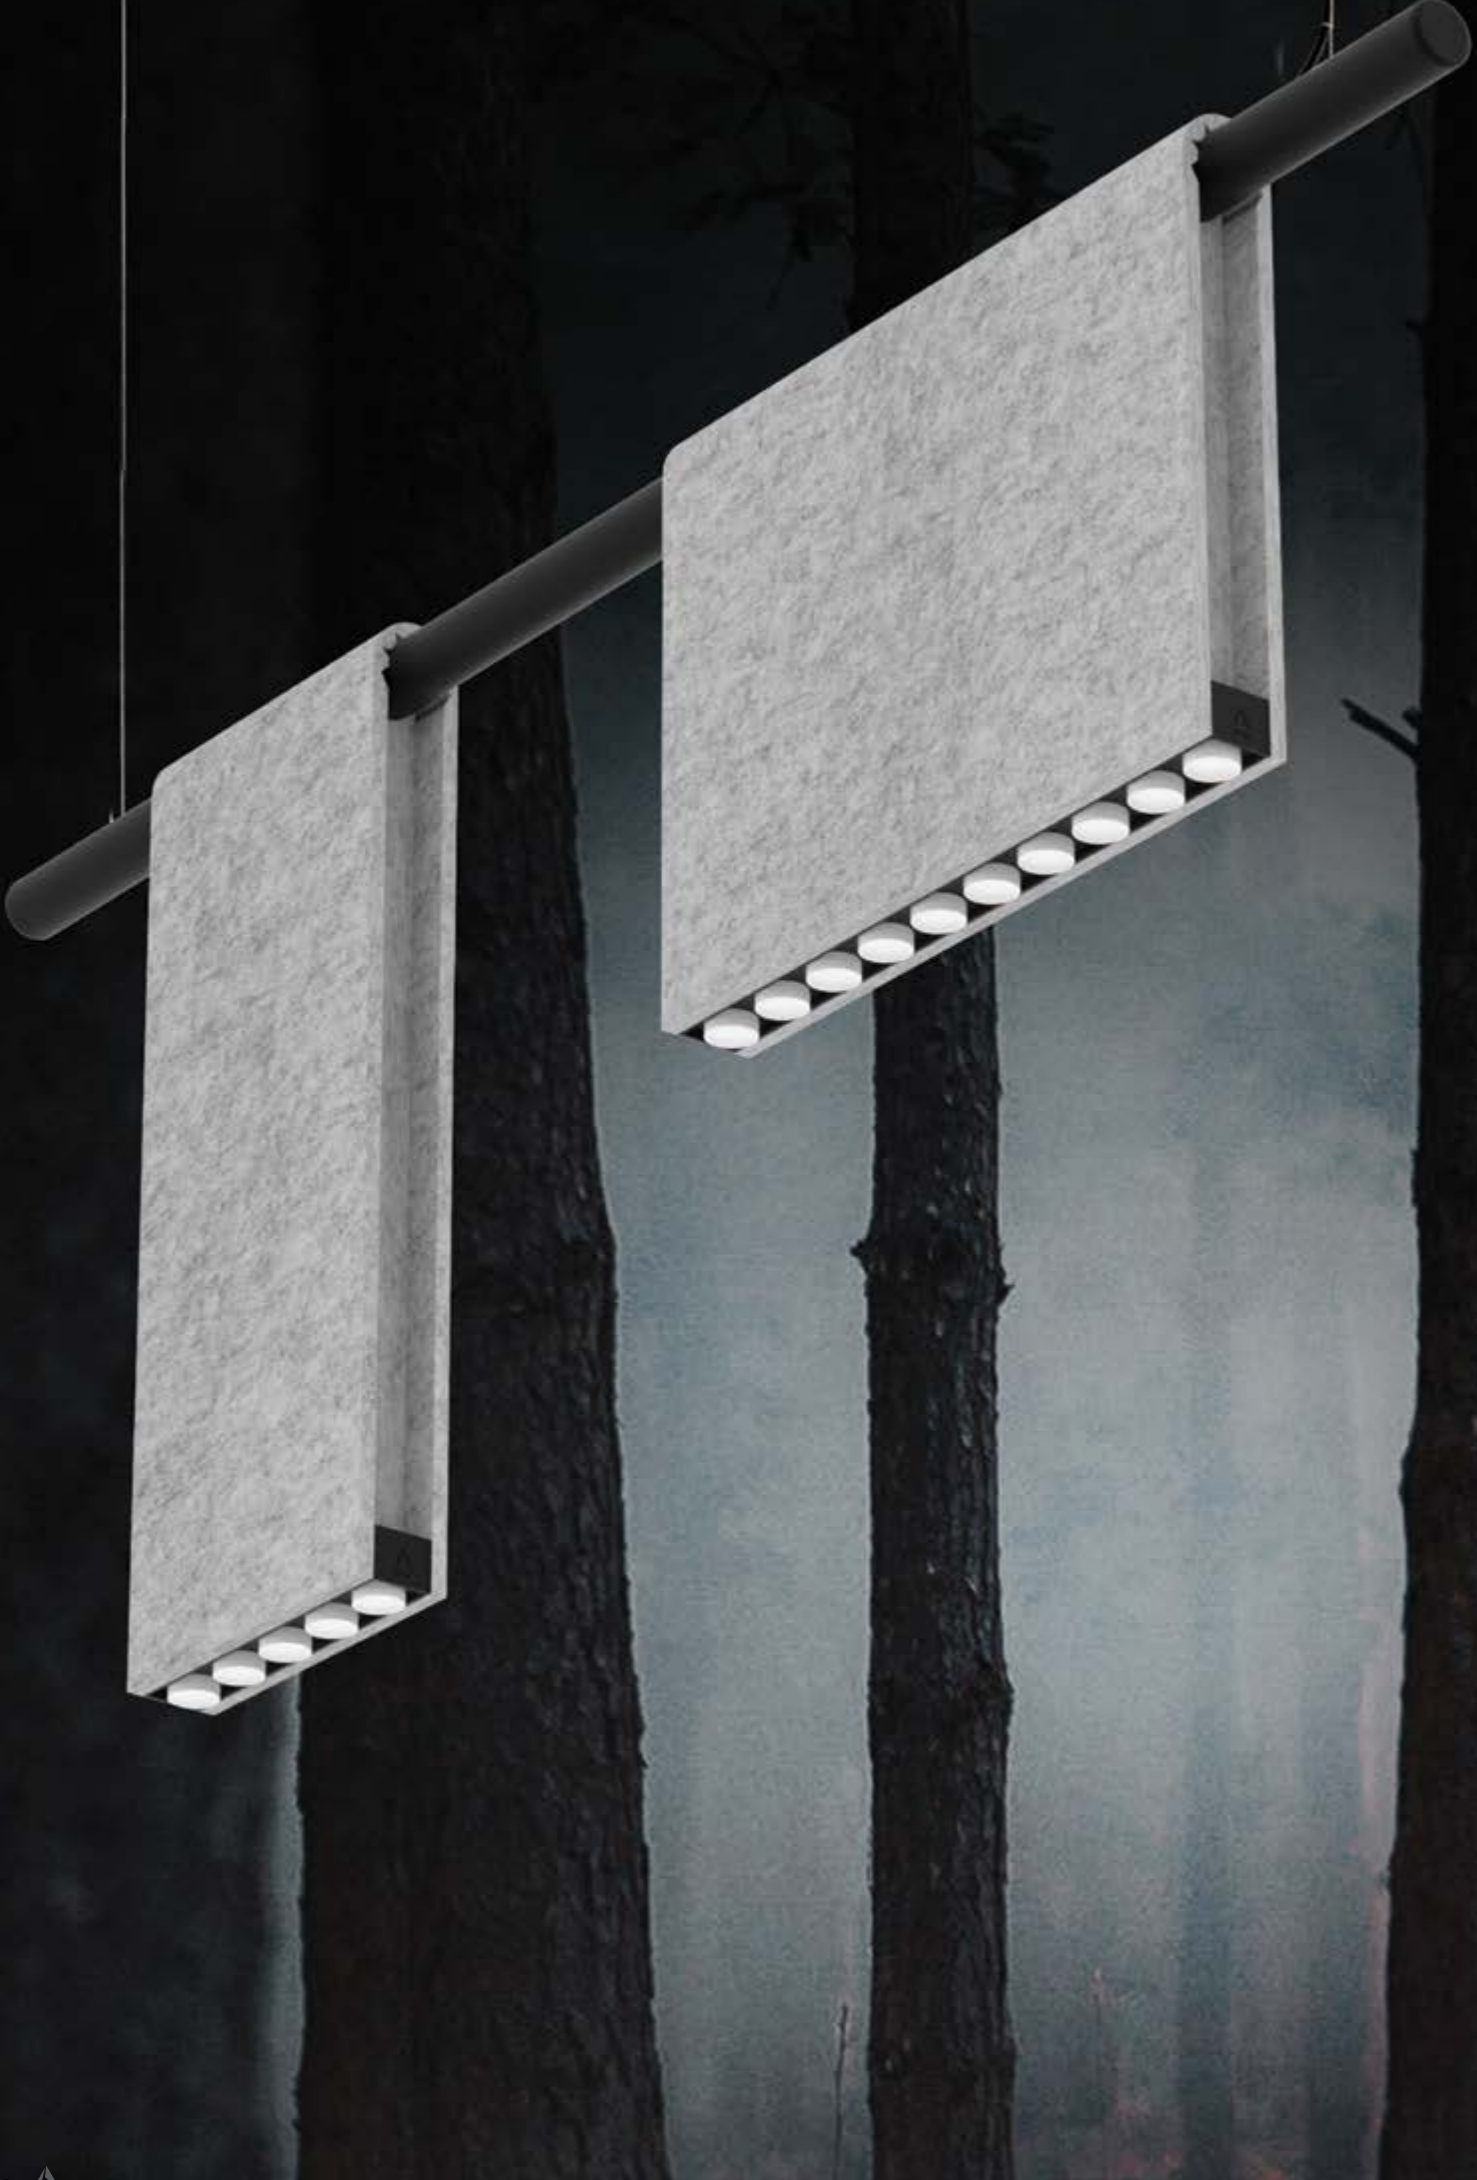

FINISHES

● PROFILE COLORS



● LED MODULE COLORS

ACOUSTIC COLORS



LED MODULE COLORS



DIMENSIONS

● LENGTHS mm.

1000

LIGHTING OPTIONS

■ BEAM OPTIONS

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 |

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES


2 x Suspension cables 3m
Connection Box
Cover Kit

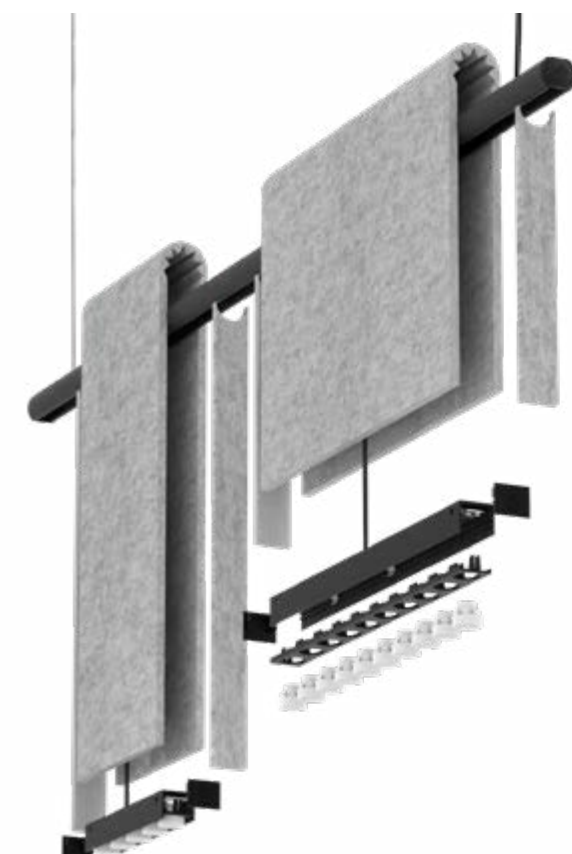

- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- 48V. REMOTE
- 220-240 V 50-60 Hz
- CE

ACOUSTIC OKKO


REF 230003.PN

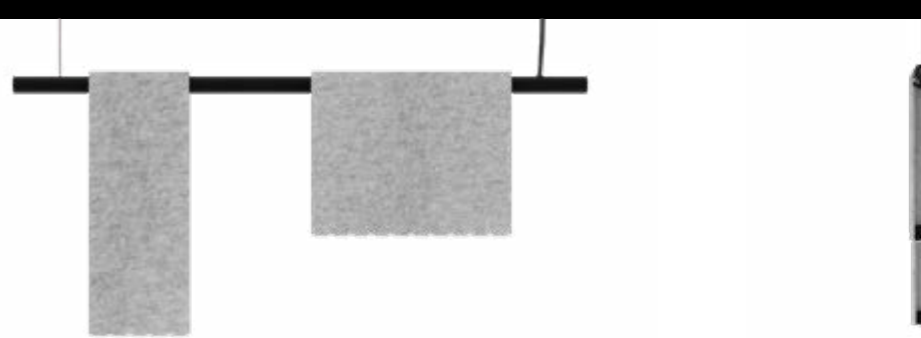

53

.PN
PENDANT

REFERENCE ORDER EXAMPLE | EJEMPLO DE REFERENCIA

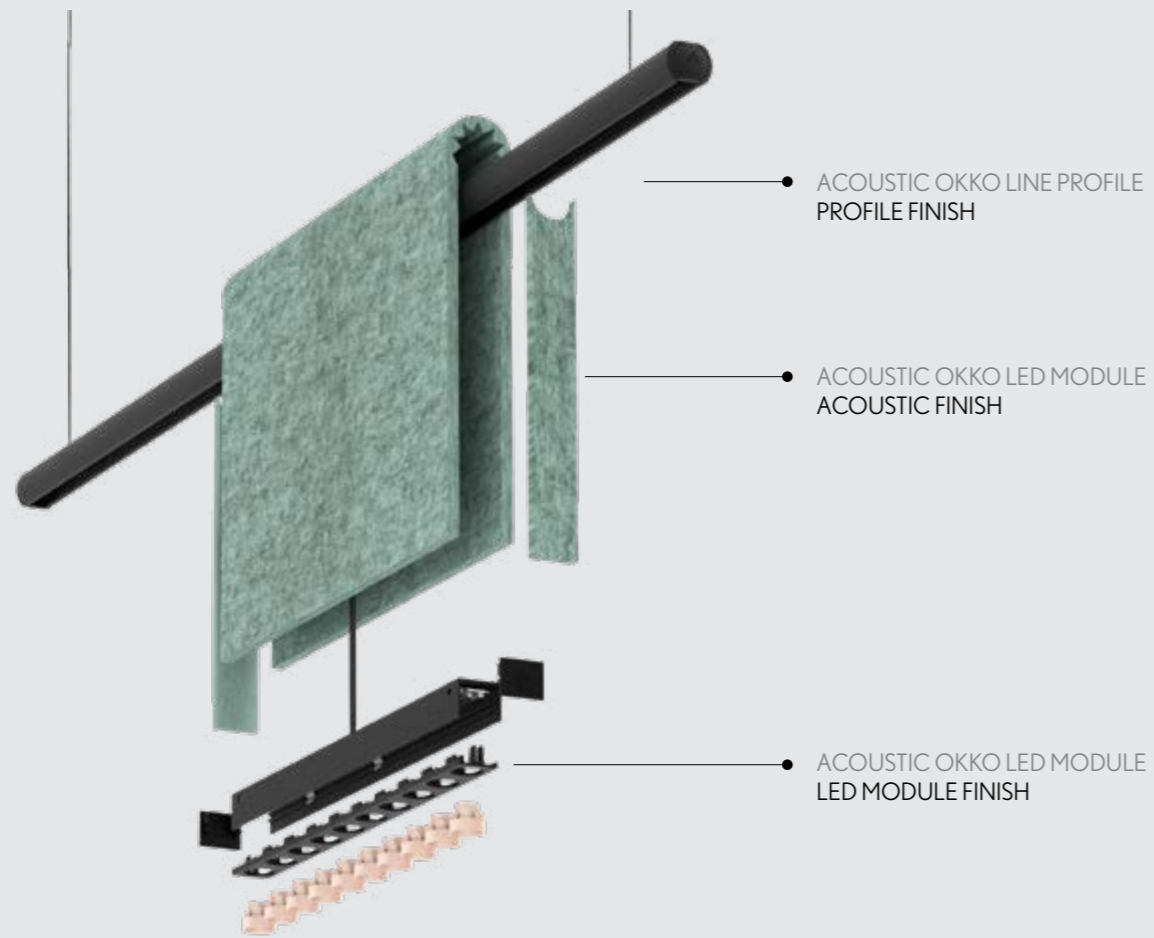

ACOUSTIC OKKO LINE PROFILE
PROFILE FINISH

ACOUSTIC OKKO LED MODULE
ACOUSTIC FINISH

ACOUSTIC OKKO LED MODULE
LED MODULE FINISH

ACOUSTIC OKKO LINE PROFILE

Reference order | 230003.01.PN.BK-BK

ACOUSTIC OKKO LED MODULES

Reference order | 140002.01.55-BK-CR.XX.ST9.XX.XX

ACOUSTIC OKKO LINE	REF.	DIMENSION	FINISH
	230003	.01 1000mm	.WH-WH .BK-BK

Reference order | 230003.01.PN.XX

48V TRANSFORMER	DIMENSION	WATT
DR210012	.01	75
	.02	120
	.03	200

Reference order | DR210012.XX


ACOUSTIC OKKO LED MODULES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	DIMM	SKETCH
	140001	.01	.50 .51 .55	.20 .40 .60	.ST	.9	552 623 660	6	500	.DA .D1	
		.02									

Reference order | 140001.XX.XX.XX.XX.ST9.XX.XX


ACOUSTIC OKKO LED MODULES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	mA	DIMM	SKETCH
	140002	.01	.50 .51 .55	.20 .40 .60	.ST	.9	1114 1245 1320	12	500	.DA .D1	
		.02									

Reference order | 140002.XX.XX.XX.XX.ST9.XX.XX

Select acoustic finishes



Select LED modules finishes

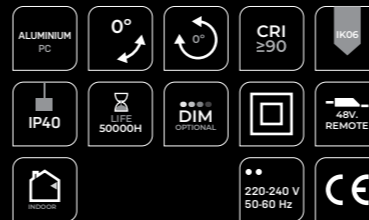

ACOUSTIC
OKKO


REF 230003.PN

ACOUSTIC PROPERTIES


- ENVIRONMENTAL:
- FIRE TEST:
- BAFFLE THICKNESS:
- BABBLE DENSITY:
- SOUND ABSORPTION COEFFICIENT:

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 αw


PHOTOMETRY

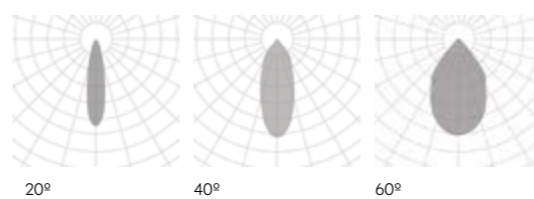

INCLUDED

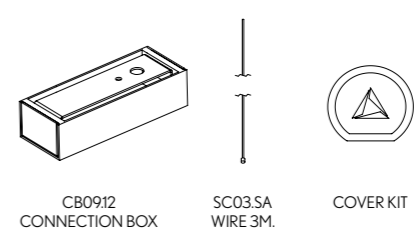

PROFILE



new



FINISHES

● ACOUSTIC COLORS



● PROFILE COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

- 3 x Suspension cables 3m
- 1 x Feed Hose 3 x 0,75mm² (125 1 Feed Hose 5 x 0,75mm²)
- Electric system
- Connection Box CB03 + Driver Box CB04.OP
- Cover Kit

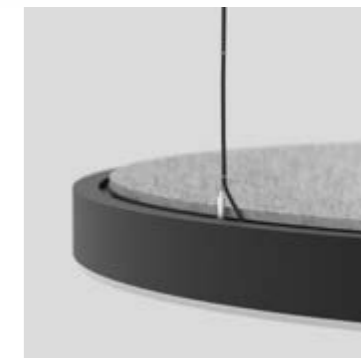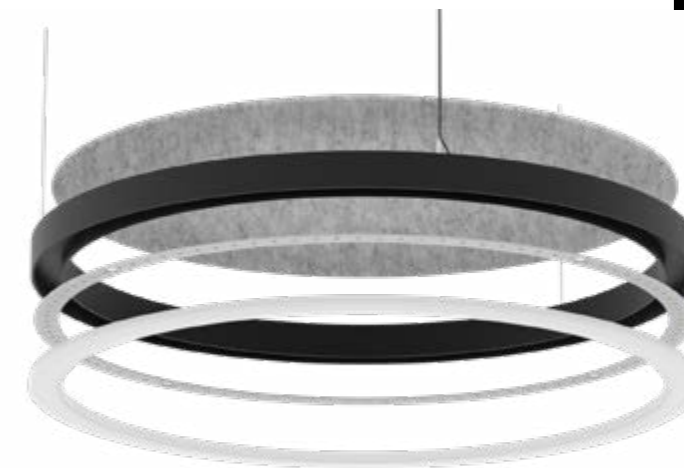

ON DEMAND

- Special RAL Color
- Number of switches
- Emergency Lighting*
- Motion Detection
- Tunable White
- RGB
- Wireless Control Options (Casambi)




* Delivered separately (not installed in luminaire).

- ALUMINUM SILICONE
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- ROOM
- 220-240 V 50-60 Hz
- CE

ACOUSTIC ALBERTA SOFT

REF 230010.PN

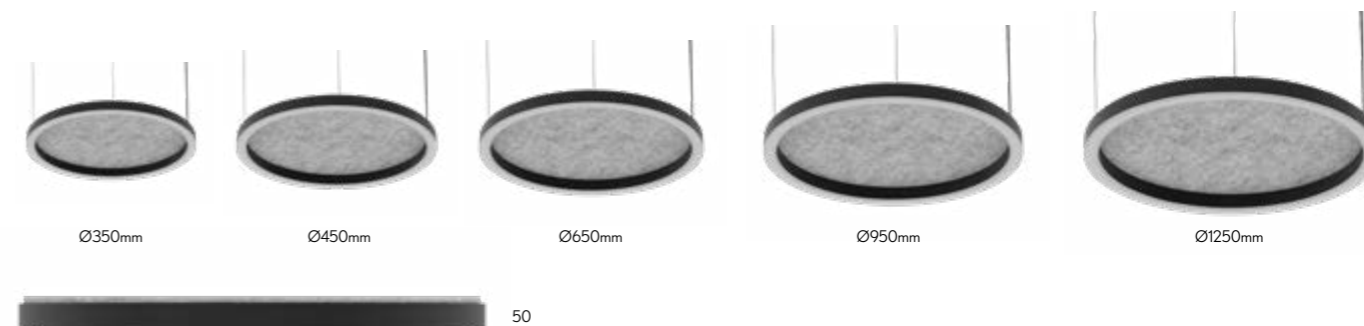

PENDANT .PN




ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	LUMEN			WATT	mA	DIMM	SKETCH	
							.27	.30	.40					
	230010	.35	.50 .51	WH BK	.SI	.ST	.9	5280	5316	5844	56	700	.DA .PU .D1	
	230010	.45	.50 .51	WH BK	.SI	.ST	.9	7086	7121	7747	70	700	.DA .PU .D1	
	230010	.65	.50 .51	WH BK	.SI	.ST	.9	8785	9040	9687	86	700	.DA .PU .D1	
	230010	.95	.50 .51	WH BK	.SI	.ST	.9	13298	13519	14703	129	700	.DA .PU .D1	
	230010	.125	.50 .51	WH BK	.SI	.ST	.9	17816	18135	18118	172	700	.DA .PU .D1	

Reference order 230010.XX.PN.XX.XX.XX.ST9.XX.XX


DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
CB09.32	CB08.30	CB09.40	CB08.38	

Reference order CB09.XX.XX

Select Acoustic finishes



Select Profile finishes



ACOUSTIC ALBERTA SOFT


REF 230010.PN

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**


Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 αw

PHOTOMETRY





SILICONE

INCLUDED

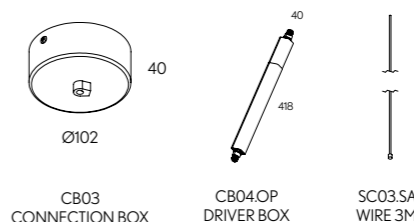

PROFILE



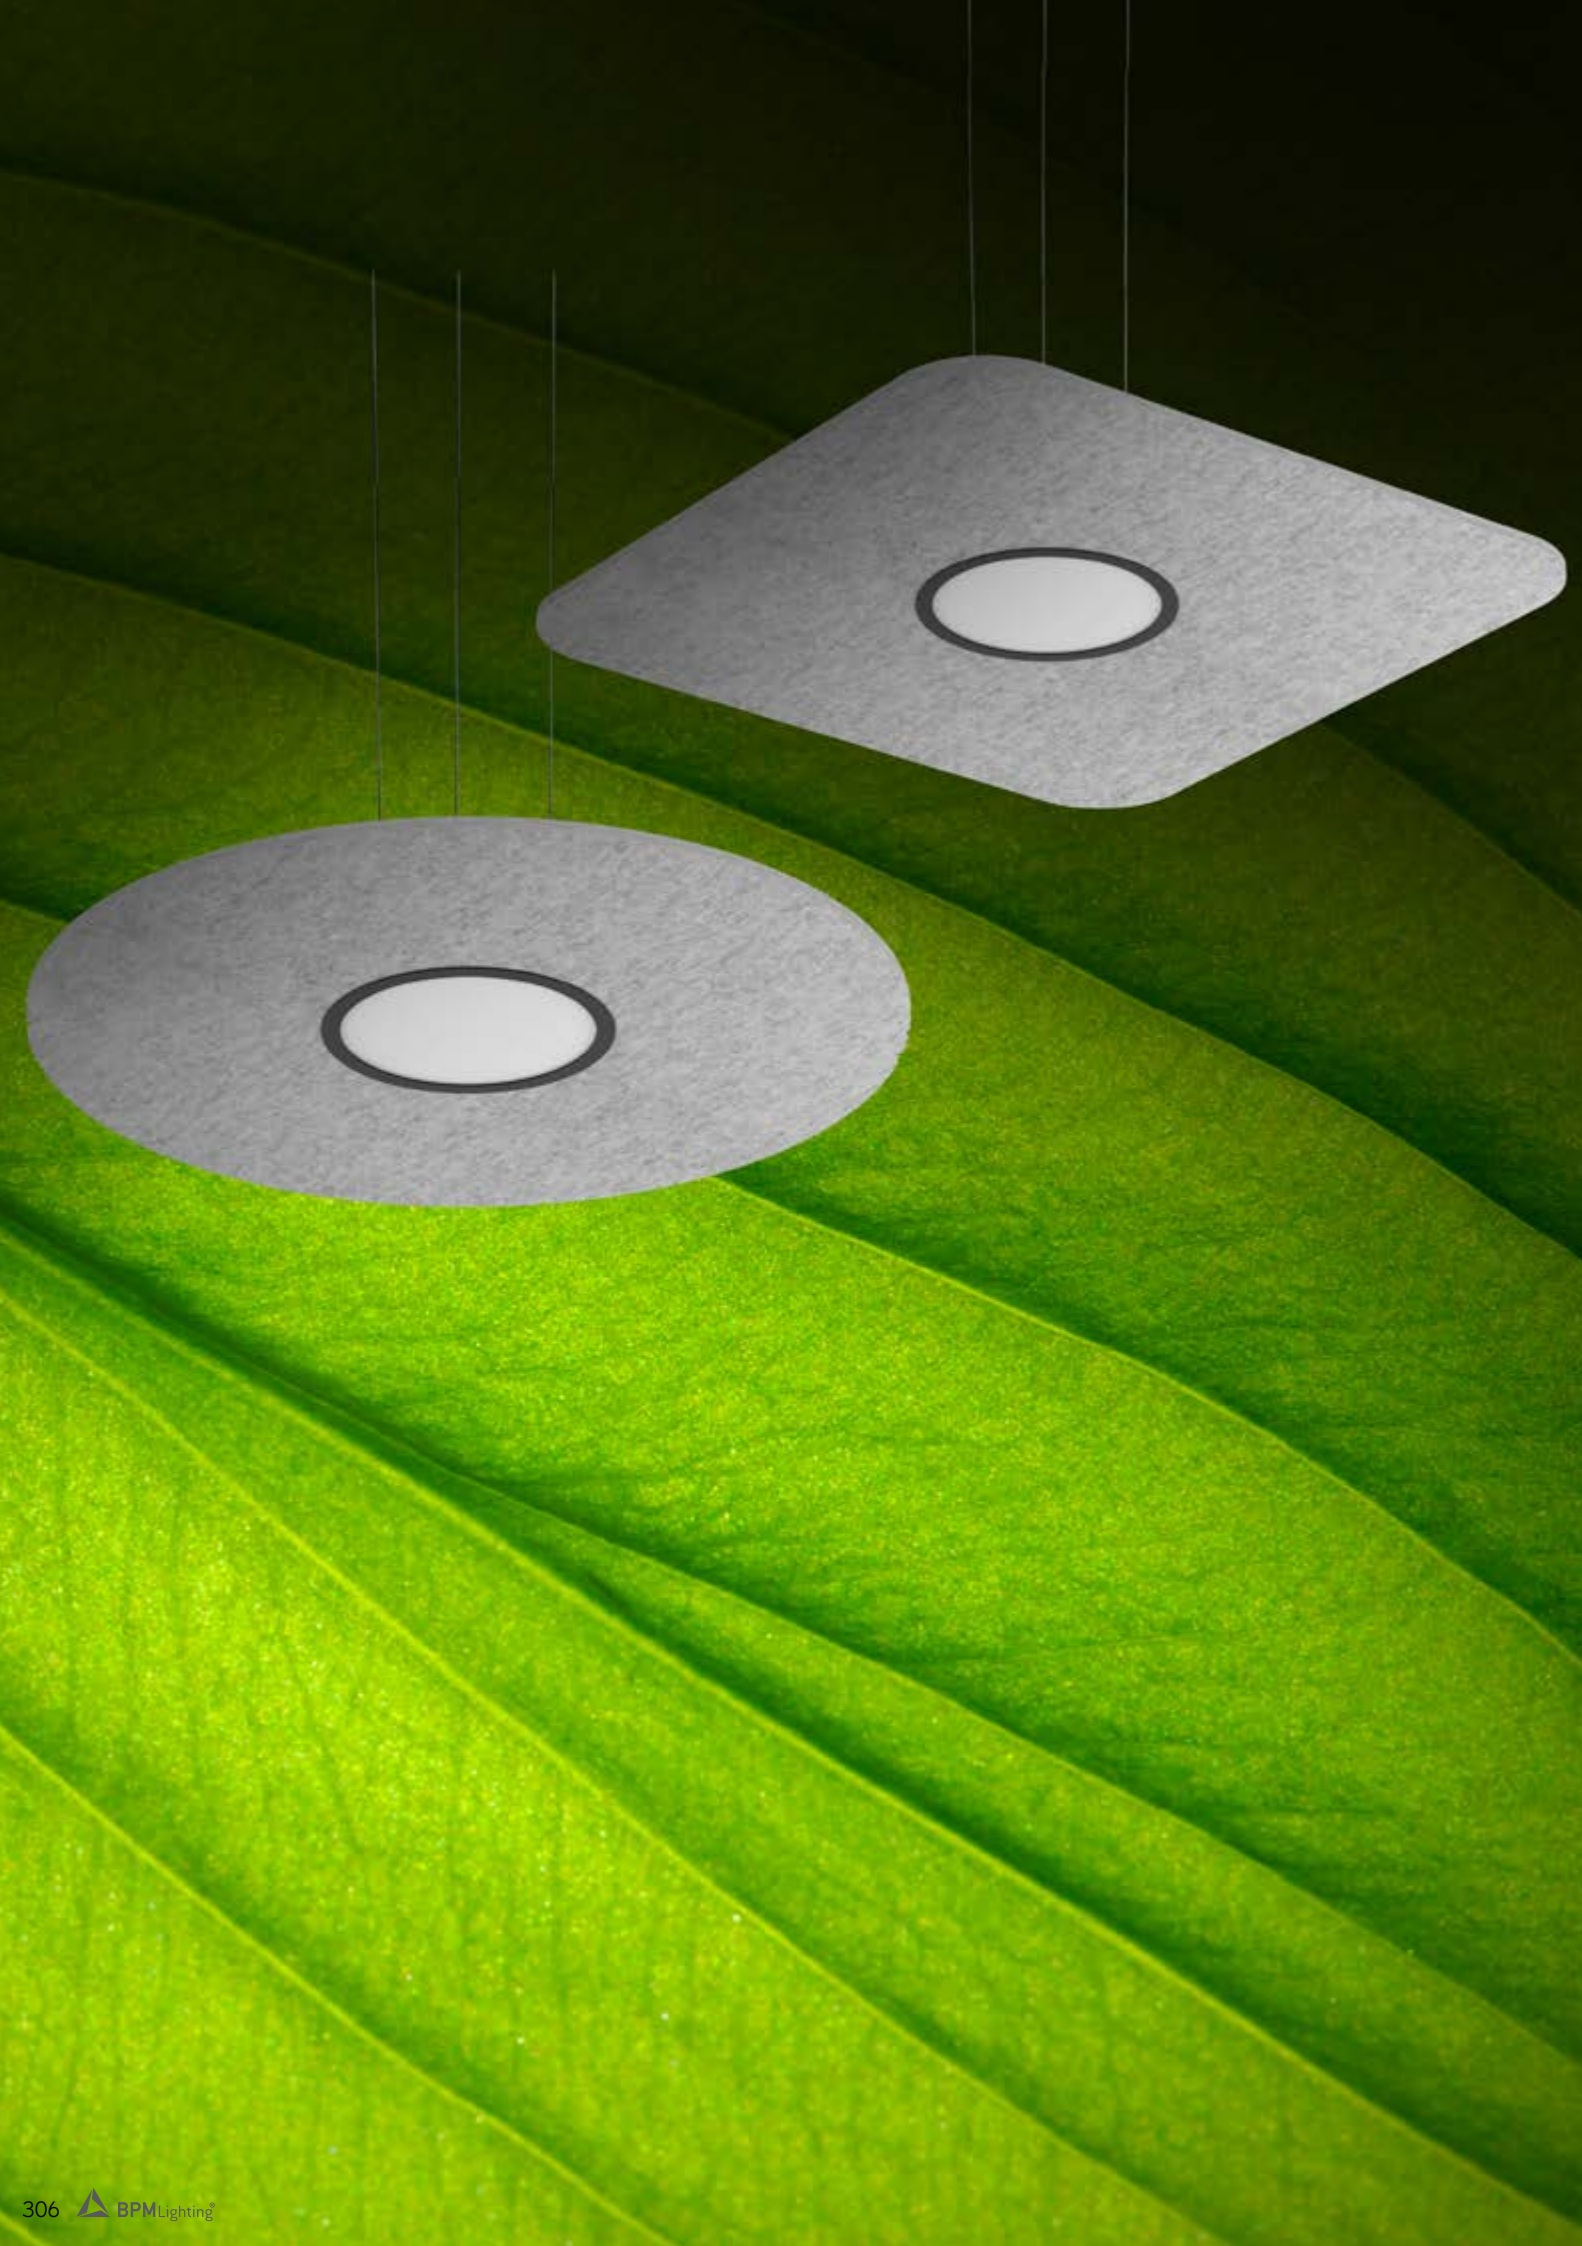

FINISHES

ACOUSTIC COLORS



PROFILE COLORS



DIMENSIONS

mm.

800 | 1000 | 1200

LIGHTING OPTIONS

DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES


3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

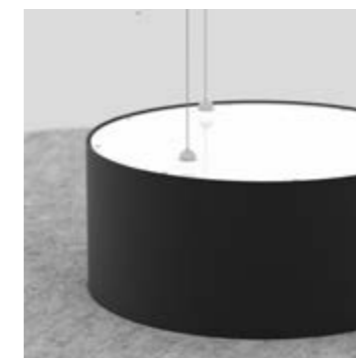

ON DEMAND


Special RAL Color
 Special Color Temperature
 Emergency Lighting*
 Motion Detection
 RGB
 CRI 80
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

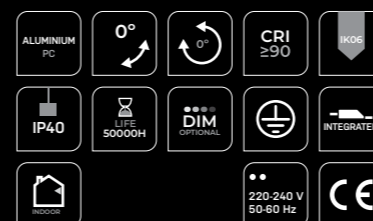







ACOUSTIC RD | SQ ALABAMA

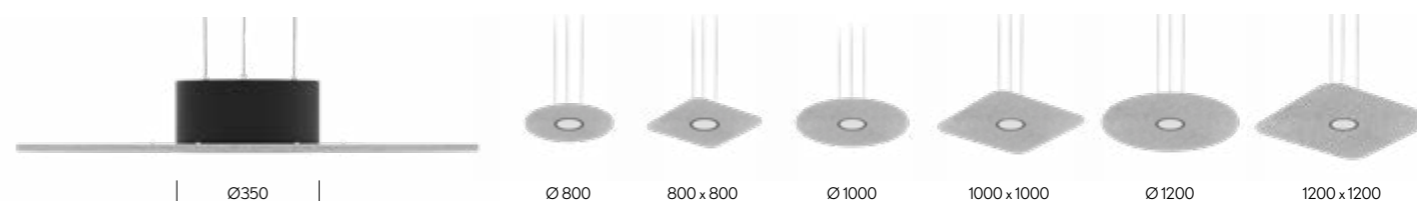





REF 460001.PN | 460003.PN










PENDANT .PN

ALABAMA RD	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	LUMEN			WATT	mA	DIMM	SKETCH
							.27	.30	.40				
	460001	.01	● WH BK	■ .OP	.ST	.9	-	2385	2475	18	500	.DA .PU .D1	
		.02											
		.03											

Reference order  460001.XX.PN.XX-XX.XX.XX.X.XX.XX

ALABAMA SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	LUMEN			WATT	mA	DIMM	SKETCH
							.27	.30	.40				
	460003	.01	● WH BK	■ .OP	.ST	.9	-	2385	2475	18	500	.DA .PU .D1	
		.02											
		.03											



Reference order  460003.XX.PN.XX-XX.XX.XX.X.XX.XX

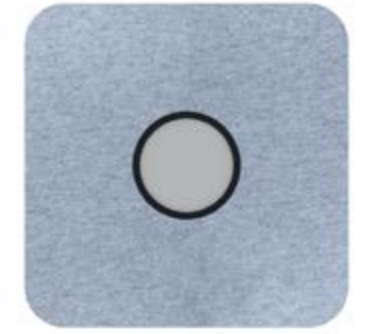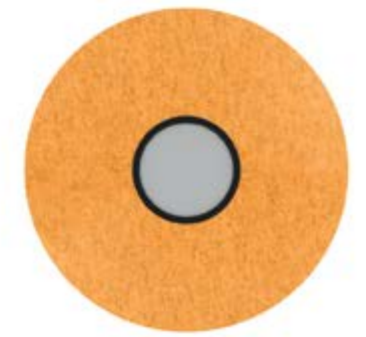

Select Acoustic finishes



Select Profile finishes

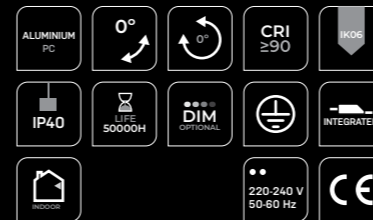

ACOUSTIC RD | SQ ALABAMA

REF 460001.PN | 460003.PN


PENDANT

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**


Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 α_w

PHOTOMETRY




OPAL

INCLUDED



CB03 CONNECTION BOX



SC03.SA WIRE 3M.

PROFILE





FINISHES

ACOUSTIC COLORS



SPOTLIGHT COLORS



DIMENSIONS

DIAMETERS mm

800 | 1000 | 1200

LIGHTING OPTIONS

BEAM ANGLE

15° 25° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm²
Connection box CB03 BK or WH finish

new

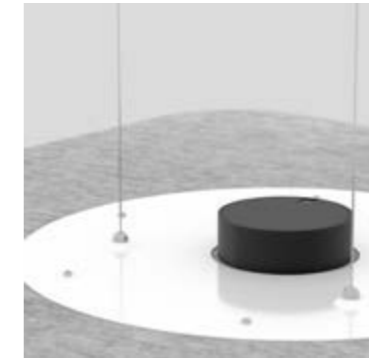

ON DEMAND


Dim to Warm
Tunable White
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).



ACOUSTIC RD | SQ KLIMT FIX

REF 460002.PN | 460004.PN

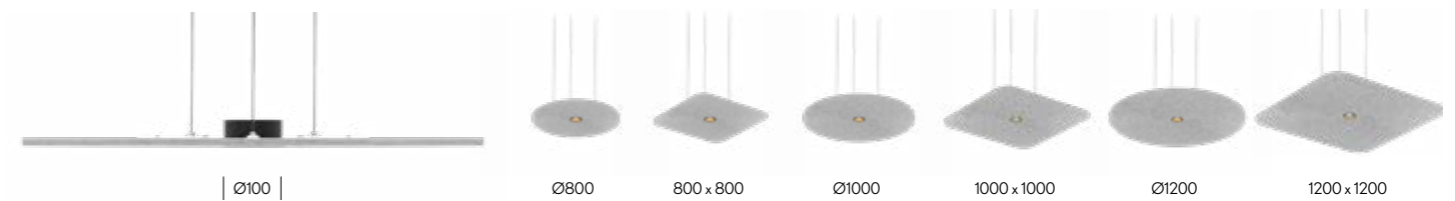

PENDANT

.PN



ROUND



SQUARE

KIMT FIX RD	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN			WATT	mA	DIMM	SKETCH
							.27	.30	.40				
	460002	.01	● WH BK BK-GD WH-GD	■ .15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	
		.02											
		.03											

Reference order | 460002.XX.PN.XX-XX.XX.XX.XX.XX.XX

KLIMT FIX SQ	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN			WATT	mA	DIMM	SKETCH
							.27	.30	.40				
	460004	.01	● WH BK BK-GD WH-GD	■ .15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	
		.02											
		.03											

Reference order | 460004.XX.PN.XX-XX.XX.XX.XX.XX.XX

● Select Acoustic finishes



● Select Spotlight finishes



- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- RECYCLE
- 220-240 V 50-60 Hz
- CE

ACOUSTIC RD | SQ KLIMT FIX


REF 460002.PN | 460004.PN

ACOUSTIC PROPERTIES


- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
 Classification B-s1, d0 and CTEDB-SI Compliant
 155Kg/m³
 9mm
 0,77 α_w

PHOTOMETRY

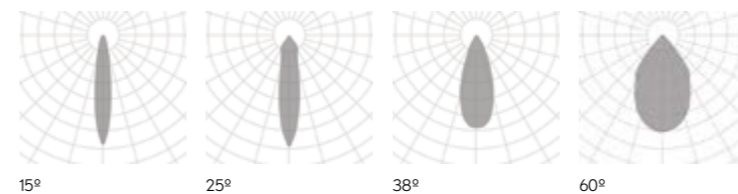

INCLUDED



PENDANT .PN



FINISHES



ACOUSTIC COLORS



DIMENSIONS

SIZES mm.

Ø800	Ø1000	Ø1200
800x800	1000x1000	1200x1200

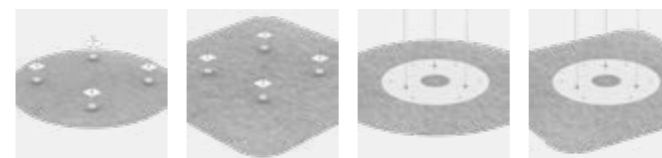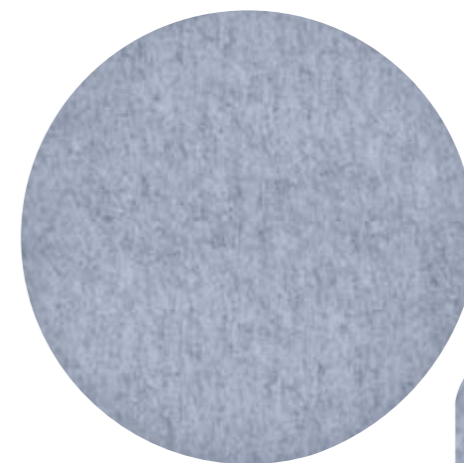

.SR .SR .PN .PN

RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.RD	.01	●	 Ø800
		.02		 Ø1000
		.03		 Ø1200

Reference order | AC.RD.XX | .SR | .PN | .XX

SQ PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.SQ	.01	●	 800x800
		.02		 1000x1000
		.03		 1200x1200

Reference order | AC.SQ.XX | .SR | .PN | .XX

ACOUSTIC ACCESORIES RD | SQ PANEL

REF AC.RD | AC.SQ

Select Acoustic finishes



61 60 55 53 54 57 51 50 56 52

PENDANT | SURFACE
SR
PN



FINISHES


ACOUSTIC COLORS




DIMENSIONS

SIZES mm



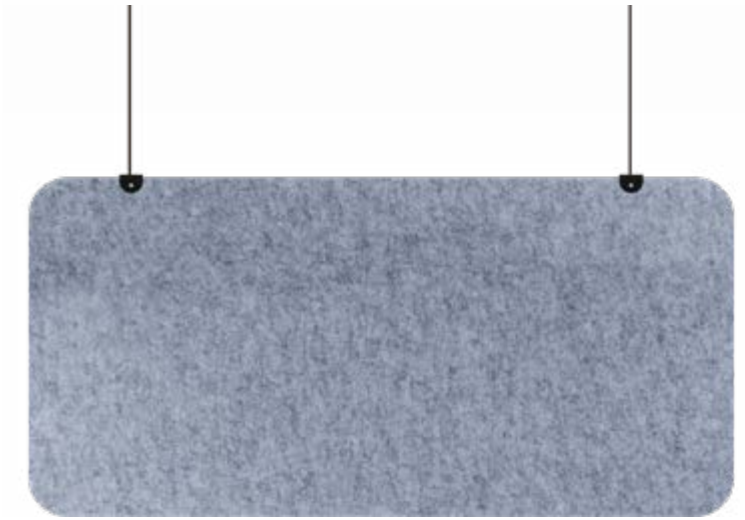

2400x300 | 2400x600



.PN



.SR

RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.VT	.01	●	
		.02		

Reference order | AC.VT.XX | .SR | .PN | .XX

ACOUSTIC ACCESORIES VT PANEL

REF AC.VT

Select Acoustic finishes



PENDANT | SURFACE
SR
PN



new

FINISHES

• COLORS



DIMENSIONS

• SIZES mm.

600x600 | 1200x600



RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.MD	.01	•	
		.02		

Reference order | AC.MD.XX.RF.XX



ACOUSTIC ACCESORIES MD PANEL

REF AC.MD.RF

Select Acoustic finishes



RECESSED FRAME

.RF

Avant-garde design

With flair and imagination, some products offer boundless possibilities. Our Tech lights bring you to a journey of simple designs that enhance every project and adapt to every need: Klimt, Martorell, Cube, among others...



Estética vanguardista



Con estilo e imaginación, algunos productos ofrecen grandes posibilidades. Esta colección te invita a un viaje de diseños sencillos que realzan cada proyecto y se adaptan a cada necesidad: Klimt, Martorell, Cube entre otros...





TECH

PENDANT | SURFACE


MARTORELL	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20115	.01 *2	●	LED	.24 .32	.ST	.9	.27 .30 .40	175 188 199	3	700	.DA .PU .D1	

	20115	.02	●	LED	.15 .24 .32	.ST	.9	.27 .30 .40	470 498 515	8	700	.DA .PU .D1	
---	-------	-----	---	-----	-------------------	-----	----	-------------------	-------------------	---	-----	-------------------	---

	20115	.03	●	LED	.24 .32	.ST	.9	.27 .30 .40	1071 1156 1198	12	350	.DA .PU .D1	
---	-------	-----	---	-----	------------	-----	----	-------------------	----------------------	----	-----	-------------------	---

Reference order | 20115.XX | SR | PN | .XX.XX.ST9.XX.XX

● Select finishes

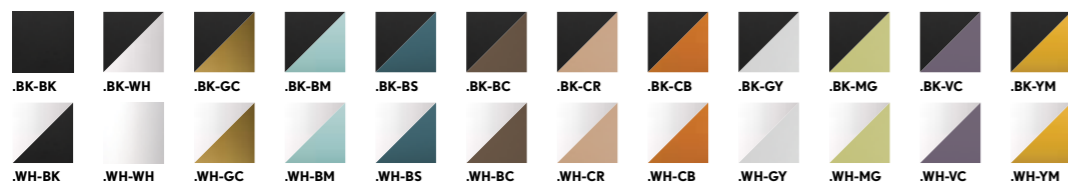

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° | 24° | 32°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color



PENDANT | SURFACE

INSTALLATIONS

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE


·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME


·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676

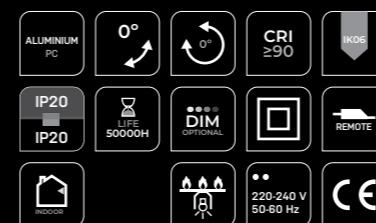








PHOTOMETRY

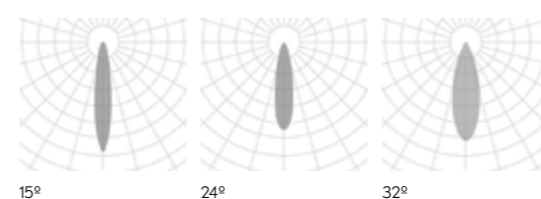

MARTORELL

REF 20115.PN | 20115.SR

MARTORELL MOVE	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20110	.01	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	167 184 206	3	700	.DA .PU .D1	
	20110	.02	●	LED	.18 .25 .35	.ST	.9	.27 .30 .40	465 507 548	9	700	.DA .PU .D1	
	20110	.03	●	LED	.18 .25 .35	.ST	.9	.27 .30 .40	1058 1096 1231	15	350	.DA .PU .D1	

Reference order |  20110.XX.SR.XX.XX.ST9.XX.XX

● Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20° 40° 60° | 18° 25° 35° | 18° 25° 35°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options



SURFACE

INSTALLATIONS



.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 324




.RF
RECESSED FRAME

·20110 MARTORELL MOVE | RF
Pag. 496



PHOTOMETRY

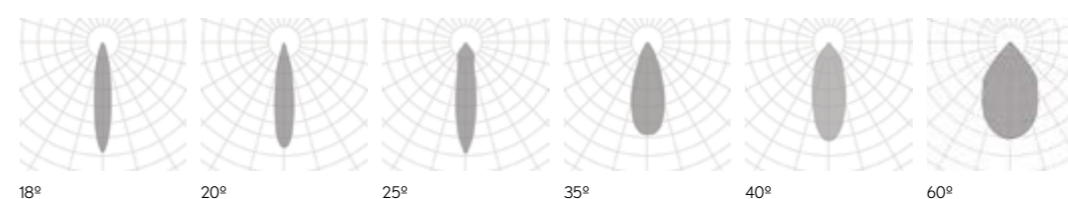

MARTORELL MOVE

REF 20110.SR

MARTORELL TUBE MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	20138 Ø60x186	.03	●	LED	.19 .24 .36	.ST	.9	.27 .30 .40	796 841 929	10	500	.DA .PU .D1	

Reference order | 20138.03.SR.XX.XX.ST9.XX.XX

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

19° | 24° | 36°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



Select finishes



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

INSTALLATIONS



.SR
SURFACE

·20138 MARTORELL TUBE MOVE | SR
Pag. 326




.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 746




PHOTOMETRY

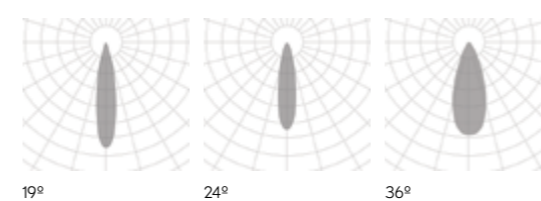







MARTORELL TUBE MOVE

REF 20138.SR

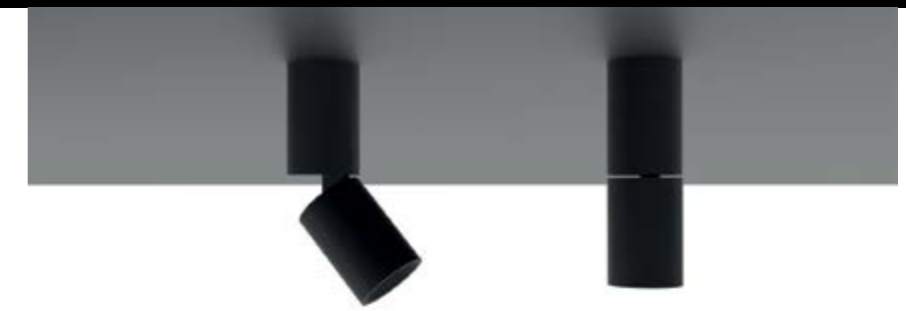


SURFACE

MARTORELL MINI CRATE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20175	.01 *2	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	175 188 199	3	700	.DA .PU .D1	
	20175	.02	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	350 276 398	6	700	.DA .PU .D1	
	20175	.03	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	525 564 597	9	700	.DA .PU .D1	

Reference order | 20175.XX.SR.XX.XX.ST.9.XX.XX

● Select external-internal finishes



FINISHES

COLOR



DIMENSIONS

◆ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

INSTALLATIONS



.SR
SURFACE

·20175 MARTORELL MINI CRATE | SR
Pag. 328




.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 502



PHOTOMETRY

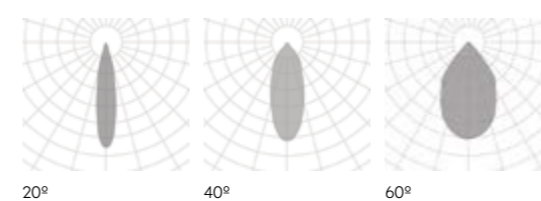







MARTORELL MINI CRATE


REF 20175.SR




.SR

SURFACE

MARTORELL CRATE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20176	.01	●	LED	.25 .32 .45	.ST	.9	.27 .30 .40	470 498 515	8	700	.DA .PU .D1	
	20176	.02	●	LED	.15 .29 .33	.ST	.9	.27 .30 .40	940 996 1030	16	700	.DA .PU .D1	
	20176	.03	●	LED	.28 .38 .43	.ST	.9	.27 .30 .40	1410 1494 1545	24	700	.DA .PU .D1	

Reference order |  20176.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes

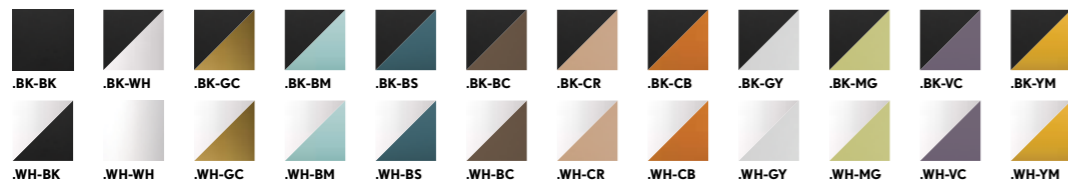

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

25° 32° 45° | 15° 29° 33° | 28°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS



.SR
SURFACE

·20176 MARTORELL CRATE | SR
Pag. 330




.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 504



PHOTOMETRY

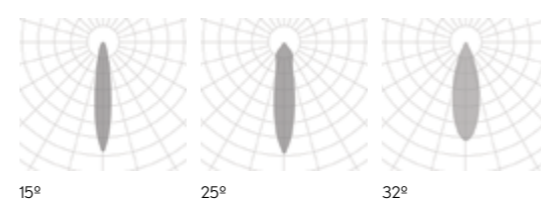

MARTORELL CRATE

REF 20176.SR



.SR

SURFACE


MARTORELL SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20132	.01	●	LED	.15 .25 .38	.ST	.9	.27 .30 .40	720 759 908	10	500	.DA .PU .D1	

Reference order 20132.01.SR.XX.XX.ST9.XX.XX

MARTORELL SQ2	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20133	.01	●	LED	.15 .25 .38	.ST	.9	.27 .30 .40	1440 1518 1816	20	500	.DA .PU .D1	

Reference order 20133.01.SR.XX.XX.ST9.XX.XX

● Select finishes

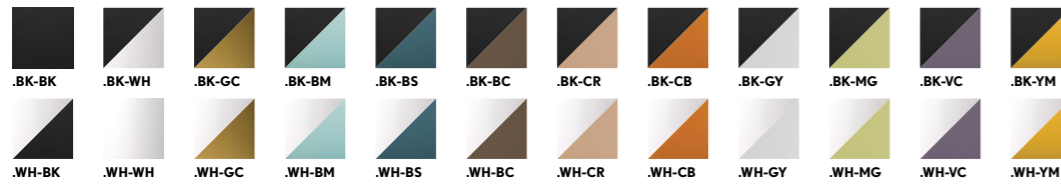

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15° | 25° | 38°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



INSTALLATIONS

.SR
SURFACE

·20132 MARTORELL SQ | SR ·20133 MARTORELL SQ2 | SR
Pag. 332




MARTORELL

SQ | SQ2

REF 20132.SR | REF 20133.SR

PHOTOMETRY

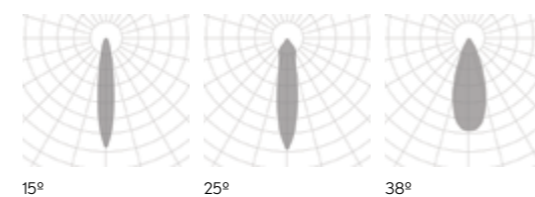

new

MARTORELL TUBULAR 40	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20192	.01	●	LED	.20 .40	.ST	.9	.27	808	14	300	.DA .PU .D1	
								.30	820				
								.40	881				
	20192	.02	●	LED	.20 .40	.ST	.9	.27	808	14	300	.DA .PU .D1	
								.30	820				
								.40	881				

Reference order | 20192.XX | .SR | .PN | .XX.XX.ST9.XX.XX

MARTORELL TUBULAR 60	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20196	.01	●	LED	.20 .40	.ST	.9	.27	1662	21	350	.DA .PU .D1	
								.30	1716				
								.40	1729				
	20196	.02	●	LED	.20 .40	.ST	.9	.27	1662	21	350	.DA .PU .D1	
								.30	1716				
								.40	1729				

Reference order | 20196.XX | .SR | .PN | .XX.XX.ST9.XX.XX

● Select finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

- FINISHES**
 - EXTERNAL COLOR
 - INTERNAL COLOR
- DIMENSIONS**
 - View in family specifications
 - .01 | .02
- LIGHTING OPTIONS**
 - BEAM ANGLE**
 - 20° | 40°
 - POWER**
 - STANDARD
 - CRI**
 - 90
 - COLOR TEMPERATURE**
 - 2700K | 3000K | 4000K
 - DIMMABLE OPTIONS**
 - DALI | 1.10 | PUSH
 - LIGHT DISTRIBUTION**
 - DOWN
- INCLUDED (.PN)**
 - Suspension cable 1.5m
 - Connection box with luminaire's finish
- ON DEMAND**
 - Dim to Warm
 - Tunable White
 - Wireless Control Options
 - Special RAL Color



PENDANT | SURFACE


INSTALLATIONS

.PN
PENDANT
·20192 TUBULAR 40 | PN ·20196 TUBULAR 60 | PN
Pag. 334

.SR
SURFACE
·20192 TUBULAR 40 | SR ·20196 TUBULAR 60 | SR
Pag. 334



PHOTOMETRY

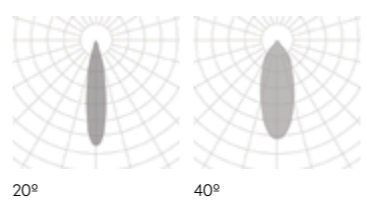

MARTORELL TUBULAR 40 | TUBULAR 60


REF 20192.SR | 20196.SR | 20192.PN | 20196.PN



MARTORELL TILT	REF.	DIMENSIONS ▲	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20195	.01	●	LED	.20 .40	.ST	.9	.27 .30 .40	164 155 188	3	700	.DA .PU .D1	

Reference order | 20195.01.SR.XX.XX.ST9.XX.XX

● Select internal - external finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

COLOR



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION


DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color




INSTALLATIONS

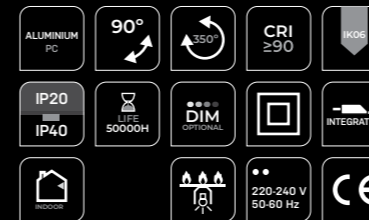

MARTORELL TUBULAR TILT



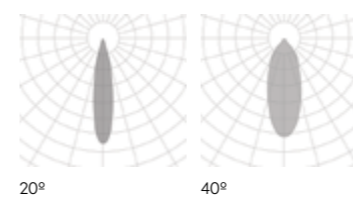



REF 20195.SR

PHOTOMETRY



.SR
SURFACE

·20195 MARTORELL TUBULAR TILT | SR
Pag. 336

KLIMT	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20134	.01	●	LED	.15 .24 .38	.ST	.9	.27 .30 .40	395 497 550	8	700	.DA .PU .D1	
	20134	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27 .30 .40	803 983 991	11	500	.DA .PU .D1	
	20134	.03	●	LED	.15 .24 .38 .60	.ST	.9	.27 .30 .40	1945 2073 2311	30	700	.DA .PU .D1	

Reference order | 20134.XX.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° 24° 38° | 15° 24° 38° 60° | 15° 24° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



SURFACE

*1 Remote driver when dimmable. (01.02) Driver remoto cuando es dimable (01.02).

INSTALLATIONS

.SR
SURFACE

·20134 KLIMT | SR
Pag. 338

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748

.RF
RECESSED FRAME


·20134 KLIMT | RF
Pag. 508









KLIMT

REF 20134.SR

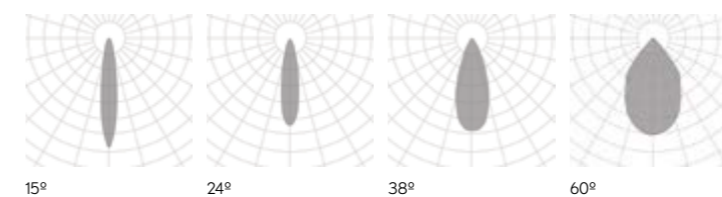PHOTOMETRY



KLIMT FIX	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM ^{*1}	SKETCH
	20135	.01	●	LED	.18 .24 .38	.ST	.9	.27 .30 .40	395 497 659	8	700	.DA .PU .D1	
	20135	.02	●	LED	.18 .24 .38 .60	.ST	.9	.27 .30 .40	803 983 991	11	500	.DA .PU .D1	
	20135	.03	●	LED	.18 .24 .38 .60	.ST	.9	.27 .30 .40	1945 2073 2311	30	700	.DA .PU .D1	

Reference order | 20135.XX.SR.XX.XX.ST9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

18° 24° 38° | 18° 24° 38° 60° | 18° 24° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



SURFACE

INSTALLATIONS

.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 340

.RF
RECESSED FRAME


·20135 KLIMT FIX | RF
Pag. 510



KLIMT FIX

REF 20135.SR

PHOTOMETRY

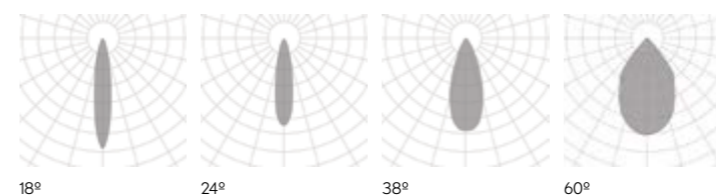

GEO	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	30511	.01	●	LED	.15 .24 .38	.ST	.9	.27 .30 .40	498 513 622	8	700	.DA .PU .D1	
	30511	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27 .30 .40	1075 1114 1319	14	350	.DA .PU .D1	
	30511	.03	●	LED	.15 .24 .38 .60	.ST	.9	.27 .30 .40	1856 2031 2529	30	700	.DA .PU .D1	

Reference order | 30511.XX.SR.XX.XX.ST9.XX.XX

● Select external - internal finishes



*1 Remote driver when dimmable. (01.02) Driver remoto cuando es dimable (01.02).

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° 24° 38° | 15° 24° 38° 60° | 15° 24° 38° 60°

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



INSTALLATIONS



.SR
SURFACE

·30511GEO|SR
Pag. 342



.TK
TRACKLIGHT

·30511GEO|TK
Pag. 750



.RF
RECESSED FRAME


·30511GEO|RF
Pag. 512



GEO

REF 30511.SR

PHOTOMETRY

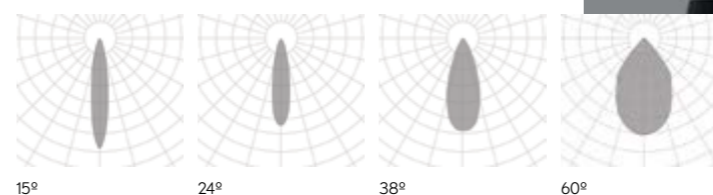

SURFACE


LUK FREIR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20018	.01	●	.LED	.40 .60	.ST	.9	.27	830	9	350	.DA .PU .D1	
								.30	845				
								.40	895				
	20018	.02	●	.LED	.40 .60	.ST	.9	.27	1271	16	500	.DA .PU .D1	
								.30	1616				
								.40	1682				

Reference order 20018XX.SR.XX.XX.ST9.XX.XX

LUK FREIR 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20019	.01	●	.LED	.40 .60	.ST	.9	.27	1660	18	350	.DA .PU .D1	
								.30	1690				
								.40	1790				
	20019	.02	●	.LED	.40 .60	.ST	.9	.27	2542	32	500	.DA .PU .D1	
								.30	3232				
								.40	3364				

Reference order 20019.XX.SR.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

18° 40° 60° | 24° 40° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.SR

SURFACE

INSTALLATIONS

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME


·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 680





PHOTOMETRY

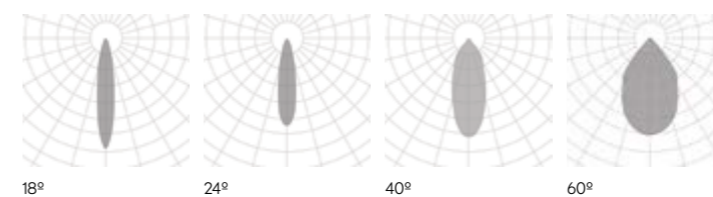


LUK

FREIR | FREIR 2

REF 20018.SR | REF 20019.SR

LUK CRUSADER	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1633 2138 2228	20	700	.DA .PU .D1	

Reference order  20082.01.SR.XX.XX.ST9.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS



DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



Select finishes



INSTALLATIONS

.SR
SURFACE


·20082 LUK CRUSADER | SR
Pag. 346

.TK
TRACKLIGHT

·20082 LUK CRUSADER | TK
Pag. 752



PHOTOMETRY

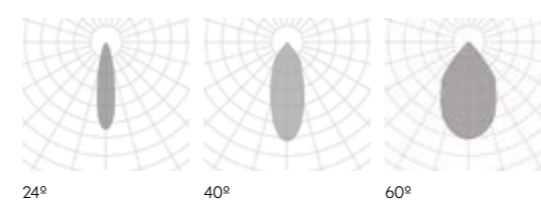

LUK CRUSADER

REF 20082.SR



.SR

SURFACE



LUK HAWKEYE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	20	700	.DA .PU .D1	
								.30	2138				
								.40	2228				

Reference order 20083.01.SR.XX.XX.ST9.XX.XX

LUK HAWKEYE 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	3266	40	700	.DA .PU .D1	
								.30	4276				
								.40	4456				

Reference order 20084.01.SR.XX.XX.ST9.XX.XX

Select finishes

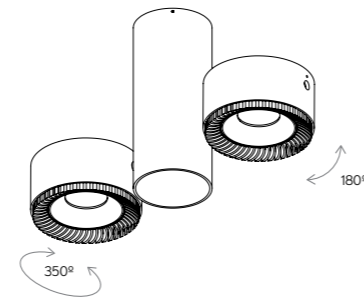

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



INSTALLATIONS



.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2|SR
Pag. 348




.TK
TRACKLIGHT

·20083 HAWKEYE ·20084 HAWKEYE 2|TK
Pag. 754



PHOTOMETRY

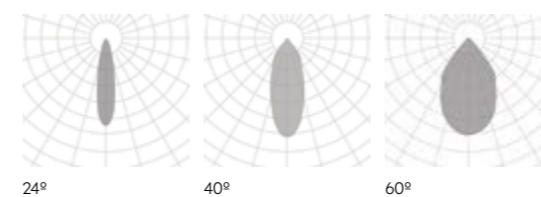

LUK HAWKEYE | HAWKEYE 2

REF 20083.SR | 20084.SR




CUBE TUBE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	9050	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	
	9050	.02	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	
	9050	.03	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	
	9050	.04	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	

Reference order **9050.XX** | .SR | .PN | .XX.XX | .ST9.XX.XX

CUBE TUBE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	9052	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1109 1597 1664	18	500	.DA .PU .D1	

Reference order **9052.01** | .SR | .PN | .XX.XX | .ST9.XX.XX

● Select finishes

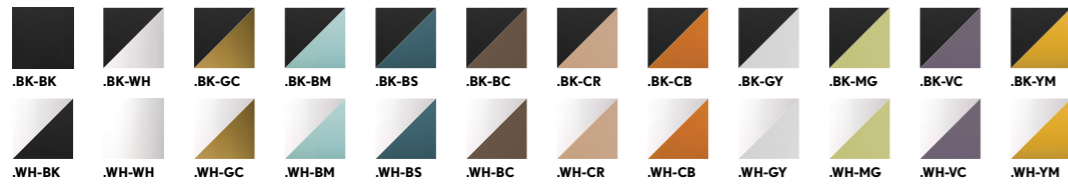

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options (Casambi)
Special RAL Color




.SR

.PN

PENDANT | SURFACE

INSTALLATIONS

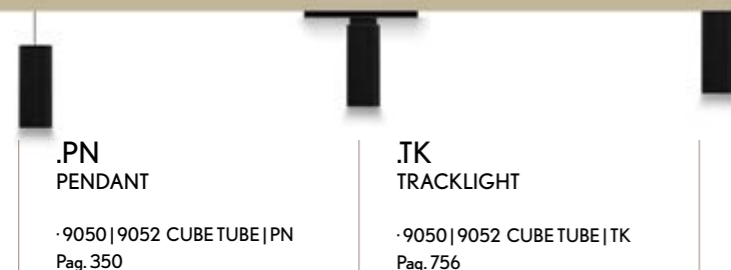

.PN
PENDANT

·9050|9052 CUBE TUBE|PN
Pag. 350

.TK
TRACKLIGHT


·9050|9052 CUBE TUBE|TK
Pag. 756

.SR
SURFACE

·9050|9052 CUBE TUBE|SR
Pag. 350





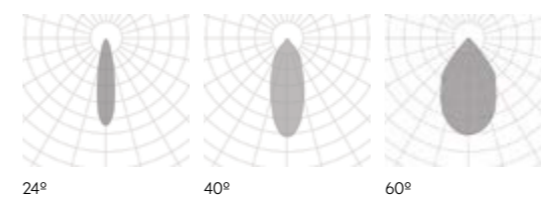





PHOTOMETRY





CUBE TUBE

REF 9050.SR | 9052.SR | 9050.PN | 9052.PN


CUBE TUBE MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	9051	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 191 Ø100
	9051	.02	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 250 Ø100
	9051	.03	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 350 Ø100
	9051	.04	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	 450 Ø100

Reference order | 9051.XX | .SR | .PN | .XX.XX | .ST9.XX.XX

CUBE TUBE MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	9053	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1359 1499 1734	20	500	.DA .PU .D1	 165 Ø140

Reference order | 9053.01 | .SR | .PN | .XX.XX | .ST9.XX.XX

• Select finishes

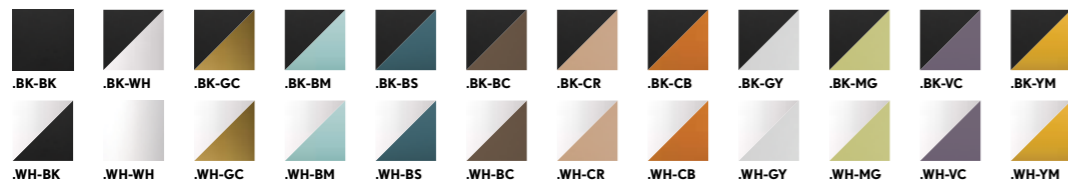

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

• View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



.SR

.PN

PENDANT | SURFACE

INSTALLATIONS

.PN
PENDANT


· 9051 | 9053 TUBE MOVE | PN
Pag. 352

.SR
SURFACE

· 9051 | 9053 TUBE MOVE | SR
Pag. 352



PHOTOMETRY

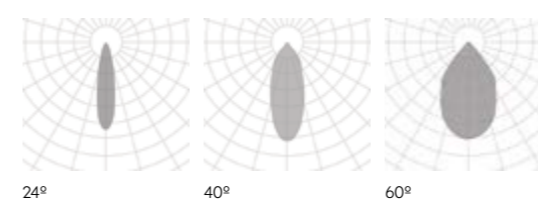

REF 9051.SR | 9053.SR | 9051.PN | 9053.PN

CUBE SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8201	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	738 862 929	11	350	.DA .PU .D1	

Reference order 8201.01.SR.XX.XX.ST9.XX.XX


CUBE SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8202	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1476 1724 1857	22	350	.DA .PU .D1	

Reference order 8202.01.SR.XX.XX.ST9.XX.XX

CUBE SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8203	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	2214 2586 2786	33	350	.DA .PU .D1	

Reference order 8203.01.SR.XX.XX.ST9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682



PHOTOMETRY

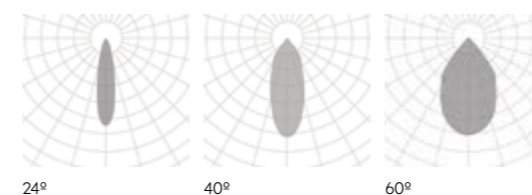

CUBE

SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR

SURFACE

CUBE SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8201	.02	●	LED	.24 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order 8201.02.SR.XX.XX.ST9.XX.XX


CUBE SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8202	.02	●	LED	.24 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2670				
								.40	3734				

Reference order 8202.02.SR.XX.XX.ST9.XX.XX

CUBE SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	8203	.02	●	LED	.24 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order 8203.02.SR.XX.XX.ST9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682



PHOTOMETRY

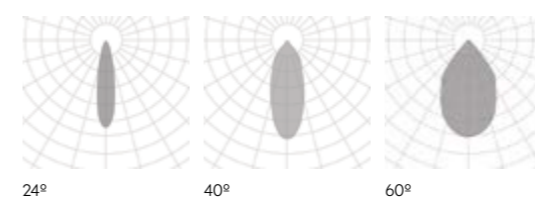

CUBE

SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR


SURFACE



ORACLE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20087	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1079 1216 1273	14	500	.DA .PU .D1	

Reference order | 20087.01.SR.XX.XX.ST9.XX.XX

• Select finishes

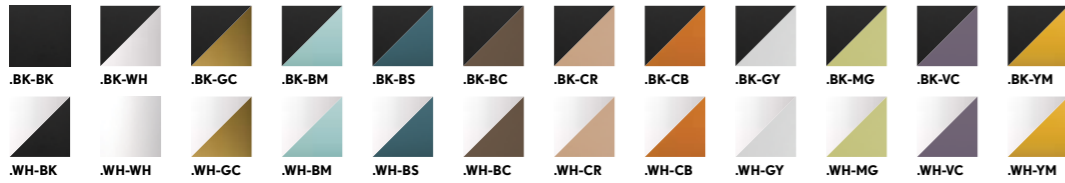

• FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

• View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.SR
.PN

PENDANT | SURFACE

INSTALLATIONS



.PN
PENDANT


·20087 ORACLE|PN
Pag. 358

.TK
TRACKLIGHT


·20087 ORACLE|TK
Pag. 758

.SR
SURFACE

·20087 ORACLE|SR
Pag. 358

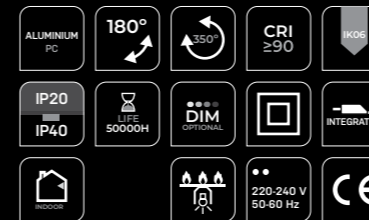

PHOTOMETRY

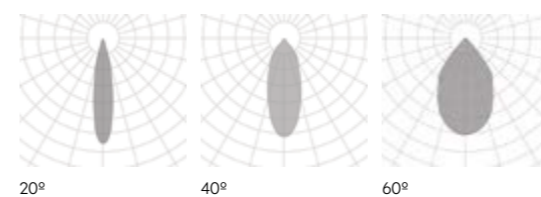

ORACLE

REF 20087.SR | 20087.PN




new

FACE TUBULAR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20205	.01	●	LED	.40	.ST	.9	.27	480	8	350	.DA .PU .D1	
								.30	493				
								.40	496				

Reference order  20205.01.SR.XX.XX.ST9.XX.XX

● Select external-internal finishes

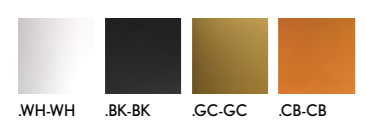

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options
Special RAL Color



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

INSTALLATIONS

.SR
SURFACE


·20205 FACE TUBULAR | SR
Pag. 360

.RF
RECESSED FRAME

·20205 FACE TUBULAR | RF
Pag. 506



PHOTOMETRY



40°



FACE TUBULAR

REF 20205.SR

SURFACE .SR


CATLI	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH	
	3010	.01	●	GU10	.GU					8				
				LED	.40 .60		.ST 	.9	.27	480	7	350		.DA .PU .D1
									.30	514				
.40	565													

Reference order 3010.01.SR.XX.XX.XX.X.XX.XX

CATLI SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH	
	3011	.01	●	GU10	.GU					8				
				LED	.40 .60		.ST 	.9	.27	480	7	350		.DA .PU .D1
									.30	514				
.40	565													

Reference order 3011.01.SR.XX.XX.XX.X.XX.XX

● Select internal - external finishes



FINISHES

COLOR



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40° | 60° | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

INSTALLATIONS

.SR
SURFACE


·3010 CATLI|SR ·3011 CATLI SQ|SR
Pag. 362

.RF
RECESSED FRAME

·3010 CATLI|RF ·3011 CATLI SQ|RF
Pag. 560



PHOTOMETRY

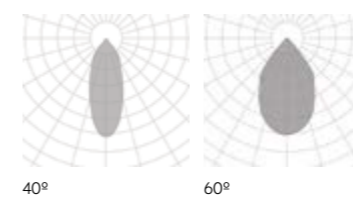

CATLI | CATLI SQ

REF 3010.SR | 3011.SR



.SR

SURFACE


new

FACE TUBULAR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20205	.01 300x Ø40	●	LED	.40	.ST	.9	.27	633	11	500	.DA .PU .D1	
								.30	678				
								.40	701				

	20205	.02 400x Ø40	●	LED	.40	.ST	.9	.27	633	11	500	.DA .PU .D1	
								.30	678				
								.40	701				

Reference order | 20205.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color




.PN

PENDANT

INSTALLATIONS

.PN
PENDANT
-20205 FACETUBULAR | PN
Pag. 364

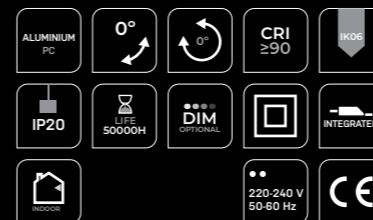


FACE TUBULAR

REF 20205.PN

PHOTOMETRY



40°

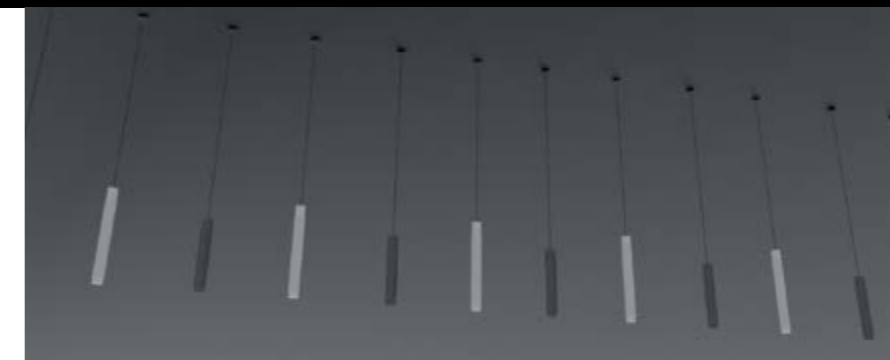


new

FACE TUBULAR SPAC	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20207	.01 300 x Ø60	●	LED	.40	.ST	.9	.27	1059	16	700	.DA .PU .D1	
								.30	1062				
								.40	1108				

	20207	.02 400 x Ø60	●	LED	.40	.ST	.9	.27	1059	16	700	.DA .PU .D1	
								.30	1062				
								.40	1108				

Reference order | 20207.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

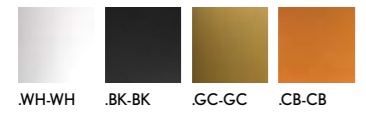

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color




INSTALLATIONS




- ALUMINIUM PC
- 0°
- 0°
- CRI ≥ 90
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- 220-240 V 50-60 Hz
- CE

PHOTOMETRY



FACE TUBULAR SPAC

REF 20207.PN

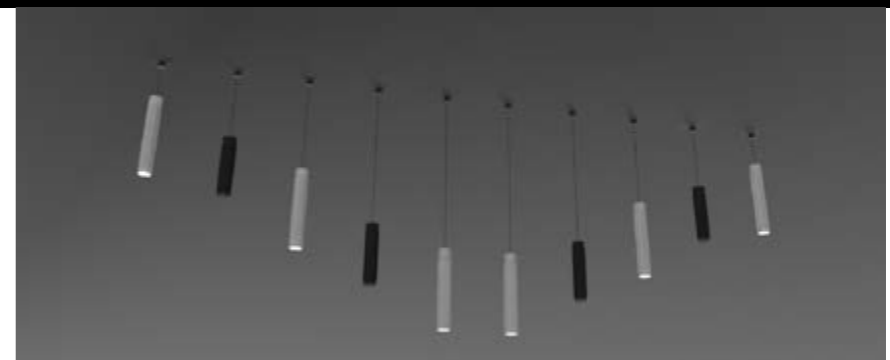

FACE KIERA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20204	.01 57 x Ø56	●	LED	.38	.ST	.9	.27	411	5	500	.DA .PU .D1	
								.30	447				
								.40	488				
	20204	.02 81 x Ø75	●	LED	.38	.ST	.9	.27	572	8	700	.DA .PU .D1	
								.30	574				
								.40	594				
	20204	.03 115 x Ø100	●	LED	.38	.ST	.9	.27	1396	18	500	.DA .PU .D1	
								.30	1655				
								.40	1962				

Reference order | 20204.XX.PN.XX.XX.ST9.XX.XX

● Select external-internal finishes



BK-BK WH-WH

*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

38°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options




PENDANT

INSTALLATIONS



.PN
PENDANT

·20204 FACE KIERA | PN
Pag. 368

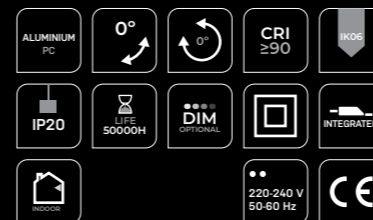

PHOTOMETRY



38°

FACE KIERA

REF 20204.PN

KIERA CEMENT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20208	.01 57 x Ø56	●	LED	.38	.ST	.9	.27	411	5	500	.DA .PU .D1	
								.30	447				
								.40	488				
	20208	.02 81 x Ø75	●	LED	.38	.ST	.9	.27	572	7	700	.DA .PU .D1	
								.30	574				
								.40	594				
	20208	.03 115 x Ø100	●	LED	.38	.ST	.9	.27	1396	18	500	.DA .PU .D1	
								.30	1655				
								.40	1962				

Reference order | 20208.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes



.BK-GY

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

38°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options



.PN

PENDANT

INSTALLATIONS

- ALUMINIUM PC
- 0°
- 0°
- CRI ≥ 90
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

FACE KIERA CEMENT

REF 20208.PN

PHOTOMETRY









38°



.PN
PENDANT


·20208 FACE KIERA CEMENT | PN
Pag. 370

new

FACE IRIS	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20203	.01 72 x Ø105	●	LED	.60	.ST	.9	.27	817	10	500	.DA .PU .D1	
								.30	852				
								.40	962				
	20203	.02 91 x Ø170	●	LED	.60	.ST	.9	.27	1504	20	500	.DA .PU .D1	
								.30	1811				
								.40	1858				
	20203	.03 112 x Ø270	●	LED	.60	.ST	.9	.27	1837	29	700	.DA .PU .D1	
								.30	2264				
								.40	2373				

Reference order | 20203.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

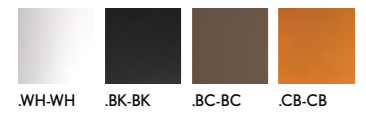

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color



INSTALLATIONS




.PN
PENDANT

20203 FACE IRIS | PN
Pag. 372

- ALUMINIUM PC
- 0°
- 0°
- CRI ≥ 90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

PHOTOMETRY



60°



FACE IRIS

REF 20203.PN

PENDANT

SUBLIM	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20206	.01 270 x 40 x 40	●	LED	.36	.ST	.9	.27	467	9	350	.DA .PU .D1	
								.30	471				
								.40	511				
	20206	.02 400 x 40 x 40	●	LED	.36	.ST	.9	.27	467	9	350	.DA .PU .D1	
								.30	471				
								.40	511				
	20206	.03 1000 x 40 x 40	●	LED	.36	.ST	.9	.27	467	9	350	.DA .PU .D1	
								.30	471				
								.40	511				

Reference order | 20206.XX.PN.XX.XX.ST9.XX.XX

● Select external-internal finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

36°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND


Wireless Control Options
Special RAL Color



.PN

PENDANT

INSTALLATIONS

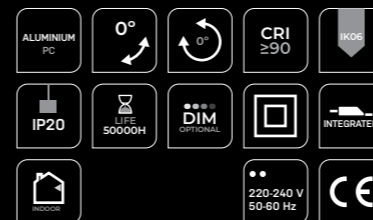

SUBLIM

REF 20206.PN

PHOTOMETRY



36°

.PN
PENDANT

20206 SUBLIM|PN
Pag. 374


new



GALANTA BONETE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	20222	.01 70 x Ø80	●	LED	.OP	.ST	.9	.27	419	6	500	.DA .PU .D1	
							.30	474					
						.40	510						

Reference order | 20222.XX.PN.XX.XX.ST9.XX.XX

● Select finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

COLORS



DIMENSIONS

◆ View in family specifications

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options



.PN

PENDANT

INSTALLATIONS



.PN
PENDANT

·20222 GALANTA BONETE|PN
Pag. 376



GALANTA BONETE

REF 20222.PN









PHOTOMETRY



OPAL




new


VENISE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	410011	.01	●	LED	.OP	.ST	.9	.30	583	12	500	.DA .PU .D1	 75 Ø200
	410011	.02	●	LED	.OP	.ST	.9	.30	1302	20	500	.DA .PU .D1	 105 Ø320
	410011	.03	●	LED	.OP	.ST	.9	.30	1343	30	700	.DA .PU .D1	 135 Ø450
	410011	.04	●	LED	.OP	.ST	.9	.30	2111	45	1050	.DA .PU .D1	 165 Ø600

Reference order | 410011.XX.PN.XX.XX.ST9.XX.XX

Select finishes

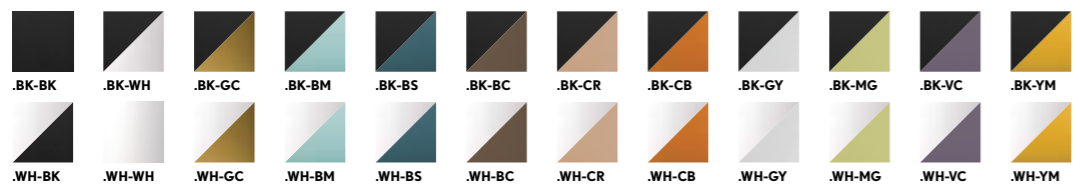

FINISHES

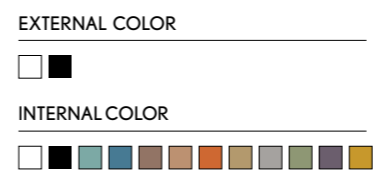

DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish



PENDANT

INSTALLATIONS

.PN
PENDANT

-410011 VENISE | PN
Pag. 378




VENISE

REF 410011.PN


PHOTOMETRY



CONNECTION BOXES

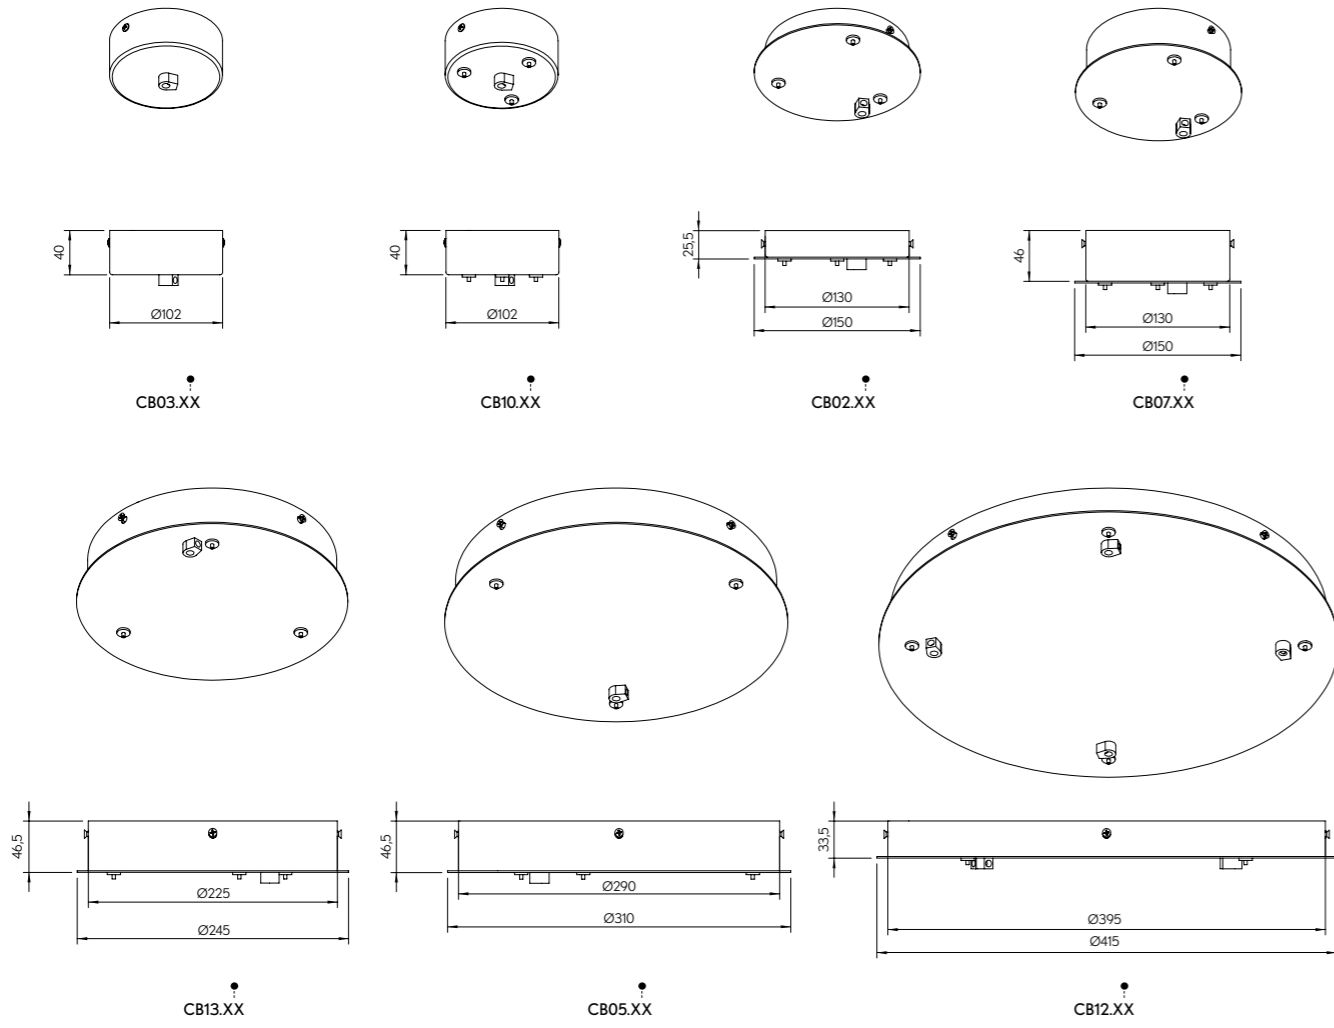

CONNECTION & DRIVER BOXES

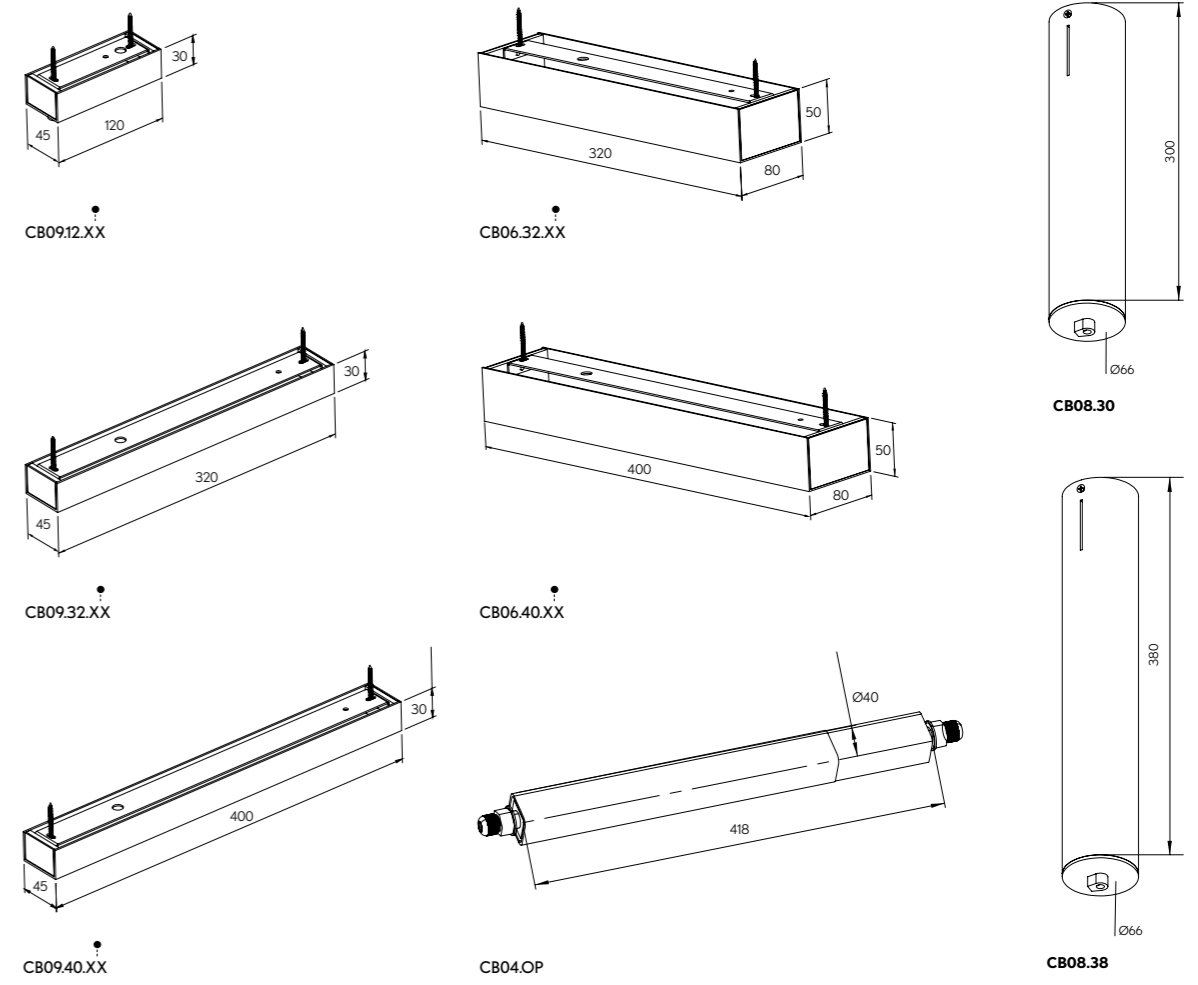


Select finishes




ACCESORIES

SUSPENSION ACCESORIES

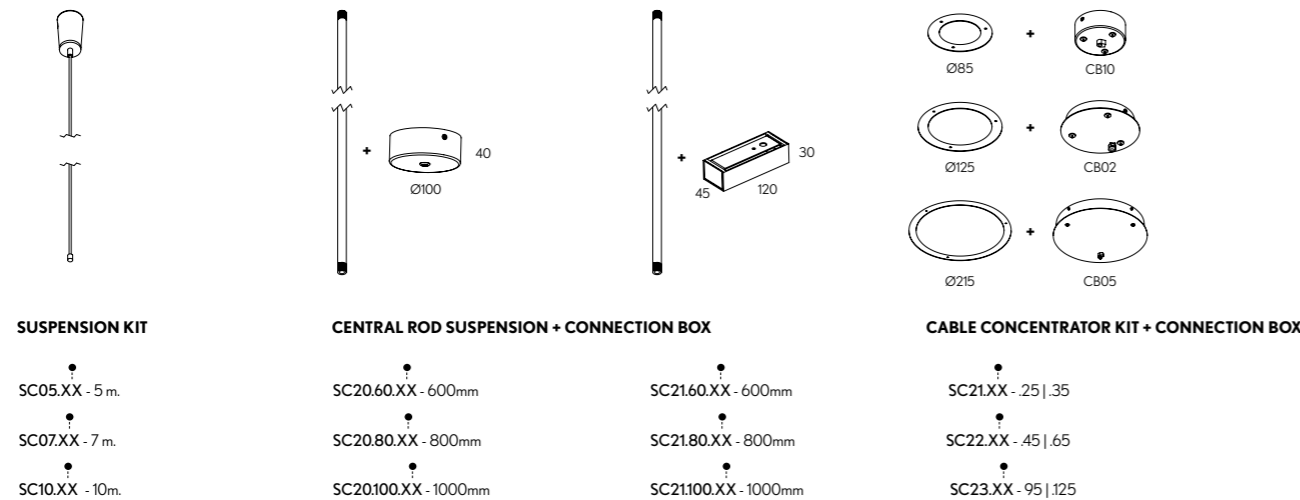

INDIVIDUAL CEILING RECESSED ACCESSORIES

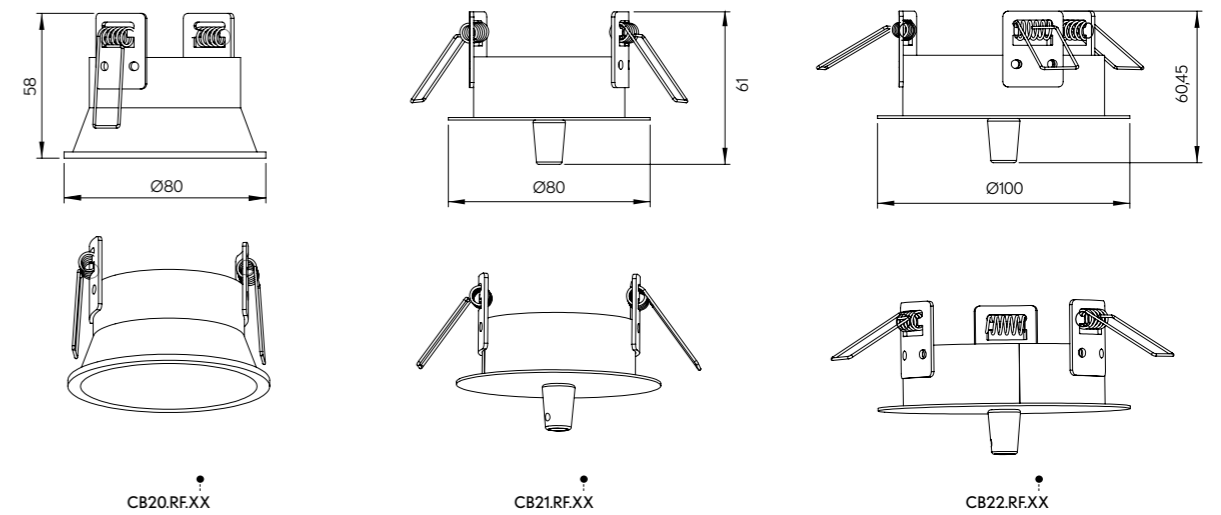

* Check luminaire's compatibility. Consultar compatibilidad con la luminaria.

The invisible star *El protagonista invisible*





The imperceivable force behind the project. An entity in its own right, whose only purpose is to enhance the ambiance, never draw attention to itself. Meet the White Structural Collection, a minimalist design featuring Crismosil, an innovative, exclusive material that integrates seamlessly in any space.





Ser el foco de atención sin ser visto. Una función en sí misma, con el único fin de dejar todo el protagonismo al espacio, nunca a la luminaria. Así se presenta la colección White Structural, resultado de un diseño minimalista y fruto de la producción exclusiva con Crismosil, un innovador material que permite una completa integración en los espacios.










STRUCTURAL

SURFACE

NOCTUA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10103	.01	●	GU10	.GU		.9	.27	480	8	350	.DA .PU .D1	
				LED	.40 .60				514				
						565							

NOCTUA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10103	.02	●	GU10	.GU		.9	.27	480	8	350	.DA .PU .D1	
				LED	.40 .60				514				
						565							

NOCTUA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10103	.03	●	GU5.3			.9	.27	1370	16	500	.DA .PU .D1	
				GU10	.GU				1442				
				GX8.5	.CD				1522				
				LED	.40 .60								

 10103.01 · 10103.02

 10103.03

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10103.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE / LAMP

40 | 60
GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options




.SR

SURFACE

• Select finishes




.WH-WH

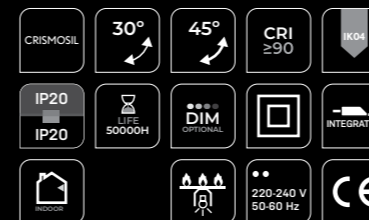

NOCTUA

REF 10103.SR

PHOTOMETRY

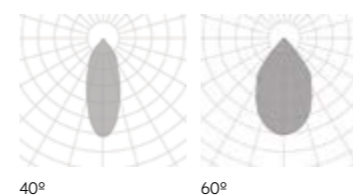

40°

60°

NOCTUA SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10099	.01	●	GU5.3		GU5.3	.9	.27	480	8	350	.DA .PU .D1	
				GU10	.GU	GU10			514				
				LED	.40 .60	.ST BPM50			565				

NOCTUA SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10099	.02	●	GU10	.GU	GU10	.9	.27	1370	16	500	.DA .PU .D1	
				GX8.5	.CD	GX8.5			1442				
				LED	.40 .60	.ST BPM3181			1522				

- 10099.01
- 10099.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10099.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE / LAMP

40 | 60
GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

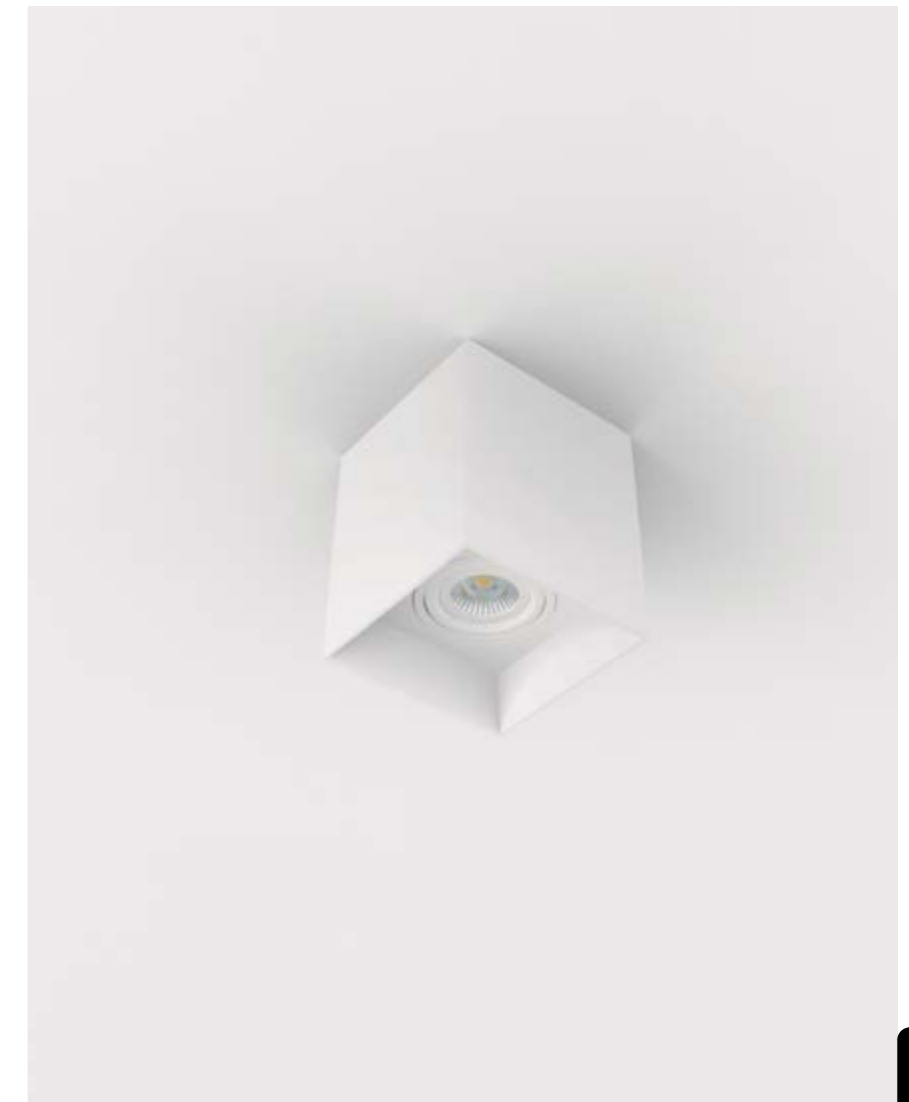

.SR

SURFACE

Select finishes




.WH-WH

- CRISMOSIL
- 30°
- 45°
- CRI ≥90
- IK04
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOR
- 220-240 V 50-60 Hz
- CE

NOCTUA SQ

REF 10099.SR

PHOTOMETRY

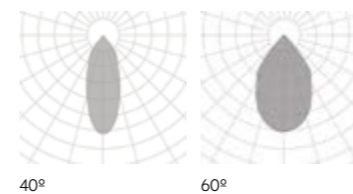

40°

60°

NOCTUA DEEP	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH			
	10100	.01	●	GU5.3		GU5.3	.9	-	480	8	-	▼				
				GU10	.GU	GU10										
				LED	.40 .60	.ST BPM50				.30				480	8	350
														514		
														565		
														686		
.HI BPM300	.27	734	10	500												
		810														

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

BEAM ANGLE / LAMP

40 | 60
GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

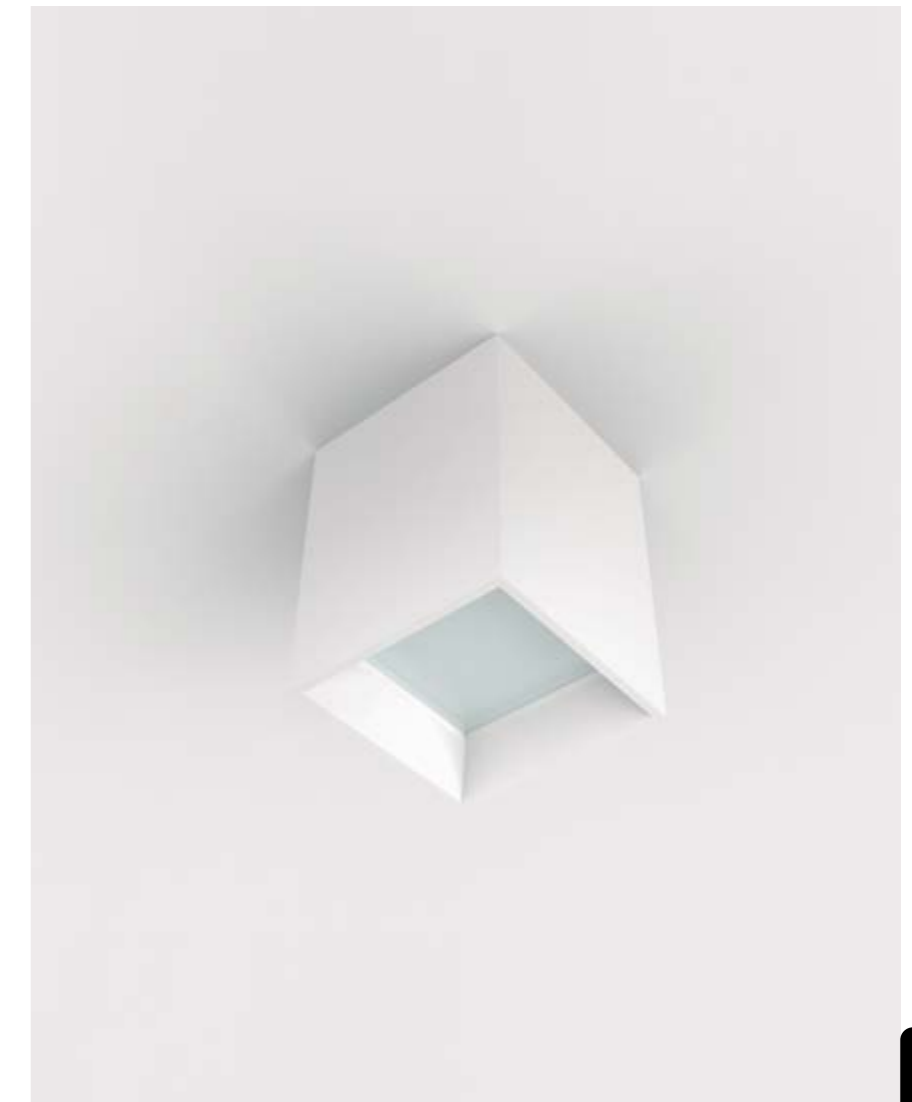

.SR

SURFACE

LUMINAIRE INCLUDES

Surface mounting kit

Con difusor opal.
With opal optic cover.

Reference order | 10100.01.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*



• Select finishes




.WH-WH



NOCTUA DEEP

REF 10100.SR

PHOTOMETRY

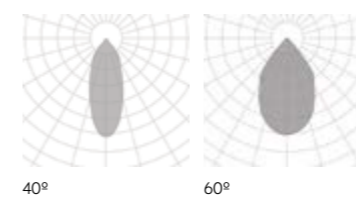

40°

60°

NOCTUA VENUS	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH			
	10102	.01	●	GU5.3		GU5.3	.9	-	480	8	-	.DA .PU .D1				
				GU10	.GU	GU10										
				LED	.40 .60	.ST BPM50								.30	514	
															.27	565
															.30	686
															.40	810

NOCTUA VENUS	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH			
	10102	.02	●	GU10	.GU	GU10	.9	-	1370	8	-	.DA .PU .D1				
				GX8.5	.CD	GX8.5										
				LED	.40 .60	.ST BPM3181								.30	1442	
															.27	1522
															.30	1522
															.40	1522

- 10102.01
- 10102.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10102.01.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

BEAM ANGLE / LAMP

40 | 60
GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



.SR

SURFACE

• Select finishes




.WH-WH

- CRISMOSIL
- 30°
- 45°
- CRI ≥90
- IK04
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOR
- 220-240 V 50-60 Hz
- CE

NOCTUA VENUS

REF 10102.SR



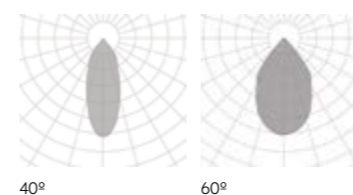


























PHOTOMETRY












































40°

60°

RECESSED WITH FRAME

ALABAMA	 ALABAMA 10158 PAG. 396	OHIO	 OHIO 10188 PAG. 400	 OHIO SQ 10204 PAG. 404	
FLORIDA	 FLORIDA 10190 PAG. 408	 FLORIDA SQ 10191 PAG. 412	ALBERTA	 ALBERTA SOFT 10217 PAG. 416	 ALBERTA 10176 PAG. 420
ALARIK	 ALARIK SLIM 20224 PAG. 428	MODULIGHT	 MODULIGHT 10210 PAG. 434		
ALBA	 ALBA MINI 10211 PAG. 440	 ALBA 10160 PAG. 444	 ALBA ASIMETRIC 210009 PAG. 448	 ALBA PLUS 10178 PAG. 452	 ALBA PLUS ASIMETRIC 210008 PAG. 456
BOLD	 BOLD 10190 PAG. 460	 BOLD LINE 10191 PAG. 460	WING	 WING 10200 PAG. 464	
OKKO	 OKKO 410012 PAG. 468	 OKKO PLUS 410013 PAG. 470	LENT	 LENT MODULAR 10216 PAG. 472	 LENT MOTION 10212 PAG. 474
VIO	 VIO 20185 PAG. 488	 VIO DEEP 20186 PAG. 488	 VIO DOME 20183 PAG. 488	 VIO SQ 20181 PAG. 488	 VIO MOVE 20184 PAG. 488
	 VIO DEEP MOVE 20182 PAG. 488	 VIO SQ MOVE 20180 PAG. 488	GALANTA	 GALANTA DEEP 410001 PAG. 492	

VISUAL INDEX

MAR-TORELL	 MARTORELL 20115 PAG. 494	 MARTORELL MOVE 20110 PAG. 496	 MARTORELL TARREGA 20117 PAG. 498	 MARTORELL TARREGA SQ 20116 PAG. 500	 MARTORELL TARREGA SQ2 20119 PAG. 500	 MARTORELL MINI CRATE 20175 PAG. 502	 MARTORELL CRATE 20176 PAG. 504	
FACE	 FACE TUBULAR MOVE 20205 PAG. 506		KLIMT				 KLIMT 20134 PAG. 508	 KLIMT FIX 20135 PAG. 510
GEO	 GEO 30511 PAG. 512	LUK		 LUK FREIR 20018 PAG. 514	 LUK FREIR 2 20019 PAG. 514	 LUK 20028 PAG. 516	 LUK 2 20071 PAG. 516	
CUBE	 CUBE 8201 PAG. 518	 CUBE SQ2 8202 PAG. 518	 CUBE SQ3 8203 PAG. 518	 CUBE SPOT 3120 PAG. 522	 CUBE SPOT 2 3131 PAG. 522			
	 CUBE SPOT MOVE 3121 PAG. 524	 CUBE SPOT 2 MOVE 3136 PAG. 524	 CUBE SPOT SQ MOVE 3134 PAG. 526	 CUBE SPOT SQ 2 MOVE 3135 PAG. 526				
CAN REVIEW	 CAN REVIEW 20149 PAG. 528	ALDAIA		 ALDAIA 20157 PAG. 530	 ALDAIA SQ 20120 PAG. 532			
VADI	 VADI 3177 PAG. 534	CASTEJON		 CASTEJON 20074 PAG. 536	 CASTEJON SQ 20073 PAG. 536			
ROY	 ROY 20154 PAG. 538	SU		 SU 3149 PAG. 540	 SU SQ 3150 PAG. 541	 SU OTIS 3234 PAG. 542		
BASIT	 BASIT 8012 PAG. 544	 BASIT MOVE 8013 PAG. 544	 BASIT MONET 20130 PAG. 546	 BASIT MONET 2 20131 PAG. 546	 BASIT LLORENS 20140 PAG. 548	 BASIT LLORENS SQ 20144 PAG. 548	 BASIT DERIN 8010 PAG. 550	

RECESSED WITH FRAME

KONI



CATLI





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 129 mm

350 | 450 | 650 | 950 | 1250 |

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA

REF 10158.RF

.PN
PENDANT

·10158 ALABAMA|PN
Pag. 78

.SR
SURFACE


·10158 ALABAMA|SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA|RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA|TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	.DA .PU .D1			
							.30	2385						
							.40	2475						
						.8	.TW *	-	-	-				
							.9	.27	-	35			500	.DA .PU .D1
								.30	4767					
	.40	4956												
		10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1		
								.30	4770					
								.40	4950					
							.8	.TW *	11400 - 11820	76	700			.DA .PU .D1
								.9	.27	9180	71			
.30									9534					
.40		9912												
		10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1		
								.30	9540					
								.40	9900					
							.8	.TW *	22800-23640	152	700			.DA .PU .D1
								.9	.27	18360	142			
	.30								19068					
	.40	19824												
		10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	.DA .PU .D1		
								.30	17490					
								.40	18150					
							.8	.TW *	41800-43340	279	700			.DA .PU .D1
								.9	.27	33660	260			
.30									34958					
.40		36344												
		10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	.DA .PU .D1		
								.30	28620					
								.40	29700					
							.8	.TW *	68400-70920	457	700			.DA .PU .D1
								.9	.27	55080	425			
	.30								57204					
	.40	59472												

Reference order | 10158.XX.RF.XX.XX.XX.XX.XX




.RF
RECESSED FRAME

ALABAMA

REF 10158.RF


- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOIL
- RECOIL
- 220-240 V 50-60 Hz
- CE

PHOTOMETRY

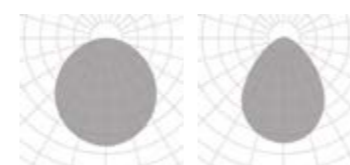

OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



● Select external finishes



WH-WH BK-BK GC-GC BM-BM BS-BS BC-BC CR-CR CB-CB GY-GY MG-MG VC-VC YM-YM



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 125 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

STANDARD

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)



* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS




OHIO

REF 10188.RF



OHIO	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10188	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10188	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10188	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10188	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10188	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10188.XX.RF.XX.XX.ST9.XX.XX

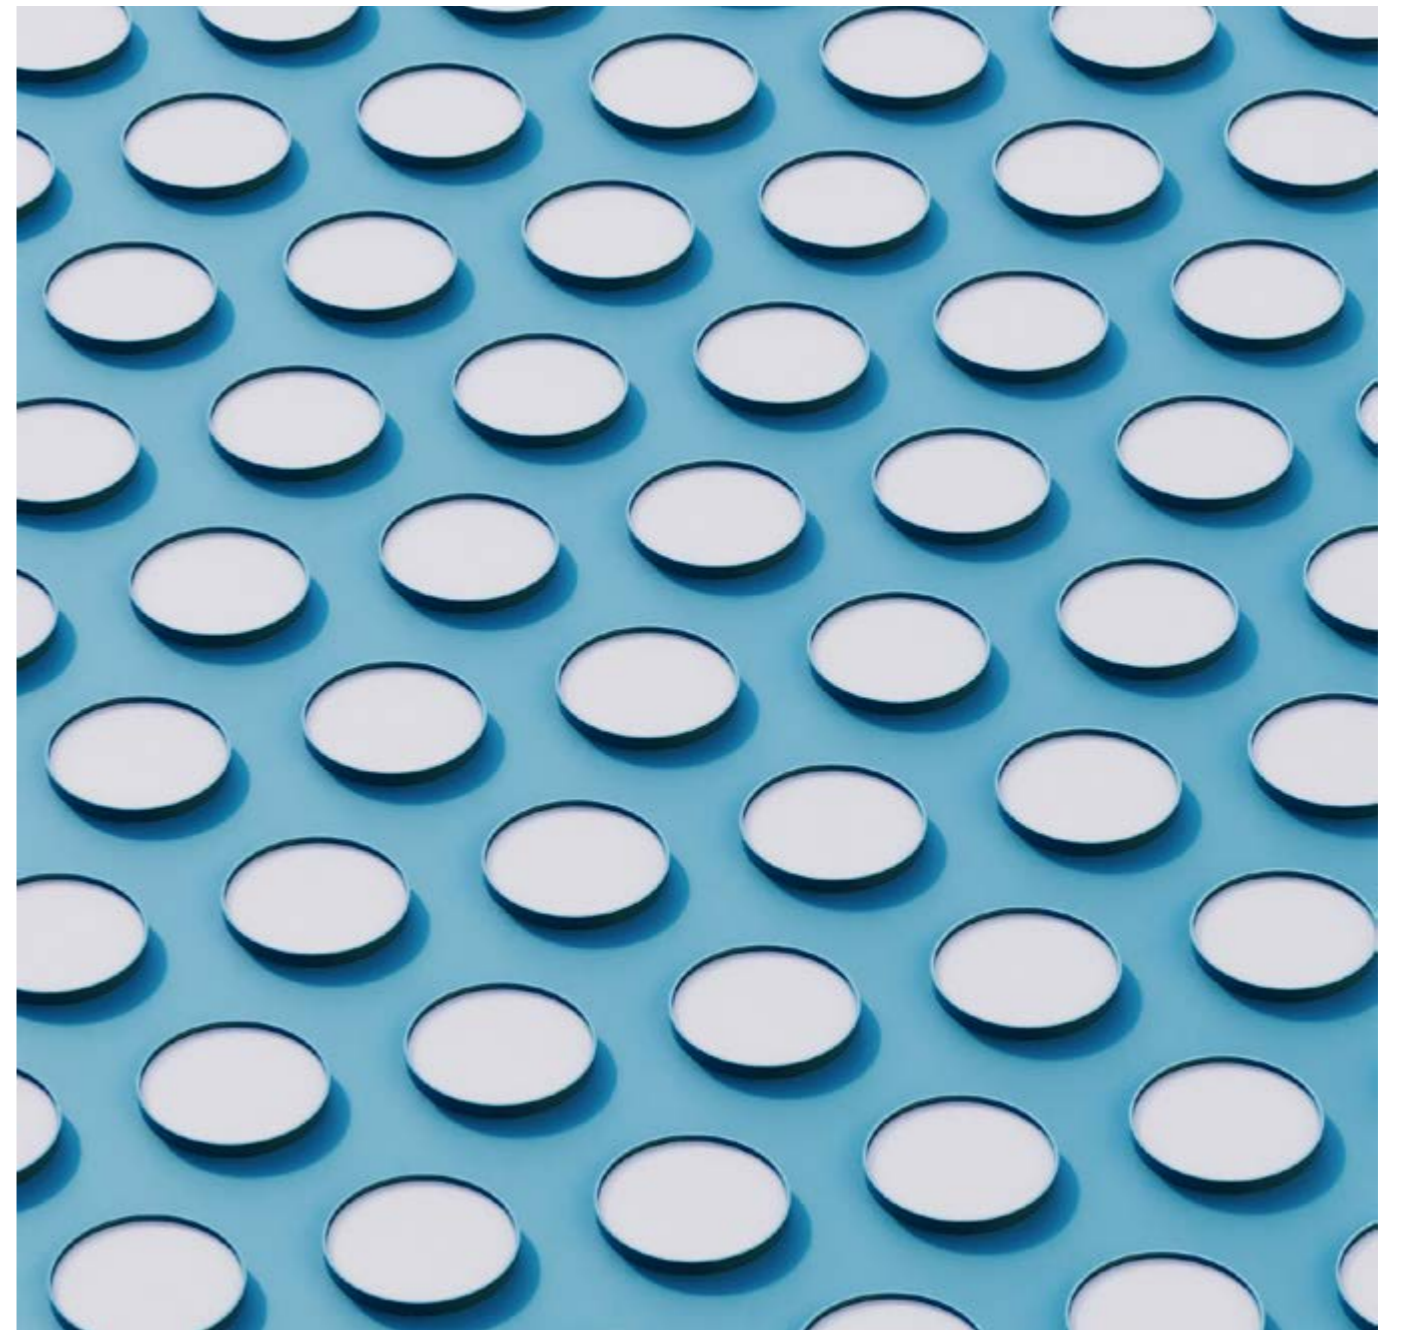

.RF
RECESSED FRAME


• Select finishes



OHIO


REF 10188.RF

PHOTOMETRY

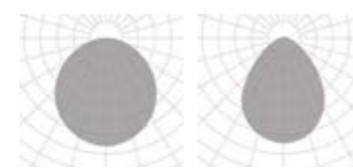


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 125 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

.RF
RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME

10204 OHIO SQ | RF
Pag. 404

.TR
TRIMLESS

10204 OHIO SQ | TR
Pag. 592



OHIO
SQ

REF 10204.RF



OHIO SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10204	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10204	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10204	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10204	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10204	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10204.XX.RF.XX.XX.ST9.XX.XX



.RF
RECESSED FRAME


• Select finishes



OHIO
SQ


REF10204.RF

PHOTOMETRY

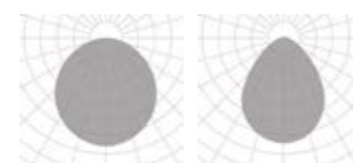


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm. | HEIGHT 114 mm
450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

RECESSED FRAME

INSTALLATIONS



FLORIDA

REF 10190.RF

.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90

.SR
SURFACE


·10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596



FLORIDA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.RF.XX.XX.ST9.XX.XX



.RF
RECESSED FRAME


Select finishes




FLORIDA

REF 10190.RF


PHOTOMETRY

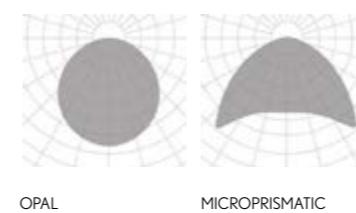

INCLUDED



PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm. | HEIGHT 114 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

RECESSED FRAME

INSTALLATIONS



FLORIDA SQ

REF 10191.RF

.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 94

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 94

.RF
RECESSED FRAME

·10191 FLORIDA SQ | RF
Pag. 412

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 600



FLORIDA SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.RF.XX.XX.ST9.XX.XX




Color is an integral element of our world and has an essential role in interior design and lighting projects, that's why we upgraded our painting booth, allowing any colors. If you can dream it, we can make it.

El color es un elemento integral de nuestro mundo y tiene un papel esencial en el diseño de interiores y los proyectos de iluminación, por ello tenemos una avanzada cabina de pintura que permite cualquier opción de acabado de color. Si puedes soñarlo, nosotros podemos hacerlo.

RECESSED FRAME .RF


Select finishes




FLORIDA SQ

REF 10191.RF


PHOTOMETRY

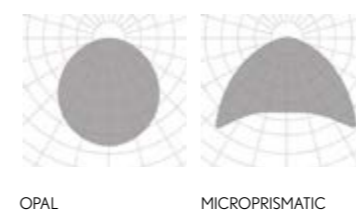

INCLUDED



PROFILE





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 38 mm

350 | 450 | 650 | 950 | 1250 | 1500
2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

.RF
RECESSED FRAME

INSTALLATIONS



ALBERTA SOFT

REF 10217.RF

.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 118

.SR
SURFACE

·10217 ALBERTA SOFT | SR
Pag. 118

.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 416



ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10217	.35	●	.SI	.HI	.9	.27	5280	56	700	.DA .PU .D1	
							.30	5316				
							.40	5844				
	10217	.45	●	.SI	.HI	.9	.27	7086	70	700	.DA .PU .D1	
							.30	7121				
							.40	7747				
	10217	.65	●	.SI	.HI	.9	.27	8785	86	700	.DA .PU .D1	
							.30	9040				
							.40	9687				
	10217	.95	●	.SI	.HI	.9	.27	13298	129	700	.DA .PU .D1	
							.30	13519				
							.40	14703				
	10217	.125	●	.SI	.HI	.9	.27	17816	172	700	.DA .PU .D1	
							.30	18135				
							.40	18118				
	10217	.150	●	.SI	.HI	.9	.27	-	185	500	.DA .PU .D1	
							.30	25326				
							.40	26901				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX

	10217	.200	●	.SI	.HI	.9	.27	-	253	500	.DA .PU .D1	
							.30	34185				
							.40	35475				
	10217	.250	●	.SI	.HI	.9	.27	-	318	500	.DA .PU .D1	
							.30	42930				
							.40	44550				
	10217	.300	●	.SI	.HI	.9	.27	-	383	500	.DA .PU .D1	
							.30	51675				
							.40	53625				
	10217	.350	●	.SI	.HI	.9	.27	-	433	700	.DA .PU .D1	
							.30	59875				
							.40	62843				
	10217	.400	●	.SI	.HI	.9	.27	-	513	500	.DA .PU .D1	
							.30	86655				
							.40	89925				
	10217	.500	●	.SI	.HI	.9	.27	-	643	500	.DA .PU .D1	
							.30	86655				
							.40	89925				
	10217	.600	●	.SI	.HI	.9	.27	-	772	500	.DA .PU .D1	
							.30	104145				
							.40	108075				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX


Select finishes



ALBERTA SOFT


REF 10217.RF

PHOTOMETRY




SILICONE

INCLUDED



RF INSTALATION KIT

PROFILE



RECESSED FRAME

.RF



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 125 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

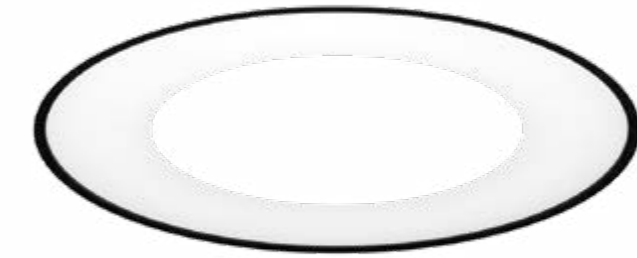

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accessories are delivered separately
(not installed in luminaire).

RECESSED FRAME .RF

INSTALLATIONS



ALBERTA

REF 10176.RF

.PN
PENDANT



·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604



ALBERTA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	.DA .PU .D1	
							.30	3975				
							.40	4125				
							.8	.TW *1				
					.HI	.9	.27	7650	59	500	.DA .PU .D1	
							.30	7945				
							.40	8260				
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
							.8	.TW *1				
					.HI	.9	.27	12240	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10176	.125	●	.OP .MP	.ST	.9	.27	7650	59	500	.DA .PU .D1	
							.30	7950				
							.40	8250				
							.8	.TW *1				
					.HI	.9	.27	15300	118	500	.DA .PU .D1	
							.30	15890				
							.40	16520				

Reference order 10176.XX.RF.XX.XX.XX.X.XX.XX



Perfection has a circular shape
La Perfección tiene forma circular

• Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



ALBERTA


REF 10176.RF

PHOTOMETRY

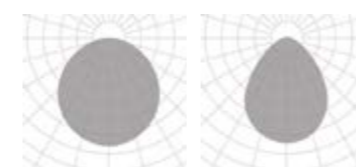


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



124

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.

RECESSED FRAME .RF

A blank canvas.

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces..

When it comes to technology, there's no shortage of features: With options for indirect light, dimmer, tunable white, RedUGeR®, customisable technology... and more.

Un lienzo en blanco.


Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfiles lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.

A nivel técnico, un auténtico compendio de ventajas: Capacidad de incorporar luz indirecta, regulaciones, blanco dinámico, RedUGeR®, personalizable en aspectos técnicos... entre otros muchos beneficios.



LINES

RECESSED WITH FRAME



Mastering light has never been so easy

Alarik is a set of modular designs for building or simplifying your lighting scheme. With Mini and Slim versions - and their own subfamilies - they adapt to every need.

It's playtime! Lighting design with Alarik is an exercise in creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

Alarik combina referencias modulares que permiten crecer o simplificar los puntos de luz, así como versiones Mini y Slim - a la vez con sus propias subfamilias - que se adaptan a cada necesidad.

¡Que empiece el juego! Iluminar con Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

ALARIK SLIM



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit




ON DEMAND
Taylor your own design

.RF
RECESSED FRAME


INSTALLATIONS



 <p>.PN PENDANT</p> <p>·20224 ALARIK SLIM PN Pag. 178</p>	 <p>.SR SURFACE</p> <p>·20224 ALARIK SLIM SR Pag. 178</p>	 <p>.RF RECESSED FRAME</p> <p>·20224 ALARIK SLIM RF Pag. 428</p>	 <p>.TR TRIMLESS</p> <p>·20224 ALARIK SLIM TR Pag. 622</p>
---	--	---	--

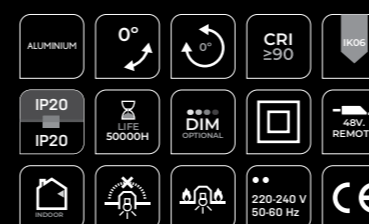

ALARIK SLIM

REF 20224.RF

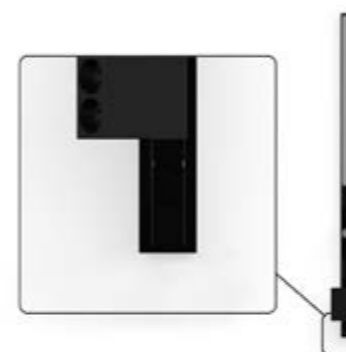


ALARIK SLIM	REF.	DIMENSION	FINISH	SKETCH
	20224	.01 1 mt.	●	





Reference order | 20224.XX.RF.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200



Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W



Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				





Reference order | 11544.XX.XX.XX.ST9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11546	.03	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				



Reference order | 11546.XX.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11551	.01	●	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				





Reference order | 11551.XX.XX.XX.ST9.XX.XX

SLIM LED TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST9.XX.XX



SLIM WALL WASHER	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST9.XX.XX

● Select finish

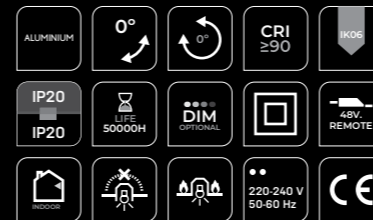


ALARIK SLIM

REF 20224.RF

PHOTOMETRY

SLIM PATRICIA

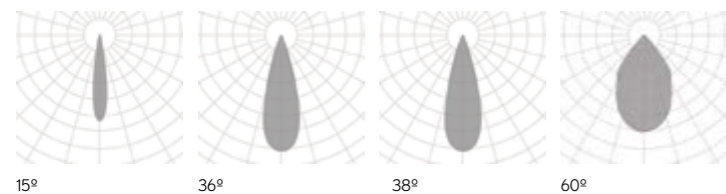

15° 36° 38° 60°

PHOTOMETRY


SLIM LED BALL SLIM WALL WASHER



38°


PHOTOMETRY

SLIM TUBE | SLIM LENSES

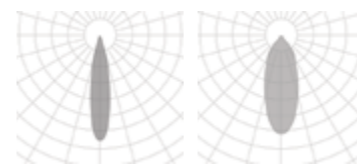

20° 40°

INCLUDED



RF INSTALLATION KIT

RECESSED FRAME

SLIMMOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _{AC}	DIMM	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order 11547.XX.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	V _{AC}	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order 11549.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	

Reference order TF19.RF.XX

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH	ANGLE JOINT CONNECTOR	FINISH
	.BK-BK .WH-WH		.BK-BK .WH-WH

ACC20224.UR.XX

ACC20224.UL.XX

POWER FEEDER UNIT	FINISH
	.BK-BK .WH-WH

ACC20224.CA.XX


LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT

UR19

UL19

UV19

Select finish




.WH-WH .BK-BK



ALARIK SLIM

REF 20224.RF

PHOTOMETRY




OPAL

INCLUDED



RF INSTALLATION KIT

PROFILE



RECESSED FRAME



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Taylor your own design
Special RAL Color
Tunable White

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



MODULIGHT

REF 10210.RF



.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 196



.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 196




.RF
RECESSED FRAME



·10210 MODULIGHT | RF
Pag. 434



.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 634

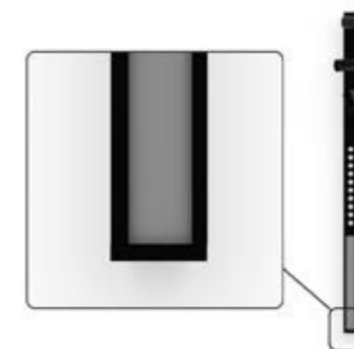



MODULIGHT	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	



Reference order | 10210.XX.RF.XX

DRIVER	DIMENSION**	DIMM
DR10210	.01 0-15 W	.DA .PU .D1
	.02 16-30 W	
	.03 31-65 W	
	.04 66-90 W	






Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			




Reference order | 11538.XX.XX.XX.ST9.XX

LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVER	REF.	FINISH
	ACC10210.01	.WH-WH .BK-BK

Reference order | ACC10210.01.XX



ROUND .RD
26x29.3 mm
Int Ø14.5 - Ext. Ø23 mm

SQUARE .SQ
26x29.3 mm
Ø14.5 mm

*1 Modular system that requires a technical drawing. Sistema modular que requiere de un plano técnico.

*2 Driver power must be at least 15% higher than the sum of the power of selected LED modules. La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.

• Select lens finishes




MODULIGHT

REF 10210.RF


PHOTOMETRY

MINI TUBE

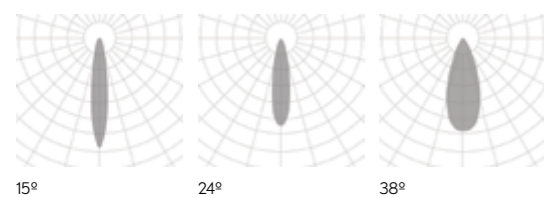

PHOTOMETRY

LENSES

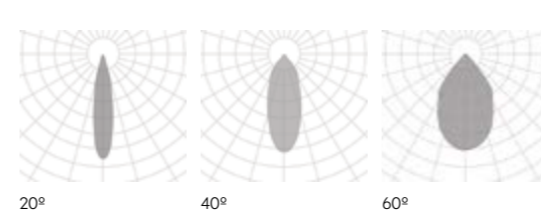

LED MODULES	REF.	DIMEN- SION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.BK-BK	.OP .MP	.HI	.9	.27	953	12	700	
							.30	972			
							.40	1141			
	11524	.02 562mm.	.BK-BK	.OP .MP	.HI	.9	.27	1906	24	700	
							.30	1944			
							.40	2282			
	11524	.03 843mm.	.BK-BK	.OP .MP	.HI	.9	.27	2859	36	700	
							.30	2916			
							.40	3423			
	11524	.04 1124mm.	.BK-BK	.OP .MP	.HI	.9	.27	3812	48	700	
							.30	3888			
							.40	4564			
	11524	.05 1405mm.	.BK-BK	.OP .MP	.HI	.9	.27	4765	60	700	
							.30	4860			
							.40	5705			
	11524	.06 1686mm.	.BK-BK	.OP .MP	.HI	.9	.27	5718	72	700	
							.30	5832			
							.40	6846			

Reference order | **11524.XX.XX.XX.HI.9.XX**

COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	●

Reference order | **TF23.RF.XX**

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		●
UR23	UL23	X	X	UV23	

Reference order | **XX23.RF.XX**

● Select finish




MODULIGHT

REF 10210.RF

PHOTOMETRY

LED MODULES

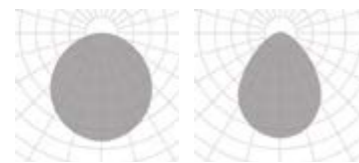

OPAL


MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT


PROFILE



46

49

RECESSED FRAME

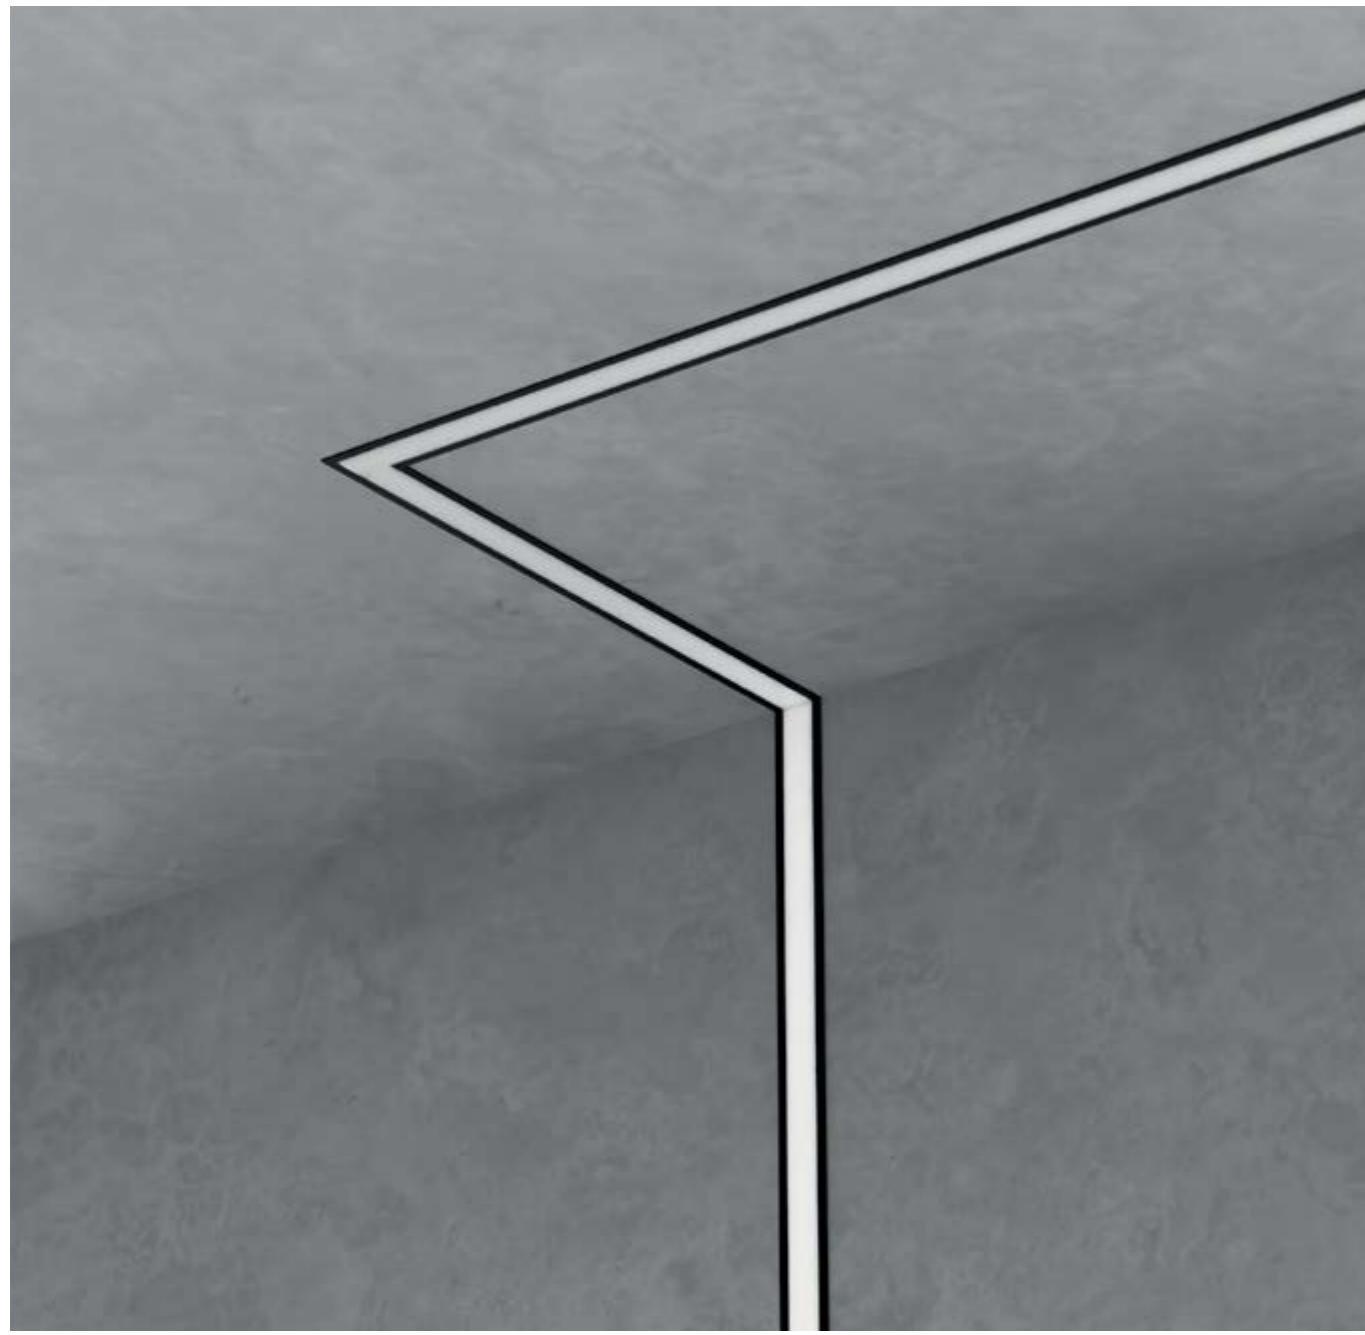

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

868 | 1149 | 1430 | 1711 | 1992 | 2273

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

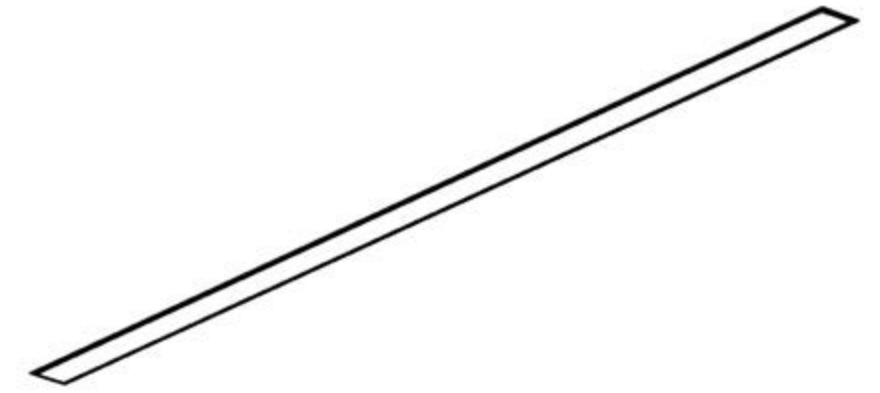

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).



INSTALLATIONS



ALBA MINI

REF 10211.RF

.PN
PENDANT

-10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE


-10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

-10211 ALBA MINI | RF
Pag. 440

.TR
TRIMLESS

-10211 ALBA MINI | TR
Pag. 640

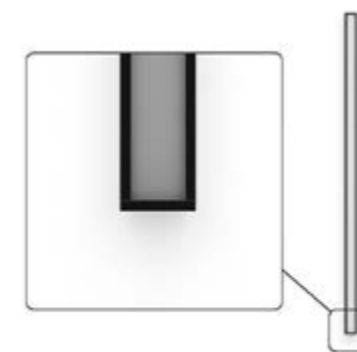

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1149					3060	3180	3300	7600-7880	24	51	
	.05	1430					3825	3975	4125	9500-9850	30	64	
	.06	1711					4590	4770	4950	11400-11820	35	76	
	.07	1992					5355	5565	5775	13300-13790	41	89	
	.08	2273					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1149					6120	6356	6608	47	
	.05	1430					7650	7945	8260	59	
	.06	1711					9180	9534	9912	71	
	.07	1992					10710	11123	11564	83	
	.08	2273					12240	12712	13216	94	

Reference order | 10211.XX.RF.XX.XX.XX9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03	●

Reference order | TF03.RF.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03.RF.XX


● Select finish



ALBA MINI

REF 10211.RF

PHOTOMETRY

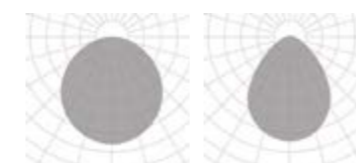


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

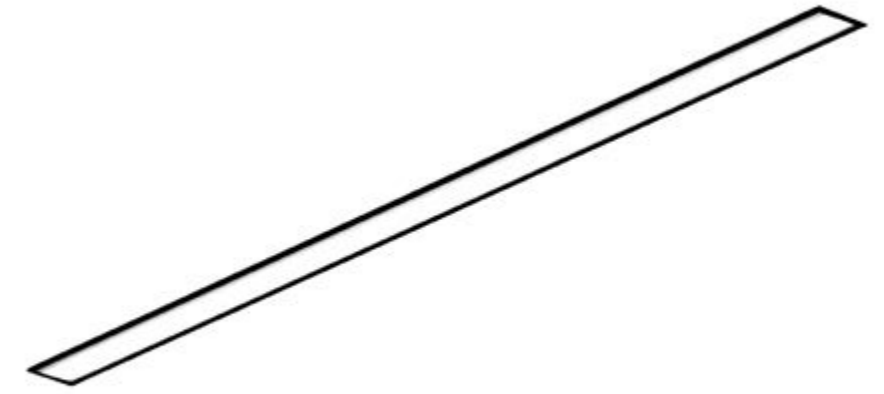

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.RF

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE



·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644

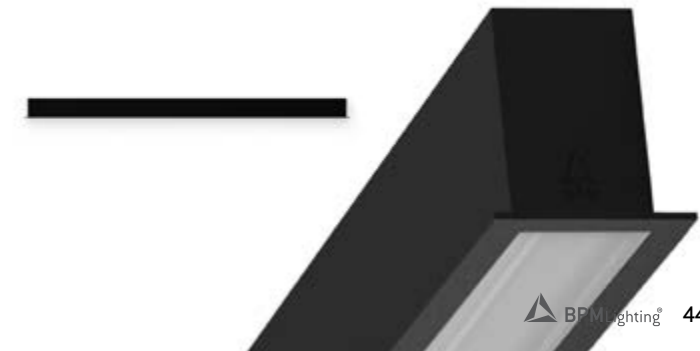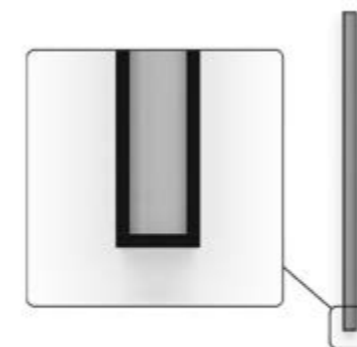

RECESSED FRAME

.RF

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.RF.XX.XX.XX.9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF02	●

Reference order | TF02.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	

Reference order | XX02.RF.XX


Select finish



ALBA

REF 10160.RF

PHOTOMETRY

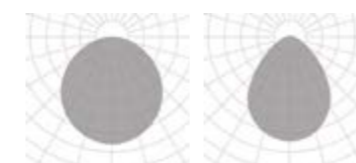


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



49

*Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 **Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

new



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALBA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448



.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648



ALBA ASIMETRIC

REF 210009.RF

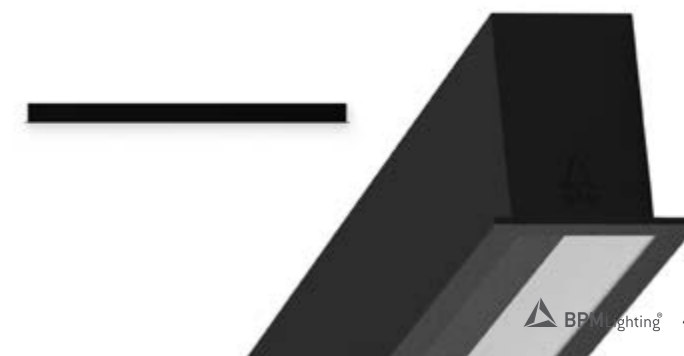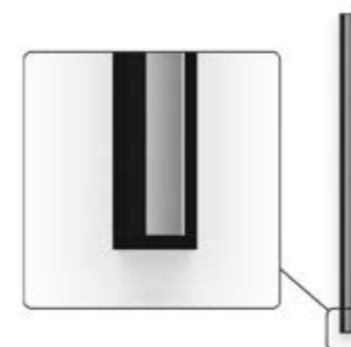

RECESSED FRAME

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX.RF.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF06	●

Reference order | TF06.RF.XX

JOINTS

LINEAR JOINT
UR06



● Select finish



ALBA ASIMETRIC

REF 210009.RF

PHOTOMETRY




TRANSPARENT PC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

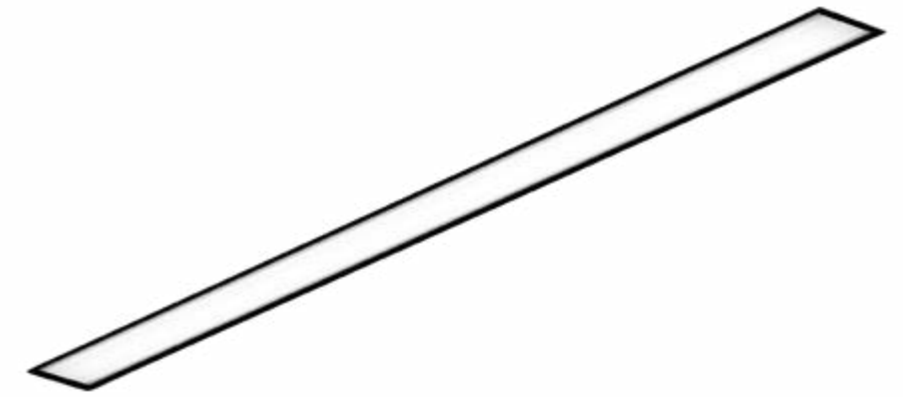

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA PLUS

REF 10178.RF

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE


·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS|TR
Pag. 652

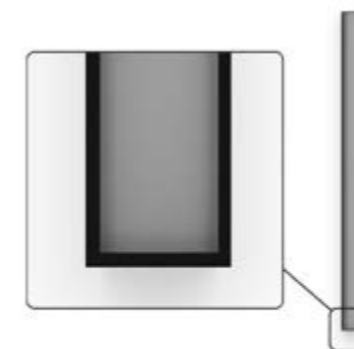

RECESSED FRAME

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10178.XX.RF.XX.XX.XX9.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF01	●

Reference order | TF01.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Reference order | XX01.RF.XX


● Select finish



ALBA PLUS


REF 10178.RF

PHOTOMETRY

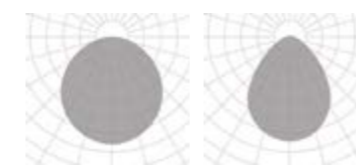


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

RECESSED FRAME

.RF

RECESSED FRAME



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

RECESSED FRAME

INSTALLATIONS



ALBA PLUS ASIMETRIC

REF 210008.RF

.PN
PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 250

.SR
SURFACE


·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 250

.RF
RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 456

.TR
TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 656

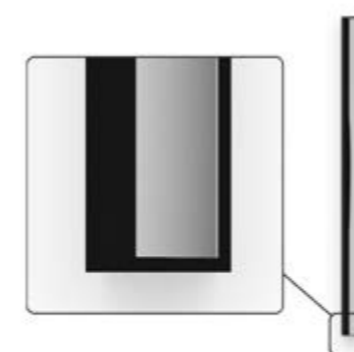

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210008.XX.RF.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF05	●

Reference order | TF05.RF.XX

JOINTS

LINEAR JOINT
UR05



● Select finish



ALBA PLUS ASIMETRIC

REF 210008.RF

PHOTOMETRY




TRANSPARENT PC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863	1144	1425	1706
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

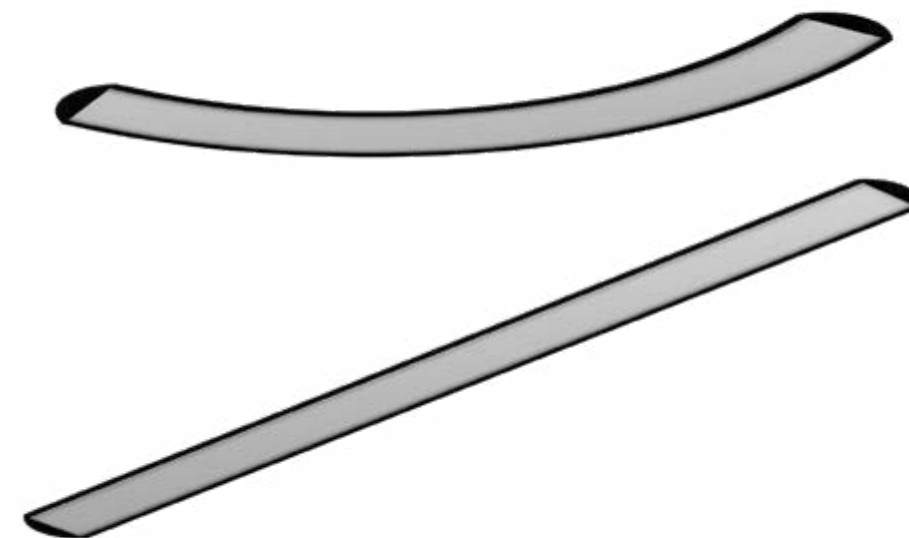

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN PENDANT

·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254

.RF RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE | RF
Pag. 460



BOLD | BOLD LINE

REF 210001.RF | 210015.RF



BOLD						
.01	.02	.03	.04	.05	.06	.07
800 mm 45°	800 mm 90°	1520 mm 45°	1520 mm 90°	2950 mm 45°	2950 mm 90°	5100 mm 45°

REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
						.27	.30	.40		
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	.07					5355	5565	5775	41	

REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
						.27	.30	.40		
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	.07					10710	11123	11564	83	

Reference order | 210001.XX.RF.XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT K	DIMM ▼
		▲	MM					.27	.30	.40		
	210015	●	.OP .MP	.ST	.9	.03	863	2295	2385	2475	18	.DA .PU .D1
						.04	1144	3060	3180	3300	24	
						.05	1425	3825	3975	4125	30	
						.06	1706	4590	4770	4950	35	

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT K	DIMM ▼
		▲	MM					.27	.30	.40		
	210015	●	.OP .MP	.ST	.9	.03	863	4590	4767	4956	35	.DA .PU .D1
						.04	1144	6120	6356	6608	47	
						.05	1425	7650	7945	8260	59	
						.06	1706	9180	9534	9912	71	

Reference order | 210015.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	TF17

Reference order | TF17.RF.XX


Select finish



BOLD | BOLD LINE

REF 210001.RF | 210015.RF

PHOTOMETRY




OPAL

INCLUDED



RF INSTALLATION KIT

PROFILE



68

RECESSED FRAME



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

RECESSED FRAME
.RF

INSTALLATIONS



WING

REF 10200.RF

.PN
PENDANT

10200 WING | PN
Pag. 262

.SR
SURFACE


10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

10200 WING | RF
Pag. 464

.TR
TRIMLESS

10200 WING | TR
Pag. 660

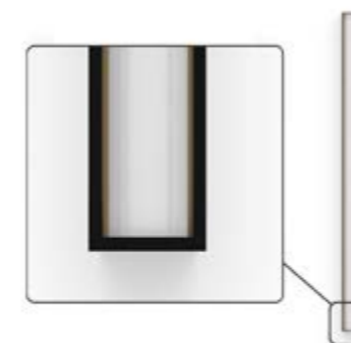

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.04	1144					6120	6356	6608	47		
	.05	1425					7650	7945	8260	59		
	.06	1706					9180	9534	9912	71		
	.07	1987					10710	11123	11564	83		
	.08	2268					12240	12712	13216	94		

Reference order | 10200.XX.RF.XX.XX.XX.XX.XX.XX.XX

COMPONENTS


COVER KIT	REF.	FINISH
	TF13	●

Reference order | TF13.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX


JOINTS

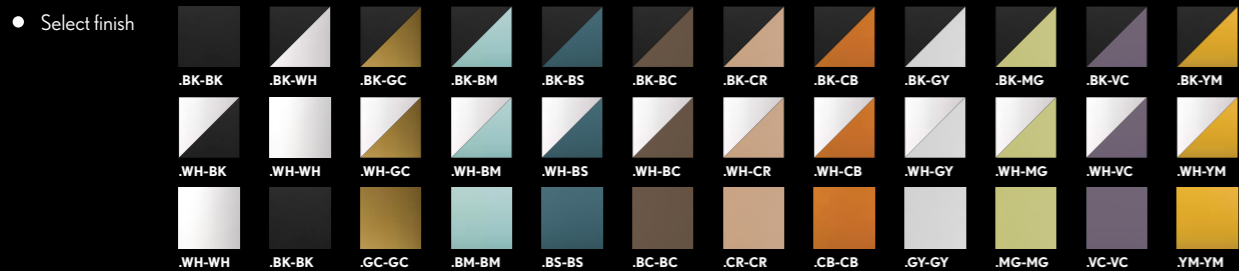

WING

REF 10200.RF

PHOTOMETRY

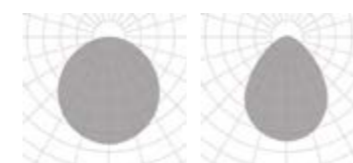


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



*Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
-TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.


RECESSED FRAME

.RF

OKKO MODULAR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	410012	.01	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	111 125 132	2	100	.DA .PU .D1	
	410012	.02	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	222 250 264	3	200	.DA .PU .D1	
	410012	.03	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	333 375 396	5	300	.DA .PU .D1	
	410012	.05	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	555 625 660	7	500	.DA .PU .D1	
	410012	.10	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	1114 1245 1320	12	500	.DA .PU .D1	

Reference order 410012.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

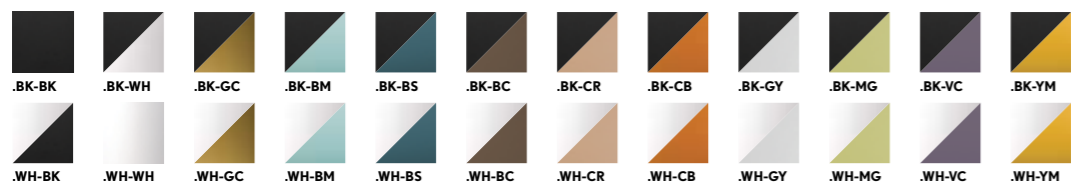

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.PN
PENDANT

·210012 OKKO MODULAR LINE|
PN - Pag. 150

.SR
SURFACE


·210012 OKKO MODULAR LINE|
SR - Pag. 150

.RF
RECESSED FRAME

·410012 OKKO MODULAR | RF-Pag.
468



PHOTOMETRY

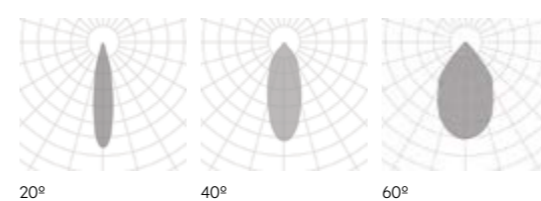

OKKO MODULAR


REF 410012.RF

RECESSED FRAME

OKKO PLUS MODULAR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	410013	.01	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	111 125 132	2	100	.DA .PU .D1	
	410013	.02	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	222 250 264	3	200	.DA .PU .D1	
	410013	.03	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	333 375 396	5	300	.DA .PU .D1	
	410013	.05	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	555 625 660	7	500	.DA .PU .D1	
	410013	.10	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	1114 1245 1320	12	500	.DA .PU .D1	

Reference order 410013.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

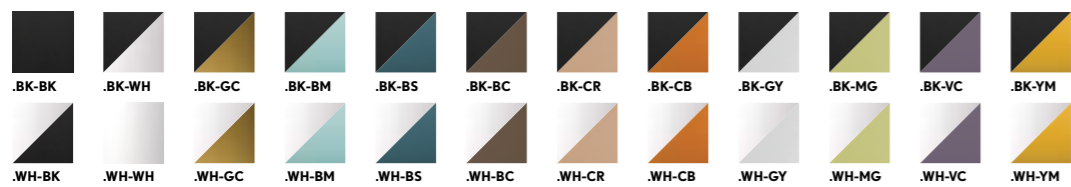

● FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.PN
PENDANT


·210013 OKKO PLUS MODULAR
LINE | PN - Pag. 154

.SR
SURFACE


·210013 OKKO PLUS MODULAR
LINE | SR - Pag. 154

.RF
RECESSED FRAME

·410013 OKKO PLUS MODULAR |
RF - Pag. 470

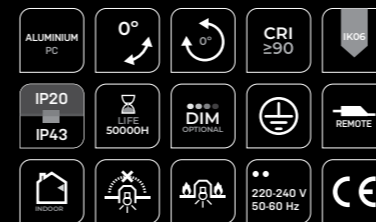

PHOTOMETRY

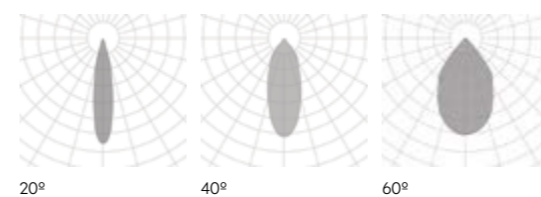

OKKO PLUS
MODULAR

REF 410013.RF

RECESSED FRAME

LENT MODULAR	REF.	DIMENSIONS	SHAPE	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	10216	.01	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	152 181 185	6	580	.DA .PU .D1	
	10216	.03	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	448 458 500	8	700	.DA .PU .D1	
	10216	.05	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	774 892 929	14	700	.DA .PU .D1	
	10216	.10	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	1519 1814 1871	24	700	.DA .PU .D1	

Reference order | 10216.XX.RF.XX.XX.XX.ST9.XX.XX

● Select finishes

.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM

FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

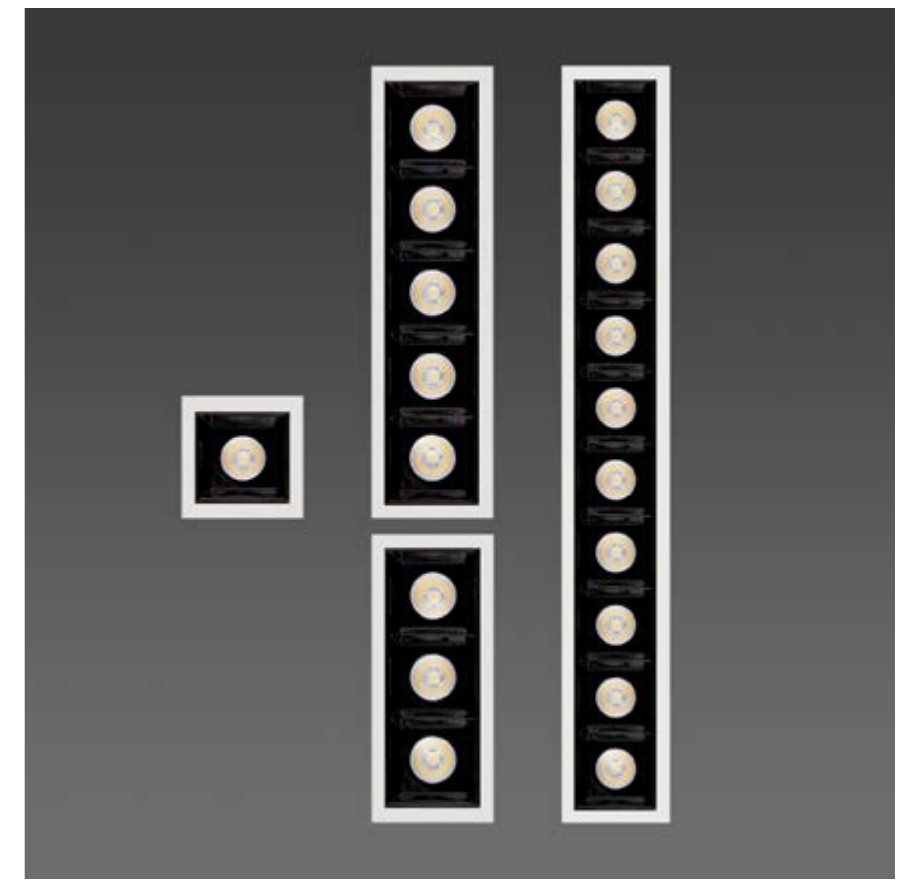

INSTALLATIONS

.RF
RECESSED FRAME



10216 LENT MODULAR | RF
Pag. 472

.TR
TRIMLESS

10216 LENT MODULAR | TR
Pag. 666

ALUMINIUM PC	0°	0°	CRI ≥90	IK08
IP20 IP43	LIFE 50000H	DIM OPTIONAL	REMOTE	
RECESSED	RECESSED	RECESSED	220-240 V 50-60 Hz	CE

PHOTOMETRY

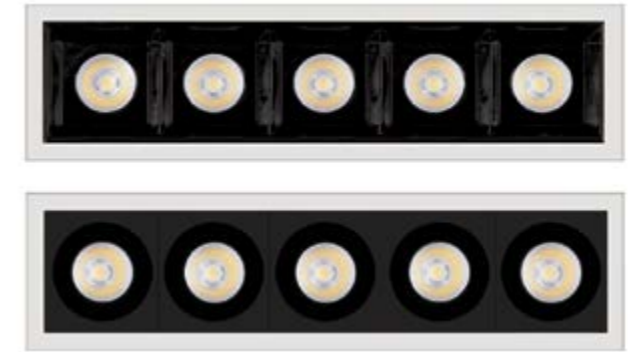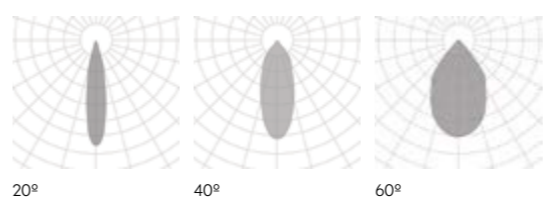

SQUARE | SQ

ROUND | RD

LENT MODULAR


REF 10216.RF

RECESSED FRAME

LENT MOTION	REF.	DIMENSIONS	SHAPE	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	10212	.03	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	448 458 500	8	700	.DA .PU .D1	
	10212	.05	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	774 892 929	14	700	.DA .PU .D1	
	10212	.05	.RO .SQ	●	.LED	.20 .40 .60	.ST	.9	.27 .30 .40	1519 1814 1871	24	700	.DA .PU .D1	

Reference order | 10212.XX.RF.XX.XX.XX.ST9.XX.XX

Select finishes

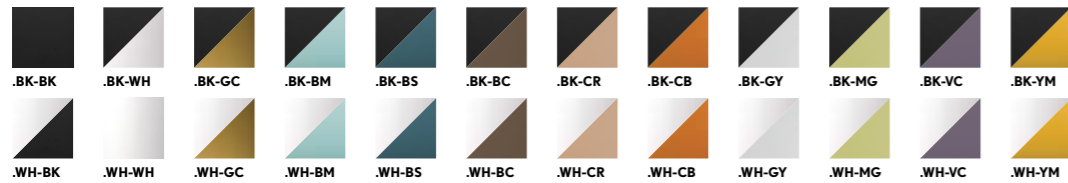

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.03 | .05 | .10

LIGHTING OPTIONS

BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

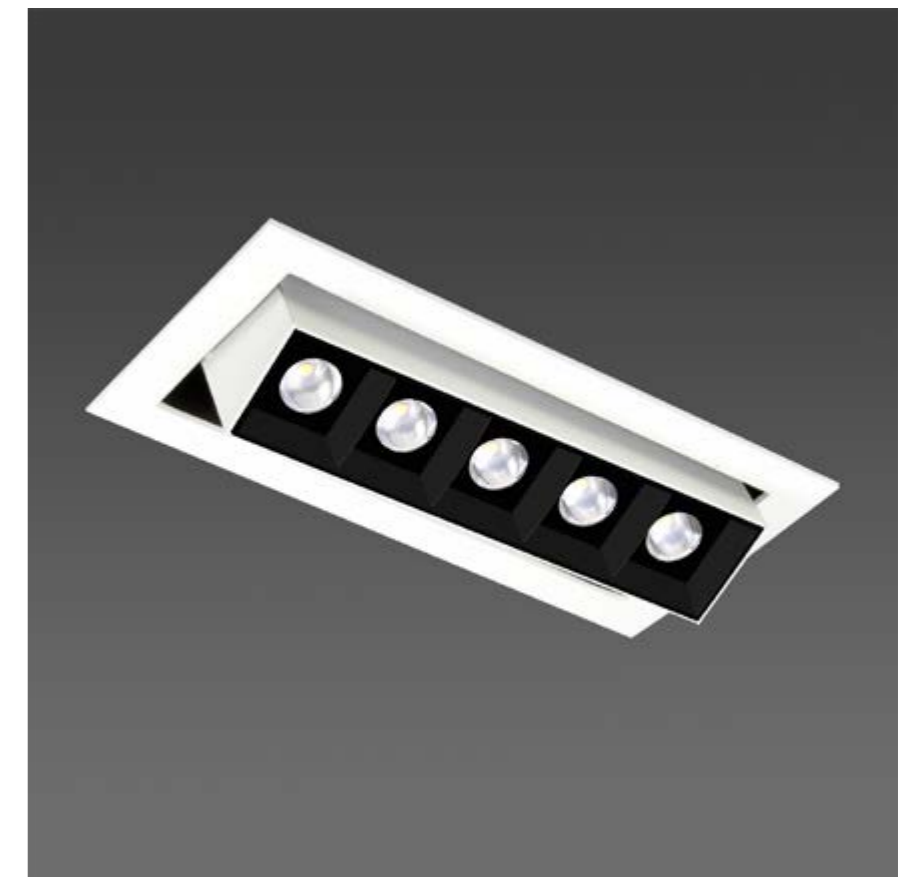



INSTALLATIONS



LENT MOTION

REF 10212.RF


PHOTOMETRY

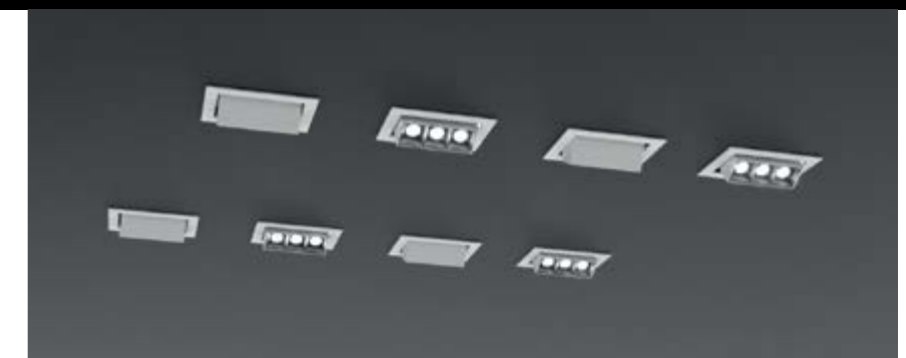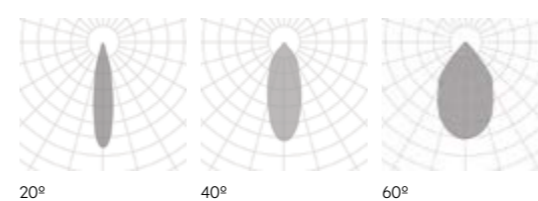

.RF
RECESSED FRAME

10212 LENT MOTION | RF
Pag. 474


.RF
RECESSED FRAME

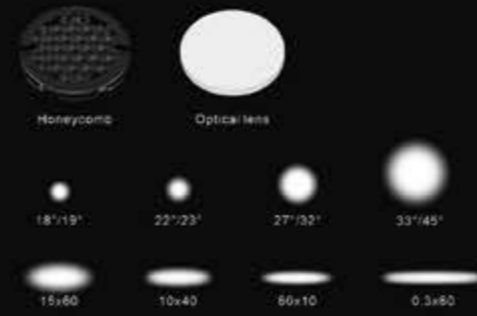

OPTICAL ACCESORIES



TILTING 30°

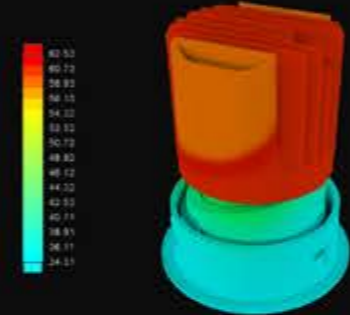

HEAT DISSIPATION THEORY

SASSY



new

A new era in LED lighting

Specific and efficient. This is your new go-to LED lighting solution. It gets five stars for its lighting capacity and has brilliant accessories that give you the highest possible performance.

Una nueva era en la iluminación LED

Especialización y eficacia. Así es el nuevo modelo de referencia en iluminación LED. Un 5 estrellas por su capacidad lumínica pero especialmente por los accesorios que aporta y acopla para conseguir el mayor rendimiento posible.

new

SASSY	REF.	DIMENSIONS	FINISHES	SKETCH
	410002	.01	.WH.WH .BK-BK	

Reference order **410002.01.RF.XX**

SASSY LED	REF.	DIMENSIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH	
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	599	10	250	.DA .PU .D1		
							.30	732					
							.40	775					
					.MD	.9	.27	696	12	300	.DA .PU .D1		
							.30	872					
							.40	893					
					.DW	.9	.9	.27	713 to 14	7	420 to 14		.DA
								.30	778	15	350		.DA .PU .D1
								.40	947				
					.HI	.9	.9	.27	778	10	280 to 14		.DA
								.30	947				
								.40	1033				
.DW	.9	.9	.27	880 to 30	10	280 to 14	.DA						
			.30	947									
			.40	1033									

Reference order **120001.01.BK-BK.XX.XX.X.XX.XX**

FINISHES

EXTERNAL COLORS



INTERNAL COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

15° | 26° | 38° | 50°

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options



RECESSED FRAME


INSTALLATIONS

- ALUMINUM PC
- 30°
- 0°
- CRI ≥ 90
- IK08
- IP20
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- REcessed
- REcessed
- 220-240 V 50-60 Hz
- CE

SASSY

REF 410002.RF

PHOTOMETRY

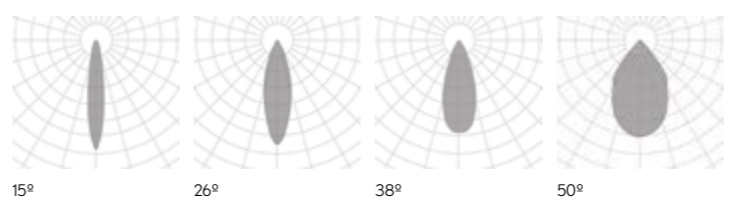

.RF
RECESSED FRAME

410002 SASSY | RF
Pag. 476




.TR
TRIMLESS

410002 SASSY | TR
Pag. 668

COMPONENTS






RING PART	FINISH
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX






RING PART			FINISH
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX

ACCESSORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410002.OV	.03X60	6.4  Ø37.5
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX

FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410002	.ZSX1.3	6.4  Ø37.5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX

HONEYCOMB

ACC410002.HC

Select finish



.RF
RECESSED FRAME

- ALUMINIUM PC
- 30°
- 0°
- CRI ≥90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- RECESSED
- 220-240 V 50-60 Hz
- CE

SASSY

REF 410002.RF

new

SASSY	REF.	DIMENSIONS	FINISHES	SKETCH
	410003	.01	.WH.WH .BK-BK	

Reference order 410003.01.RF.XX

SASSY LED	REF.	DIMENSIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	599	10	250	.DA .PU .D1	
							.30	732				
							.40	775				
					.DW	.9	.27	696	12	300	.DA .PU .D1	
							.30	872				
							.40	893				
					.DW	.9	.27	778	15	350	.DA .PU .D1	
							.30	947				
							.40	1033				
					.DW	.9	.27	778	10	280 to 14	.DA	
							.30	947				
							.40	1033				

Reference order 120001.01.BK-BK.XX.XX.X.XX.XX

FINISHES

EXTERNAL COLORS



INTERNAL COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

15° | 26° | 38° | 50°

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options



RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME
-410003 SASSY SQ | RF
Pag. 482



.TR
TRIMLESS
-410003 SASSY SQ | TR
Pag. 672

- ALUMINUM PC
- 30°
- 0°
- CRI ≥ 90
- IK08
- IP20
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- REcessed
- 220-240 V 50-60 Hz
- CE

SASSY SQ

REF 410003.RF

PHOTOMETRY

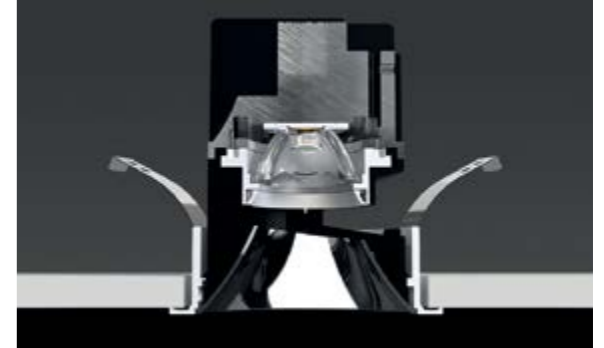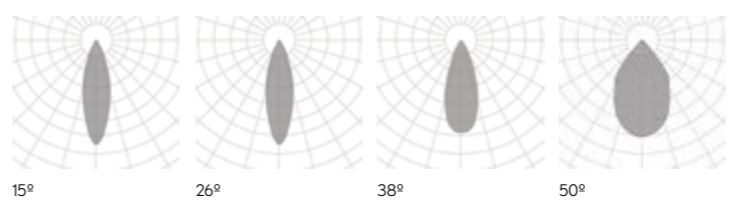











COMPONENTS

RING PART	FINISH
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410003.OV	.03X60	6.4 
		.10X60	
		.10X40	
		.15X60	

FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410003	.ZSX1.3	6.4 
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

HONEYCOMB

ACC410003.HC

Reference order | ACC410003.OV.XX

Reference order | ACC410003.XX



.RF
RECESSED FRAME

• Select finish



SASSY SQ

REF 410003.RF

VIO

Re -framing spaces

Focus on something specific or set the mood for the entire room.

Removable LED modules, a choice of fixed and adjustable assembly modes (4+4) and textured black and white finishes make them your best ally for achieving the pleasing effect you need. Welcome to your blank page.

Let your imagination fly, then watch as the VIO product family sets the stage. And when you have finished lighting, if you like, hit the Re-frame button.

Re-encuadre de espacios

Poner el foco en un elemento concreto o tamizar una estancia completa.

Gracias a sus módulos LED extraíbles, su capacidad de montaje en modo orientado o fijo (4+4) y sus acabados en negro texturizado o blanco, VIO se convierte en el mejor aliado para dibujar el escenario que necesitas.

Bienvenido a un espacio aún por definir. Imagínalo y deja que la familia de productos VIO defina el encuadre. ¡Y una vez iluminado, reencuádralo!





FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

9° | 12° | 30° | 16° | 24° | 38°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options



new

INSTALLATIONS



VIO
 VIO | SQ | DEEP | DOME
 VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE
 REF 2018X.RF

.RF
 RECESSED FRAME

·2018X VIO | RF
 Pag. 488

.RF
 RECESSED FRAME

VIO MOVE	REF.	DIMENSIONS	FINISHES	SKETCH
	20184	.01	●	

VIO SQ MOVE	REF.	DIMENSIONS	FINISHES	SKETCH
	20180	.01	●	

VIO DEEP MOVE	REF.	DIMENSIONS	FINISHES	SKETCH
	20187	.01	●	

VIO DOME MOVE	REF.	DIMENSIONS	FINISHES	SKETCH
	20182	.01	●	

VIO	REF.	DIMENSIONS	FINISHES	SKETCH
	20185	.01	●	

VIO SQ	REF.	DIMENSIONS	FINISHES	SKETCH
	20181	.01	●	

VIO DEEP	REF.	DIMENSIONS	FINISHES	SKETCH
	20186	.01	●	

VIO DOME	REF.	DIMENSIONS	FINISHES	SKETCH
	20183	.01	●	

* .ST = H + 51mm | .HI = H + 76mm

VIOLED	REF.	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM**	SKETCH
	VL	●	LED	.9 .12 .30	.ST	.9	.27	156	3	700	.DA .PU .D1	
							.30	165				
							.40	172				
	VL	●	LED	.16 .24 .38	.HI	.9	.27	391	7	500	.DA .PU .D1	
							.30	402				
							.40	458				


Reference order | VL.XX.XX.XX9.XX.XX

VIO DRIVERS	DIMENSION	DIMM	POWER
DRVL	.01 2 - 3 vio	.DA .PU .D1	.ST
	.02 4 - 9 vio		
	.03 10 - 15 vio		
	.01 1 - 3 vio	.DA .PU .D1	.HI
	.02 4 - 8 vio		

Reference order | DRVL.XX.XX.XX


** Dimmable driver dimensions are greater than those of the cut-out-hole. Dimming options require the combination of a minimum of 2 luminaires.
Las dimensiones del driver dimmable son superiores a las del agujero de corte. Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.

● Select finishes









VIO
VIO | SQ | DEEP | DOME
VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE
REF 2018X.RF

PHOTOMETRY

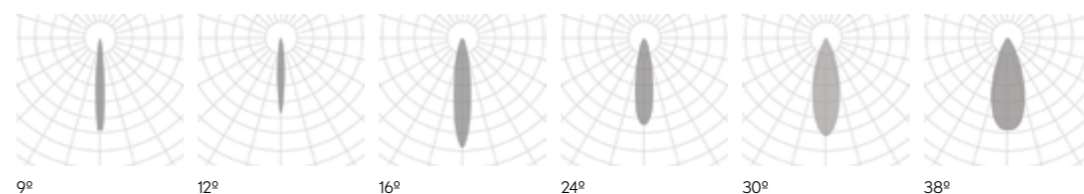


9° 12° 16° 24° 30° 38°

new

GALANTA DEEP	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	410001	.01	●	LED	.OP	.ST	.9	.27	324	5	500	.DA .PU .D1	
								.30	345				
								.40	417				
	410001	.02	●	LED	.OP	.ST	.9	.27	527	8	500	.DA .PU .D1	
								.30	465				
								.40	430				
	410001	.03	●	LED	.OP	.ST	.9	.27	768	12	500	.DA .PU .D1	
								.30	694				
								.40	641				

Reference order | 410001.XX.RF.XX.XX.ST9.XX.XX

Select finishes

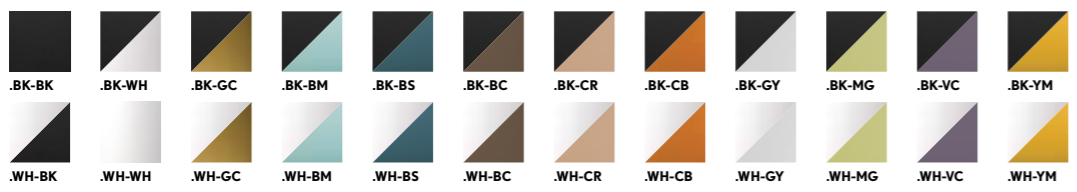

FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

ALUMINIUM PC

0°

CRI ≥ 90

IP20

IP43

LIFE 50000H

DIM OPTIONAL

REMOTE

RECOOR


220-240 V 50-60 Hz

CE

GALANTA DEEP

REF 410001.RF







PHOTOMETRY



.RF
RECESSED FRAME


-410001 GALANTA DEEP | RF
Pag. 492

RECESSED FRAME .RF

MARTORELL	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20115	.01	.WH-WH .BK-BK	LED	.24 .32	.ST	.9	.27 .30 .40	175 188 199	3	700	.DA*1 .PU*1 .D1*1	
	20115	.02	●	LED	.15 .24 .32	.ST	.9	.27 .30 .40	470 498 515	8	700	.DA .PU .D1	
	20115	.03	●	LED	.24 .32	.ST	.9	.27 .30 .40	1071 1156 1198	12	350	.DA .PU .D1	

Reference order | 20115.XX.RF.XX.XX.ST9.XX.XX

Select finishes

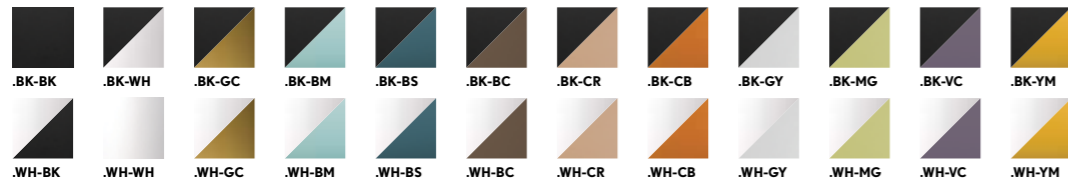

*1 Dimming options require the combination of a minimum of 2 luminaires. Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

15° | 24° | 32°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color



INSTALLATIONS

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME


·20115 MARTORELL | RF
Pag. 674

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676



PHOTOMETRY

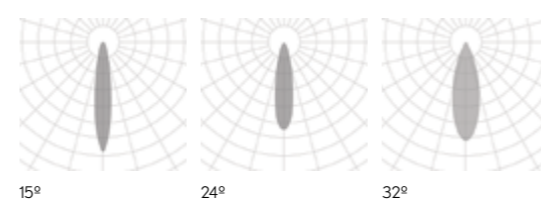








MARTORELL

REF 20115.RF




RECESSED FRAME .RF

MARTORELL MOVE	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20110	.01	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	167 184 206	3	700	.DA .PU .D1	
	20110	.02	●	LED	.18 .25 .35	.ST	.9	.27 .30 .40	465 507 548	9	700	.DA .PU .D1	
	20110	.03	●	LED	.18 .25 .35	.ST	.9	.27 .30 .40	1058 1096 1231	15	350	.DA .PU .D1	

Reference order |  20110.XX.RF.XX.XX.ST9.XX.XX

Select finishes

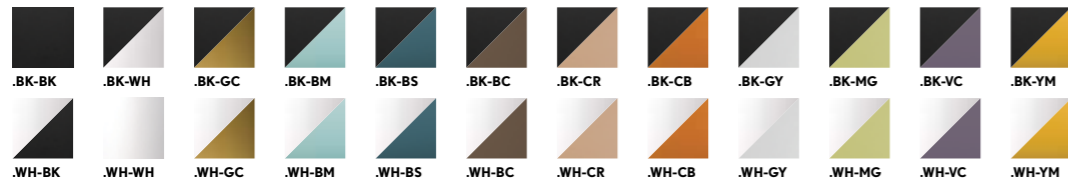

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

20° 40° 60° | 18° 25° 35° | 18° 25° 35°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options



INSTALLATIONS



.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 324



.RF
RECESSED FRAME


·20110 MARTORELL MOVE | RF
Pag. 496





MARTORELL MOVE

REF 20110.RF

PHOTOMETRY

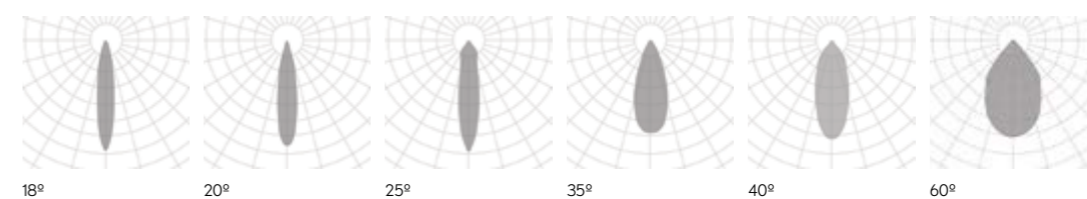


RECESSED FRAME

MARTORELL TARREGA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20117	.01	●	LED	.25 .30	.ST	.9	.27 .30 .40	563 647 719	10	500	.DA .PU .D1	

Reference order | 20117.XX.RF.XX.XX.ST9.XX.XX

• Select finishes

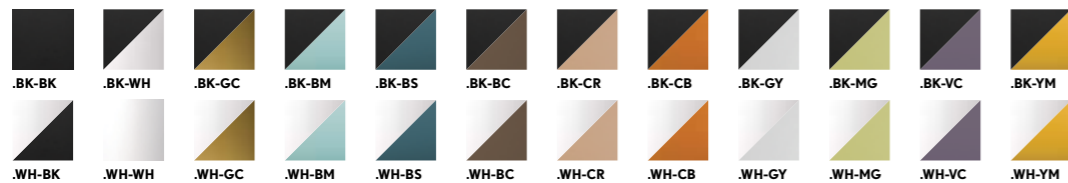

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

• View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25° | 30°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS

.RF
RECESSED FRAME


·20117 TARREGA | RF
Pag. 498

.TR
TRIMLESS

·20117 TARREGA | TR
Pag. 678

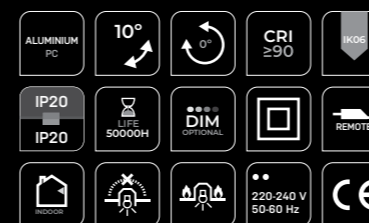

PHOTOMETRY

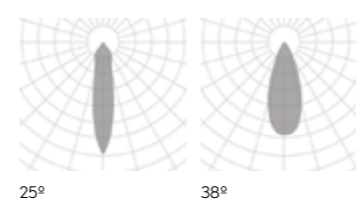

MARTORELL TARREGA

REF 20117.RF



.RF
RECESSED FRAME

MARTORELL TARREGA SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20116	.01	●	LED	.25 .30	.ST	.9	.27	563	10	500	.DA .PU .D1	
								.30	647				
								.40	719				

Reference order | 20116.XX.RF.XX.XX.ST9.XX.XX

MARTORELL TARREGA SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20119	.01	●	LED	.25 .30	.ST	.9	.27	1126	20	500	.DA .PU .D1	
								.30	1294				
								.40	1438				

Reference order | 20119.XX.RF.XX.XX.ST9.XX.XX

Select finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

25° | 30°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.RF
RECESSED FRAME


·20116 TARREGA SQ | RF ·20119 TARREGA SQ2 | RF
Pag. 500

.TR
TRIMLESS

·20116 TARREGA SQ | TR
Pag. 678




PHOTOMETRY

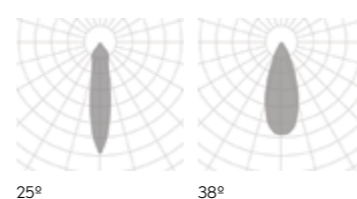








MARTORELL TARREGA SQ | TARREGA SQ2

20116.RF | 20119.RF

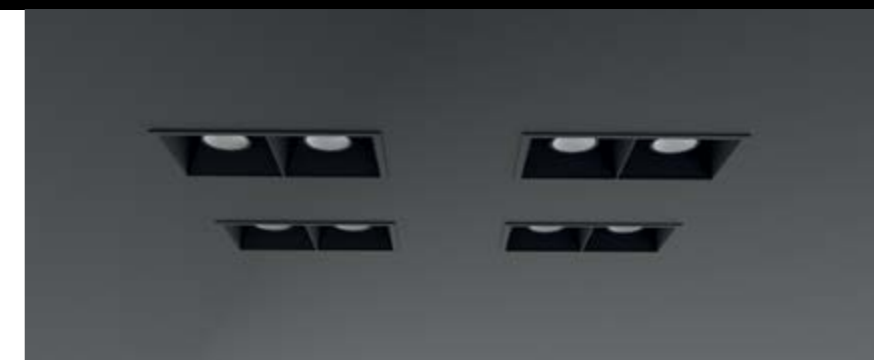

.RF
RECESSED FRAME

MARTORELL MINICRATE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20175	.01	●	LED	.20 .40 .60	.ST	.9	.27	175	3	700	.DA*1 .PU*1 .D1*1	
								.30	188				
								.40	199				
	20175	.02	●	LED	.20 .40 .60	.ST	.9	.27	350	6	700	.DA .PU .D1	
								.30	276				
								.40	398				
	20175	.03	●	LED	.20 .40 .60	.ST	.9	.27	525	9	700	.DA .PU .D1	
								.30	564				
								.40	597				

Reference order |  20175.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes



*1 Dimming options require the combination of a minimum of 2 luminaires. Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.

FINISHES

COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

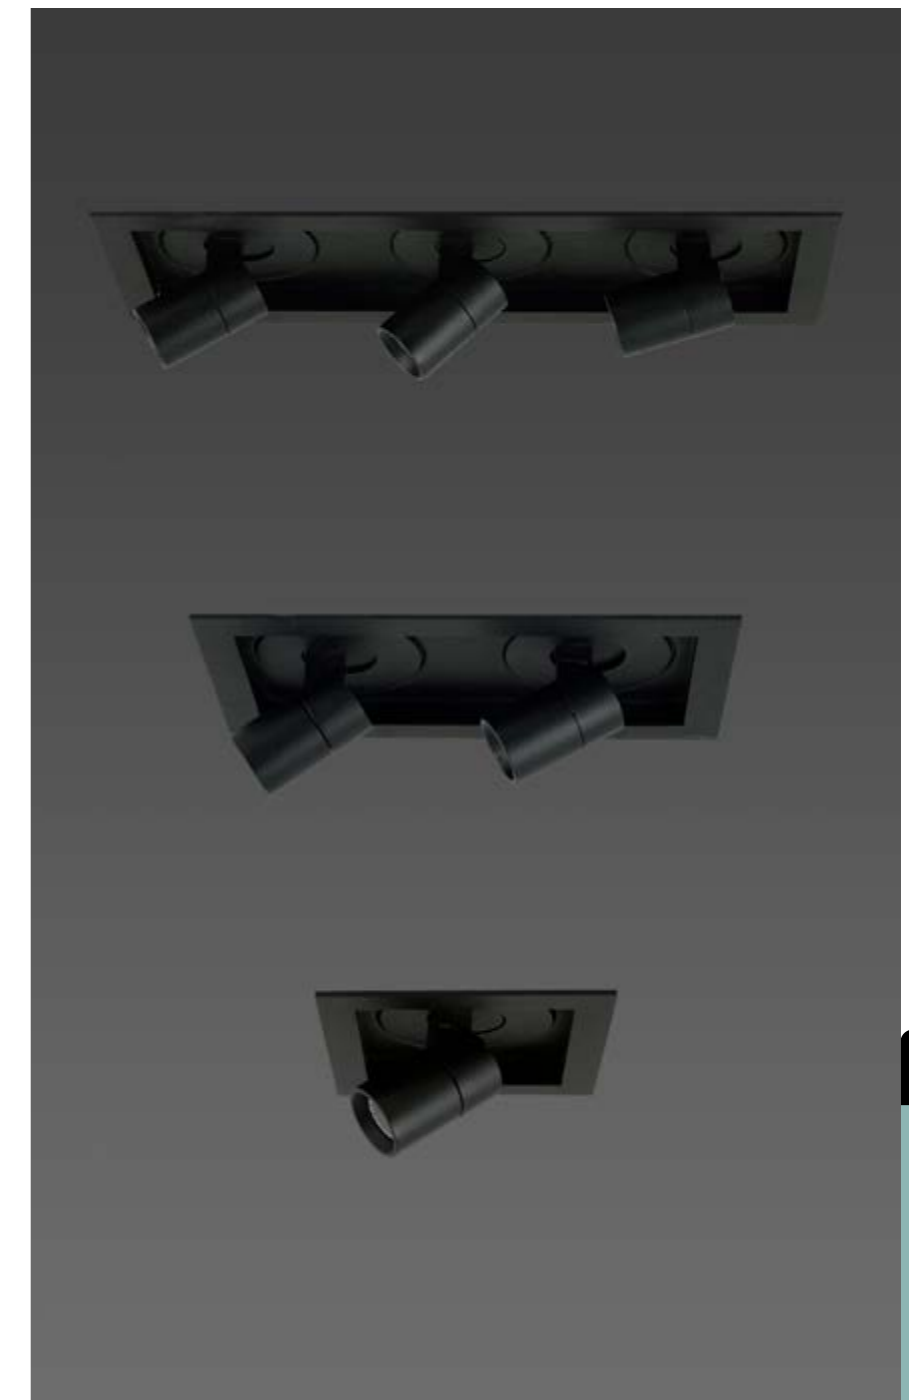

.RF

RECESSED FRAME

INSTALLATIONS

.SR
SURFACE


·20175 MARTORELL MINI CRATE | SR
Pag. 328

.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 502









PHOTOMETRY

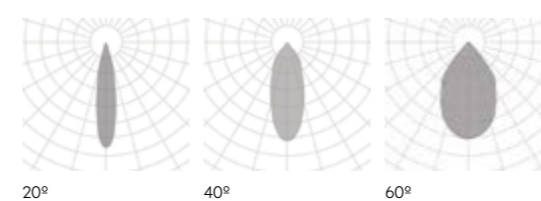


MARTORELL MINI CRATE

REF 20175.RF

MARTORELL CRATE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20176	.01	●	LED	.25 .32 .45	.ST	.9	.27 .30 .40	470 498 515	8	700	.DA .PU .D1	
	20176	.02	●	LED	.15 .29 .33	.ST	.9	.27 .30 .40	940 996 1030	16	700	.DA .PU .D1	
	20176	.03	●	LED	.28 .38 .43	.ST	.9	.27 .30 .40	1410 1494 1545	24	700	.DA .PU .D1	

Reference order | 20176.XX.RF.XX.XX.ST9.XX.XX

Select finishes

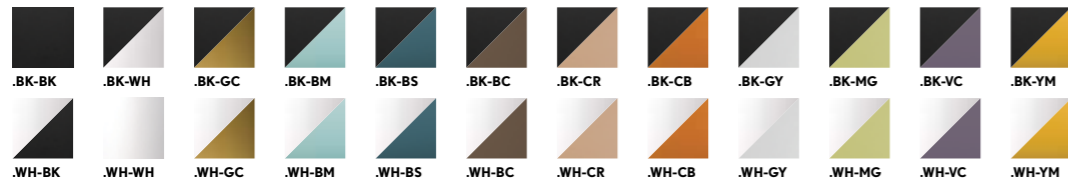

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

25° 32° 45° | 15° 29° 33° | 28° 38° 43°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

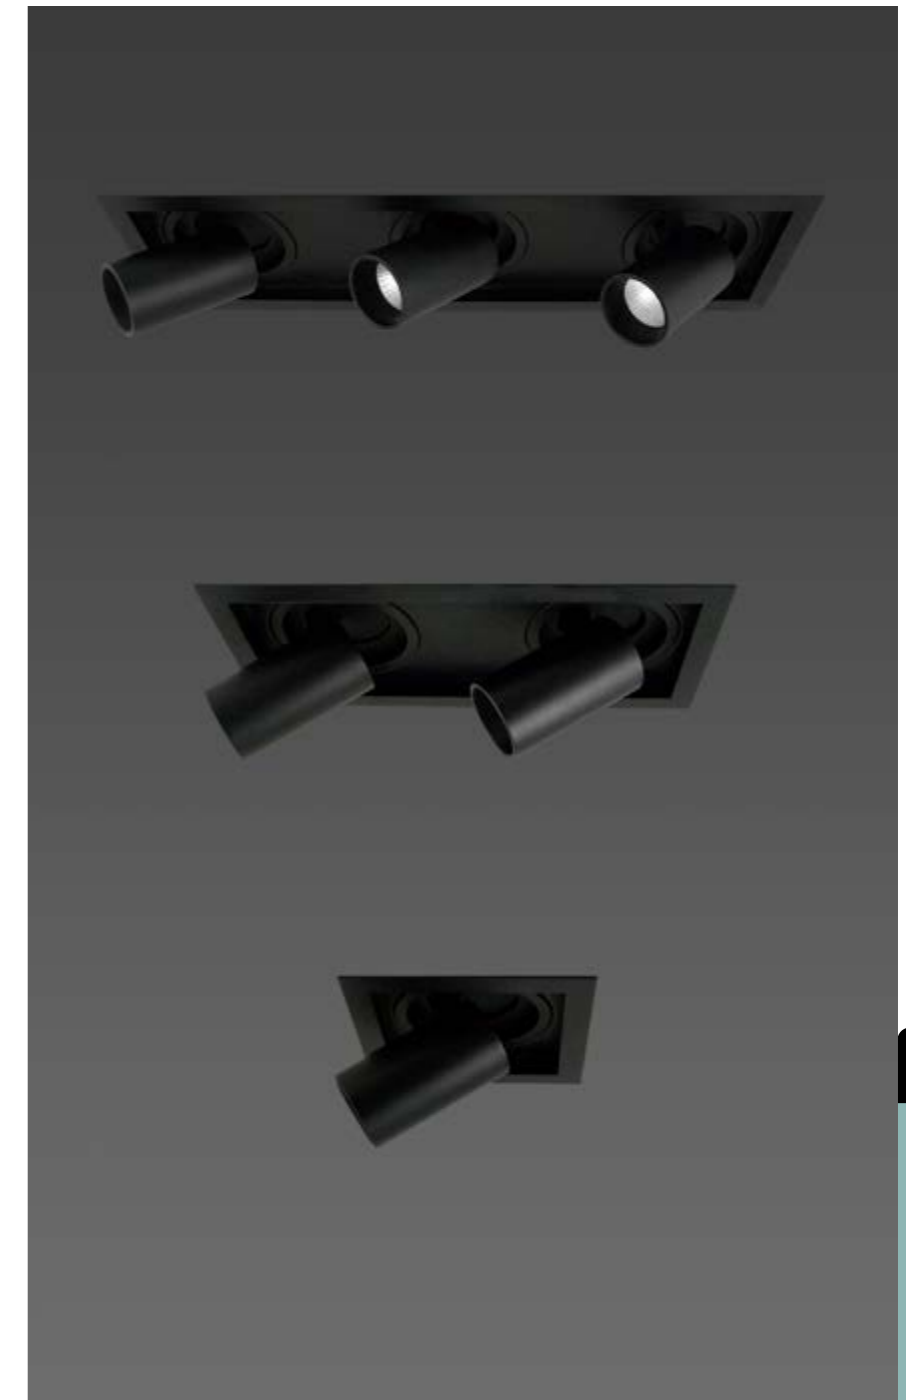

.RF

RECESSED FRAME

INSTALLATIONS

.SR
SURFACE


·20176 MARTORELL CRATE | RF
Pag. 330

.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 504



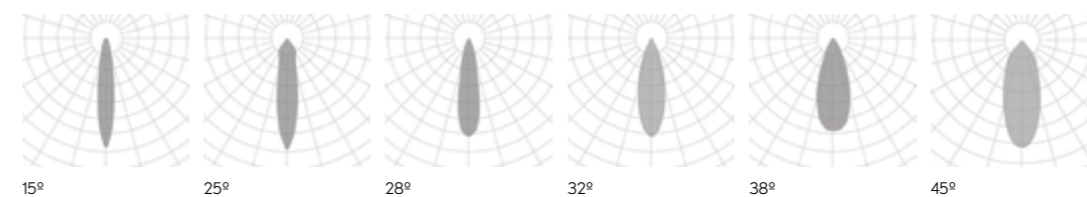


PHOTOMETRY



MARTORELL CRATE

REF 20176.RF

new

FACETUBULAR	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20205	.01	●	.LED	.40	.ST	.9	.27	480	8	350	.DA .PU .D1	
								.30	493				
								.40	496				

Reference order | 20205.XX.RF.XX.XX.ST9.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options
Special RAL Color



Select external-internal finishes



INSTALLATIONS

.SR
SURFACE


·20205 FACE TUBULAR | SR
Pag. 360

.RF
RECESSED FRAME

·20205 FACE TUBULAR | RF
Pag. 506



PHOTOMETRY



38°



FACE TUBULAR


REF 20205.RF

RECESSED FRAME

KLIMT	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*1	SKETCH
	20134	.01	●	LED	.15 .24 .38	.ST	.9	.27	395	8	700	.DA .PU .D1	
								.30	497				82
								.40	550				Ø75
	20134	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27	803	11	500	.DA .PU .D1	
								.30	983				136
								.40	991				Ø100
	20134	.03	●	LED	.15 .24 .38 .60	.ST	.9	.27	1945	30	700	.DA .PU .D1	
								.30	2073				180
								.40	2311				Ø125

Reference order | 20134.XX.RF.XX.XX.ST9.XX.XX

● Select external - internal finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° 24° 38° | 15° 24° 38° 60° | 15° 24° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



INSTALLATIONS



.SR
SURFACE

·20134 KLIMT | SR
Pag. 338



.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748




.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 508



PHOTOMETRY

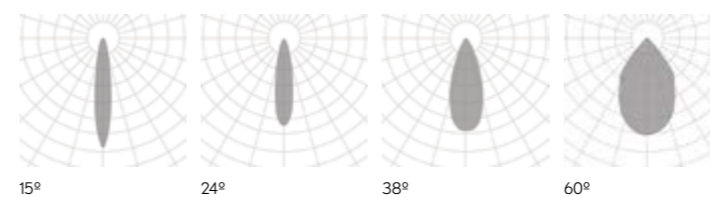







KLIMT

REF 20134.RF



RECESSED FRAME

KLIMT FIX	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20135	.01	●	LED	.18 .24 .38	.ST	.9	.27	395	8	700	.DA .PU .D1	
								.30	497				
								.40	659				
	20135	.02	●	LED	.18 .24 .38 .60	.ST	.9	.27	803	11	500	.DA .PU .D1	
								.30	983				
								.40	991				
	20135	.03	●	LED	.18 .24 .38 .60	.ST	.9	.27	1945	30	700	.DA .PU .D1	
								.30	2073				
								.40	2311				

Reference order | 20135.XX.RF.XX.XX.ST9.XX.XX

• Select external - internal finishes



FINISHES

EXTERNAL | INTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

• View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

18° 24° 38° | 18° 24° 38° 60° | 18° 24° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 340

.RF
RECESSED FRAME


·20135 KLIMT FIX | RF
Pag. 510



KLIMT FIX

REF 20135.RF


PHOTOMETRY

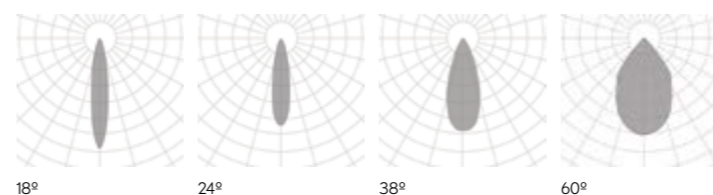

new

GEO	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*1	SKETCH
	30511	.01	●	.15 .24 .38	.ST	.9	.27	498	8	700	.DA .PU .D1	
							.30	513				
							.40	622				
	30511	.02	●	.15 .24 .38 .60	.ST	.9	.27	1075	14	350	.DA .PU .D1	
							.30	1114				
							.40	1319				
	30511	.03	●	.15 .24 .38 .60	.ST	.9	.27	1856	30	700	.DA .PU .D1	
							.30	2031				
							.40	2529				

Reference order | 30511.XX.RF.XX.XX.ST9.XX.XX

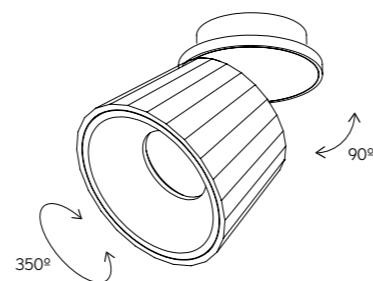

● Select external - internal finishes



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° 24° 38° | 15° 24° 38° 60° | 15° 24° 38° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color



RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·30511GEO|SR
Pag. 342

.TK
TRACKLIGHT

·30511GEO|TK
Pag. 750

.RF
RECESSED FRAME


·30511GEO|RF
Pag. 512



GEO

REF 30511.RF

PHOTOMETRY

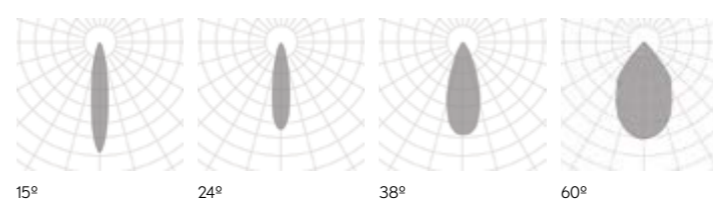


LUK FREIR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20018	.01	●	.LED	.40 .60	.ST	.9	.27	830	9	350	.DA .PU .D1	138 x 138 mm 75mm
								.30	845				145 145
								.40	895				
	20018	.02	●	.LED	.40 .60	.ST	.9	.27	1271	16	500	.DA .PU .D1	157 x 157 mm 85mm
								.30	1616				175 175
								.40	1682				

Reference order | 20018XX.RF.XX.XX.ST9.XX.XX

LUK FREIR 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20019	.01	●	.LED	.40 .60	.ST	.9	.27	1660	18	350	.DA .PU .D1	240 x 124 mm 80mm
								.30	1690				146 266
								.40	1790				
	20019	.02	●	.LED	.40 .60	.ST	.9	.27	2542	32	500	.DA .PU .D1	313 x 160 mm 85mm
								.30	3232				177 342
								.40	3364				

Reference order | 20019.XX.RF.XX.XX.ST9.XX.XX

• Select finishes



FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

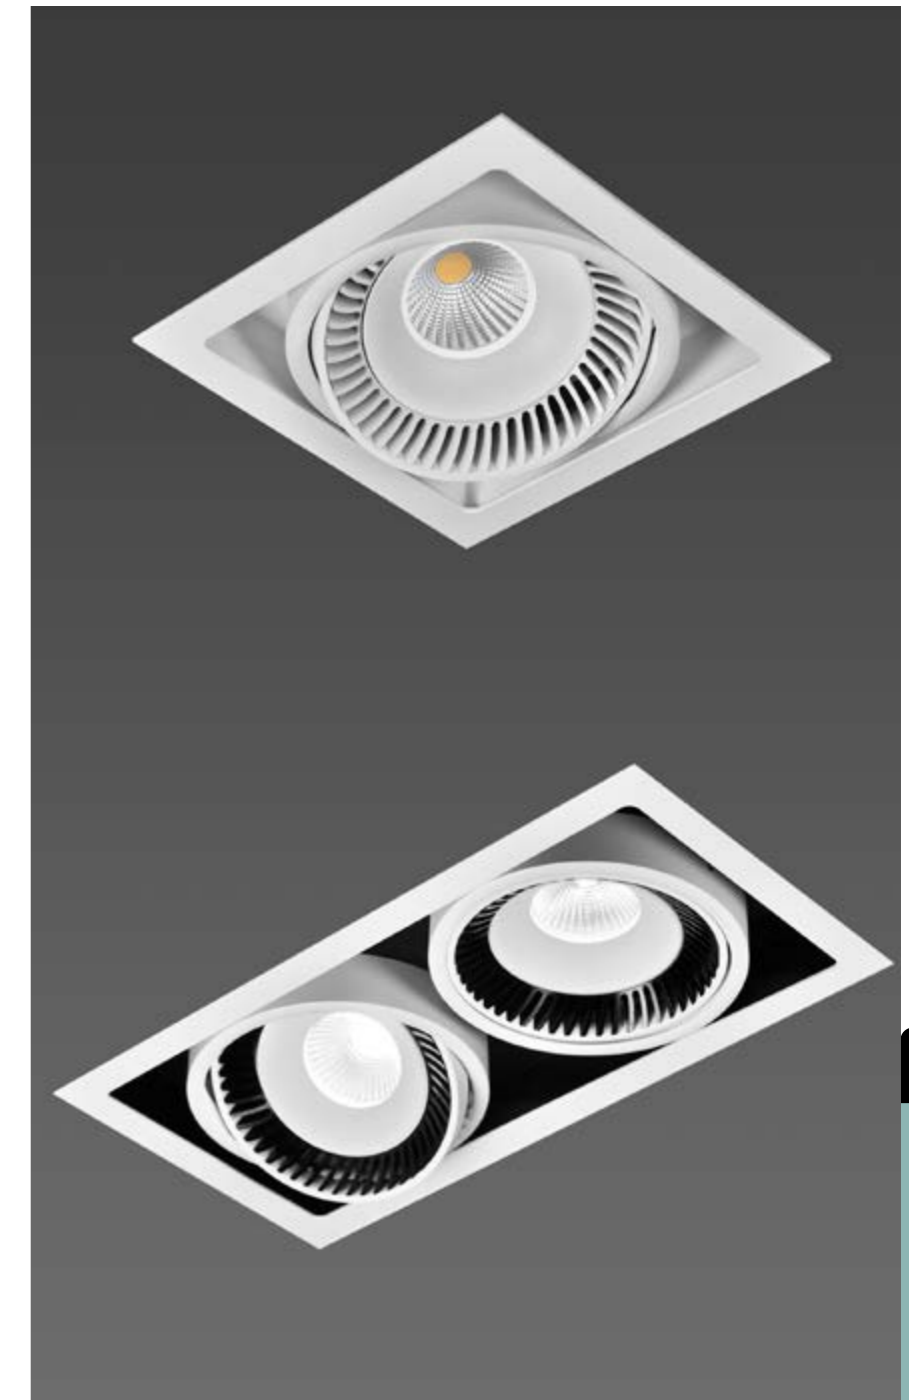

.RF
RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

•20018 LUK FREIR •20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME


•20018 LUK FREIR •20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

•20018 LUK FREIR •20019 LUK FREIR 2 | TR
Pag. 680







PHOTOMETRY

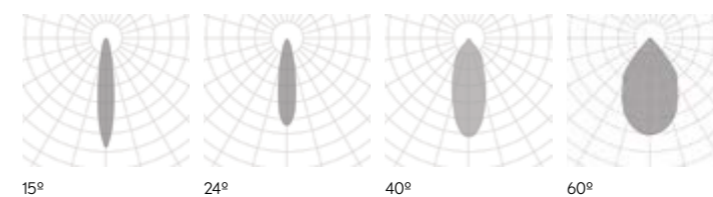





LUK
FREIR | FREIR 2

REF 20018.RF | REF 20019.RF


LUK	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20028	.01	●	.LED	.40 .60	.ST	.9	.27	787	14	350	.DA .PU .D1	
								.30	829				62
								.40	876				Ø115
	20028	.02	●	.LED	.40 .60	.ST	.9	.27	1373	16	500	.DA .PU .D1	
								.30	1445				78
								.40	1522				Ø144

Reference order **20028.XX.RF.XX.XX.ST9.XX.XX**

LUK 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20071	.01	●	.LED	.40 .60	.ST	.9	.27	1574	22	350	.DA .PU .D1	
								.30	1658				62
								.40	1752				116 225
	20071	.02	●	.LED	.40 .60	.ST	.9	.27	2746	39	500	.DA .PU .D1	
								.30	2890				78
								.40	3040				145 295

Reference order **20071.XX.RF.XX.XX.ST9.XX.XX**

• Select finishes



FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

·20028 LUK ·20071 LUK 2 | RF
Pag. 516



PHOTOMETRY

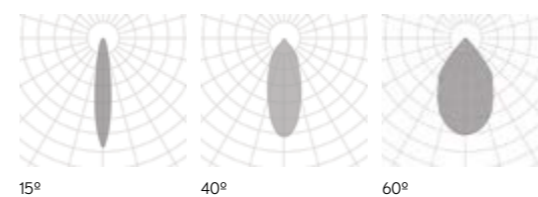

LUK
LUK | LUK 2

REF 20028.RF | REF 20071.RF

CUBESQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8201	.01	●	.LED	.24 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order | 8201.01.RF.XX.XX.ST9.XX.XX


CUBESQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8202	.01	●	.LED	.24 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order | 8202.01.RF.XX.XX.ST9.XX.XX

CUBESQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8203	.01	●	.LED	.24 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order | 8203.01.RF.XX.XX.ST9.XX.XX

• Select finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682



PHOTOMETRY

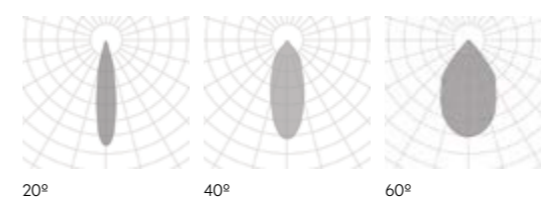

CUBE

SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

CUBE SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8201	.02	●	LED	.20 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order | 8201.02.RF.XX.XX.ST9.XX.XX


CUBE SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8202	.02	●	LED	.20 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2670				
								.40	3734				

Reference order | 8202.02.RF.XX.XX.ST9.XX.XX

CUBE SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8203	.02	●	LED	.20 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order | 8203.02.RF.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682




CUBE

SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

PHOTOMETRY

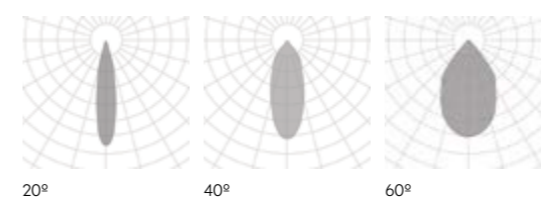

CUBESPOT	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3120	.01	●	.LED	.40 .60	.ST	.9	.27	673	12	250	.DA .PU .D1	
								.30	737				
								.40	801				

Reference order | **3120.XX.RF.XX.XX.ST9.XX.XX**

CUBESPOT 2	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3131	.01	●	.LED	.40 .60	.ST	.9	.27	1345	23	250	.DA .PU .D1	
								.30	1475				
								.40	1603				

Reference order | **3131.XX.RF.XX.XX.ST9.XX.XX**

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

·3120 CUBE SPOT ·3131 CUBE SPOT 2 | RF
Pag. 522



PHOTOMETRY

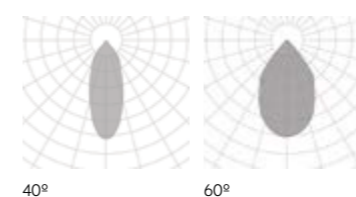

CUBE SPOT | SPOT 2

REF 3120.RF | 3131.RF

CUBE SPOT MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3121	.01	●	.LED	.40 .60	.ST	.9	.27	810	11	350	.DA .PU .D1	
								.30	832				
								.40	1014				

Reference order | **3121.XX.RF.XX.XX.ST9.XX.XX**

CUBE SPOT 2 MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3136	.01	●	.LED	.40 .60	.ST	.9	.27	1621	22	350	.DA .PU .D1	
								.30	1664				
								.40	2028				

Reference order | **3136.XX.RF.XX.XX.ST9.XX.XX**

● Select finishes



BK-BK WH-WH

FINISHES

EXTERNAL | INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME


·3121 CUBE SPOT MOVE ·3136 CUBE SPOT MOVE 2 | RF
Pag. 524



CUBE SPOT MOVE | SPOT MOVE 2

REF 3121.RF | 3136.RF

PHOTOMETRY

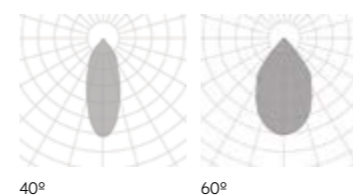

40°

60°

CUBE SPOT SQ MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3134	.01	●	.LED	.40 .60	.ST	.9	.27	810	11	350	.DA .PU .D1	
								.30	832				
								.40	1014				

Reference order | 3134.XX.RF.XX.XX.ST9.XX.XX

CUBE SPOT SQ 2 MOVE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3135	.01	●	.LED	.40 .60	.ST	.9	.27	1621	22	350	.DA .PU .D1	
								.30	1664				
								.40	2028				

Reference order | 3135.XX.RF.XX.XX.ST9.XX.XX

● Select finishes



BK-BK WH-WH

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS




CUBE

SPOT SQ MOVE | SPOT SQ 2 MOVE

REF 3134.RF | REF 3135.RF

PHOTOMETRY

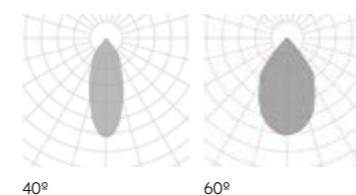

40°

60°

.RF
RECESSED FRAME

·3134 CUBE SPOT SQ MOVE ·3135 CUBE SPOT SQ 2 MOVE | RF
Pag. 526

CAN REVIEW	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20149	.01	●	.40 .60	.ST	.9	.27	711	10	250	.DA .PU .D1	
							.30	748				
							.40	776				
	20149	.02	●	.40 .60	.ST	.9	.27	1422	20	500	.DA .PU .D1	
							.30	1496				
							.40	1552				
	20149	.03	●	.40 .60	.ST	.9	.27	2132	30	750	.DA .PU .D1	
							.30	2244				
							.40	2327				
	20149	.04	●	.40 .60	.ST	.9	.27	3610	40	1000	.DA .PU .D1	
							.30	3690				
							.40	4200				
	20149	.05	●	.40 .60	.ST	.9	.27	4155	50	1200	.DA .PU .D1	
							.30	4462				
							.40	4961				

● Select external - internal finishes



BK-BK WH-WH

Reference order

20149.XX.RF.XX.XX.ST.9.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03 | .04 | .05

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.RF
RECESSED FRAME


20149 CAN REVIEW | RF
Pag. 528



CAN REVIEW

REF 20149.RF

PHOTOMETRY

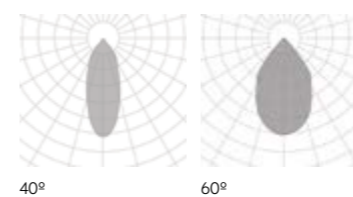

.RF
RECESSED FRAME

ALDAIA	REF.	DIMEN-SIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20157	.01	●	.LED	.OP	.ST	.9	.27	691	9	300	.DA .PU .D1	
								.30	727				
								.40	761				
	20157	.02	●	.LED	.OP	.ST	.9	.27	1227	16	500	.DA .PU .D1	
								.30	1292				
								.40	1309				
	20157	.03	●	.LED	.OP	.ST	.9	.27	2394	32	1050	.DA .PU .D1	
								.30	2520				
								.40	2678				

Reference order | 20157.XX.RF.XX.XX.ST9.XX.XX

● Select finishes



BK-BK WH-WH

FINISHES

COLORS



DIMENSIONS

◆ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS



ALDAIA

REF 20157.RF

PHOTOMETRY



OPAL



.RF
RECESSED FRAME

·20157 ALDAIA | RF
Pag. 530

ALDAIA SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20120	.01	●	.LED	.OP	.ST	.9	.27	691	9	300	.DA .PU .D1	
								.30	727				
								.40	761				
	20120	.02	●	.LED	.OP	.ST	.9	.27	1227	16	500	.DA .PU .D1	
								.30	1292				
								.40	1309				
	20120	.03	●	.LED	.OP	.ST	.9	.27	2394	32	1050	.DA .PU .D1	
								.30	2520				
								.40	2678				

Reference order | 20120.XX.RF.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS



ALDAIA SQ

REF 20120.RF

PHOTOMETRY





OPAL





.RF
RECESSED FRAME

·20120 ALDAIA SQ | RF
Pag. 532

RECESSED FRAME

VADI	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3177	.01	●	.LED	.40 .60	.ST	.9	.27	703	10	500	.DA .PU .D1	
								.30	740				
								.40	784				

	3177	.02	●	.LED	.40 .60	.ST	.9	.27	1373	16	500	.DA .PU .D1	
								.30	1445				
								.40	1522				

Reference order |  3177.XX.RF.XX.XX.ST9.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



Select finishes



WH-WH



INSTALLATIONS



VADI

REF 3177.RF


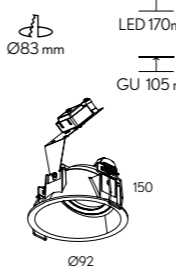
PHOTOMETRY

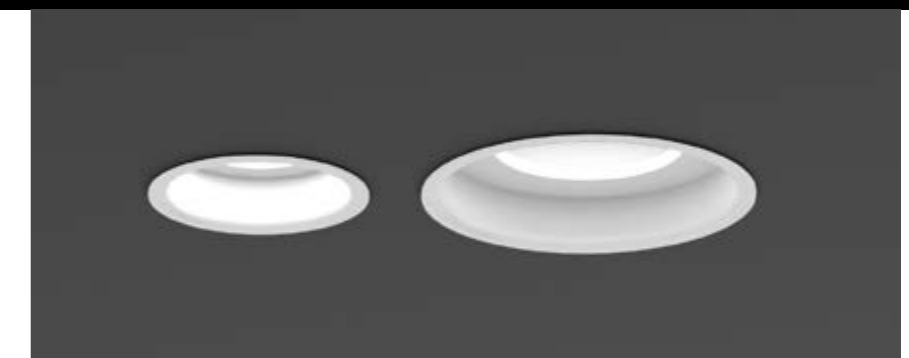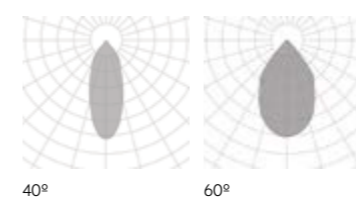


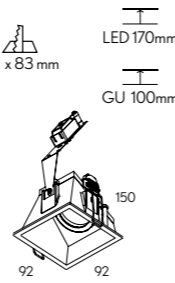
.RF
RECESSED FRAME

3177 VADI | RF
Pag. 534

.RF
RECESSED FRAME

CASTEJON	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20074	.01	●	G5.3		GUS.3	-		-	50	-	▼	
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPM50				.9			

Reference order | 20074.XX.RF.XX.XX.XX.X.XX.XX

CASTEJONSQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20073	.01	●	G5.3		GUS.3	-		-	50	-	▼	
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPM50				.9			

Reference order | 20073.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



BK-BK WH-WH

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

40° | 60° | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




.RF

RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

·20074 CASTEJON ·20073 CASTEJON SQ | RF
Pag. 536

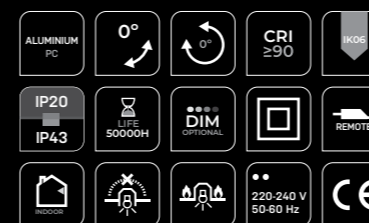

PHOTOMETRY

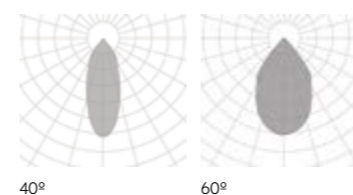

CASTEJON CASTEJON SQ

REF 20074.RF | REF 20073.RF

ROY	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20154	.01	●	.LED	.18 .25 .38 .60	.ST	.9	.27	779	10	250	.DA .PU .D1	
								.30	820				
								.40	860				

Reference order | 20154.XX.RF.XX.XX.ST9.XX.XX

• Select finishes



BK-BK WH-WH

FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

18° | 25° | 38° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF

RECESSED FRAME

INSTALLATIONS




ROY

REF 20154.RF

.RF
RECESSED FRAME

20154 ROY | RF
Pag. 538

PHOTOMETRY

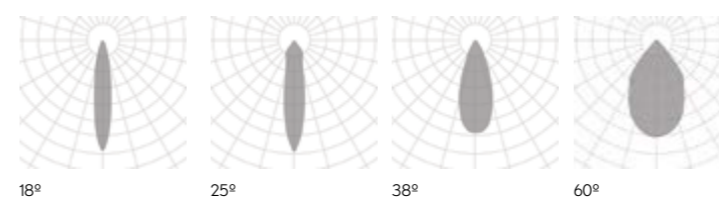

SU	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3149	.01	●	.LED	.60	.ST	.9	.27	260	5	350	.DA .PU .D1	
								.30	303				
								.40	544				
	3149	.02	●	.LED	.30	.ST	.9	.27	550	8	350	.DA .PU .D1	
								.30	639				
								.40	644				

Reference order | 3149.XX.RF.XX.XX.ST9.XX.XX

SUSQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3150	.01	●	.LED	.60	.ST	.9	.27	178	5	350	.DA .PU .D1	
								.30	187				
								.40	196				
	3150	.02	●	.LED	.30	.ST	.9	.27	513	7	350	.DA .PU .D1	
								.30	540				
								.40	570				

Reference order | 3150.XX.RF.XX.XX.ST9.XX.XX

• Select finishes



FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

30° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

IP65



.RF

RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME


3149 SU 3150 SU SQ | RF
Pag. 540








SU
SU SQ

REF 3149.RF | REF 3150.RF

PHOTOMETRY

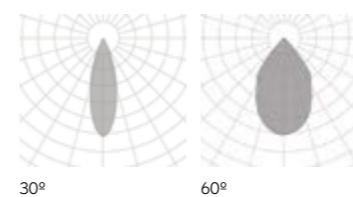

SU OTIS	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3234	.01	●	.LED	.40 .60	.ST	.9	.27 .30 .40	578 605 663	10	500	.DA .PU .D1	
	3234	.02	●	.LED	.40	.ST	.9	.27 .30 .40	867 908 995	15	500	.DA .PU .D1	

Reference order |  3234.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes



INSTALLATIONS

.RF
RECESSED FRAME

3234 SU OTIS | RF
Pag. 542

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° 60° | 40°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND


Dim to Warm
Tunable White
Wireless Control Options

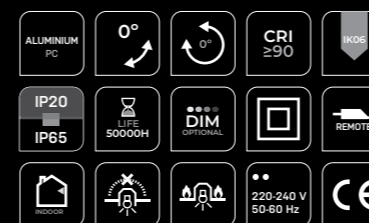

SU
OTIS

REF 3234.RF

PHOTOMETRY

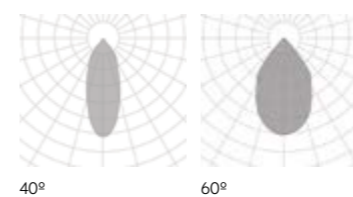

RECESSED FRAME


BASIT	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8012	.01	.WH-WH .BK-BK	G5.3		GUS.3				50			
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27 .30 .40	526 570 711	8	350	.DA .PU .D1	

Reference order | 8012.XX.RF.XX.XX.XX.X.XX.XX

BASIT MOVE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8013	.01	.	G5.3		GUS.3				50			
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27 .30 .40	526 570 711	8	350	.DA .PU .D1	

Reference order | 8013.XX.RF.XX.XX.XX.X.XX.XX

• Select finishes



FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

•8012 BASIT •8013 BASIT MOVE | RF
Pag. 544



PHOTOMETRY

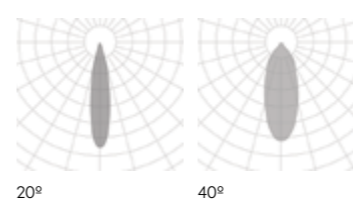

BASIT
BASIT MOVE
REF 8012.RF | 8013.RF


BASIT MONET	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20130	.01	●	.LED	.25 .38 .50	.ST	.9	.27	817	13	300	.DA .PU .D1	
								.30	854				
								.40	1002				

Reference order | 20130.01.RF.XX.XX.ST9.XX.XX

BASIT MONET 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20131	.01	●	.LED	.25 .38 .50	.ST	.9	.27	1633	25	300	.DA .PU .D1	
								.30	1707				
								.40	2005				

Reference order | 20131.01.RF.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25° | 38° | 50°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

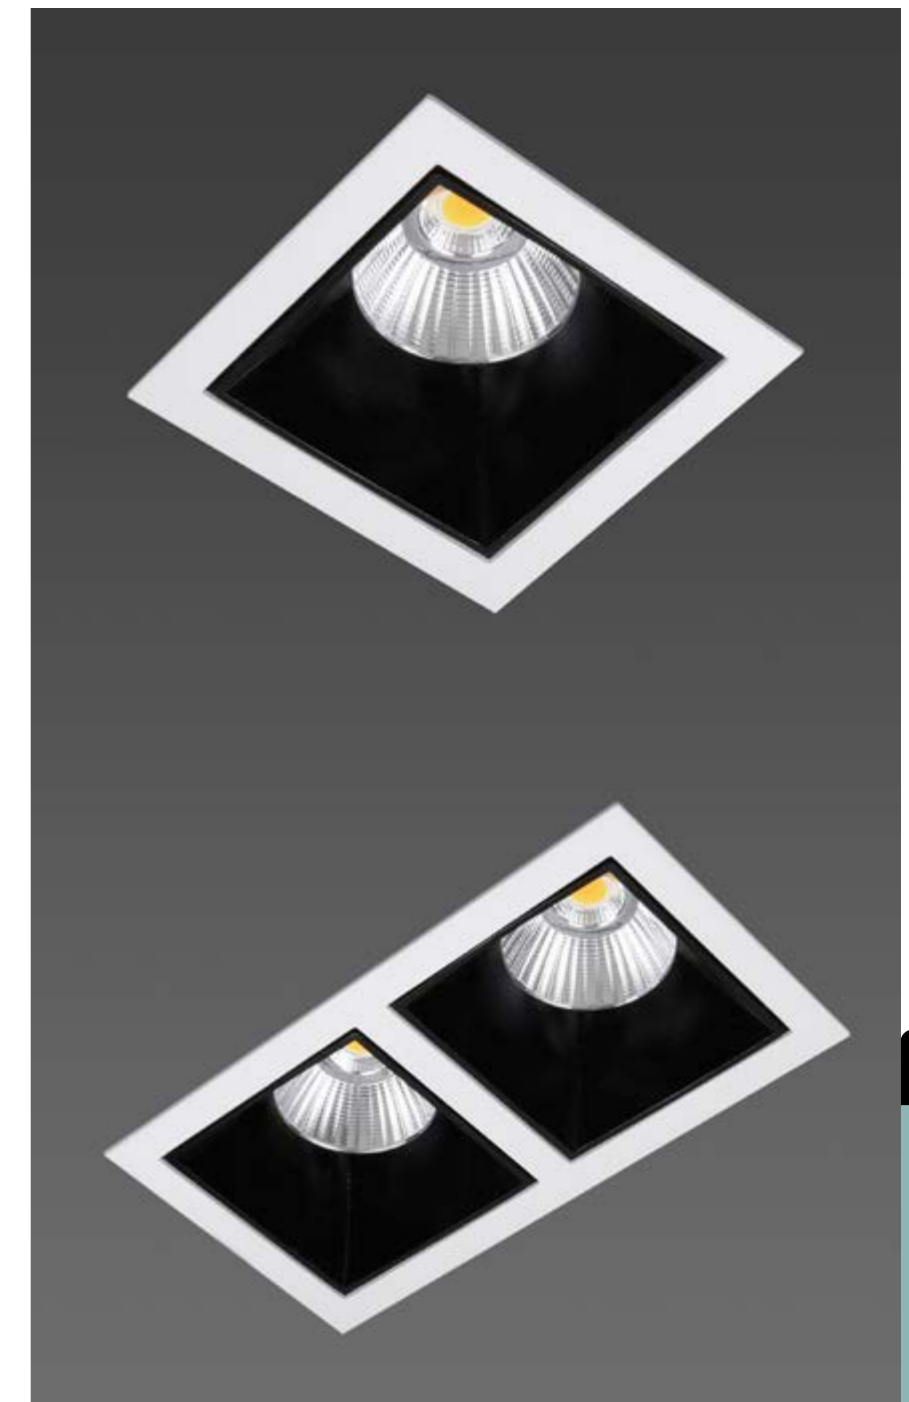

.RF
RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

·20130 BASIT MONET ·20131 BASIT MONET 2 | RF
Pag. 546



PHOTOMETRY

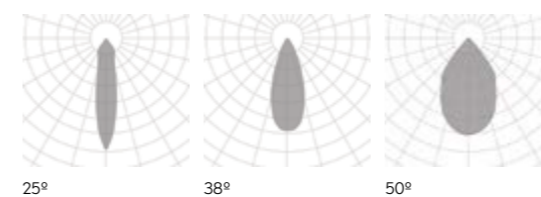

BASIT MONET | MONET 2

REF 20130.RF | REF 20131.RF


BASIT LLORENS	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20140	.01	●	.LED	.24	.ST	.9	.27	370	9	300	.DA .PU .D1	
								.30	526				
								.40	607				
	20140	.02	●	.LED	.24	.ST	.9	.27	370	13	300	.DA .PU .D1	
								.30	915				
								.40	907				

Reference order 20140.XX.RF.XX.XX.ST9.XX.XX

BASIT LLORENS SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20144	.01	●	.LED	.24	.ST	.9	.27	370	8	300	.DA .PU .D1	
								.30	526				
								.40	607				
	20144	.02	●	.LED	.24	.ST	.9	.27	730	13	300	.DA .PU .D1	
								.30	915				
								.40	807				

Reference order 20144.XX.RF.XX.XX.ST9.XX.XX

• Select finishes



FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME

·20140 BASIT LLORENS ·20144 BASIT LLORENS SQ | RF
Pag. 548



PHOTOMETRY



24°

BASIT LLORENS | LLORENS SQ

REF 20140.RF | REF 20144.RF

BASIT DERIN	REF.	DIMEN-SIONS	FINISHES	LAMP	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8010	.01	●	.G5	GU5.3	-	-	-	50	-	▼	
				.GU	GU10				50			

Reference order 8010.XX.RF.XX.XX.XX.X.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

-

POWER

-

CRI

-

COLOR TEMPERATURE

-

DIMMABLE OPTIONS

-

LIGHT DISTRIBUTION

DOWN



Select finishes




WH-WH

INSTALLATIONS









BASIT DERIN

REF 8010.RF

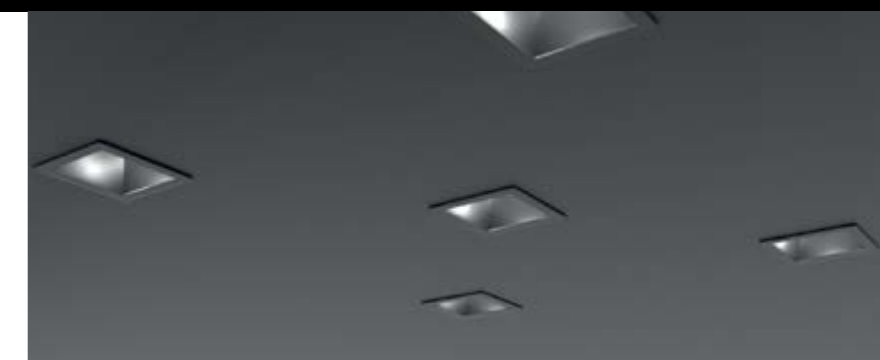

.RF
RECESSED FRAME

8010 BASIT DERIN | RF
Pag. 550

KONI	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3161	.01*	.WH-WH .BK-BK .GY-GY	G5.3		GUS.3		-		50			
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST	BPM50	.9	.27 .30 .40	480 514 565	8	350	
	3161	.02	●	G5.3		GUS.3		-		50			
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST	BPM50	.9	.27 .30 .40	480 514 565	8	350	
	3161	.03	.WH-WH .BK-BK	G5.3		G53		-		100			
				GU10	.GU	GU10				75			
				CDMR	.CD	G4.5				70			

● Select finishes



Reference order | 3161.XX.RF.XX.XX.XX.X.XX.XX

*1 Model 3161.01 does not tilt. El modelo 3161.01 no bascula

FINISHES

EXTERNAL | INTERNAL COLOR



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

.3161 KONI | RF
Pag. 552



PHOTOMETRY

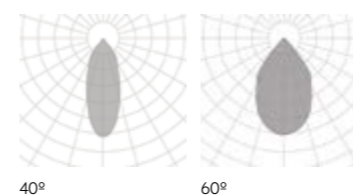

KONI

REF 3161.RF

new

KONISQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3169	.01	●	G5.3		GUS.3				50			 80 x 80mm. LED 135mm GU 135mm
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPMSO	.9	.27	480			7	350
				.30	514								
								.40	565				

Reference order | 3169.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes

BK-BK

WH-WH

FINISHES

COLORS

DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS

- ALUMINIUM PC
- 45°
- 0°
- CRI ≥ 90
- IK08
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- RECESSED
- RECESSED
- 220-240 V 50-60 Hz
- CE

KONI SQ

REF 3169.RF

PHOTOMETRY

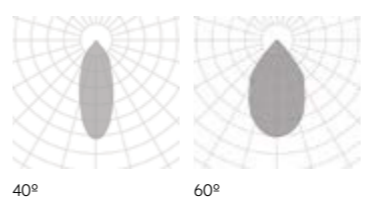

.RF
RECESSED FRAME

3169 KONISQ | RF
Pag. 554

RECESSED FRAME

new



KONIDEEP	REF	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3171	.01	●	G5.3		GU5.3	-		395	50	-	▼	
				GU	.GU	GU10				50			
				LED	.40 .60	.ST BPMSO	.9	.27 .30 .40	497 659	8	700	.DA .PU .D1	

Reference order | 3171.XX.RF.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS



KONI DEEP

REF 3171.RF

PHOTOMETRY

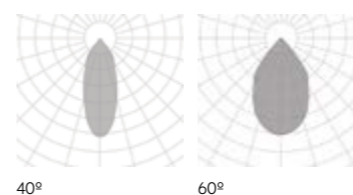

.RF
RECESSED FRAME

·3171 KONIDEEP | RF
Pag. 556


.RF
RECESSED FRAME

KONI TURTA	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	3156	.01*	●	.LED	.40 .60	.ST	.9	.27	513	6	350	.DA .PU .D1	
							.30	540					
							.40	574					

	3156	.02	●	.LED	.40 .60	.ST	.9	.27	513	6	350	.DA .PU .D1	
							.30	540					
							.40	574					

Reference order | 3156.XX.RF.XX.XX.ST9.XX.XX

• Select finishes



*Model 3156.01 does not tilt or rotate. El modelo 3156.01 no bascula ni gira.

• FINISHES

COLORS



DIMENSIONS

• View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS



KONI TURTA

REF 3156.RF

PHOTOMETRY

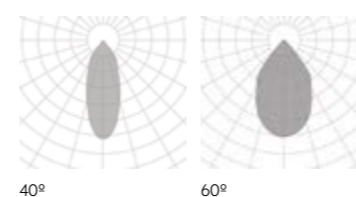

.RF
RECESSED FRAME

3156 KONI TURTA | RF
Pag. 558

CATLI	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH										
	3010	.01	●	GU5.3	-	GU5.3	-	-	-	8	-	-											
				GU10		.GU								GU10									
				LED	.40 .60	.9	●	.ST	-	-	-	-	-	8	350	-							
																		.HI	.27	526	10	500	.DA .PU .D1
																			.30	570			
																			.40	711			
																		.HI	.27	707	10	500	.DA .PU .D1
																			.30	927			
				.40	635																		

CATLI	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH										
	3010	.02	●	G53	-	G53	-	-	-	8	-	-											
				GU10		.GU								GU10									
				CDMR		.CD								GX8.5									
				LED	.40 .60	.9	●	.ST	-	-	-	-	-	16	500	-							
																		.HI	.27	1370	16	500	.DA .PU .D1
																			.30	1442			
																			.40	1522			

Reference order | 3010.XX.RF.XX.XX.XX.XX.XX.XX

● Select internal - external finishes



FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE


·3010 CATLI|SR
Pag. 362

.RF
RECESSED FRAME

·3010 CATLI|RF
Pag. 560



PHOTOMETRY

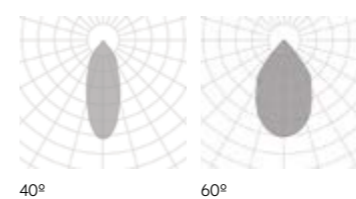



CATLI



REF 3010.RF



.RF


RECESSED FRAME

CATLISO	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH					
	3011	.01	●	G5.3		G5.3	.9	-	526	8	-	-						
				GU10	.GU	GU10												
				LED	.40 .60	.ST BPM50								.27	526	8	350	.DA .PU .D1
														.30	570			
														.40	711			
														.27	707			
.HI BPM300	.30	927	10	500														
	.40	635																

CATLISO	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH					
	3011	.02	●	G5.3		G5.3	.9	-	1370	16	500	-						
				GU10	.GU	GU10												
				CDMR	.CD	GX8.5												
				LED	.40 .60	.ST BPM3181								.27	1370	16	500	.DA .PU .D1
														.30	1442			
														.40	1522			

Reference order | 3011.XX.RF.XX.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE


·3011CATLISO|SR
Pag. 362

.RF
RECESSED FRAME

·3011CATLISO|RF
Pag. 562



PHOTOMETRY

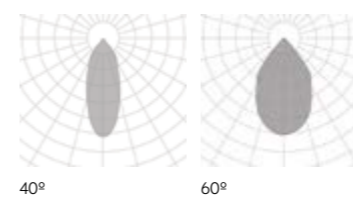

CATLI
SQ

REF 3011.RF



RECESSED FRAME

CATLI SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH				
	3012	.01	●	G5.3		G5.3	.9	-	-	16	-	-					
				GU10	.GU	GU10											
				LED	.40 .60	.ST								BPM50	.27	1052	.DA .PU .D1
															.30	1140	
															.40	1422	
															.27	1414	
															.30	1854	
															.40	1270	

CATLI SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH				
	3012	.02	●	G5.3		G5.3	.9	-	-	16	-	-					
				GU10	.GU	GU10											
				CDMR	.CD	GX8.5											
				LED	.40 .60	.ST								BPM3181	.27	2740	.DA .PU .D1
															.30	2884	
															.40	3044	

Reference order | 3012.XX.RF.XX.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.RF
RECESSED FRAME


.3012 CATLI SQ2 | RF
Pag. 564



CATLI SQ2

REF 3012.RF

PHOTOMETRY

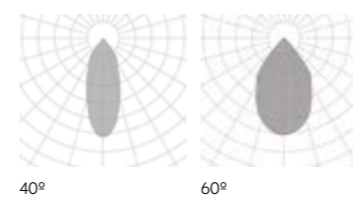

RECESSED FRAME


.RF

CATLI SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	3013	.01	●	G5.3		G5.3		-		50			LED 67mm GU 88mm		
				GU10	.GU	GU10									
				LED	.40 .60	.ST	BPM50	.9	.27	1440	8	350	500	.DA .PU .D1	94 283
									.30	1542					
									.40	1695					
									.27	2058					
									.30	2202					
									.40	2430					
				.HI	BPM300										

CATLI SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	3013	.02	●	G5.3		G5.3		-		100			LED 106mm GU/CD 163mm		
				GU10	.GU	GU10									
				CDMR	.CD	GX8.5									
				LED	.40 .60	.ST	BPM3181	.9	.27	4110	16	500	500	.DA .PU .D1	170 500
									.30	4326					
									.40	4566					

Reference order | 3013.XX.RF.XX.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options




INSTALLATIONS



CATLI SQ3

REF 3013.RF

PHOTOMETRY

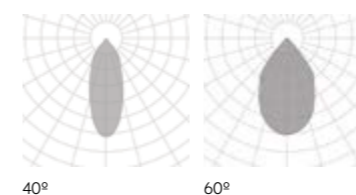

.RF
RECESSED FRAME

·3013 CATLI SQ3 | RF
Pag. 566


CATLI HALKA	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	3017	.01	●	G5.3	■	GUS.3	-	-	-	50	-	▼	 LED 55mm Ø70mm GU 85mm						
				GU10		.GU				GU10				50					
				LED	.40 .60	.9	●	■	■	.ST	-	-		-	8	350	.DA .PU .D1		
										■								.27	480
																		.30	514
															.40	565			
										■					10	500		.27	686
																		.30	734
				.40	810														

Reference order 3017.XX.RF.XX.XX.XX.XX.XX

CATLI HALKASQ	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	3021	.01	●	G5.3	■	GUS.3	-	-	-	50	-	▼	 LED 55mm Ø68mm GU 85mm						
				GU10		.GU				GU10				50					
				LED	.40 .60	.9	●	■	■	.ST	-	-		-	8	350	.DA .PU .D1		
										■								.27	480
																		.30	514
															.40	565			
										■					10	500		.27	686
																		.30	734
				.40	810														

Reference order 3021.XX.RF.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME

INSTALLATIONS

.RF
RECESSED FRAME


·3017 CATLI HALKA | RF ·3021 CATLI HALKA SQ | RF
Pag. 568





CATLI HALKA | HALKA SQ

REF 3017.RF | 3021.RF

PHOTOMETRY

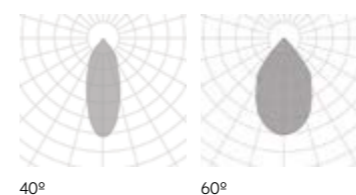

CATLI ODALKI	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH								
	3018	.01	●	G5.3		GUS.3				50		▼	 LED 55mm GU 85mm Ø60mm Ø75								
				GU10	.GU	GU10				50											
				LED	.40 .60		●				.9				8	350		.DA .PU .D1			
																			.ST	.27	480
																			BPM50	.30	514
																				.40	565
																			BPM300	.27	686
																				.30	734
																				.40	810

Reference order | 3018.XX.RF.XX.XX.XX.XX.XX.XX

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



Select finishes



.WH-WH | .SA-SA


INSTALLATIONS



CATLI ODALKI

REF 3018.RF

PHOTOMETRY

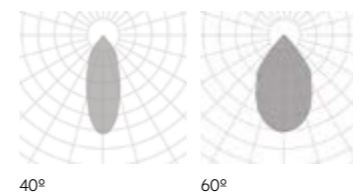


.RF
RECESSED FRAME

3018 CATLI ODALKI | RF
Pag. 570

CATLI CLASSIC	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH																				
	3005	.01	●	G5.3	■	GUS.3	-	-	-	50	-	▼	LED 55mm GU 100mm Ø85																				
				GU10		.GU				GU10				50																			
				LED	.40 .60	.9	●	■	.ST	BPM50	-	-		-	8	350	.DA .PU .D1	25															
																			.27	480													
																			.30	514													
																			.40	565													
																			.HI	BPM300	-	-	-	10	500	-	-	-	-	-	-		
																																.27	686
																																.30	734
																																.40	810

Reference order | 3005.XX.RF.XX.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



.RF
RECESSED FRAME


INSTALLATIONS



CATLI CLASSIC

REF 3005.RF

PHOTOMETRY

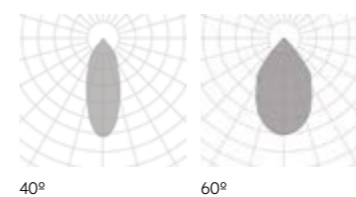


.RF
RECESSED FRAME

3005 CATLI CLASSIC | RF
Pag. 572

CATLI CLASSIC SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH												
	3006	.01	●	G5.3	■	GUS.3	-	-	-	50	-	▼													
				GU10		.GU				GU10				50											
				LED	.40 .60	.9				●				.ST	■	BPM50	-	-	-	8	350	-	.DA .PU .D1		
														.HI										BPM300	
														.27											480
														.30											514
														.40											565
														.27											686
				.30	734																				
														.40	810	10	500								

Reference order | 3006.XX.RF.XX.XX.XX.XX.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60° | GU

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

IP 65



.RF

RECESSED FRAME

INSTALLATIONS




CATLI
CLASSIC SQ

REF 3006.RF

.RF
RECESSED FRAME


3006 CATLI CLASSIC SQ | RF
Pag. 574



PHOTOMETRY

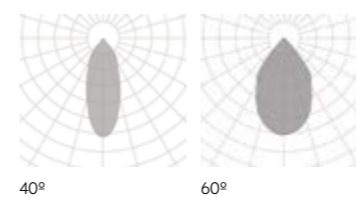



40°

60°

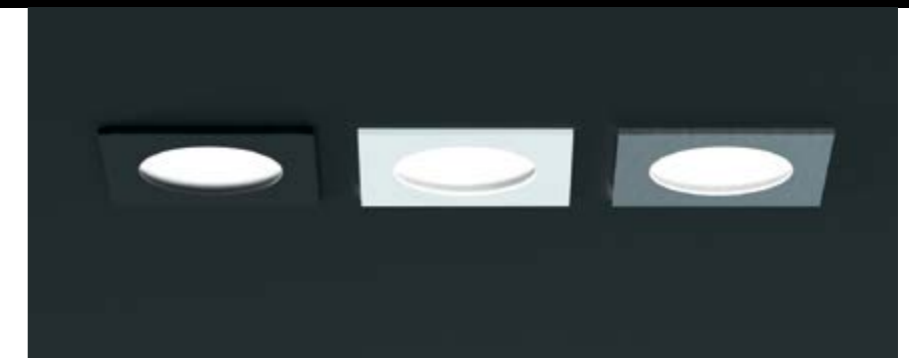

CATLI CARE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	3000	.01	●	G5.3	■	GUS.3	-			50		▼	 90 x 90						
				GU10		.GU				GU10				50					
				LED	.40 .60	.9	●	■	.ST	BPM50	-			480	8	350	.DA .PU .D1		
																		.30	514
																			.40
															.27	686			
																.30		734	
															.40	810			

Reference order 3000.XX.RF.XX.XX.XX.X.XX.XX

CATLI CARE 2	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	3001	.01	●	G5.3	■	GUS.3	-			100		▼	 180 x 90						
				GU10		.GU				GU10				100					
				LED	.40 .60	.9	●	■	.ST	BPM50	-			960	16	350	.DA .PU .D1		
																		.30	1028
																			.40
														.27	1372				
															.30	1468			
														.40	1620				

Reference order 3001.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes



FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

40° | 60° | GU

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



RECESSED FRAME


INSTALLATIONS

.RF
RECESSED FRAME

·3000 CATLI CARE ·3001 CATLI CARE 2 |RF
Pag. 576







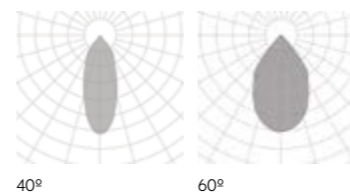



























PHOTOMETRY


























CATLI CARE | CARE 2

REF 3000.RF | 3001.RF

TRIMLESS

ALABAMA	 ALABAMA 10158 PAG. 580	ALTAIR	 ALTAIR 10172 PAG. 584			
OHIO	 OHIO 10188 PAG. 588	 OHIO SQ 10204 PAG. 592	FLORIDA	 FLORIDA 10190 PAG. 596	 FLORIDA SQ 10191 PAG. 600	
ALBERTA	 ALBERTA 10176 PAG. 604	EYE	 EYE 210016 PAG. 610			
ALARIK	 ALARIK MINI 210006 PAG. 614	 ALARIK SLIM 20224 PAG. 622	 ALARIK 10225 PAG. 628	MODULIGHT	 MODULIGHT 10210 PAG. 634	
ALBA	 ALBA MINI 10211 PAG. 640	 ALBA 10160 PAG. 644	 ALBA ASIMETRIC 210009 PAG. 648	 ALBA PLUS 10178 PAG. 652	 ALBA PLUS ASIMETRIC 210008 PAG. 656	
WING	 WING 10200 PAG. 660	LENT	 LENT MODULAR 10216 PAG. 666			
SASSY	 SASSY 410002 PAG. 668	 SASSY SQ 410003 PAG. 672	MARTORELL	 MARTORELL 20115 PAG. 676	 MARTORELL TARREGA 20117 PAG. 678	 MARTORELL TARREGA SQ 20118 PAG. 678
LUK	 LUK FREIR 20018 PAG. 680	 LUK FREIR 2 20019 PAG. 680	CUBE	 CUBE 8201 PAG. 682	 CUBE SQ2 8202 PAG. 682	 CUBE SQ3 8203 PAG. 682
VITA	 VITA 30007 PAG. 688	VOLCANO	 VOLCANO 10062 PAG. 690	 VOLCANO DEEP 10063 PAG. 692		

VISUAL INDEX

ESPIGA	 ESPIGA 10086 PAG. 694	 ESPIGA SQ 10083 PAG. 696	 ESPIGA SIRIO 10077 PAG. 698	 ESPIGA SIRIO TWINS 30000 PAG. 700	 ESPIGA ORIONIS 10080 PAG. 702	 ESPIGA ORIONIS TWINS 30001 PAG. 704
ZENIT	 ZENIT 10123 PAG. 706	 ZENIT SQ 30002 PAG. 706	 ZENIT DEEP 30004 PAG. 708	 ZENIT DEEP TWINS 30005 PAG. 709	 ZENIT MOVE 10125 PAG. 710	 ZENIT MOVE SQ 30003 PAG. 711
	 ZENIT ORTO 10126 PAG. 712	 ZENIT SIDEREA 10050 PAG. XXX	 ZENIT ZUBIA 10122 PAG. XXX	 ZENIT ZUBIA SQ 10121 PAG. XXX		
SUNSET	 SUNSET 10124 PAG. 716					
VEGA	 VEGA ADHARA 10016 PAG. 718	 VEGA ADHARA TWINS 10066 PAG. 720	 VEGA 10028 PAG. 722	 VEGA TWINS 10070 PAG. 724	 VEGA ZETA 10001 PAG. 726	 VEGA ZETA SQ 10019 PAG. 728
	 VEGA ZETA SQ TWINS 10072 PAG. 730					
CENTAURO	 CENTAURO 10109 PAG. 732					



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 125 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA

REF 10158.TR

.PN
PENDANT

-10158 ALABAMA | PN
Pag. 78

.SR
SURFACE



-10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

-10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

-10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
					.HI	.9	.27	-	35	500	.DA .PU .D1	
							.30	4767				
							.40	4956				

	10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1	
							.30	4770				
							.40	4950				
					.HI	.9	.27	11400 - 11820	76	700	.DA	
							.30	9180				
							.40	9534				

	10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
					.HI	.9	.27	22800 - 23640	152	700	.DA	
							.30	18360				
							.40	19068				

	10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	.DA .PU .D1	
							.30	17490				
							.40	18150				
					.HI	.9	.27	41800 - 43340	279	700	.DA	
							.30	33660				
							.40	34958				

	10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	.DA .PU .D1	
							.30	28620				
							.40	29700				
					.HI	.9	.27	68400 - 70920	457	700	.DA	
							.30	55080				
							.40	57204				

Reference order | 10158.XX.TR.XX.XX.XX.XX.XX



TR
TRIMLESS

- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECORD
- RECORD
- RECORD
- 220-240 V 50-60 Hz
- CE


ALABAMA

REF 10158.TR


● Select finishes

- WH-WH
- BK-BK
- GC-GC
- BM-BM
- BS-BS
- BC-BC
- CR-CR
- CB-CB
- GY-GY
- MG-MG
- VC-VC
- YM-YM


PHOTOMETRY

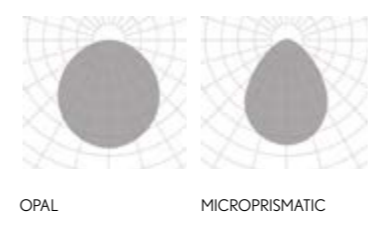

INCLUDED



PROFILE





FINISHES

● COLORS



DIMENSIONS

● SIZES mm. | HEIGHT 125 mm

450 | 650 | 950 | 1250

300 x 650 | 300 x 950 | 300 x 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

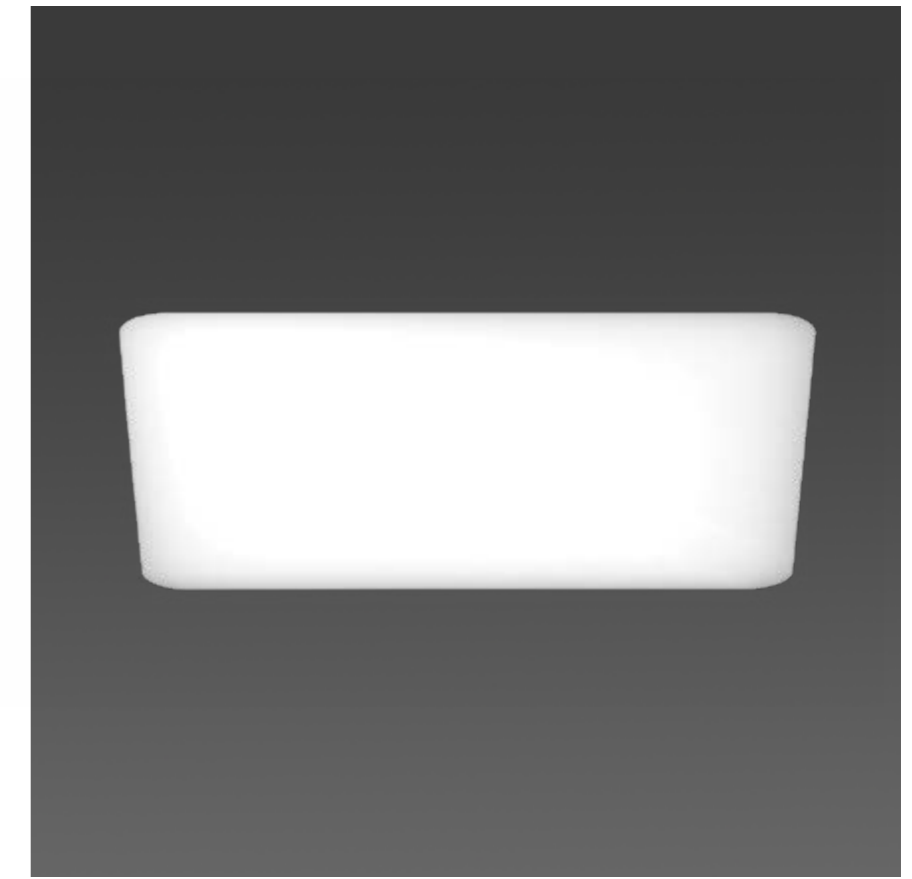

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

-10172 ALTAIR | PN
Pag. 82

.SR
SURFACE

-10172 ALTAIR | SR
Pag. 82


.TR
TRIMLESS

-10172 ALTAIR | TR
Pag. 584



ALTAIR

REF 10172.TR



ALTAIR	REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
					.HI	.9	.27	7600 - 7880	51	700	.DA .PU .D1	
							.30	6120				
							.40	6356				
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
					.HI	.9	.27	15200 - 15760	102	700	.DA .PU .D1	
							.30	12240				
							.40	12712				
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	.DA .PU .D1	
							.30	11925				
							.40	12375				
					.HI	.9	.27	28500 - 29550	191	700	.DA .PU .D1	
							.30	22950				
							.40	23835				
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
					.HI	.9	.27	45600 - 47280	305	700	.DA .PU .D1	
							.30	36720				
							.40	38136				
						.40	39648					

Reference order | 10172.XX.TR.XX.XX.XX.XX.XX.XX



• Select finishes




.WH-WH

ALUMINUM PC	0°	0°	CRI ≥90	IK05
IP20 IP43	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
RECOOL			220-240 V 50-60 Hz	CE

ALTAIR

REF 10172.TR


PHOTOMETRY

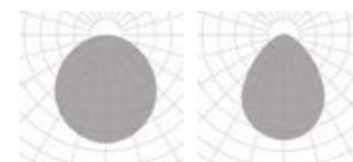

OPAL


MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



125

.TR

TRIMLESS



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 160 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



OHIO

REF 10188.TR

.PN
PENDANT

·10188 OHIO|PN
Pag. 86

.SR
SURFACE


·10188 OHIO|SR
Pag. 86

.RF
RECESSED FRAME

·10188 OHIO|RF
Pag. 400

.TR
TRIMLESS

·10188 OHIO|TR
Pag. 588

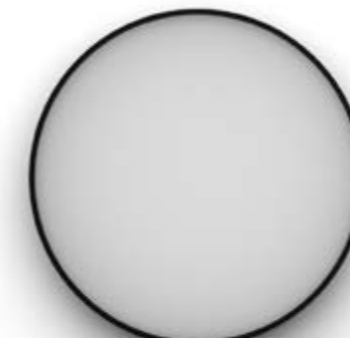


OHIO	REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10188	.35	●	.OP .MP	.ST	.9	.27	-	18	700	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10188	.45	●	.OP .MP	.ST	.9	.27	4590	35	700	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10188	.65	●	.OP .MP	.ST	.9	.27	9180	71	700	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10188	.95	●	.OP .MP	.ST	.9	.27	16830	130	700	.DA .PU .D1	
							.30	17490				
							.40	18150				
	10188	.125	●	.OP .MP	.ST	.9	.27	27540	212	700	.DA .PU .D1	
							.30	28620				
							.40	29700				

Reference order | 10188.XX.TR.XX.XX.ST9.XX.XX




• Select finishes

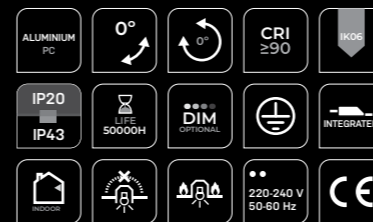

OHIO


REF 10188.TR

PHOTOMETRY

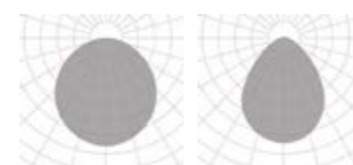


OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



.TR

TRIMLESS



FINISHES

● COLORS



DIMENSIONS

● SIZES mm. | HEIGHT 160 mm

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.RF
RECESSED FRAME

·10204 OHIOSQ|RF
Pag. 404


.TR
TRIMLESS

·10204 OHIOSQ|TR
Pag. 592




OHIO SQ

REF 10204.TR



OHIO SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10204	.35	●	.OP .MP	.ST	.9	.27	2295	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10204	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10204	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10204	.95	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
	10204	.125	●	.OP .MP	.ST	.9	.27	30600	236	500	.DA .PU .D1	
							.30	31800				
							.40	33000				

Reference order | 10204.XX.TR.XX.XX.ST9.XX.XX

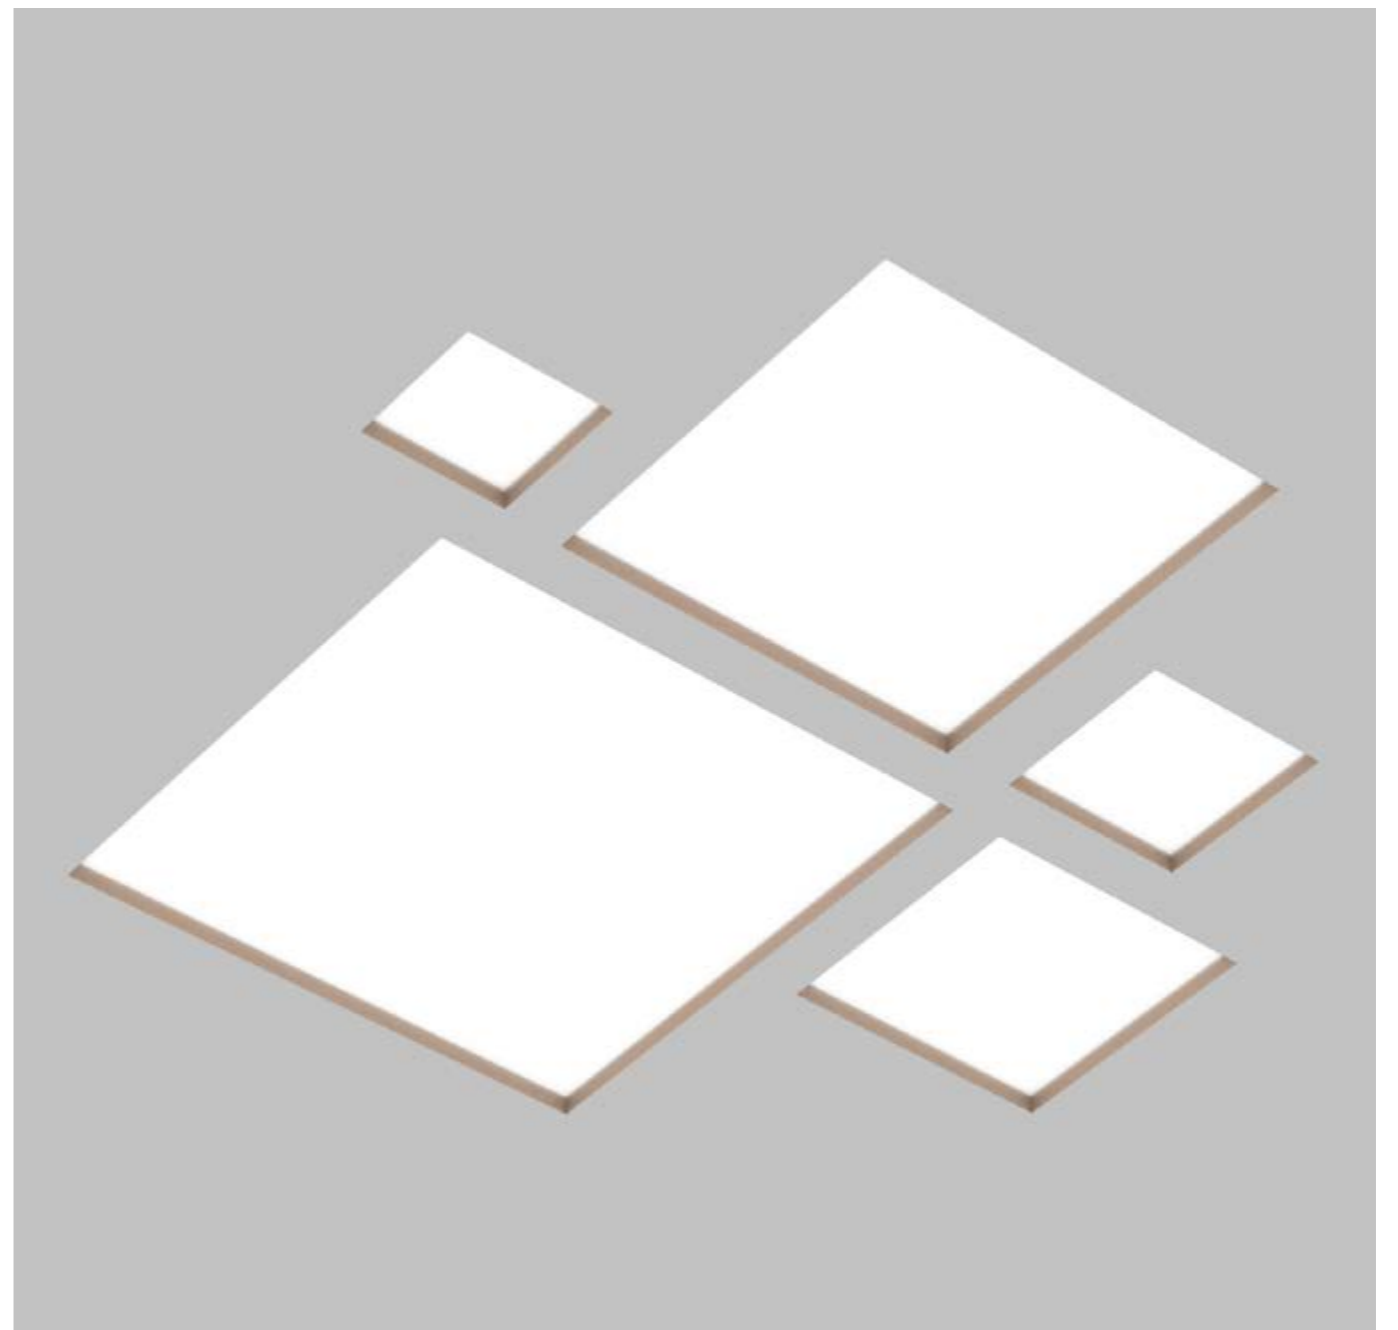


• Select finishes



OHIO
SQ


REF 10204.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm. | HEIGHT 114 mm

450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

1.10

PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

TRIMLESS

INSTALLATIONS



FLORIDA

REF 10190.TR

.PN
PENDANT

-10190 FLORIDA | PN
Pag. 90

.SR
SURFACE

-10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

-10190 FLORIDA | RF
Pag. 408


.TR
TRIMLESS

-10190 FLORIDA | TR
Pag. 596



FLORIDA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.TR.XX.XX.ST9.XX.XX

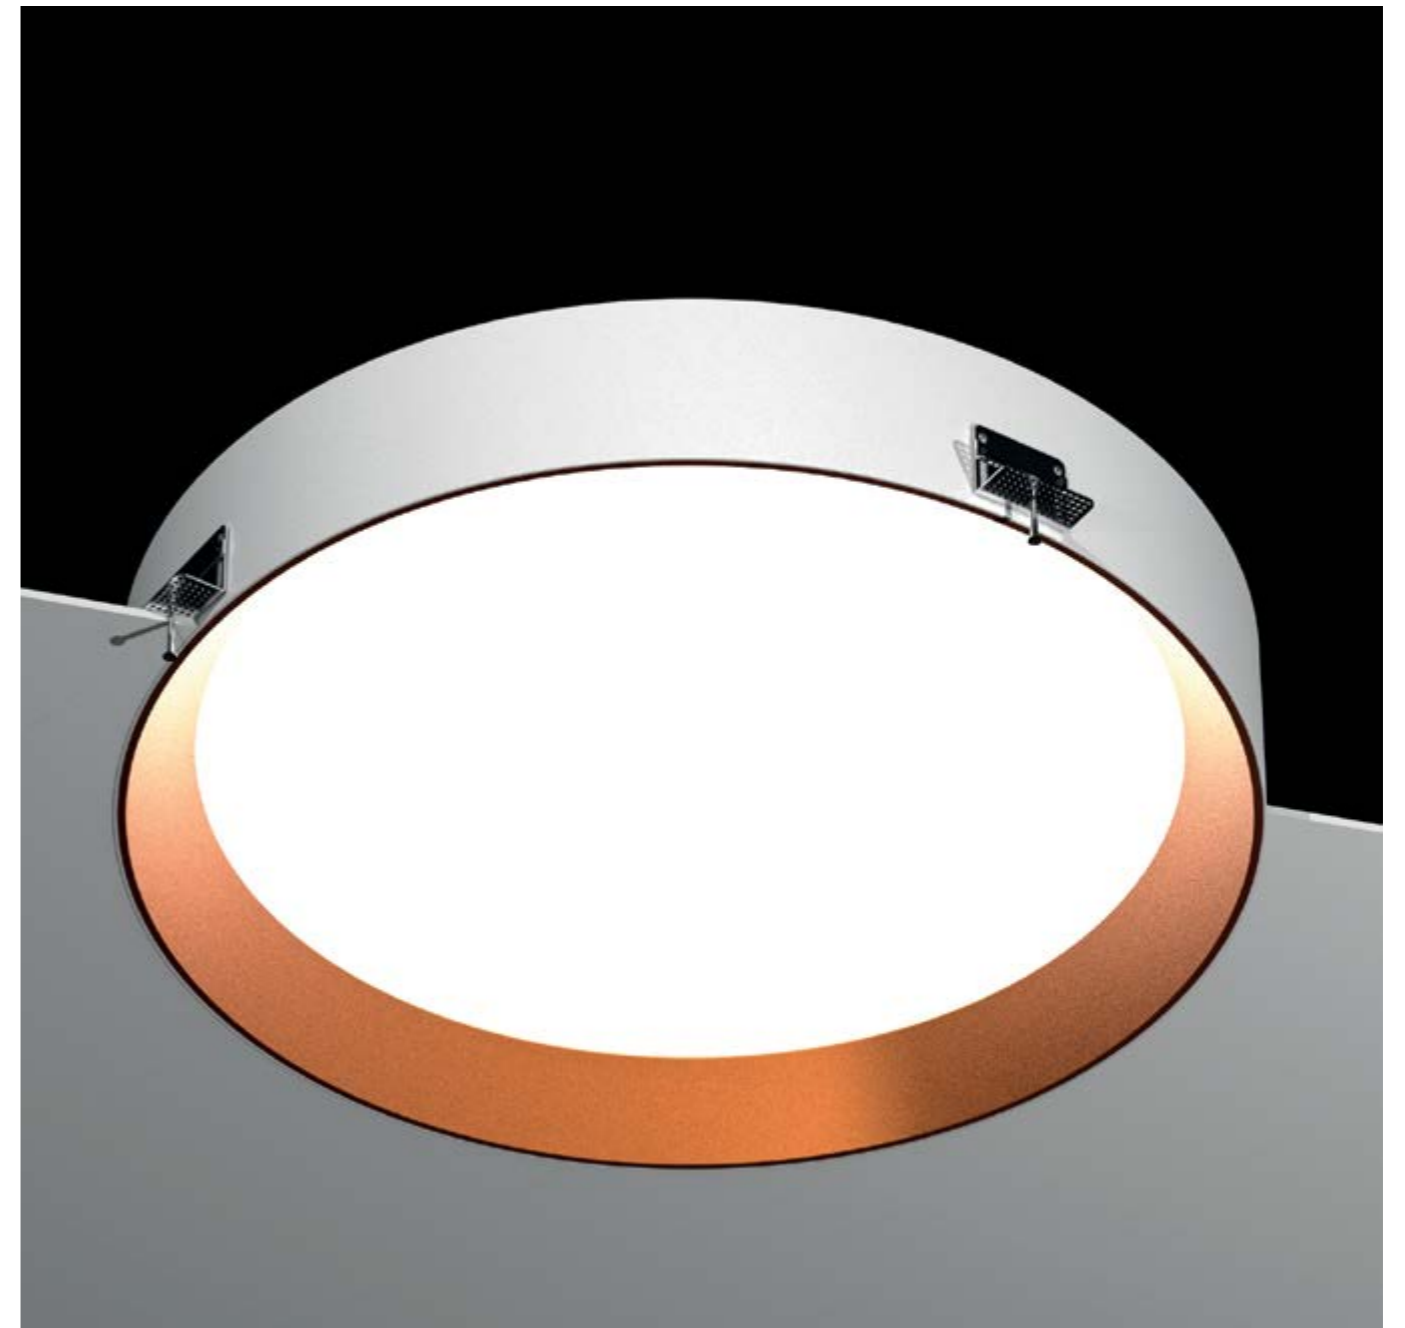

TR
TRIMLESS


Select finishes




FLORIDA

REF 10190.TR


PHOTOMETRY

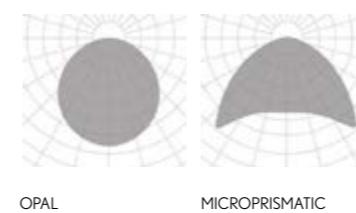

INCLUDED



PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

SIZES mm. | HEIGHT 114 mm
 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)

* Accessories are delivered separately
 (not installed in luminaire).

TRIMLESS

INSTALLATIONS



FLORIDA SQ

REF 10191.TR

.PN
PENDANT

-10191 FLORIDA SQ | PN
Pag. 94

.SR
SURFACE

-10191 FLORIDA SQ | SR
Pag. 94

.RF
RECESSED FRAME

-10191 FLORIDA SQ | RF
Pag. 412

.TR
TRIMLESS

-10191 FLORIDA SQ | TR
Pag. 600



FLORIDA SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.TR.XX.XX.ST9.XX.XX




• Select finishes



FLORIDA SQ


REF 10191.TR

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



TRIMLESS

.TR



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 125 mm

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

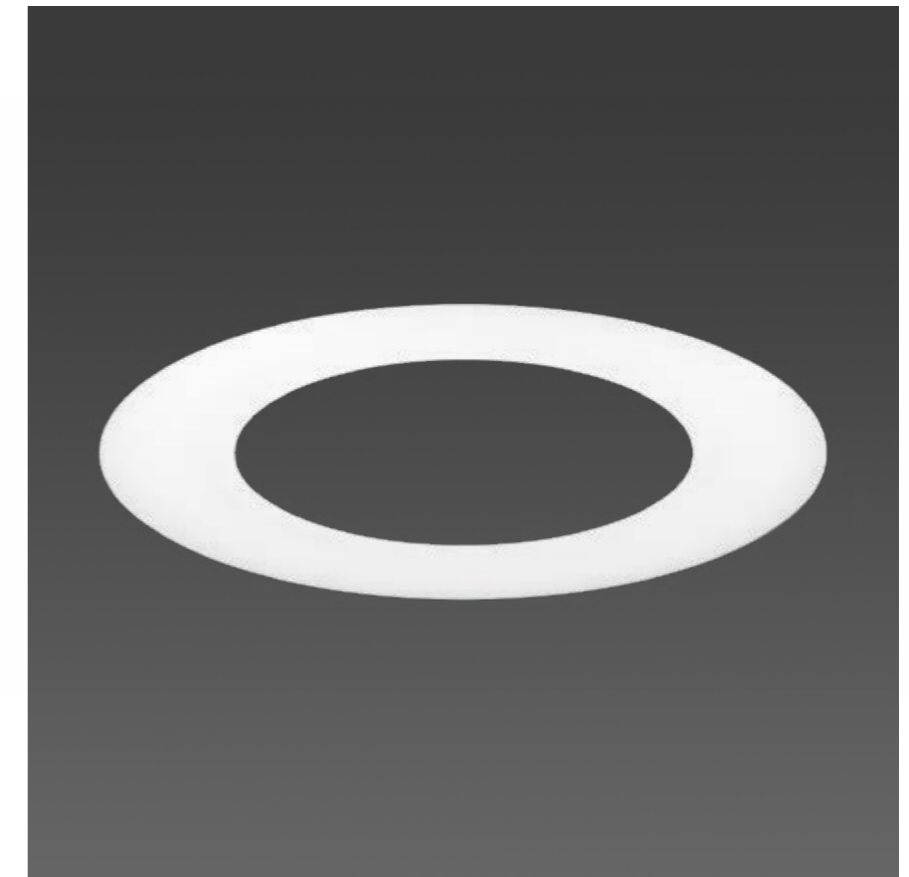

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions



* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA

REF 10176.TR



ALBERTA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10176	.65	●	.OP .MP	.ST	.9	.27	3825	30	500	.DA .PU .D1		
							.30	3975					
							.40	4125					
					.HI	.9	.8	.TW *1	9500 - 9850	64	700	.DA	
							.27	7650					
							.30	7945					
.40	8260												
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1		
							.30	6360					
							.40	6600					
					.HI	.9	.8	.TW *1	15200 - 15760	102	700	.DA	
							.27	12240					
							.30	12712					
.40	13216												
	10176	.125	●	.OP .MP	.ST	.9	.27	7650	59	500	.DA .PU .D1		
							.30	7950					
							.40	8250					
					.HI	.9	.8	.TW *1	19000-19700	127	700	.DA	
							.27	15300					
							.30	15890					
.40	16520												

Reference order 10176.XX.TR.XX.XX.XX.X.XX.XX



• Select finishes




.WH-WH

- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20 / IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOL
- RECOOL
- RECOOL
- 220-240 V 50-60 Hz
- CE

ALBERTA

REF 10176.TR


PHOTOMETRY

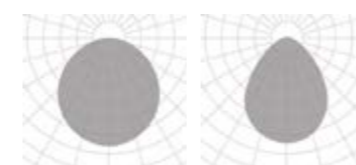

OPAL


MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



124

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI (.DA), CRI 80 (8) 700mA.



A blank canvas

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces.

Un lienzo en blanco

Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfilera lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.

LINES

TRIMLESS



FINISHES

● PROFILE COLORS



● EYE COLORS



DIMENSIONS

● LENGTHS mm.

1m.

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS


-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

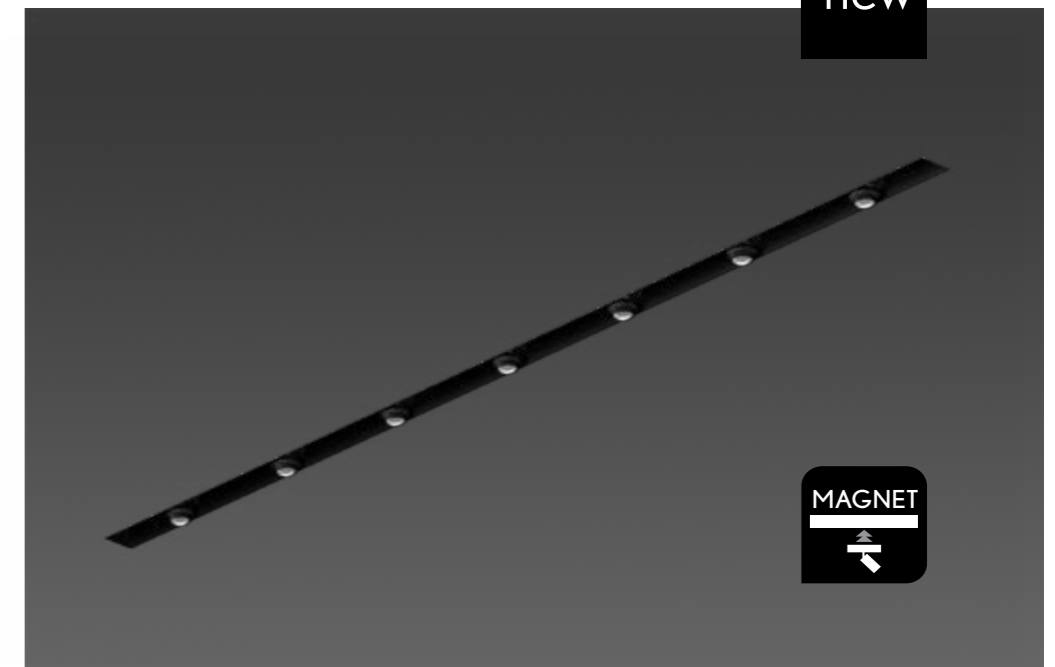

INSTALLATIONS

.PN
PENDANT

·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158


.TR
TRIMLESS

·210016 EYE|TR
Pag. 610



EYE



REF 210016.TR

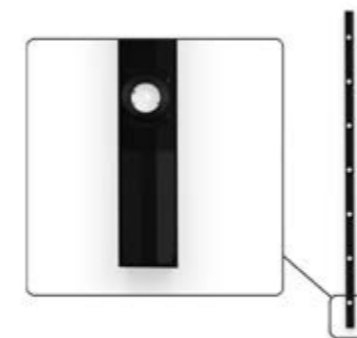

TRIMLESS

.TR



new

EYE	REF.	DIMENSION	FINISH	SKETCH
	210016	.01	.BK-BK .WH-WH	

Reference order | 210016.XX.TR.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX

EYE MODULE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN	WATT	VdC	DIMM	SKETCH
	20210	.01	●	.AC	.ST	.9	419 474 510	5	48	-	


Reference order | 20210.01.XX.AC.ST9.XX




COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●

Reference order | TF16.TR.XX

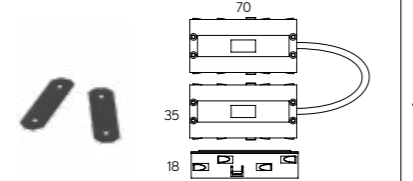
LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH
	● .BK-BK .WH-WH

Reference order | UR16.XX

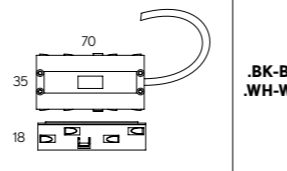POWER FEEDER UNIT	FINISH
	● .BK-BK .WH-WH

Reference order | ACC210016.CA.XX

Select profile finishes



.WH-WH .BK-BK

Select eye finishes



.WH-WH .BK-BK .GC-GC

ALUMINUM PC	0°	0°	CRI ≥90	IK08
IP20 IP43	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
RECOOL			220-240 V 50-60 Hz	CE

EYE


REF 210016.TR

PHOTOMETRY



OPAL

PROFILE

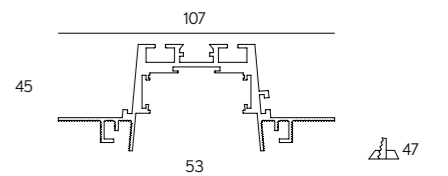

.TR

TRIMLESS



MINI PATRICIA
450001

MINI PATRICIA
450001

MINI PATRICIA ROUND LENSES
450005

MINI PATRICIA FLAT
450007

MINI PATRICIA LOL
450002



MINI MOTION LENSES
450004

MINI LENSES
450005


MINI PATRICIA ZOOM
450003

MINI LED MODULES
450006

ALARIK MINI



new

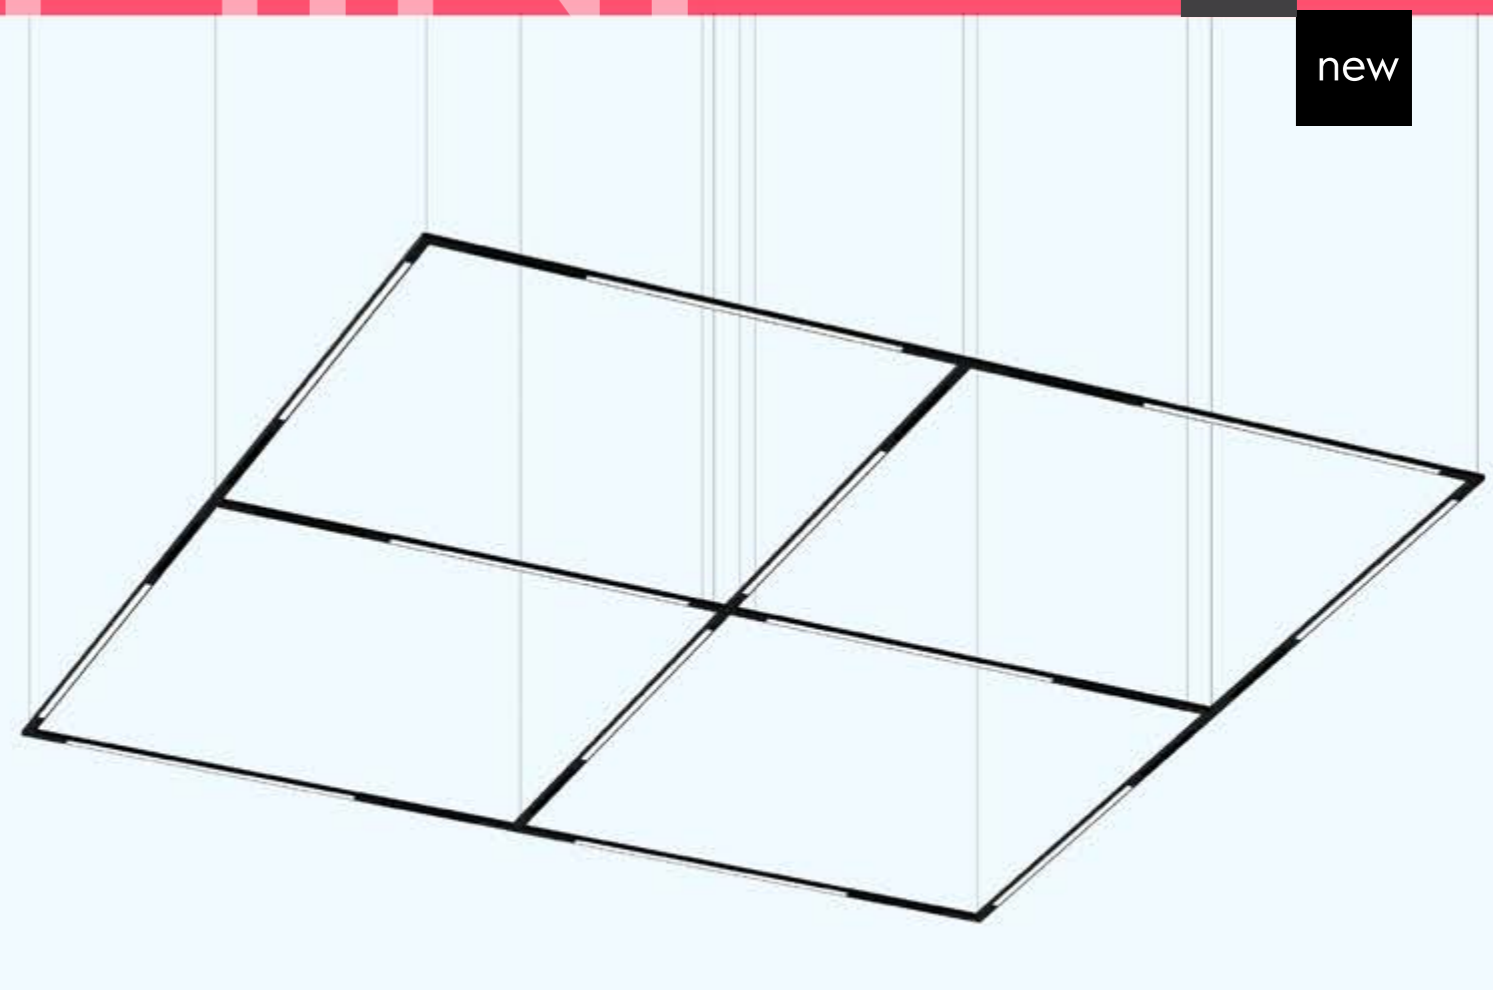



new

FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
 MINI PATRICIA LOL
 MINI PATRICIA ZOOM
 MINI MOTION LENSES
 MINI LENSES
 MINI LED MODULES
 MINI PATRICIA FLAT
 MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 2m
 NON-DIM DOWN or DIM DOWN: 1 x Power feeder
 Connection box



ON DEMAND
 Custom dimensions

INSTALLATIONS



.PN
 PENDANT

·210006 ALARIK MINI | PN
 Pag. 164



.SR
 SURFACE

·210006 ALARIK MINI | SR
 Pag. 164




.TR
 TRIMLESS

·210006 ALARIK MINI | TR
 Pag. 616



ALARIK MINI

REF 210006.TR

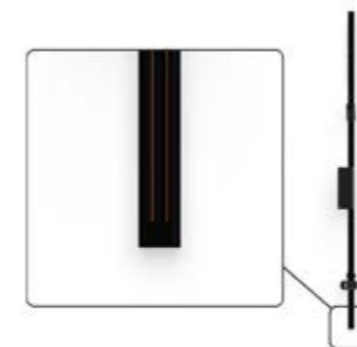

TRIMLESS

ALARIK MINI	DIMENSION	FINISH	SKETCH
	210006 .01 1m		

Reference order | 210006.XX.TR.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH	SKETCH
	ACC210006.CA	.BK-BK .WH-WH	

Reference order | ACC210006.CA.XX

MINI PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450003	.01		.15-40	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450003.XX.XX.XX.ST9.XX.XX

MINI PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450001	.01		.15 .38 .60	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02		.15 .38 .60	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST9.XX.XX

MINI PATRICIA LOL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450002	.01		.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.XX.XX.XX.ST9.XX.XX


MINI PATRICIA FLAT	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450007	.01		.15 .30 .36	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.XX.XX.XX.ST9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450008	.01		.30 .36 .60	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.XX.XX.XX.ST9.XX.XX

Select finishes








- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOL
- RECOOL
- 220-240 V 50-60 Hz
- CE


ALARIK MINI

REF 210006.TR

PHOTOMETRY

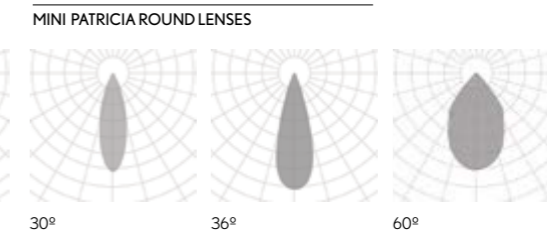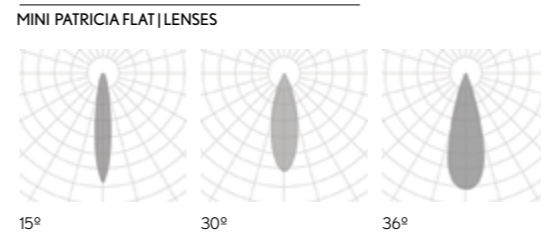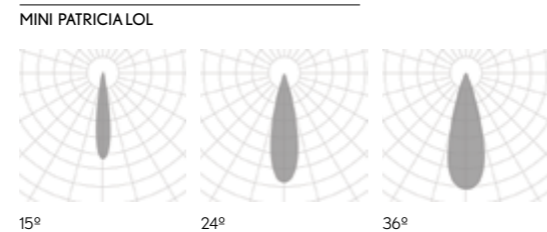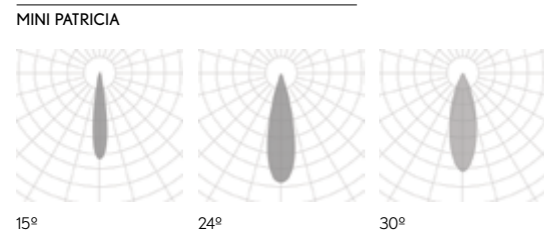

PROFILE



MINI LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order 450005.XX.XX.XX.ST9.XX.XX

MINI MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	576	9	48	-	
							.30	607				
							.40	695				

Reference order 450004.XX.XX.XX.ST9.XX.XX

MINI LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	558	6	48	-	
							.30	560				
							.40	604				
	450006	.02	●	.OP	.ST	.9	.27	1115	12	48	-	
							.30	1120				
							.40	1208				
	450006	.03	●	.OP	.ST	.9	.27	1670	24	48	-	
							.30	1680				
							.40	1812				

Reference order 450006.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●


Reference order TF21.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	WALL-CEILING JOINT		FINISH
						●
UR21	UL21	UC21	UT21	UV21	ACC21006.UP	.BK .WH

Reference order XX.XX

● Select finishes




ALARIK MINI

REF 210006.TR


PHOTOMETRY

MINI LENSES

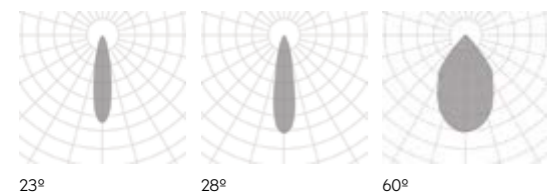

PHOTOMETRY

MINI LED MODULES




OPAL

INCLUDED

TR INSTALLATION KIT

PROFILE





new

FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

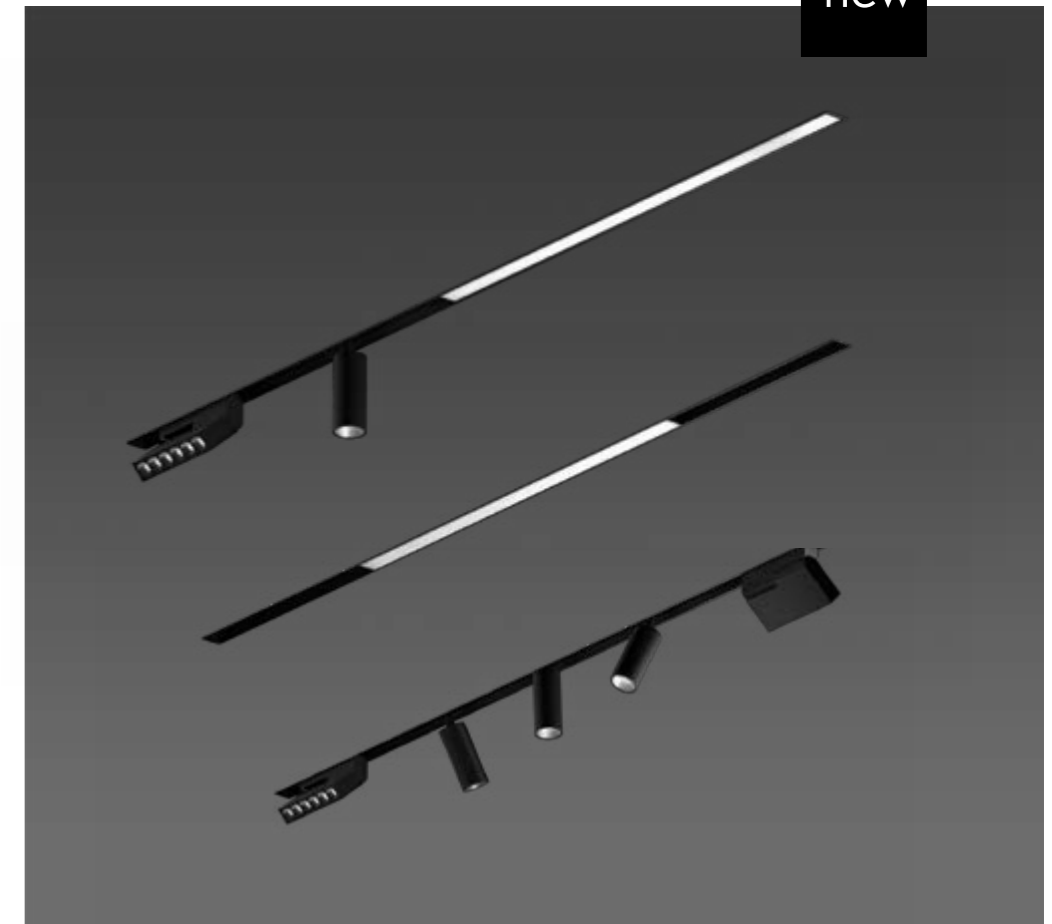

ON DEMAND
Custom dimensions

INSTALLATIONS

.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 178

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 178

.RF
RECESSED FRAME

·20224 ALARIK SLIM | RF
Pag. 428


.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 622



ALARIK SLIM

REF 20224.TR

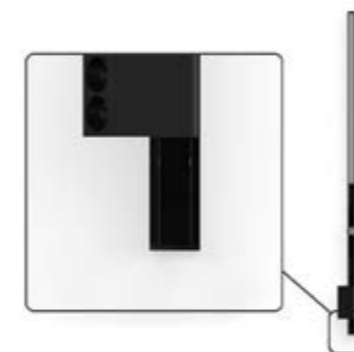

TRIMLESS

.TR

ALARIK SLIM	REF.	DIMEN-SION	FINISH	SKETCH
	20224	.01 1mt.	●	

Reference order | 20224.XX.TR.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				

Reference order | 11546.XX.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11551	.01	●	.37	.ST	.9	.27	760	8	48	.DA .D1	
							.30	808				
							.40	848				

Reference order | 11551.XX.XX.XX.ST9.XX.XX

SLIM LED TUBE	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11552	.01 Ø40 x 40	●	.20 .40	.ST	.9	.27	808	14	48	.DA	
							.30	820				
							.40	881				
	11552	.02 Ø60 x 60	●	.20 .40	.ST	.9	.27	1662	21	48	.DA	
							.30	1716				
							.40	1729				

Reference order | 11552XX.XX.XX.ST9.XX.XX


SLIM WALL WASHER	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	1100	15	48	.DA .D1	
							.30	1169				
							.40	1251				

Reference order | 11550.XX.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMEN-SION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST9.XX.XX

● Select finish




ALARIK SLIM

REF 2024.TR


PHOTOMETRY

SLIM PATRICIA

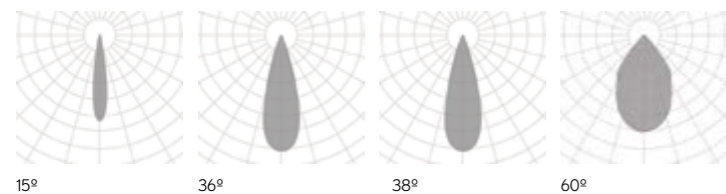


PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER

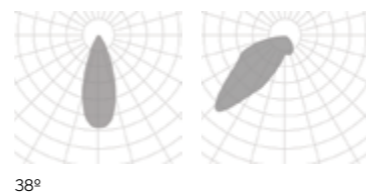


PHOTOMETRY

SLIM TUBE | SLIM LENSES

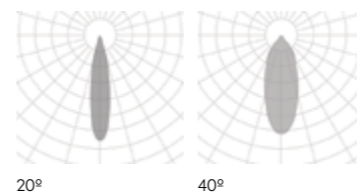

PROFILE

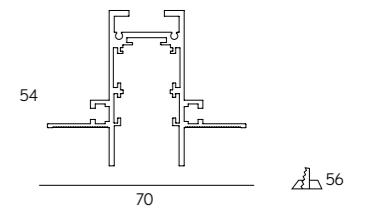

TRIMLESS

.TR

SLIMMOTIONLENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VaC	DIMM	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order 11547.XX.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VaC	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order 11549.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order TF19.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH
	.BK-BK .WH-WH

ACC20224.UR.XX

ANGLE JOINT CONNECTOR	FINISH
	.BK-BK .WH-WH

ACC20224.UL.XX

POWER FEEDER UNIT	FINISH
	.BK-BK .WH-WH

ACC20224.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT


UR19

UC19

UW19

*Corners and wall-ceiling joints require miter cut since they do not have a joint. Las esquinas y las figuras techo-pared requieren un corte a inglete ya que no tienen una unión.

● Select finish




ALARIK SLIM

REF 20224.TR

PHOTOMETRY

SLIMMOTIONLENSES

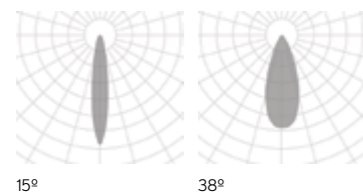


15°

38°

PHOTOMETRY

SLIM LED MODULES



OPAL



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

Trimless mounting kit

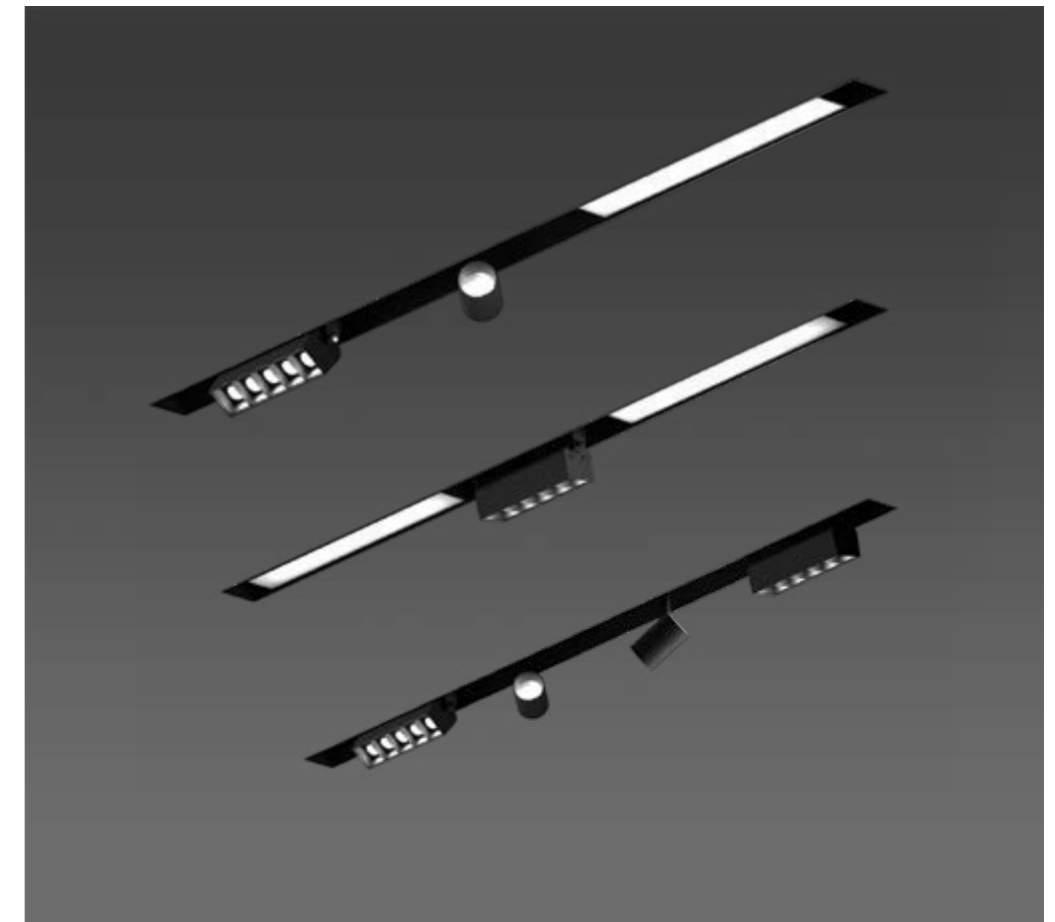

ON DEMAND
Custom dimensions

INSTALLATIONS



.PN
PENDANT

·10225 ALARIK | PN
Pag. 190



.SR
SURFACE

·10225 ALARIK | SR
Pag. 190




.TR
TRIMLESS



·10225 ALARIK | TR
Pag. 628



ALARIK

REF 10225.TR

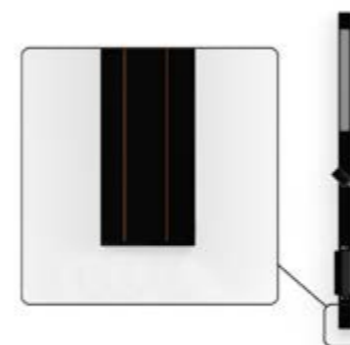



ALARIK	REF.	DIMENSION	FINISH	SKETCH
	10225	.01 1m	●	



48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | 10225.XX.TR.XX







Reference order | DR48.XX

PATRICIA S	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	20146	.01	●	.15 .24 .38	.ST	.9	.27	576	8	48	.DA	
							.30	607				
							.40	695				



Reference order | 20146.XX.XX.XX.ST9.XX.XX



PATRICIA M	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	20193	.01	●	.15 .24 .38	.ST	.9	.27	1173	13	48	.DA	
							.30	1181				
							.40	1207				

Reference order | 20193.XX.XX.XX.ST9.XX.XX

LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11542	.01	.BK-BK	.OP	.ST	.9	.27	765	6	48	.DA	
							.30	795				
							.40	825				
	11542	.02	.BK-BK	.OP	.ST	.9	.27	1530	12	48	.DA	
							.30	1590				
							.40	1650				
	11542	.03	.BK-BK	.OP	.ST	.9	.27	2295	18	48	.DA	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST9.XX.XX

LENSES	REF.	DIMENSION	SHAPE	FINISH	OPTIC OP.	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH
	11534	.05	.RD .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				


	11534	.05F	.RD .SQ	.BK-BK	.20 .40 .60	.ST	.9	.27	660	10	48	.DA	
								.30	750				
								.40	827				

ROUND RD
26x29,3 mm
Int Ø14,5 - Ext Ø23 mm

SQUARE SQ
26x29,3 mm
Ø14,5 mm

Reference order | 11534.XX.XX.XX.XX.ST9.XX.XX

● Select finish



.WH-WH .BK-BK




ALARIK

REF 10225.TR


PHOTOMETRY

PATRICIA

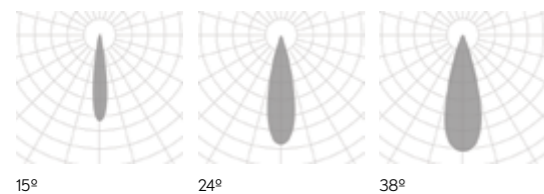


PHOTOMETRY

LENSES

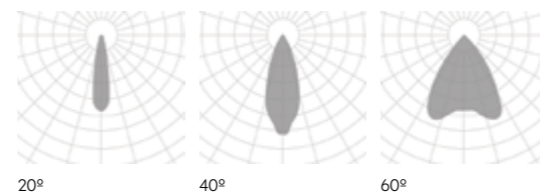


PHOTOMETRY


LED MODULES

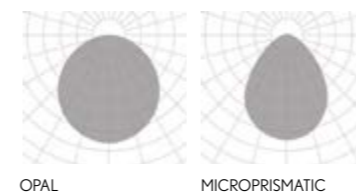

PROFILE

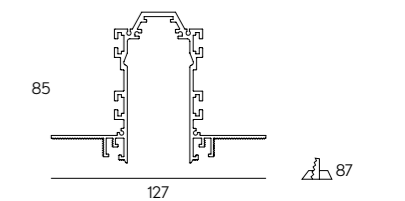





COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	•

Reference order | TF18.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
				X	•
UR18	UL18	UT18	UC18	X	


* Each corner requires an additional driver to that of the luminaire. *Cada esquina requiere de un driver adicional al de la luminaria.*

Reference order | XX18.TR.XX



TRIMLESS

• Select finish




.WH-WH .BK-BK

ALUMINUM PC	0°	0°	CRI ≥90	KOS
IP20 IP43	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
INDOOR			220-240 V 50-60 Hz	CE

ALARIK

REF 10225.TR

PROFILE

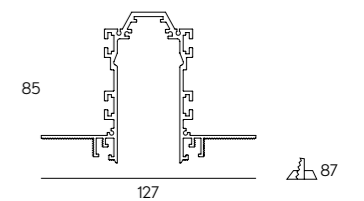



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

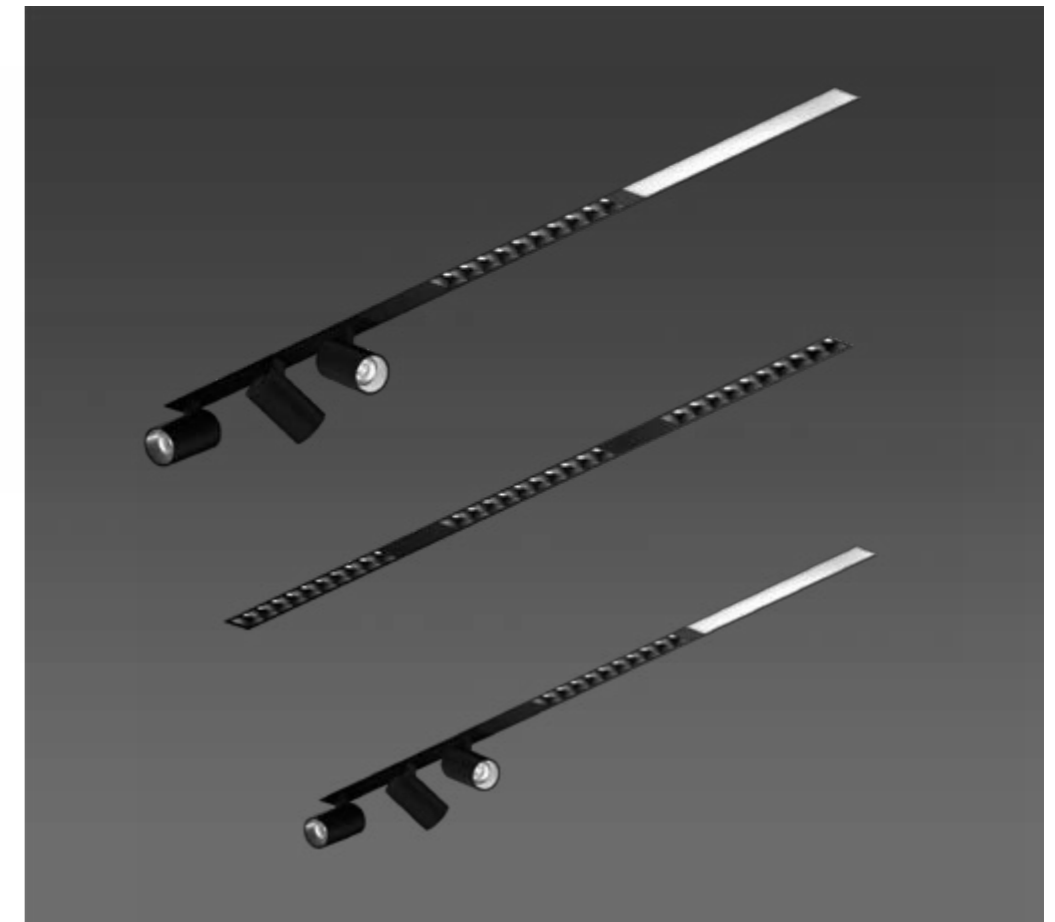

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special RAL Color
Tunable White

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 196




.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 196



.RF
RECESSED FRAME

·10210 MODULIGHT | RF
Pag. 434




.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 634



MODULIGHT

REF 10210.TR

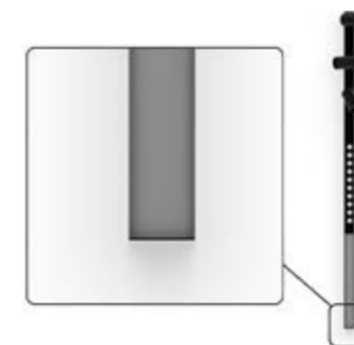

MODULIGHT	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	

Reference order | 10210.XX.TR.XX

DRIVER	DIMENSION*	DIMM
DR10210	.01 0 - 15 W	.DA .PU .D1
	.02 16 - 30 W	
	.03 31 - 65 W	
	.04 66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.XX.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			



Reference order | 11538.XX.XX.XX.ST9.XX

LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVER	REF.	FINISH
	ACC10210.01	.WH-WH .BK-BK

Reference order | ACC10210.01.XX



*1 Modular system that requires a technical drawing. Sistema modular que requiere de un plano técnico.

*2 Driver power must be at least 15% higher than the sum of the power of selected LED modules. La potencia del driver debe ser por lo menos un 15% mayor que la suma de la potencia de los módulos LED elegidos.

● Select finish




MODULIGHT

REF 10210.TR


PHOTOMETRY

MINI TUBE

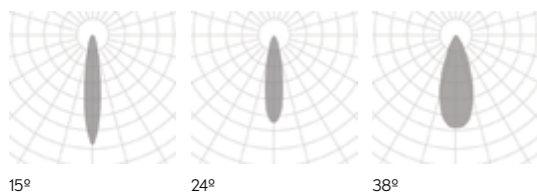


PHOTOMETRY

MINI LENSES

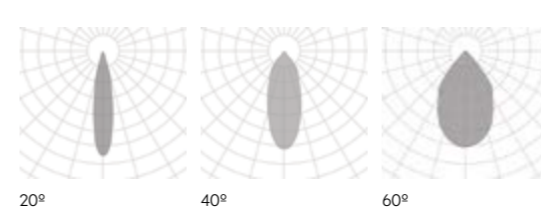

PROFILE

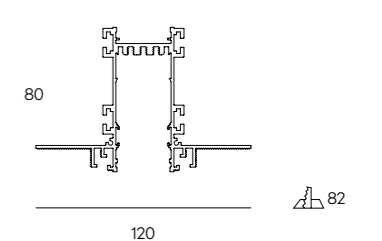

LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.BK-BK	.OP .MP	.HI	.9	.27	953	12	700	
							.30	972			
							.40	1141			
	11524	.02 562mm.	.BK-BK	.OP .MP	.HI	.9	.27	1906	24	700	
							.30	1944			
							.40	2282			
	11524	.03 843mm.	.BK-BK	.OP .MP	.HI	.9	.27	2859	36	700	
							.30	2916			
							.40	3423			
	11524	.04 1124mm.	.BK-BK	.OP .MP	.HI	.9	.27	3812	48	700	
							.30	3888			
							.40	4564			
	11524	.05 1405mm.	.BK-BK	.OP .MP	.HI	.9	.27	4765	60	700	
							.30	4860			
							.40	5705			
	11524	.06 1686mm.	.BK-BK	.OP .MP	.HI	.9	.27	5718	72	700	
							.30	5832			
							.40	6846			

Reference order **11524.XX.XX.XX.HI.9.XX**

COMPONENTS

COVER KIT	REF.	FINISH
	TF23	●

Reference order **TF23.TR.XX**

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		●
UR23	UL23	X	X	UV23	

Reference order **XX23.TR.XX**

Select finish




MODULIGHT

REF 10210.TR

PHOTOMETRY


LED MODULES

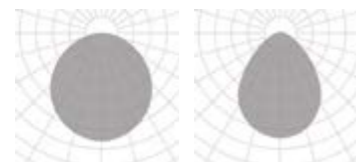

OPAL

MICROPRISMATIC

PROFILE

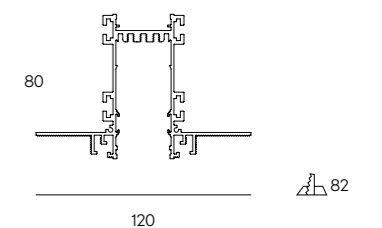

120

82



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

868 | 1149 | 1430 | 1711 | 1992 | 2273

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

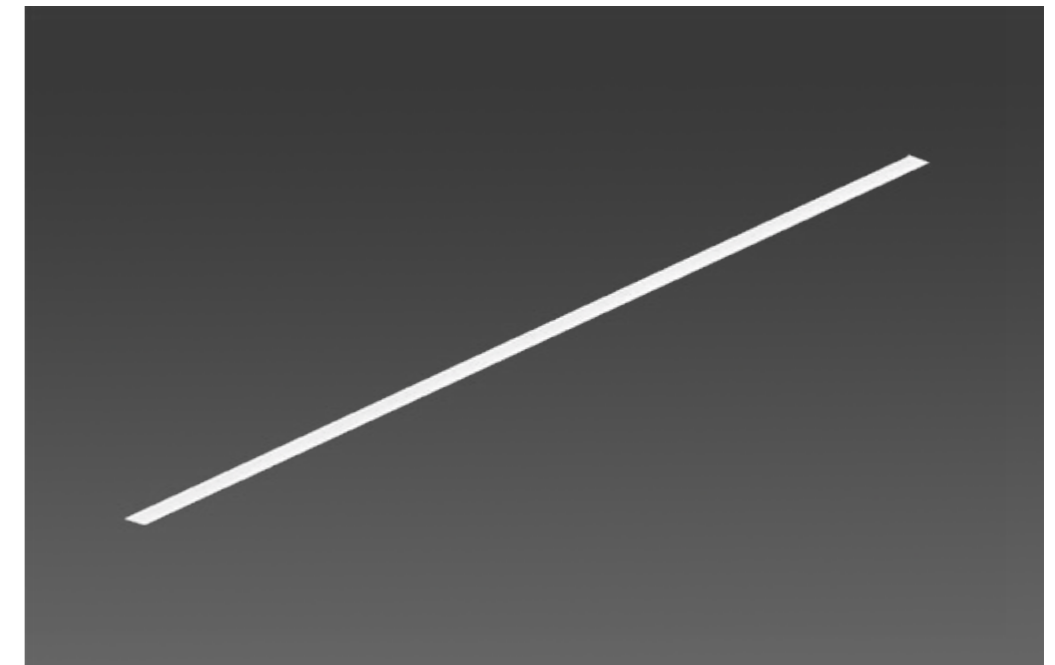

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10211 ALBA MINI|PN
Pag. 226

.SR
SURFACE

·10211 ALBA MINI|SR
Pag. 226

.RF
RECESSED FRAME

·10211 ALBA MINI|RF
Pag. 440



.TR
TRIMLESS

·10211 ALBA MINI|TR
Pag. 640



ALBA MINI

REF 10211.TR

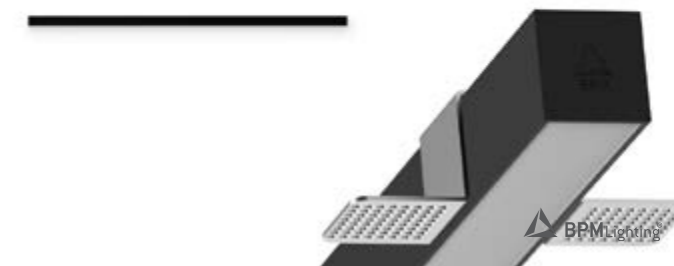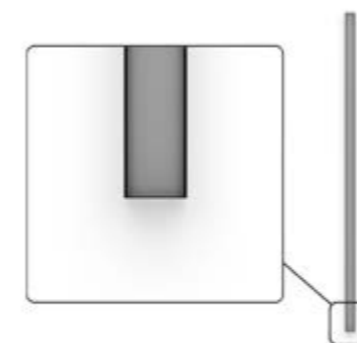

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10211	.03	868	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1149					3060	3180	3300	7600-7880	24	51	
	.05	1430					3825	3975	4125	9500-9850	30	64	
	.06	1711					4590	4770	4950	11400-11820	35	76	
	.07	1992					5355	5565	5775	13300-13790	41	89	
	.08	2273					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10211	.03	868	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1149					6120	6356	6608	47	
	.05	1430					7650	7945	8260	59	
	.06	1711					9180	9534	9912	71	
	.07	1992					10710	11123	11564	83	
	.08	2273					12240	12712	13216	94	

Reference order | 10211.XX.TR.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03	●

Reference order | TF03.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03.TR.XX


Select finish



ALBA MINI


REF 10211.TR

PHOTOMETRY

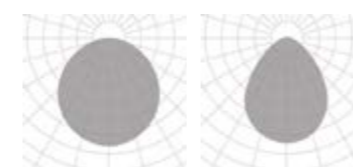


OPAL MICROPRISMATIC

INCLUDED



TR INSTALLATION KIT

PROFILE



36

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
- TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

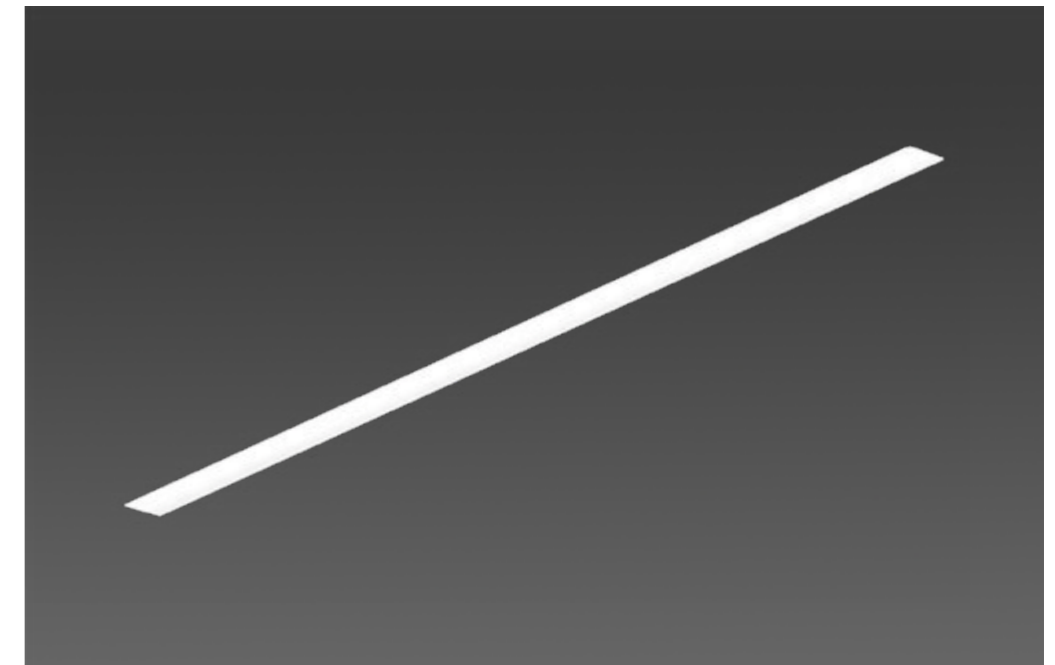

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.TR

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE



·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644

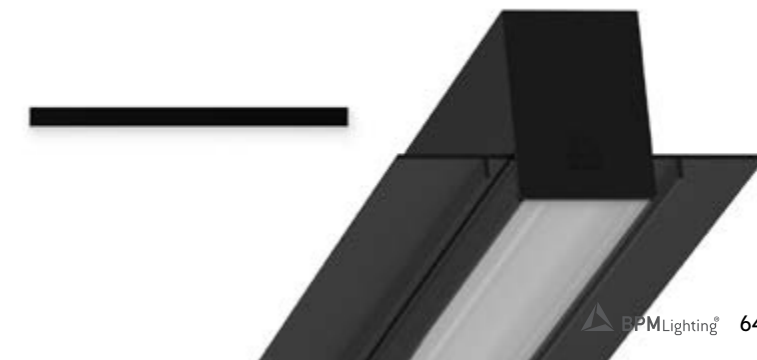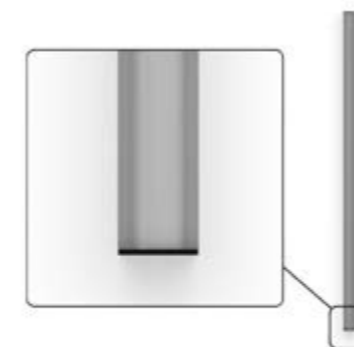

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.TR.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF02	●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | TF02.TR.XX

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	

Reference order | XX02.TR.XX


Select finish




ALBA

REF 10160.TR

PHOTOMETRY

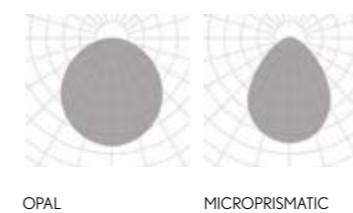

PROFILE

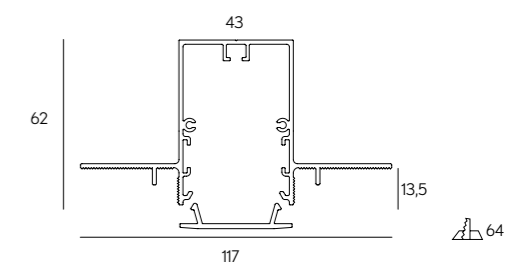

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

new



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMERIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

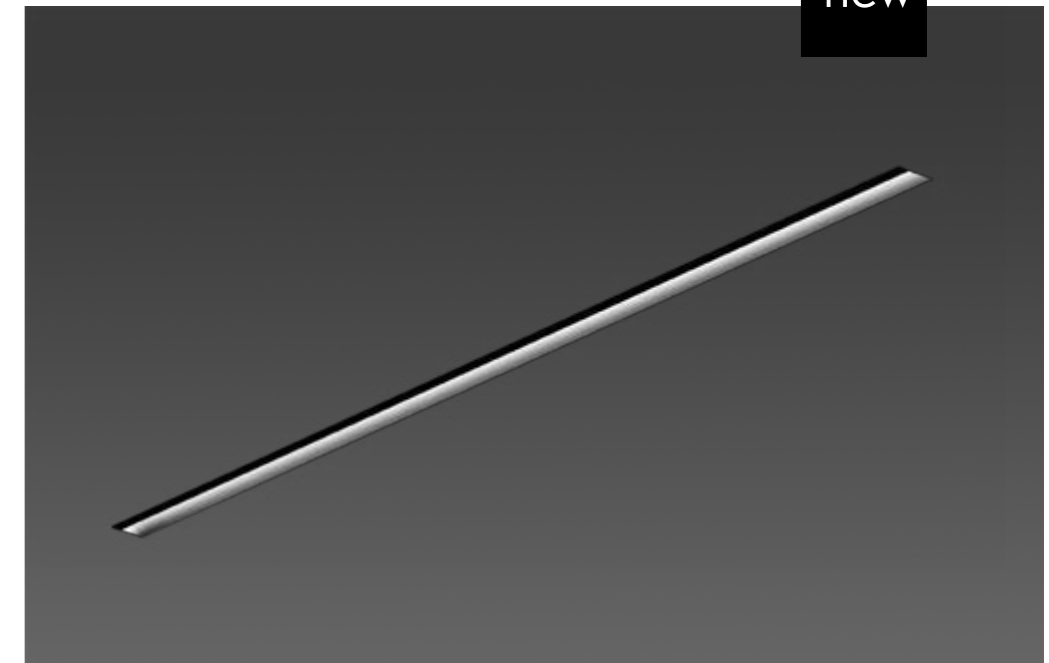

ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

TRIMLESS

INSTALLATIONS

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALBA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448



.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648



ALBA ASIMETRIC

REF 210009.TR

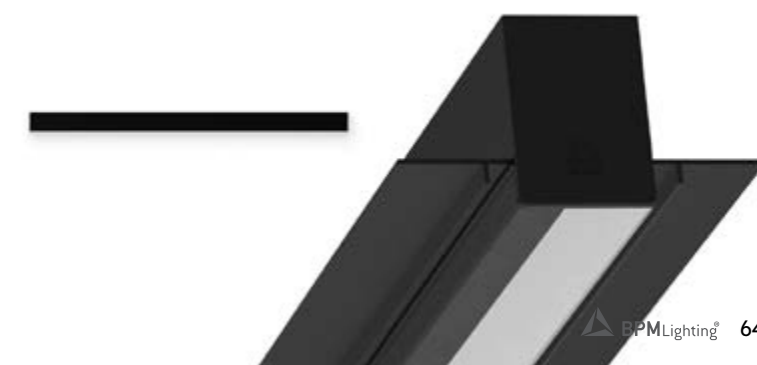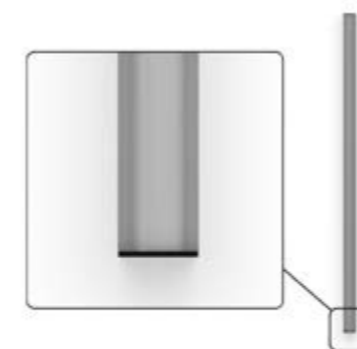


REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
210009	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 210009.XX.TR.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF06	●

Reference order | TF06.TR.XX

JOINTS

LINEAR JOINT

UR06

Select finish



ALBA ASIMETRIC


REF 210009.TR

PHOTOMETRY



TRANSPARENT PC

PROFILE

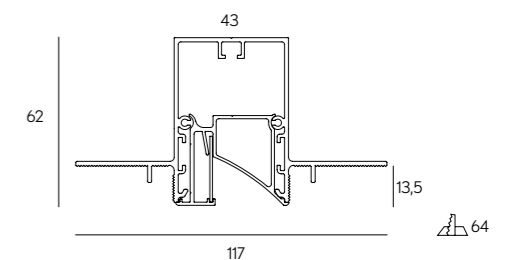

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 - TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

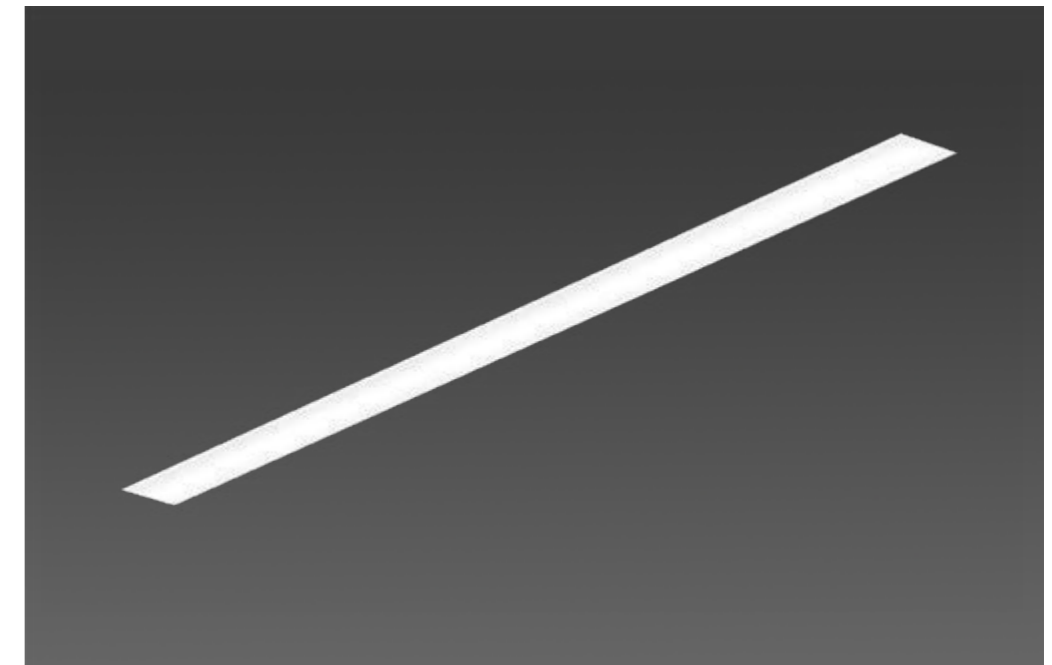

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452



.TR
TRIMLESS

·10178 ALBA PLUS|TR
Pag. 652



ALBA PLUS

REF 10178.TR

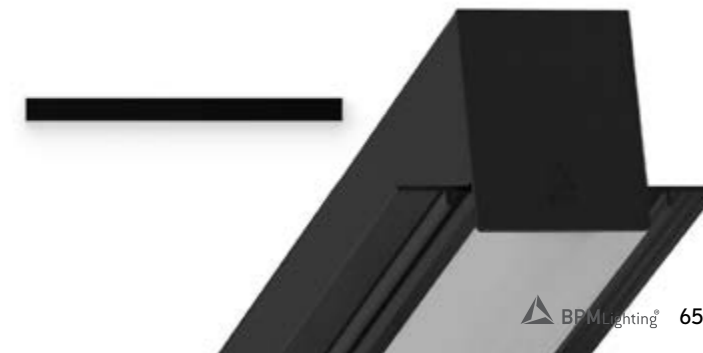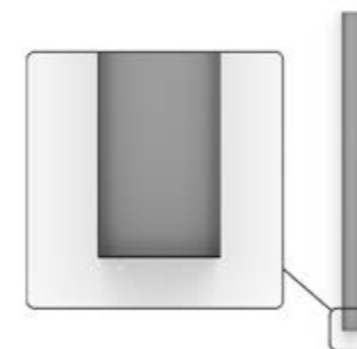

TRIMLESS

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10178	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-11360	24	51	
	.05	1425					3825	3975	4125	9500-14200	30	64	
	.06	1706					4590	4770	4950	11400-17040	35	76	
	.07	1987					5355	5565	5775	13300-19880	41	89	
	.08	2268					6120	6360	6600	15200-22720	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10178	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10178.XX.TR.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF01	●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | TF01.TR.XX

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT
UR01

ANGLE JOINT
UL01

T-JOINT
UT01

CROSS JOINT
UC01

WALL-CEILING JOINT
UV01

FINISH
●

Reference order | XX01.TR.XX


Select finish



ALBA PLUS


REF 10178.TR

PHOTOMETRY

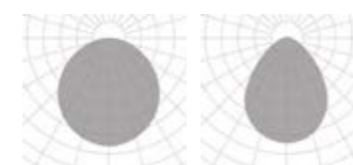

OPAL MICROPRISMATIC

PROFILE

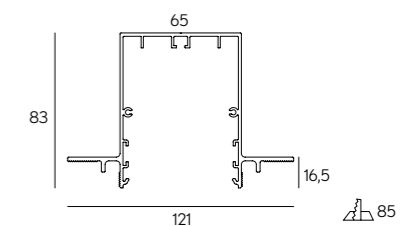

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

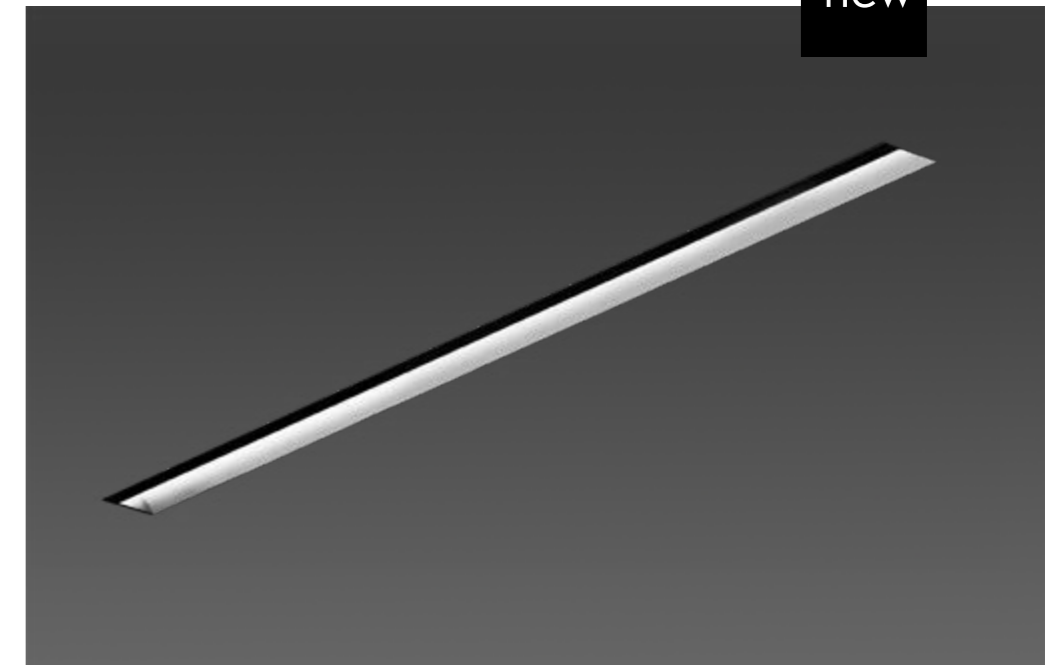

ON DEMAND

Emergency Lighting*
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA PLUS ASIMETRIC

REF 210008.TR

.PN
PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 250

.SR
SURFACE



·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 250

.RF
RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 456

.TR
TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 656

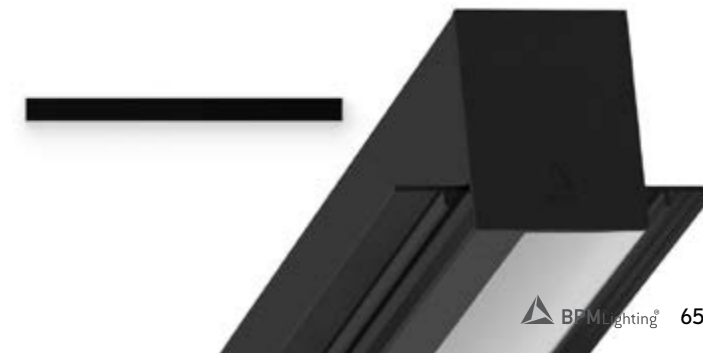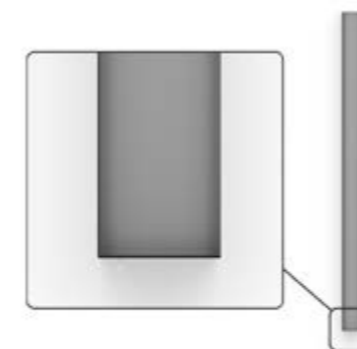

TRIMLESS

.TR

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
210008	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
210008	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.04	1144					6120	6356	6608	47		
	.05	1425					7650	7945	8260	59		
	.06	1706					9180	9534	9912	71		
	.07	1987					10710	11123	11564	83		
	.08	2268					12240	12712	13216	94		

Reference order | 210008.XX.TR.XX.XX.XX.XX.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF05	●

Reference order | TF05.TR.XX

JOINTS

LINEAR JOINT
UR05

Select finish



ALBA PLUS ASIMETRIC


REF 210008.TR

PHOTOMETRY



TRANSPARENT PC

PROFILE

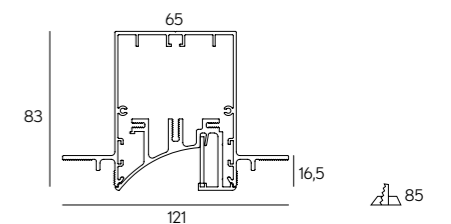

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 - TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

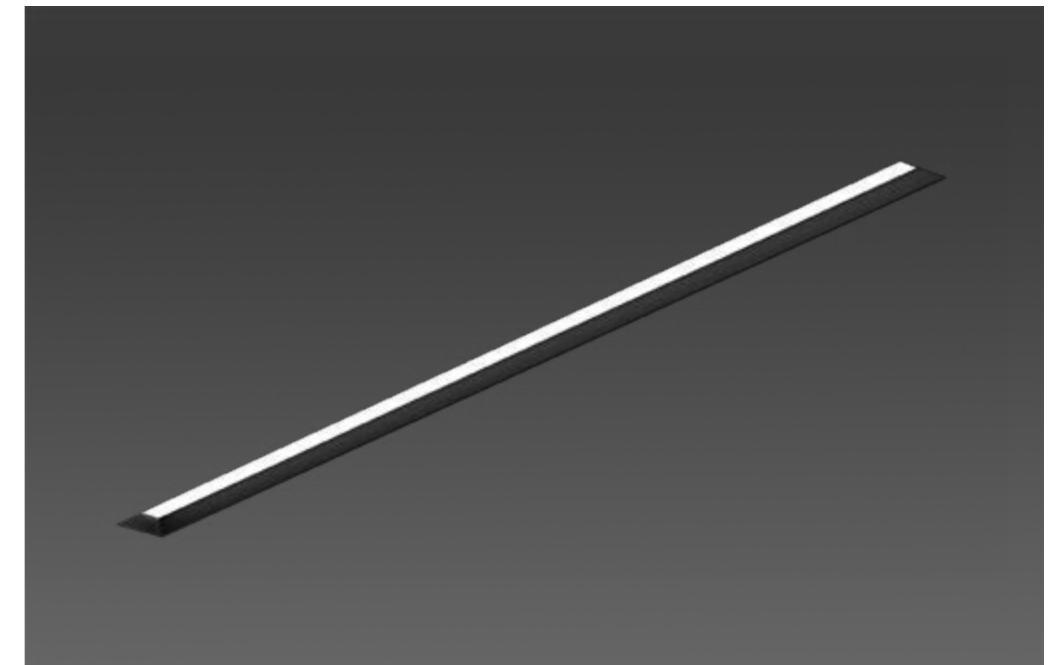

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

10200 WING | PN
Pag. 262

.SR
SURFACE

10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

10200 WING | RF
Pag. 464


.TR
TRIMLESS

10200 WING | TR
Pag. 660



WING


REF 10200.TR

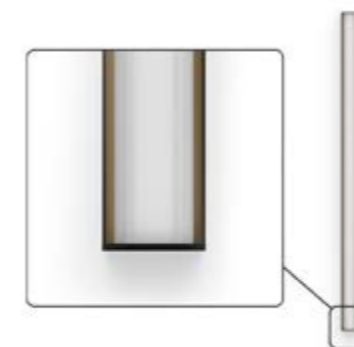


REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*	K	TW	
10200	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210009	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10200.XX.TR.XX.XX.XX.X.XXX.XXX.XX

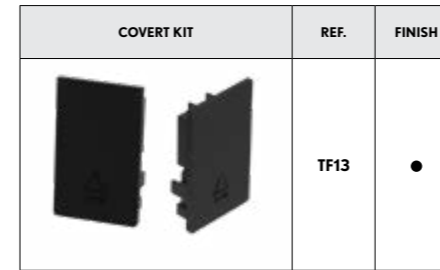


Reference order | TF13.TR.XX

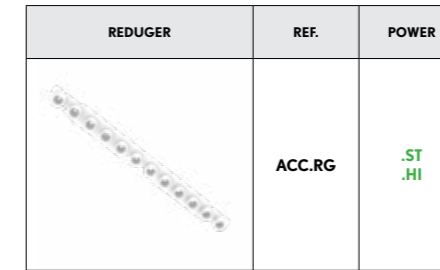

Reference order | ACC.RG.XX


JOINTS

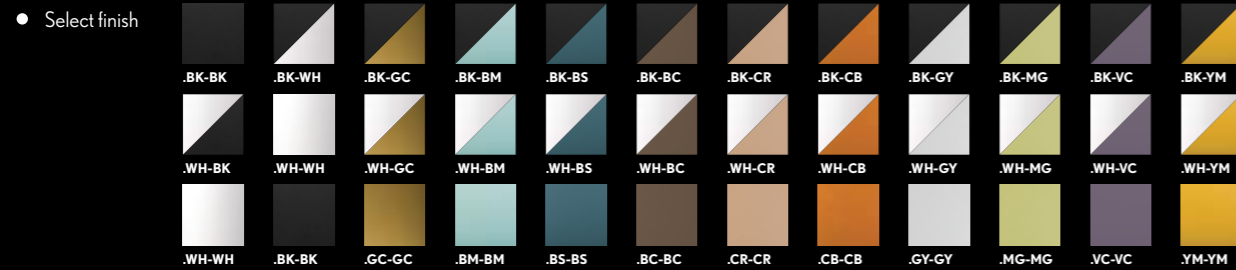


WING

REF 10200.TR


PHOTOMETRY

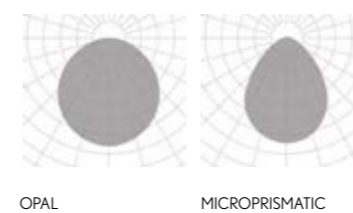

INCLUDED



PROFILE



*Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 **Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Avant-garde design

Our tech lights are an opportunity for creativity, a lighting game where everyone wins, since they are design to achieve a wide range of lighting solutions.

Estética vanguardista

Son una oportunidad para la creatividad, un juego de iluminación donde todos ganan, ya que están diseñadas para lograr una amplia gama de soluciones de iluminación.



TECH

TRIMLESS

LENT MODULAR	REF.	DIMENSIONS	SHAPE	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	10216	.01	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	142	2	350	.DA .PU .D1	
									.30	161				
									.40	212				
	10216	.03	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	426	6	350	.DA .PU .D1	
									.30	483				
									.40	635				
	10216	.05	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	710	10	350	.DA .PU .D1	
									.30	805				
									.40	1060				
	10216	.10	.RO .SQ	●	LED	.20 .40 .60	.ST	.9	.27	1420	20	350	.DA .PU .D1	
									.30	1611				
									.40	2120				

Reference order | 10216.XX.TR.XX.XX.XX.ST9.XX.XX

● Select finishes

.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM

ROUND.RO 26x29,3 mm Int Ø14,5 - Ext. Ø23 mm	SQUARE.SQ 26x29,3 mm Ø14,5 mm

FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

● View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

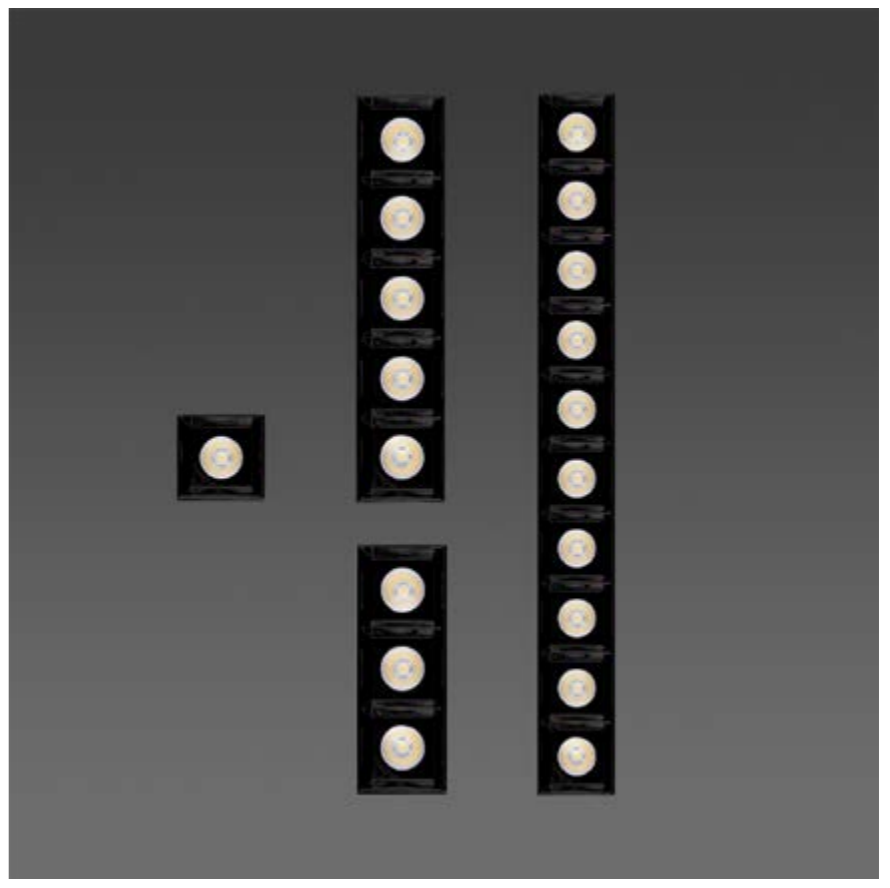

INSTALLATIONS

.RF
RECESSED FRAME



10216 LENT MODULAR | RF
Pag. 472

.TR
TRIMLESS

10216 LENT MODULAR | TR
Pag. 666

ALUMINIUM PC	0°	0°	CRI ≥90	IK05
IP20 IP43	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
RECOOL			220-240 V 50-60 Hz	CE

PHOTOMETRY

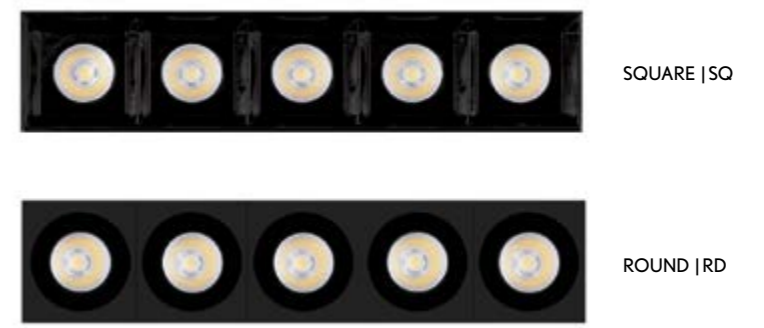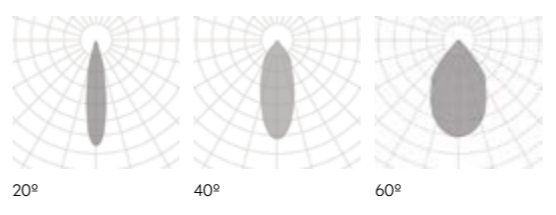
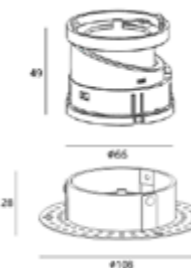


LENT MODULAR

REF 10216.TR

TRIMLESS

new

SASSY	REF.	DIMENSIONS	FINISHES	SKETCH
	410002	.01	.WH.WH .BK-BK	

Reference order 410002.01.TR.XX

SASSYLED	REF.	DIMENSIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	599	10	250	.DA .PU .D1	
							.30	732				
							.40	775				
							.DW	627 to 14				
					.MD	.9	.27	696	12	300	.DA .PU .D1	
							.30	872				
							.40	893				
							.DW	713 to 14				
					.HI	.9	.27	778	15	350	.DA .PU .D1	
							.30	947				
							.40	1033				
							.DW	880 to 30				

Reference order 120001.01.BK-BK.XX.XX.X.XX.XX

FINISHES

EXTERNAL COLORS



INTERNAL COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

15° | 26° | 38° | 50°

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS

.RF
RECESSED FRAME

410002 SASSY | RF
Pag. 476

.TR
TRIMLESS


410002 SASSY | TR
Pag. 668

- ALUMINUM PC
- 0°
- 0°
- CRI ≥ 90
- IK08
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- REcessed
- TRIMLESS
- 220-240 V 50-60 Hz
- CE

SASSY

REF 410002.TR

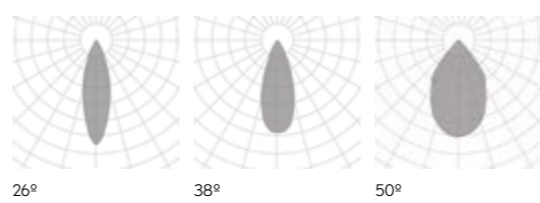


PHOTOMETRY



COMPONENTS






RING PART	FINISH
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX






RING PART			FINISH
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX

ACCESSORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410002.OV	.03X60	 6.4 Ø37.5
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX

FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410002	.ZSX1.3	 6.4 Ø37.5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX

HONEYCOMB

ACC410002.HC

Select finish



- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- RECESSED
- 220-240 V 50-60 Hz
- CE

SASSY

REF 410002.TR

TRIMLESS

SASSY	REF.	DIMENSIONS	FINISHES	SKETCH
	410003	.01	●	

Reference order 410003.01.TR.XX

SASSY LED	REF.	DIMENSIONS	FINISHES	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	120001	.01	.BK-BK	.15 .26 .38 .50	.ST	.9	.27	599	10	250	.DA .PU .D1	
							.30	732				
							.40	775				
					.DW	.9	.27	696	12	300	.DA .PU .D1	
							.30	872				
							.40	893				
					.DW	.9	.27	778	7	420 to 14	.DA	
							.30	947				
							.40	1033				
					.DW	.9	.27	778	15	350	.DA .PU .D1	
							.30	947				
							.40	1033				
.DW	.9	.27	778	10	280 to 14	.DA						
		.30	947									
		.40	1033									

Reference order 120001.01.BK-BK.XX.XX.X.XX.XX

FINISHES

EXTERNAL COLORS



INTERNAL COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

15° | 26° | 38° | 50°

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

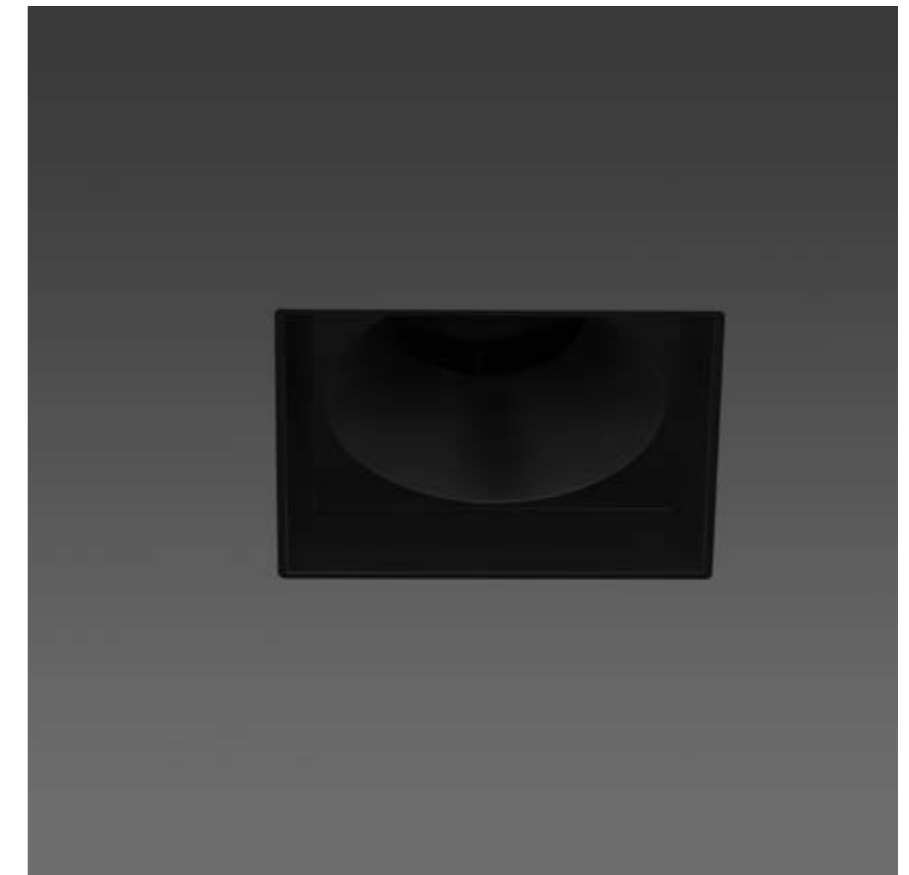

INSTALLATIONS

.RF
RECESSED FRAME

410003 SASSY SQ | RF
Pag. 482

.TR
TRIMLESS



410003 SASSY SQ | TR
Pag. 672



SASSY SQ

REF 410003.TR

PHOTOMETRY

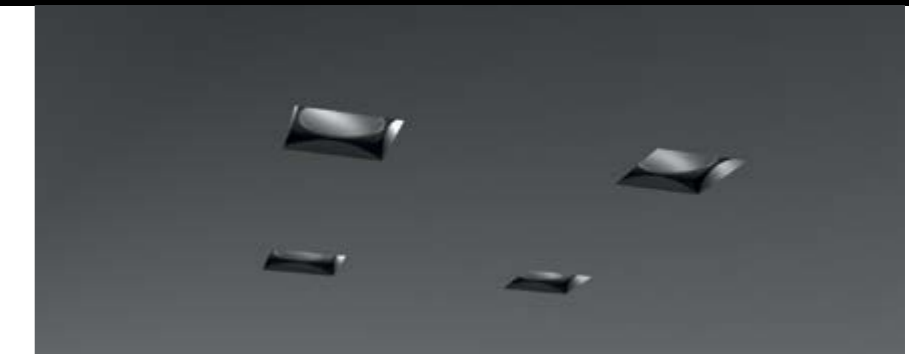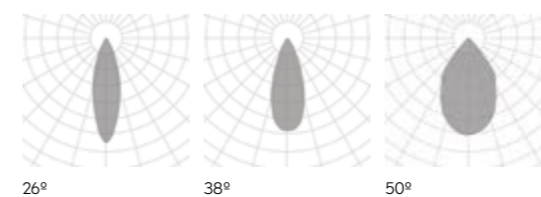

TRIMLESS






.TR






COMPONENTS

RING PART	FINISH
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410003.OV	.03X60	6.4 
		.10X60	
		.10X40	
		.15X60	

FLOOD LENS	REF.	LENSE EFFECT	SKETCH
	ACC410003	.ZSX1.3	6.4 
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

HONEYCOMB

ACC410003.HC

Reference order | ACC410003.OV.XX

Reference order | ACC410003.XX



• Select finish



SASSY SQ

REF 410003.TR


.TR

TRIMLESS

MARTORELL	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20115	.01	.WH-WH .BK-BK	LED	.24 .32	.ST	.9	.27 .30 .40	175 188 199	3	700	.DA .PU .D1	
	20115	.02	●	LED	.15 .24 .32	.ST	.9	.27 .30 .40	470 498 515	8	700	.DA .PU .D1	
	20115	.03	●	LED	.24 .32	.ST	.9	.27 .30 .40	1071 1156 1198	12	350	.DA .PU .D1	

Reference order | 20115.XX.TR.XX.XX.ST9.XX.XX

● Select finishes

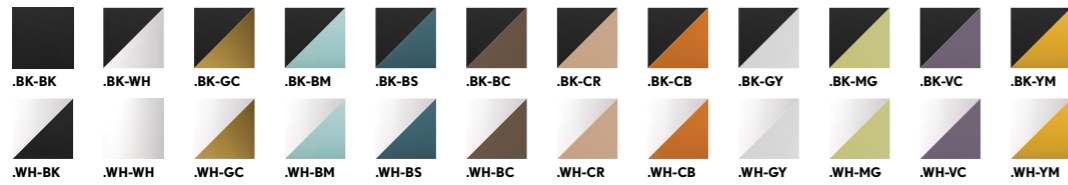

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° | 24° | 32°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color

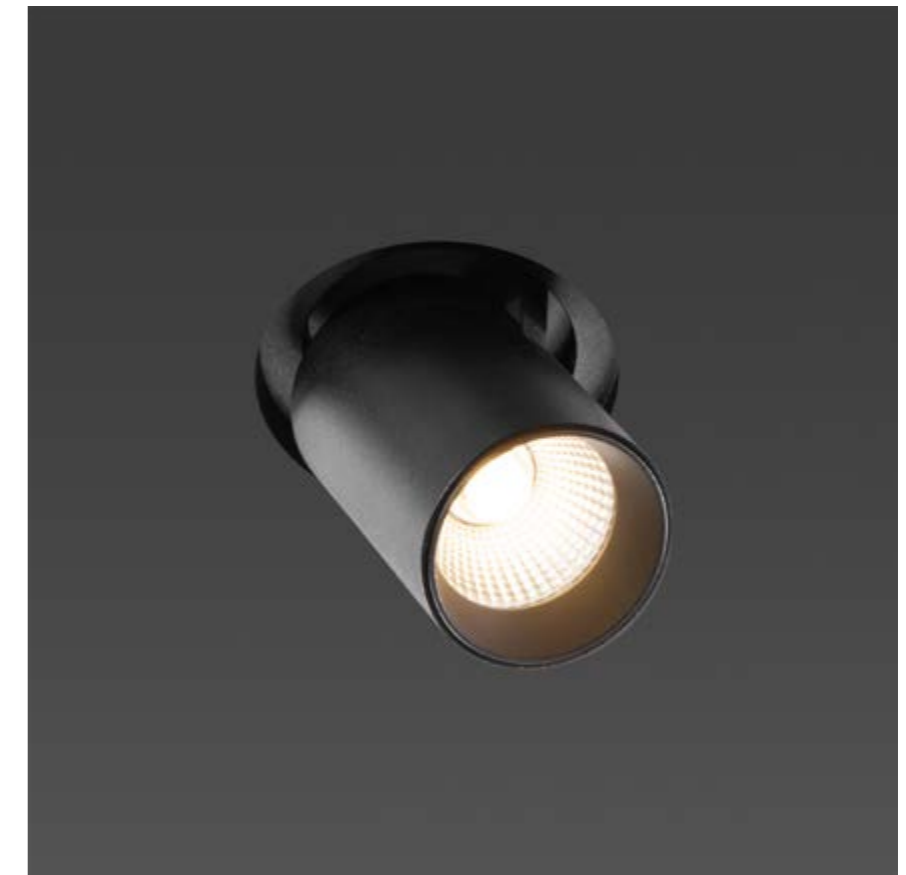

INSTALLATIONS

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME


·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676



PHOTOMETRY

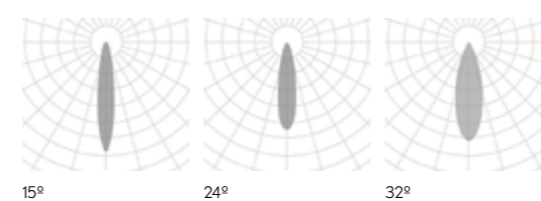



MARTORELL

REF 20115.TR





TRIMLESS

.TR

MARTORELL TÁRREGA	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20117	.01	●	LED	.25 .30	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order |  20117.01.TR.XX.XX.ST9.XX.XX

MARTORELL TÁRREGA SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20116	.01	●	LED	.25 .30	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order |  20116.01.TR.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

● View in family specifications

LIGHTING OPTIONS

■ BEAM ANGLE

25° | 30°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS


.RF
RECESSED FRAME

·20117 TARREGA | RF·20116 TARREGA SQ | RF
Pag. 498

.TR
TRIMLESS

·20117 TARREGA | TR·20116 TARREGA SQ | TR
Pag. 678



PHOTOMETRY

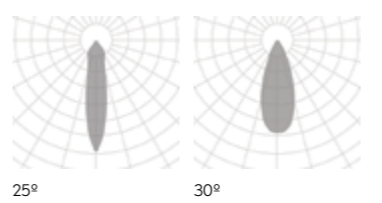



MARTORELL TÁRREGA | TÁRREGA SQ



REF 20117.TR | 20116.TR





LUK FREIR	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20018	.01	●	LED	.40 .60	.ST	.9	.27	830	9	350	.DA .PU .D1	
								.30	845				
								.40	895				

	20018	.02	●	LED	.40 .60	.ST	.9	.27	1271	16	500	.DA .PU .D1	
								.30	1616				
								.40	1682				

Reference order | 20018XX.TR.XX.XX.ST9.XX.XX

LUK FREIR 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20019	.01	●	LED	.40 .60	.ST	.9	.27	1660	18	350	.DA .PU .D1	
								.30	1690				
								.40	1790				

	20019	.02	●	LED	.40 .60	.ST	.9	.27	1271	16	500	.DA .PU .D1	
								.30	1616				
								.40	1682				

● Select finishes



Reference order | 20019.XX.TR.XX.XX.ST9.XX.XX

FINISHES

COLORS



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40° 60° | 40° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME


·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 680



PHOTOMETRY

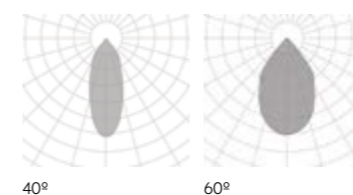

LUK FREIR | FREIR 2

REF 20018.TR | REF 20019.TR

.TR

TRIMLESS

CUBE SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8201	.01	●	LED	.24 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order | 8201.01.TR.XX.XX.ST9.XX.XX


CUBE SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8202	.01	●	LED	.24 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order | 8202.01.TR.XX.XX.ST9.XX.XX

CUBE SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8203	.01	●	LED	.24 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order | 8203.01.TR.XX.XX.ST9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682




PHOTOMETRY

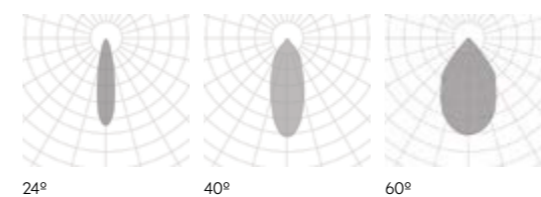

CUBE

SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR

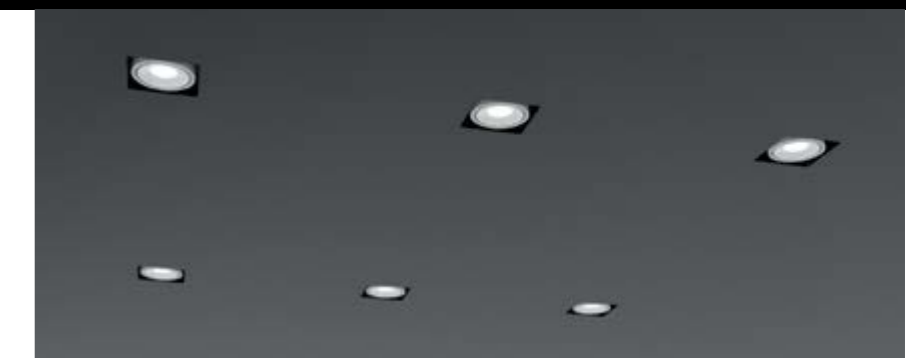

CUBE SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8201	.02	●	LED	.24 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order | 8201.02.TR.XX.XX.ST9.XX.XX


CUBE SQ2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8202	.02	●	LED	.24 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2690				
								.40	3734				

Reference order | 8202.02.TR.XX.XX.ST9.XX.XX

CUBE SQ3	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	8203	.02	●	LED	.24 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order | 8203.02.TR.XX.XX.ST9.XX.XX

● Select external - internal finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options



INSTALLATIONS

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS


·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682



CUBE SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR

PHOTOMETRY

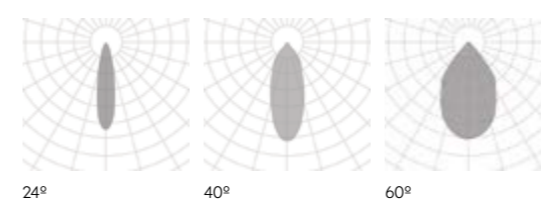

The invisible star *El protagonista invisible*



Style your spaces with even, harmonious light, where luminaries go virtually unnoticed. That's the secret of success of Structural / Crismosil. Say goodbye to wall lights, joins and superfluous items and let the light take centre stage.



Conseguir ambientes con una perfecta luz difusa, armoniosa, obviando la visibilidad de las luminarias. Así consigue Structural / Crismosil su objetivo. Se prescinde de apliques, juntas y todo lo superfluo para dar todo el protagonismo a la luz.



STRUCTURAL

TRIMLESS


VITA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	30007	.01	●	LED	.15	.ST	.9	.30	790	7	350	-	
					.24			.40	.60				

VITA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	30007	.02	●	LED	.15	.ST	.9	.30	1840	20	540	-	
					.24			.40	.60				

10 - 20 mm ↑ * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order  30007.XX.TR.XX.XX.XX.X.XX

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS



LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH



VITA

REF 30007.TR

PHOTOMETRY

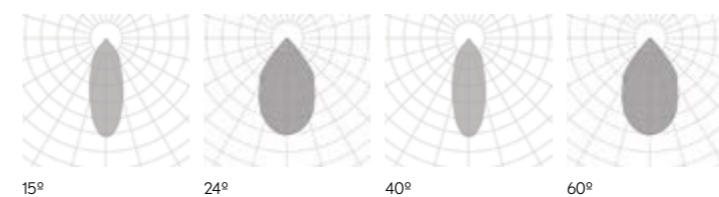





15°


24°

40°

60°

VOLCANO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10062	.01	●	GU5.3	■	GU5.3	.9	-	-	8	-	-	 
				GU10	■	GU10							
	10062	.01	●	LED	■	.ST	.9	.27	526	8	350	.DA .PU .D1	
						.30		570					
						.27		711					
						.30		927					
						.HI		.40	635				

VOLCANO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10062	.02	●	LED	■	.ST	.9	.27	1043	16	500	.DA .PU .D1	
						.30		1100					
						.40		1230					

VOLCANO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10062	.03	●	LED	■	.ST	.9	.27	3280	23	500	.DA .PU .D1	
						.30		3480					
						.40		3640					
						.27		6560	47	500			
						.30		6920					
						.40		7269					

7 - 22 mm * Espesor del falso techo
Ceiling thickness

12,5 mm *2 Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10062.XX.TR.XX.XX.XX.X.XX.XX

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



Select finishes




.WH-WH



VOLCANO

REF 10062.TR

PHOTOMETRY



OPAL

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10063	.01	●	GU5.3	■	GU5.3	.9	-	-	8	-	-	295x295 mm LEDXX GUXXX	
				GU10	■	GU10								
	10063	.01	●	LED	■	.ST	.9	.27	526	8	350	-	.DA .PU .D1	290x290 Ø85
						.HI		.30	570					
								.40	711					
								.27	707					
								.30	927					
		.40	635											

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10063	.02	●	LED	■	.ST	.9	.27	1043	16	500	-	.DA .PU .D1	395x395 mm LEDX Ø158 390x390
						.HI		.30	1100					
								.40	1230					

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10063	.03	●	LED	■	.ST	.9	.27	3280	23	500	-	.DA .PU .D1	650x650 mm LEDX Ø395 277 645x645
						.HI		.30	3480					
								.40	3640					
								.27	6560	47	500			
								.30	6920					
								.40	7269					

7 - 22 mm * Espesor del falso techo
Ceiling thickness

12,5 mm *2 Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10063.XX.TR.XX.XX.XX.X.XX.XX

FINISHES

□

DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH



VOLCANO DEEP

REF 10063.TR

PHOTOMETRY



OPAL

ESPIGA	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH					
	10086	.01	●	GU5.3	■	GU5.3	.9	-	526	8	-	-						
				GU10	■	GU10												
				LED	■	.OP								.ST	BPM50	.27	711	.DA .PU .D1
																.30	570	
																.27	707	
																.30	927	
.40	635																	

ESPIGA	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10086	.02	●	LED	■	.OP	.9	-	.27	1043	16	500	.DA .PU .D1
									.30	1100			
									.40	1230			

ESPIGA	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10086	.03	●	LED	■	.OP	.9	-	.27	1647	25	600	.DA .PU .D1
									.30	1700			
									.40	2040			

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10086.XX.TR.XX.XX.XXX.XXX.XX

7 - 22 mm * Espesor del falso techo Ceiling thickness

Select finishes




WH-WH




ESPIGA

REF 10086.TR

Altura interna - Internal height

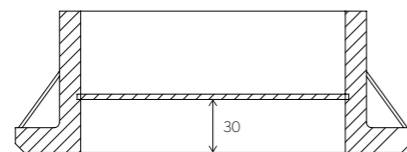

PHOTOMETRY



OPAL

ESPIGA SQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH							
	10083	.01	●	GU5.3	■	GU5.3	.9	-	-	8	-	-								
				GU10	■	GU10														
				LED	■	.OP								.ST	BPM50	.27	526	.DA	.PU	.D1
																.30	570			
																.27	711			
																.30	927			
				.HI	BPM300	.40	635													

ESPIGA SQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	10083	.02	●	LED	■	.OP	.ST	.9	.27	1043	16	500	.DA	.PU	.D1
									.30	1100					
									.40	1230					

ESPIGA SQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	10083	.03	●	LED	■	.OP	.ST	.9	.27	1647	25	600	.DA	.PU	.D1
									.30	1700					
									.40	2040					

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10083.XX.TR.XX.XX.XX.XX.XX.XX

Select finishes




WH-WH




ESPIGA SQ

REF 10083.TR

Altura interna- Internal height

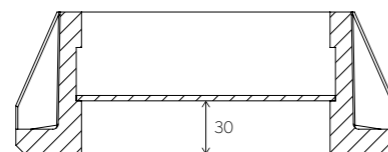

PHOTOMETRY



OPAL

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10077	.01	●	GU5.3	■	GU5.3	.9	-	-	8	-	-	
				GU10	■	GU10							
	10077	.01	●	LED	■	.ST	.9	.27	526	8	350	.DA .PU .D1	
						.HI		.30	570				
								.27	711				
								.30	927				
						.40		635					

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10077	.02	●	LED	■	.ST	.9	.27	1043	16	500	.DA .PU .D1	
								.30	1100				
								.40	1230				

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10077	.03	●	LED	■	.ST	.9	.27	1647	25	600	.DA .PU .D1	
								.30	1700				
								.40	2040				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



7 - 22 mm

* Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10077.XX.TR.XX.XX.XX.XX.XX.XX

Select finishes




WH-WH




ESPIGA SIRIO

REF 10077.TR

Altura interna- Internal height

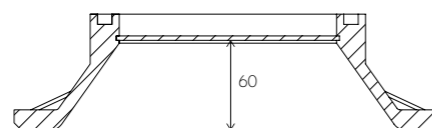

PHOTOMETRY



OPAL

ESPIGA SIRIO TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH		
	30000	.01	●	LED	.OP	.ST	.9	.27	3280	23	500	.DA .PU .D1			
								.30	3480						
								.40	3640						
								.HI	.27	6560	47			500	
										.30					6920
										.40					7269

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order 30000.01.TR.XX.XX.XX.X.XX.XX

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



Select finishes




.WH-WH




ESPIGA SIRIO TWINS

REF 30000.TR




Altura interna- Internal height







PHOTOMETRY



OPAL

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH				
	10080	.01	●	GU5.3	■	GU5.3	.9	-	526	8	-	.DA .PU .D1					
				GU10	.GU	GU10											
				LED	.OP	.ST									BPM50		
						.HI										BPM300	
						.30											570
						.27											711
.27	707																
.30	927																
.40	635																

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10080	.02	●	LED	.OP	.ST	.9	-	.27	1043	16	500	.DA .PU .D1	
									.30	1100				
									.40	1230				

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10080	.03	●	LED	.OP	.ST	.9	-	.27	1647	25	600	.DA .PU .D1	
									.30	1700				
									.40	2040				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

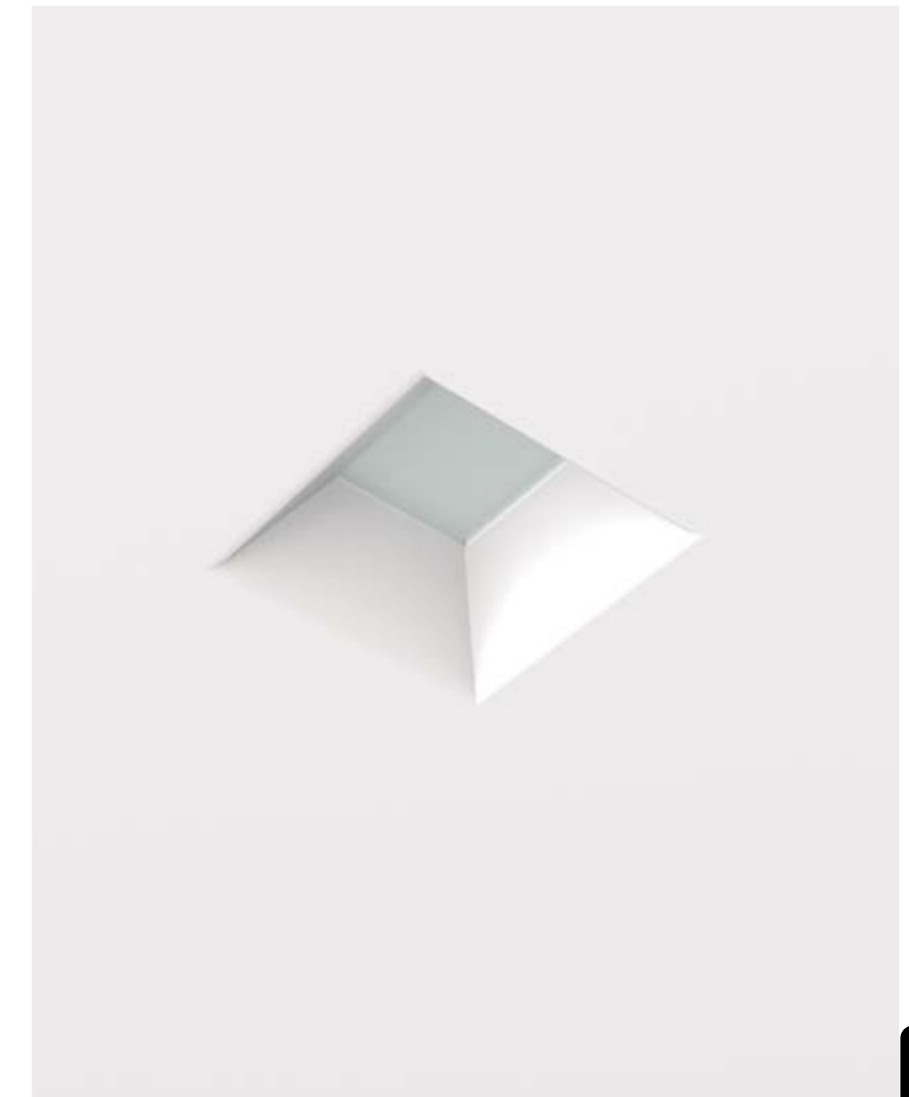

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10080.XX.TR.XX.XX.XX.XX.XX

Select finishes




.WH-WH




ESPIGA ORIONIS

REF 10080.TR

Altura interna- Internal height



PHOTOMETRY



OPAL

ESPIGA ORIONIS TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	30001	.01	●	LED	.OP	.ST .HI	.9	.27	-	20	500	.DA .PU .D1	
								.30	3040				
								.40	3180				
								.27	-	41	500		
								.30	6060				
								.40	6360				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30001.01.TR.XX.XX.XX.X.XX.XX

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH




ESPIGA ORIONIS TWINS

REF 30001.TR

Altura interna- Internal height



PHOTOMETRY



OPAL

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

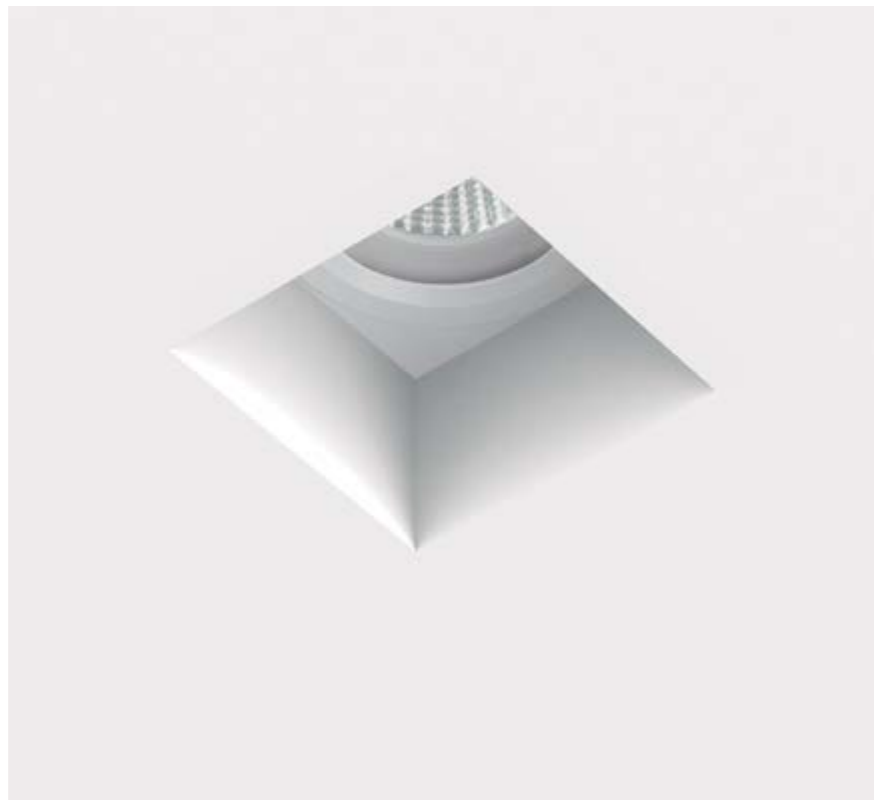

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH										
	30002	.01	.WH-WH	GU5.3	.GU	GU5.3	9	.27 .30 .40 .27 .30 .40	526 570 711 707 927 635	8	350 500	.DA .PU .D1											
				GU10		GU10								8									
				LED	.40 .60	.ST BPMSO				8				10	500	.DA .PU .D1							
																		.HI BPMSO	10	500			
																					.DA .PU .D1	10	500

ZENIT	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH										
	10123	.01	.WH-WH	GU5.3	.GU	GU5.3	9	.27 .30 .40 .27 .30 .40	526 570 711 707 927 635	8	350 500	.DA .PU .D1											
				GU10		GU10								8									
				LED	.40 .60	.ST BPMSO				8				10	500	.DA .PU .D1							
																		.HI BPMSO	10	500			
																					.DA .PU .D1	10	500

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order 30002.XX.TR.XX.XX.XX.X.XX.XX

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order 10123.XX.TR.XX.XX.XX.X.XX.XX



ZENIT
SQ

REF 30002.TR





ZENIT

REF 10123.TR



PHOTOMETRY

Altura interna- Internal height

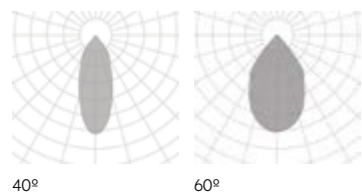

PHOTOMETRY

Altura interna- Internal height

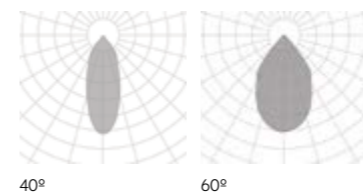

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT DEEP	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH									
	30004	.01	.WH-WH	GU5.3	.40	GU5.3	9	.27 .30 .40 .27 .30 .40	526 570 711 707 927 635	8	350 500	.DA .PU .D1										
				GU10		GU10																
				LED	.60	.ST BPM50				.9				8	10	500	.DA .PU .D1					
																		.HI BPM300	16	350		
																					20	500

ZENIT DEEP TWINS	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH									
	30005	.01	.WH-WH	GU5.3	.40	GU5.3	9	.27 .30 .40 .27 .30 .40	1052 1140 1422 1414 1854 1270	8	350 500	.DA .PU .D1										
				GU10		GU10																
				LED	.60	.ST BPM50				.9				16	20	500	.DA .PU .D1					
																		.HI BPM300	16	350		
																					20	500

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order 30004.XX.TR.XX.XX.XX.XX.XX.XX

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order 30005.XX.TR.XX.XX.XX.XX.XX.XX



ZENIT DEEP

REF 30004.TR





ZENIT DEEP TWINS

REF 30005.TR


PHOTOMETRY

Altura interna- Internal height

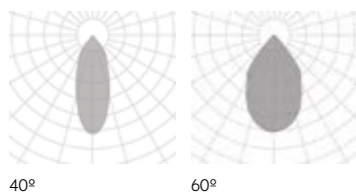

PHOTOMETRY

Altura interna- Internal height

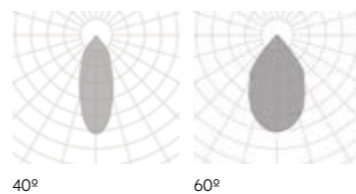

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT MOVE	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10125	.01	.WH-WH	GU5.3	.40	GUS.3	.9	.27	526	8	350	.DA .PU .D1	
				GU10		GU10							
				LED	.60	.ST BPMSO	.30	570	8	350	.DA .PU .D1		
						711							

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10125.XX.TR.XX.XX.XX.X.XX.XX

ZENIT MOVE SQ	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	30003	.01	.WH-WH	GU5.3	.40	GUS.3	.9	.27	526	8	350	.DA .PU .D1	
				GU10		GU10							
				LED	.60	.ST BPMSO	.30	570	8	350	.DA .PU .D1		
						711							

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

30003.XX.TR.XX.XX.XX.X.XX.XX



ZENIT MOVE

REF 10125.TR




ZENIT MOVE SQ

REF 30003.TR



PHOTOMETRY

Altura interna- Internal height

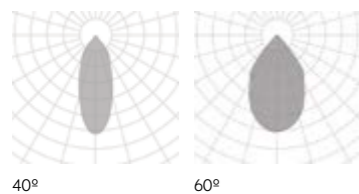

PHOTOMETRY

Altura interna- Internal height

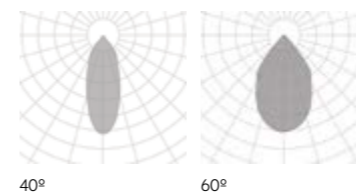

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ZENIT ORTO	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10126	.01	.WH-WH	GU5.3	40°	GU5.3	9	-	-	8	-	-	
				GU10		GU10							
				LED	.40 .60	.9	.ST BPMS0	.27 .30 .40 .27 .30 .40	526 570 711 707 927 635	8 8 10	350 500	.DA .PU .D1	

ZENIT SIDEREA	REF.	DIMEN-SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10050	.01	.WH-WH	GU5.3	40°	GU5.3	9	-	-	8	-	-	
				GU10		GU10							
				LED	.40 .60	.9	.ST BPMS0	.27 .30 .40 .27 .30 .40	526 570 711 707 927 635	8 8 10	350 500	.DA .PU .D1	

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit


Reference order | 10126.XX.TR.XX.XX.XX.X.XX.XX

7 - 22 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10050.XX.TR.XX.XX.XX.X.XX.XX

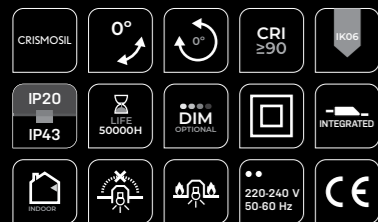

ZENIT ORTO

REF 10126.TR





ZENIT SIDEREA

REF 10050.TR



PHOTOMETRY

Altura interna- Internal height

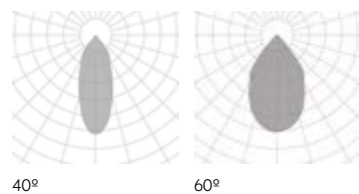

PHOTOMETRY

Altura interna- Internal height

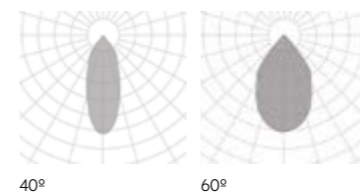

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

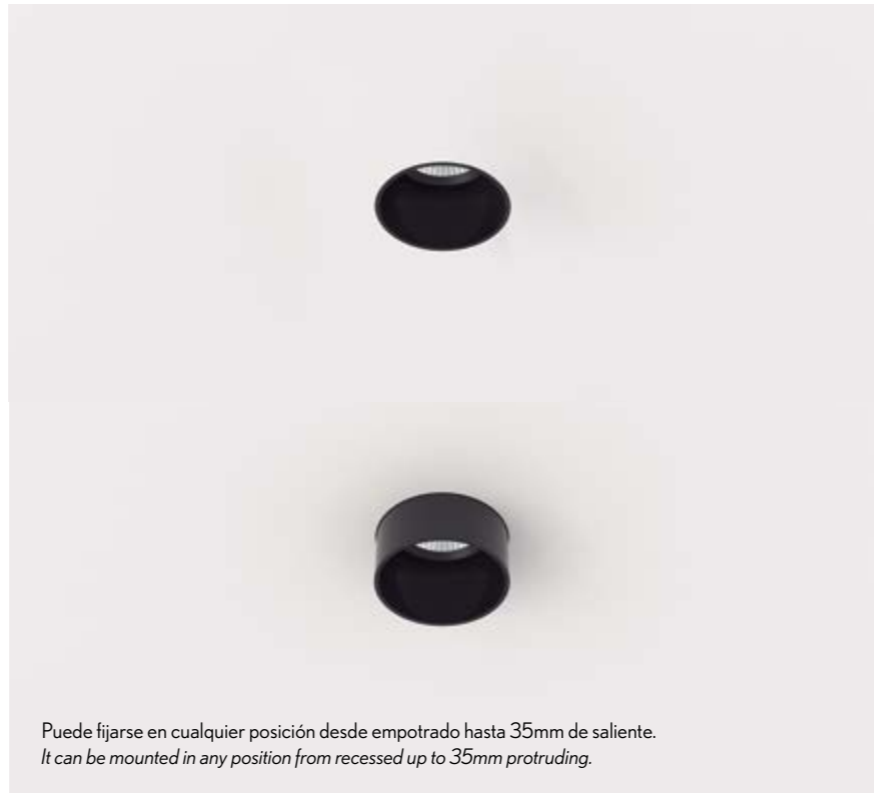

Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

ZENIT ZUBIA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10122	.01	.WH-.WH .WH-.BK	GU5.3		GU5.3				8			145x145 mm LED98 GU18
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27 .30 .40	526	8	350	.DA .PU .D1	140x140 Ø56
									570				
									711				
									707				
									927				
				635									
						.HI BPM350							

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10122.01.TR.XX.XX.XX.X.XX.XX

ZENIT ZUBIASQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10121	.01	.WH-.WH .WH-.BK	GU5.3		GU5.3				8			145x145 mm LED98 GU18
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27 .30 .40	526	8	350	.DA .PU .D1	56x56 140x140
									570				
									711				
									707				
									927				
				635									
						.HI BPM350							

7 - 22 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10121.01.TR.XX.XX.XX.X.XX.XX

CRISMOSIL 0° 0° CRI ≥90 IK05
IP20 IP43 LIFE 50000H DIM OPTIONAL INTEGRATED
RECESSED 220-240 V 50-60 Hz CE

ZENIT ZUBIA

REF 10122.TR



CRISMOSIL 0° 0° CRI ≥90 IK05
IP20 IP43 LIFE 50000H DIM OPTIONAL INTEGRATED
RECESSED 220-240 V 50-60 Hz CE

ZENIT ZUBIA SQ

REF 10121.TR



PHOTOMETRY

Altura interna- Internal height

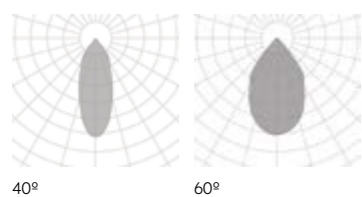

PHOTOMETRY

Altura interna- Internal height

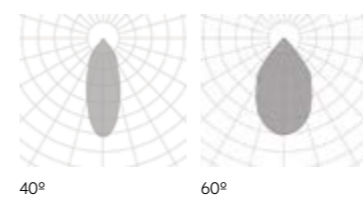

SUNSET	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10124	.01	●	GU5.3		GU5.3	.9	.27	526	8	350	.DA .PU .D1	
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50							
							.40	711					

SUNSET	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10124	.02	●	GU5.3		GU5.3	.9	.27	526	8	350	.DA .PU .D1	
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50							
							.40	711					

SUNSET	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH			
	10124	.03	●	GU5.3		GU5.3	.9	.27	2086	32	350	.DA .PU .D1				
				GU10	.GU	GU10										
				GX8.5	.CD	GX8.5								.30	2200	32
				LED	.40 .60	.ST BPM3181								.40	2460	32

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



7 - 22 mm ↑ .01 Espesor del falso techo
Ceiling thickness

10 - 20 mm ↑ .02 .03 Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10124.XX.TR.XX.XX.XX.X.XX.XX

• Select finishes




WH-WH




SUNSET

REF 10124.TR

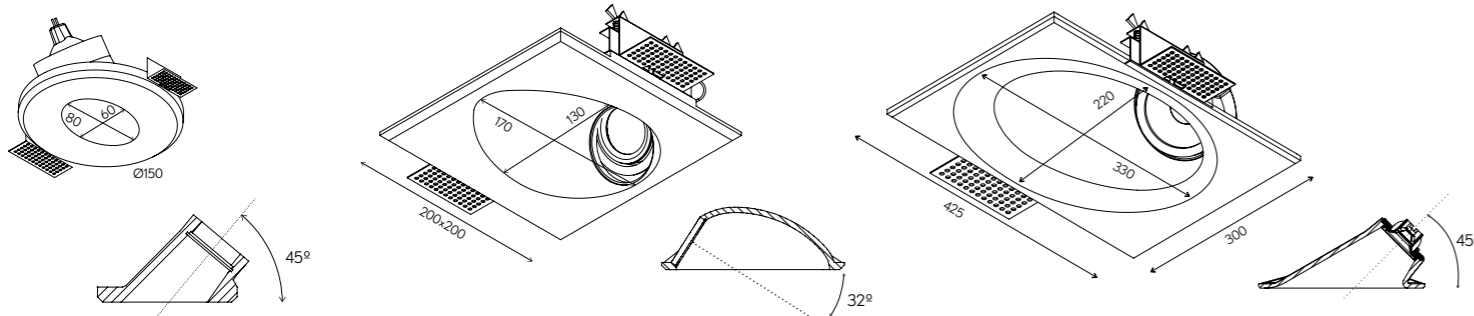

PHOTOMETRY

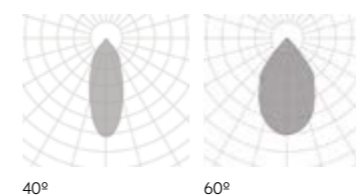

VEGA ADHARA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH					
	10016	.01	●	GU5.3		GU5.3	.9	-	526	8	-	.DA .PU .D1						
				GU10	.GU	GU10												
				LED	.40 .60	.ST								.9	.27	8	350	
						.HI									.30			570
															.27			711
.HI	.27	707																
	.30	927																
.40	635																	

VEGA ADAHARA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH			
	10016	.02	●	GU5.3		GU5.3	.9	-	1043	100	-	.DA .PU .D1				
				GU10	.GU	GU10				75						
				GX8.5	.CD	GX8.5				70						
				LED	.40 .60	.ST				.9				.27	16	350
														.30		
.40	1230															

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



10 - 20 mm * Espesor del falso techo
Ceiling thickness

13 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10016.XX.TR.XX.XX.XX.XX.XX.XX

Select finishes




.WH-WH




VEGA ADHARA

REF 10016.TR

Altura interna- Internal height



PHOTOMETRY

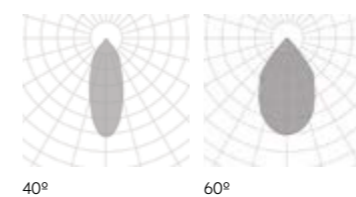

40°

60°

VEGA ADHARA TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	10066	.01	●	GU5.3		GU5.3	.9	-	1052	100	-	-							
				GU10	.GU	GU10								LED	.40 .60	LED97 GU117			
				LED	.40 .60	LED97 GU117											ST	.27	1140
																	BPM50	.40	1422
																		BPM300	.27
.40	1854																		
				.40	1270														

VEGA ADHARA TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH							
	10066	.02	●	GU5.3		GU5.3	.9	-	2086	200	-	-								
				GU10	.GU	GU10								LED	.40 .60	LED105 GU105				
				LED	.40 .60	LED105 GU105											GX8.5	.CD	GX8.5	150
																	BPM3181	.27	2200	
																			.40	2460
				.40	2460															

10 - 20 mm * Espesor del falso techo
Ceiling thickness

13 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10066.XX.TR.XX.XX.XX.XXX.XXX.XX

FINISHES

□

DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH




VEGA ADHARA TWINS

REF 10066.TR

Altura interna- Internal height



PHOTOMETRY

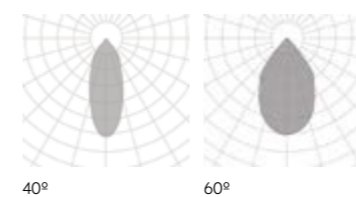

40°

60°

VEGA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH																								
	10028	.01	●	GU5.3		GU5.3	.9	-	526	8	-	.DA .PU .D1																									
				GU10	.GU	GU10								LED	.40 .60	.ST BPM50	.9	570	8	350																	
				LED	.40 .60	.ST BPM50																.9	711	8	350												
																											.HI BPM200	.9	707	10	500						
																																	.27	707	10	500	
.40	635	10	500																																		

VEGA	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH																							
	10028	.02	●	GU5.3		GU5.3	.9	-	1043	16	350	.DA .PU .D1																								
				GU10	.GU	GU10								LED	.40 .60	.ST BPM3181	.9	1100	16	350																
				LED	.40 .60	.ST BPM3181																.9	1230	16	350											
																											.27	1043	16	350						
																																.30	1100	16	350	

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



10 - 20 mm * Espesor del falso techo Ceiling thickness
13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10028.XX.TR.XX.XX.XX.XX.XX.XX

Select finishes




.WH-WH




VEGA

REF 10028.TR


PHOTOMETRY

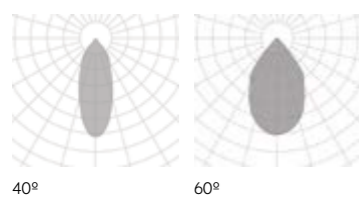


Altura interna- Internal height



PHOTOMETRY

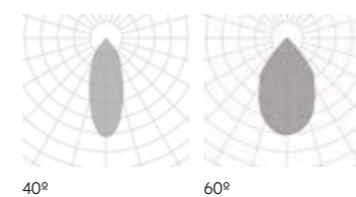

Altura interna- Internal height



VEGA TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	10070	.01	●	GU5.3		GU5.3	.9	-	1052	100	-	-							
				GU10	.GU	GU10								LED97 GU117					
				LED	.40 .60	.ST								BPM50	.27	1140	16	350	.DA .PU .D1
						.HI								BPM300	.30	1422			
															.27	1414			
.30	1854																		
.40	1270																		

VEGA TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	10070	.02	●	GU5.3		GU5.3	.9	-	2086	200	-	-							
				GU10	.GU	GU10								LED105 GU105					
				GX8.5	.CD	GX8.5								150					
				LED	.40 .60	.ST								BPM3181	.27	2200	32	350	.DA .PU .D1
															.30	2460			
.40	2460																		

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



10 - 20 mm * Espesor del falso techo
Ceiling thickness

13 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10070.XX.TR.XX.XX.XX.XXX.XXX.XX

Select finishes





WH-WH




VEGA TWINS

REF 10070.TR

Altura interna- Internal height



PHOTOMETRY

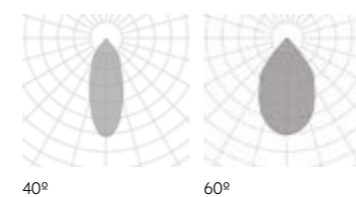

40°

60°

VEGA ZETA	REF.	DIMEN- SIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH	
	10001	.01	●	GU5.3	■	GU5.3	9	.27 .30 .40 .27 .30 .40	526	8	350	.DA .PU .D1		
				GU10	.GU	GU10			570					
				LED	.40 .60	.ST			BPM50					711
						.HI			BPM200					707
														927
														635

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10001.01.TR.XX.XX.XX.X.XX.XX

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH




VEGA ZETA

REF 10001.TR

Altura interna- Internal height

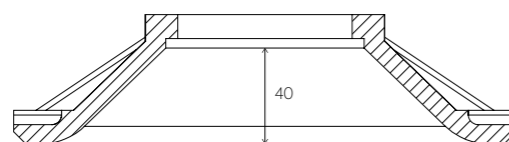

PHOTOMETRY

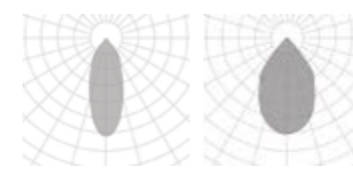

40°

60°

VEGA ZETA SQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH							
	10019	.01	●	GU5.3		GU5.3	-			8										
				GU10	.GU	GU10														
				LED	.40 .60	.ST BPM50									.9	.27	526	8	350	.DA .PU .D1
																.30	570			
																.27	711			
.30	707																			
		.HI BPM300		.40	927	10	500													
				.40	635															

VEGA ZETA SQ	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH						
	10019	.02	●	GU5.3		GU5.3	-			100									
				GU10	.GU	GU10													
				GX8.5	.CD	GX8.5									70				
				LED	.40 .60	.ST BPM3181								.9	.27	1043	16	350	.DA .PU .D1
															.30	1100			
.40	1230																		

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Reference order

10019.XX.TR.XX.XX.XXX.X.XX.XX

Select finishes



.WH-WH



VEGA ZETA SQ

REF 10019.TR

Altura interna- Internal height


10019.01



10019.02



PHOTOMETRY

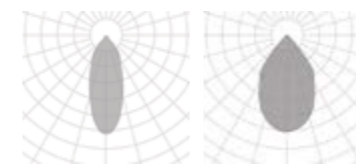

40°

60°

VEGA ZETA SQ TWINS	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10072	.02	●	GU5.3		GUS.3	-			200	-	▼	
				GU10	.GU	GU10				150			
				GX8.5	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27 .30 .40	2086 2200 2460	32	350	.DA .PU .D1	

13 mm ↑ * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10070.02.TR.XX.XX.XX.X.XX.XX

FINISHES



DIMENSIONS

.02

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



• Select finishes




.WH-WH




VEGA ZETA SQ TWINS

REF 10072.TR

Altura interna- Internal height



PHOTOMETRY

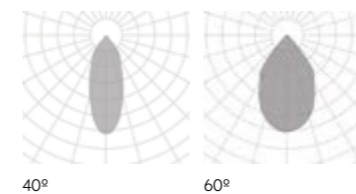

40°

60°

CENTAURO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10109	.01	●	LED	.40	.ST	.9	.30	790	7	350	.DA .PU .D1	
					.60			.40	796				

CENTAURO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10109	.02	●	LED	.40	.ST	.9	.30	1840	20	540	.DA .PU .D1	
					.60			.40	2010				

CENTAURO	REF.	DIMENSIONS	FINISHES	LAMP	BEAM ANGLE	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10109	.03	●	LED	.40	.ST	.9	.30	3200	40	750	.DA .PU .D1	
					.60			.40	3320				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



10 - 20 mm ↑ * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10109.XX.TR.XX.XX.XX.XX.XX.XX

• Select finishes




.WH-WH




CENTAURO

REF 10109.TR

Altura interna- Internal height



PHOTOMETRY

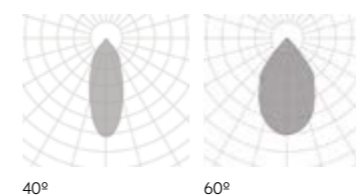

TRACK

VISUAL INDEX

PATRICIA TK



MARTORELL



KLIMT



GEO



LUK



CUBE



ORACLE



ALBA





One design, endless solutions

With flair and imagination, some products offer boundless possibilities. One of these is Patricia, the epitome of versatility.

Simple designs that enhance every project and adapt to every need. What's the secret? The accessories - Honey comb, cross ring, barndoors, spot lenses, halves, extenders and ovals - designed to bring light into the dark, to create elliptical shapes, spotlight effects, to draw the eye to a specific place, and much more.

Un diseño, múltiples soluciones

Hay productos que, con la destreza necesaria, permiten amplias posibilidades de aplicación. Y hay productos como Patricia, que son en sí mismos la máxima expresión de versatilidad.

Modelos de estética sencilla pero diseñados para evolucionar y adaptarse a cada exigencia. ¿Cómo conseguirlo? Gracias a sus accesorios - Honey comb, cross Ring, aletas, lentes concentradas, medias, extensivas y ovals - pensados para dar solución a situaciones de deslumbramiento, conseguir formas de luz elípticas, focales, direccionar el interés sobre un punto...Y un largo etcétera.

PATRICIA TK

TRACK



FINISHES

COLOR



DIMENSIONS

DIAMETERS

.01 | .02 | .03 | .04

LIGHTING OPTIONS

BEAM ANGLE

15° | 24° | 36° | 45°
50° | 55°

POWER

STANDARD | HIGH (ONLY .03)

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White




new

UGR
<19

.TK

TRACKLIGHT

INSTALLATIONS

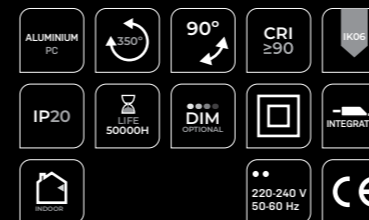


PATRICIA TK

REF 30514.TK



.TK
TRACKLIGHT

30514 PATRICIA TK | TK
Pag. 738



PATRICIA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM **	SKETCH
	30514	.01	●	LED	.24 .36 .45 .55	.ST	.9	.27 .30 .40	713 752 919	10	250	.DA	
	30514	.02	●	LED	.24 .36 .45 .55	.ST	.9	.27 .30 .40	1110 1200 1250	15	350	.DA	
	30514	.03	●	LED	.15 .24 .36 .50	.ST .HI	.9	.27 .30 .40	1853 1912 1976 2221 2399 2470	25 32	600 750	.DA	
	30514	.04	●	LED	.15 .24 .36 .50	.ST	.9	.27 .30 .40	3135 3584 3910	42	1050	.DA	

Reference order 30514.XX.TK.XX.XX.XX9.XX.XX

ACCESORIES



BARN DOOR	DIMENSIONS				FINISHES	
ACC30514					.WH	.BK
	.01	Ø45x130	.02	Ø55	.03	Ø69
			.04	Ø82		

ACC30514.XX.BD.XX



CROSS RING	DIMENSIONS				FINISHES	
ACC30514					.WH	.BK
	.01	Ø45x130	.02	Ø55	.03	Ø69
			.04	Ø82		

ACC30514.XX.CR.XX




HONEY COMB	DIMENSIONS				FINISHES	
ACC30514					.BK	.BK
	.01	Ø45x130	.02	Ø55	.03	Ø69
			.04	Ø82		

ACC30514.XX.HC.XX

*Dimmable .DA requires DALI adapter ACC6685 and luminaire is Class I / Regulación .DA requiere adaptador DALI ACC6685 y la luminaria es Clase I


● Select finishes



PATRICIA TK

REF 30514.TK

PHOTOMETRY

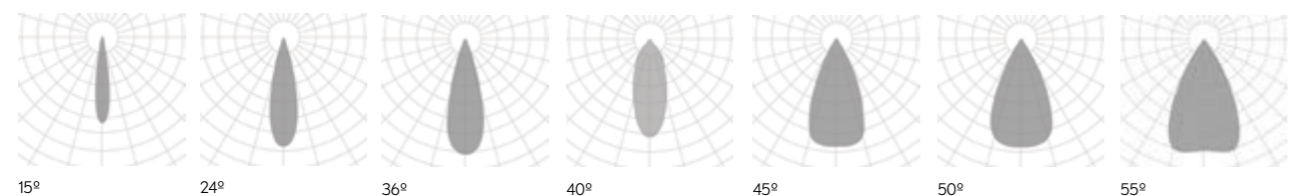

15° 24° 36° 40° 45° 50° 55°




OVAL FLOOD LENS^{*2}

ACC30514.XX.XXXX

OV.03X60	OV.60X10																		
OV.10X40	OV.15X60																		
<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.OV.03X60</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.OV.03X60	.02	.03	.04	<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.OV.60X10</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.OV.60X10	.02	.03	.04
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.OV.03X60																	
	.02																		
	.03																		
	.04																		
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.OV.60X10																	
	.02																		
	.03																		
	.04																		

OV.10X40	OV.15X60																		
<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.OV.10X40</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.OV.10X40	.02	.03	.04	<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.OV.15X60</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.OV.15X60	.02	.03	.04
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.OV.10X40																	
	.02																		
	.03																		
	.04																		
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.OV.15X60																	
	.02																		
	.03																		
	.04																		




ZOOM SPOT LENS^{*2}

ACC30514.XX.XXXX

.ZSX1.3	.ZSX1.5																		
<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.ZSX1.3</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.ZSX1.3	.02	.03	.04	<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.ZSX1.5</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.ZSX1.5	.02	.03	.04
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.ZSX1.3																	
	.02																		
	.03																		
	.04																		
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.ZSX1.5																	
	.02																		
	.03																		
	.04																		

.ZSX2	.ZSX3																		
<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.ZSX2</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.ZSX2	.02	.03	.04	<table border="1"> <thead> <tr> <th>OVAL FLOOD LENS</th> <th>DIMENSIONS</th> <th>LENS EFFECT</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ACC30514</td> <td>.01</td> <td rowspan="4">.ZSX3</td> </tr> <tr> <td>.02</td> </tr> <tr> <td>.03</td> </tr> <tr> <td>.04</td> </tr> </tbody> </table>	OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT	ACC30514	.01	.ZSX3	.02	.03	.04
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.ZSX2																	
	.02																		
	.03																		
	.04																		
OVAL FLOOD LENS	DIMENSIONS	LENS EFFECT																	
ACC30514	.01	.ZSX3																	
	.02																		
	.03																		
	.04																		

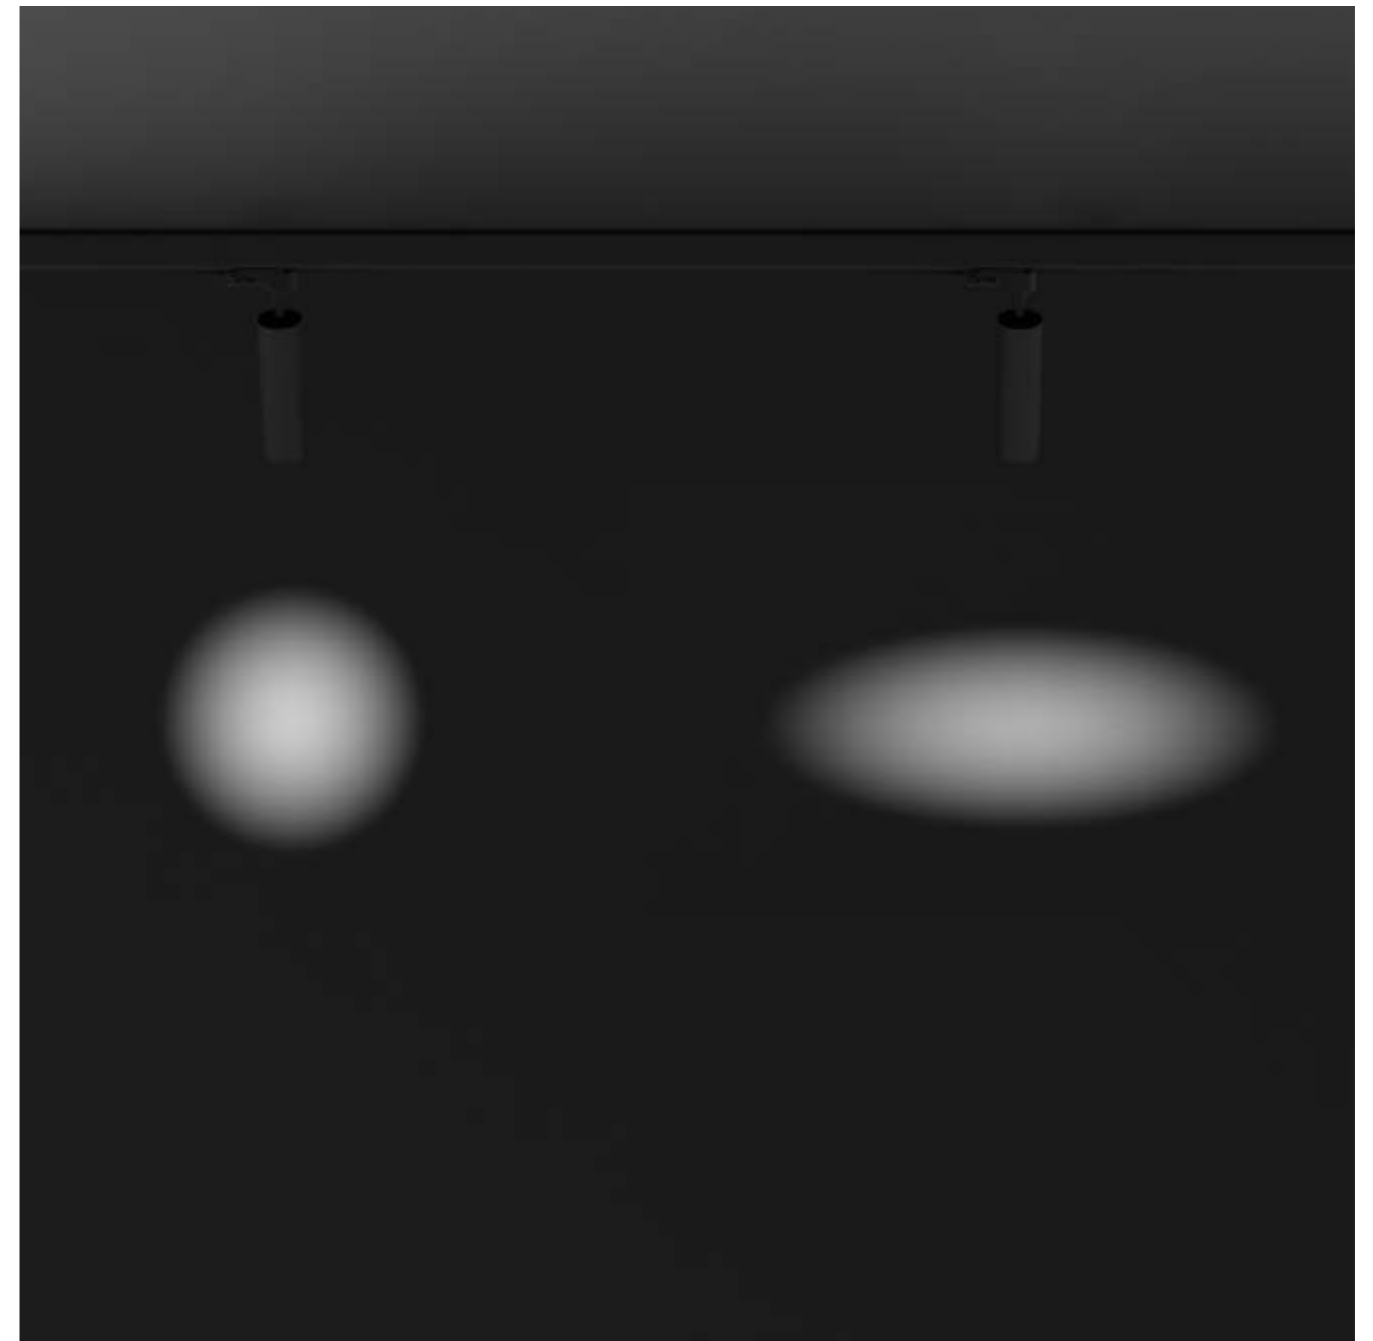



TRACKLIGHT
TK

- ALUMINIUM PC
- 350°
- 90°
- CRI ≥90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

PATRICIA TK

REF 30514.TK

^{*2}For best performance, optic lenses are only recommended with the smallest option (.24 for models 01 & 02 and .15 for 03 and 04). Para garantizar un resultado óptimo, las lentes solo se recomiendan para la óptica de menor tamaño (.24 para los modelos 01 & 02 y .15 para 03 y 04).

MARTORELL	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20115	.03	●	LED	.24 .32	.ST	.9	.27 .30 .40	1071 1156 1198	12	350	.DA .PU .D1	

Reference order | 20115.XX.TK.XX.XX.ST.9.XX.XX

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.03

LIGHTING OPTIONS

BEAM ANGLE

24° | 32°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10

LIGHT DISTRIBUTION


DOWN

ON DEMAND

Dim to Warm
Tunable White
Honey Comb
Wireless Control Options
Special RAL Color



Select finishes

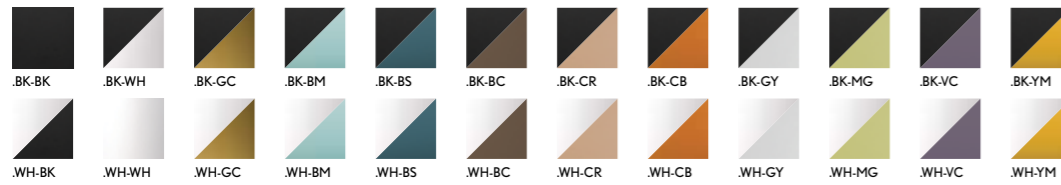

INSTALLATIONS

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE


·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME


·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676

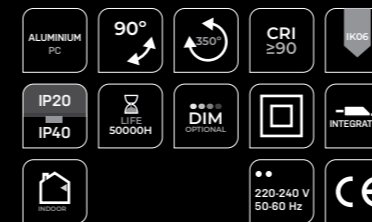

PHOTOMETRY

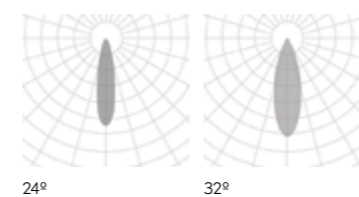



MARTORELL

REF 20115.TK



TRACKLIGHT

.TK

MARTORELL CRATE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20138	.01 Ø60 x 230	●	LED	.19 .24 .36	.ST	.9	.27 .30 .40	796 828 929	10	500	*.DA **.D1	

Reference order | 20138.XX.TK.XX.XX.ST9.XX.XX

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

19° | 24° | 36°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



* Dimmable .DA requires DALI adapter ACC6685 / Regulación .DA requiere adaptador DALI ACC6685

** Dimmable .D1 requires driver box / Regulación .D1 requiere caja para alojar el driver

Select finishes




INSTALLATIONS

.SR
SURFACE


·20138 MARTORELL TUBE MOVE | SR
Pag. 326

.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 746

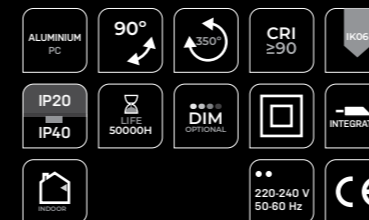

PHOTOMETRY

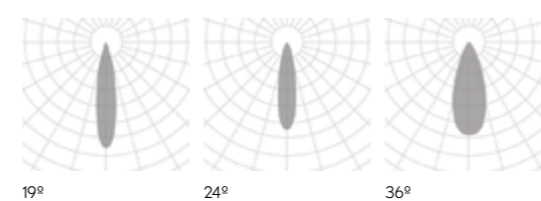


MARTORELL TUBE MOVE

REF 20138.TK




KLIMT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20134	.01 Ø75 x 139	●	LED	.15 .24 .38	.ST	.9	.27	395	8	700	.DA .D1	
								.30	497				
								.40	659				
	20134	.02 Ø100 x 144	●	LED	.15 .25 .38 .60	.ST	.9	.27	803	11	500	.DA .D1	
								.30	983				
								.40	991				
	20134	.03 Ø125 x 196	●	LED	.15 .28 .40 .60	.ST	.9	.27	1945	30	500	.DA .D1	
								.30	2073				
								.40	2311				

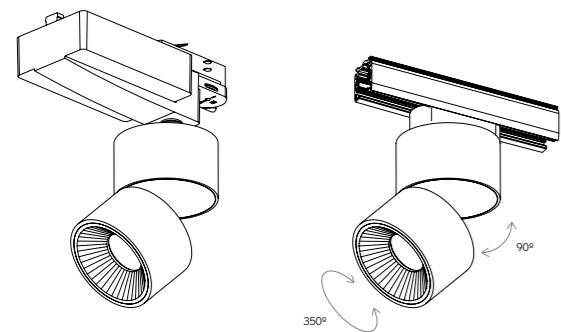

Reference order | 20134.XX.TK.XX.XX.ST.9.XX.XX

PHOTOMETRY

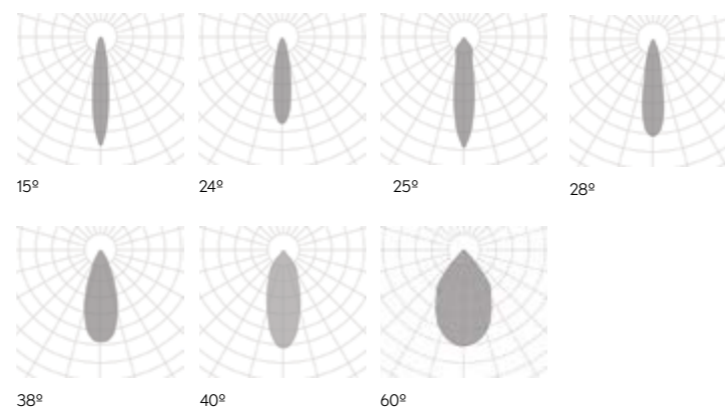

● Select external - internal finishes



* Dimmable .DA requires DALI adapter ACC6685
Regulación .DA requiere adaptador DALI ACC6685

** Dimmable .D1 requires driver box / Regulación .D1 requiere caja para alojar el driver

FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15° 24° 38° | 15° 25° 38° 60° | 15° 28° 40° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS
INSTALACIONES

KLIMT

REF 20134.TK

.SR
SURFACE


·20134 KLIMT | SR
Pag. 338

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748





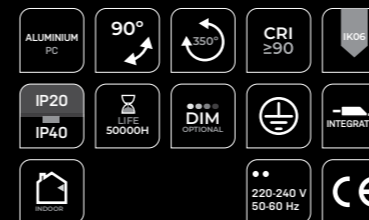

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 508




TRACKLIGHT

.TK

GEO	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	30511	.01	●	LED	.15 .24 .38	.ST	.9	.27 .30 .40	498 513 622	8	700	.DA .D1	
	30511	.02	●	LED	.15 .24 .38 .60	.ST	.9	.27 .30 .40	1075 1114 1319	14	350	.DA .D1	
	30511	.03	●	LED	.15 .24 .40 .60	.ST	.9	.27 .30 .40	1856 1963 2529	30	700	.DA .D1	

Reference order REF.30511.TK.XX.XX.XX.ST9.XX.XX

PHOTOMETRY

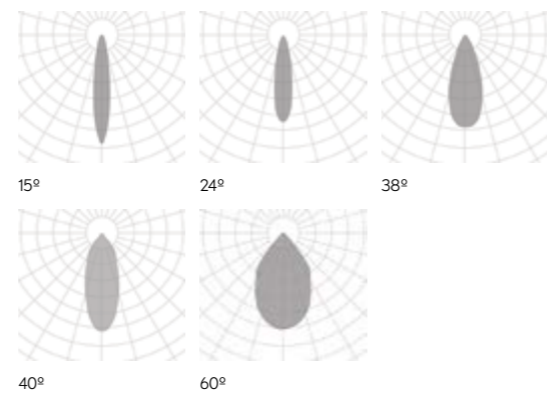

● Select external - internal finishes



* Dimmable .DA requires DALI adapter ACC6685
Regulación .DA requiere adaptador DALI ACC6685

** Dimmable .D1 requires driver box / Regulación .D1 requiere caja para alojar el driver

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

15° 24° 38° | 15° 24° 38° 60° | 15° 24° 40° 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS

.SR
SURFACE

.30511GEO|SR
Pag. 342

.TK
TRACKLIGHT

.30511GEO|TK
Pag. 750

.RF
RECESSED FRAME



.30511GEO|RF
Pag. 512



GEO

REF 30511.TK



LUK CRUSADER	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	26	700	.DA .D1	
.30								2138					
.40								2228					

Reference order | REF.20082.TK.XX.XX.XX.ST9.XX.XX

FINISHES

COLOR



DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10

LIGHT DISTRIBUTION



DOWN

ON DEMAND

Dim to Warm
Tunable White



Select finishes




INSTALLATIONS

.SR
SURFACE

·20082 LUK CRUSADER | SR
Pag. 346

.TK
TRACKLIGHT


·20082 LUK CRUSADER | TK
Pag. 752

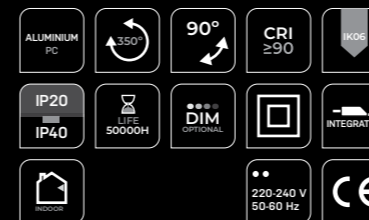

LUK CRUSADER

REF 20082.TK

PHOTOMETRY

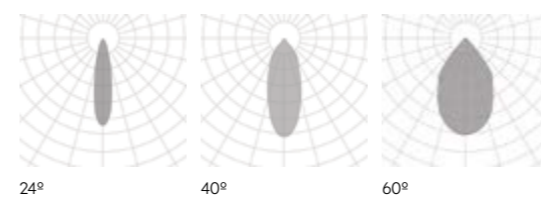

TRACKLIGHT

.TK



LUK HAWKEYE	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1689	27	700	.DA .D1	
								.30	2007				
								.40	2217				

Reference order REF.20083.TK.XX.XX.XX.ST9.XX.XX

LUK HAWKEYE 2	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	4325	51	700	.DA .D1	
								.30	4565				
								.40	4706				

Reference order REF.20084.TK.XX.XX.XX.ST9.XX.XX

Select finishes

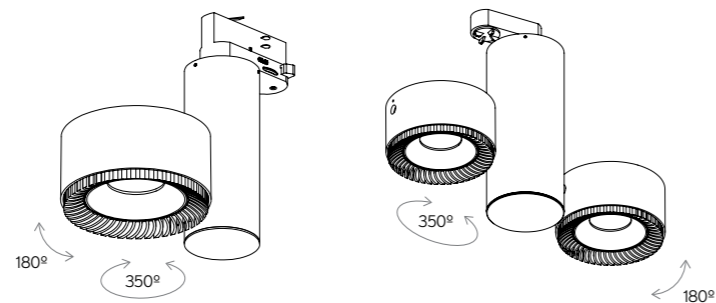

FINISHES

COLOR



DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10

LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



TRACKLIGHT

INSTALLATIONS




.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2|SR
Pag. 348



.TK
TRACKLIGHT


·20083 HAWKEYE ·20084 HAWKEYE 2|TK
Pag. 754

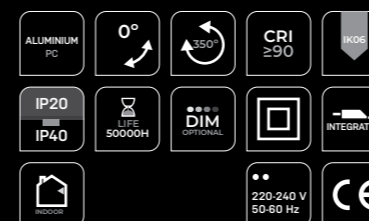

LUK HAWKEYE | HAWKEYE 2

REF 20083.TK | 20084.TK



PHOTOMETRY

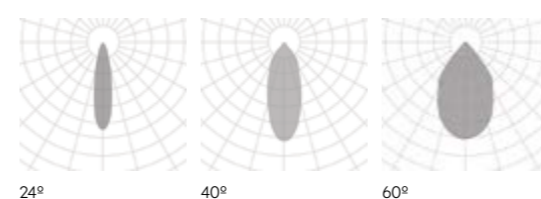

CUBE TUBE	REF.	DIMENSIONS ▲	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM* ▼	SKETCH
	9050	.01 185 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.02 250 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.03 350 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.04 450 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	

Reference order | REF9050.TK.XX.XX.XX.ST9.XX.XX

● Select finishes

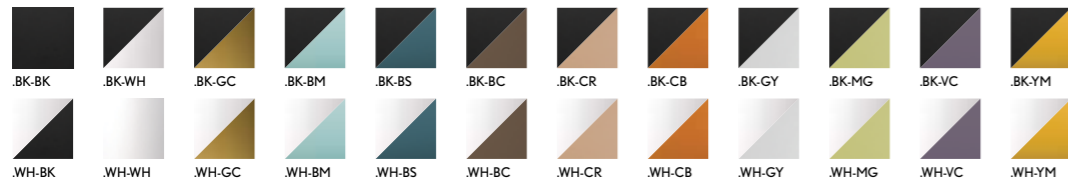

● FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White




INSTALLATIONS

 .PN PENDANT ·9050 9052 CUBE TUBE PN Pag. 350	 .TK TRACKLIGHT ·9050 CUBE TUBE TK Pag. 756	 .SR SURFACE ·9050 9052 CUBE TUBE SR Pag. 350
--	--	--

ALUMINIUM PC	0°	0°	CRI ≥90	IK05
IP20 IP40	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
INDOOR	220-240 V 50-60 Hz	CE		



PHOTOMETRY

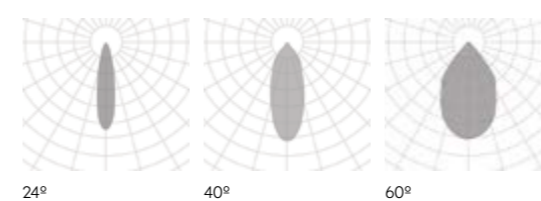

CUBE
TUBE

REF 9050.TK



ORACLE	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*	SKETCH
	20087	.01	●	LED	.20 .40 .60	.ST	.9	.27 .30 .40	1079 1216 1273	14	500	.DA .PU .D1	

Reference order REF.20087.TK.XX.XX.XX.ST9.XX.XX

FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

View in family specifications

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION


DOWN

ON DEMAND

Dim to Warm
Tunable White



Select finishes



INSTALLATIONS


		
.PN PENDANT	.TK TRACKLIGHT	.SR SURFACE
·20087 ORACLE PN Pag. 358	·20087 ORACLE TK Pag. 758	·20087 ORACLE SR Pag. 358

ALUMINIUM PC	180°	350°	CRI ≥90	IK05
IP20 IP40	LIFE 50000H	DIM OPTIONAL	INTEGRATED	
INDOOR	220-240 V 50-60 Hz	CE		

ORACLE


REF 20087.TK

PHOTOMETRY

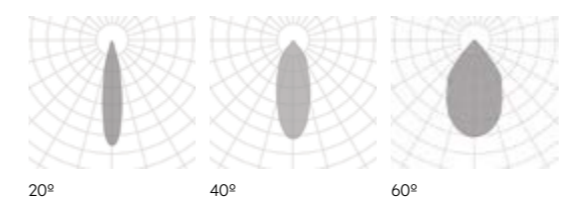

TRACKLIGHT

new

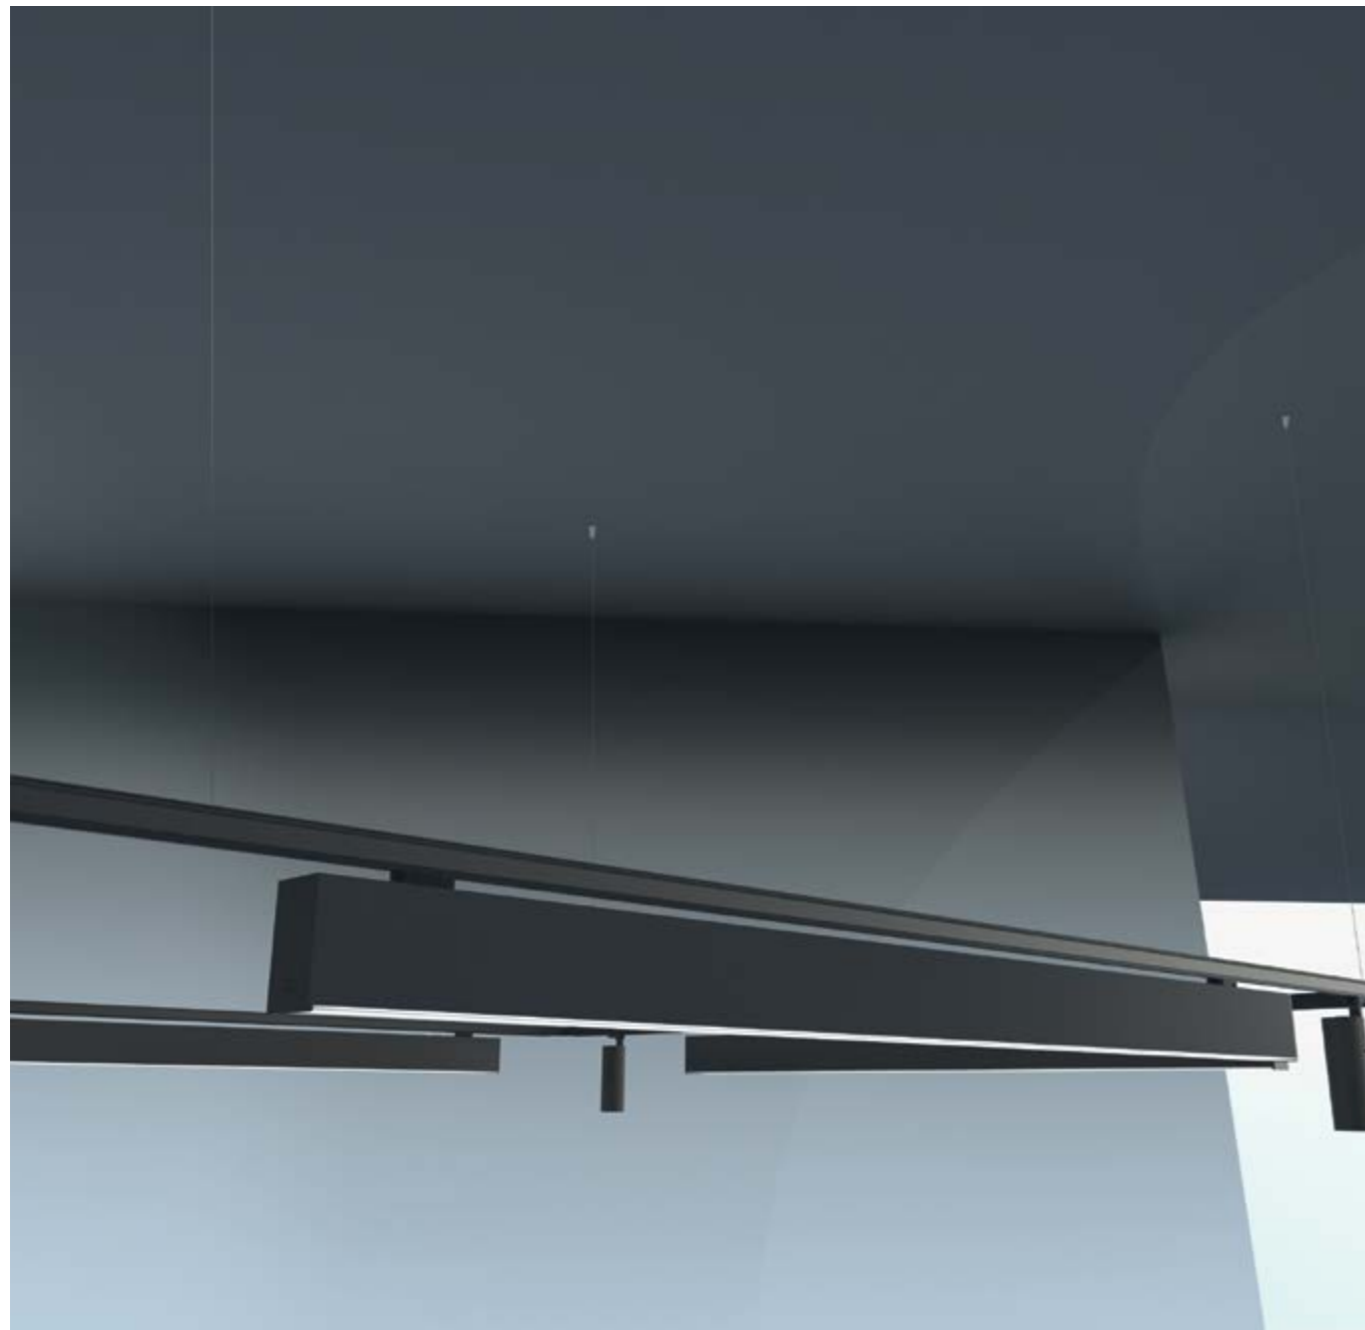

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 |

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

TRACKLIGHT
TK

INSTALLATIONS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444


.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



ALBA

REF 10160.TK

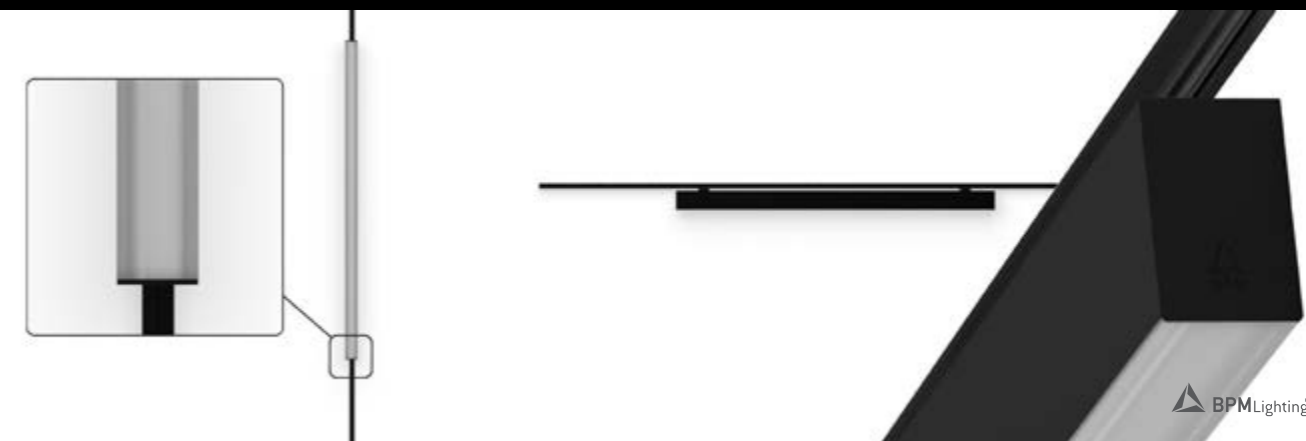

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
10160	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .D1
	.04	1144					3060	3180	3300	7600-7880	24	51	
	.05	1425					3825	3975	4125	9500-9850	30	64	
	.06	1706					4590	4770	4950	11400-11820	35	76	
	.07	1987					5355	5565	5775	13300-13790	41	89	
	.08	2268					6120	6360	6600	15200-15760	47	102	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10160	.03	863	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1144					6120	6356	6608	47	
	.05	1425					7650	7945	8260	59	
	.06	1706					9180	9534	9912	71	
	.07	1987					10710	11123	11564	83	
	.08	2268					12240	12712	13216	94	

Reference order | 10160.XX.TK.XX.XX.XX.X.XX.XX.XX


COMPONENTS

COVER KIT	REF.	FINISH
	TF02	●

Reference order | TF02.TK.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

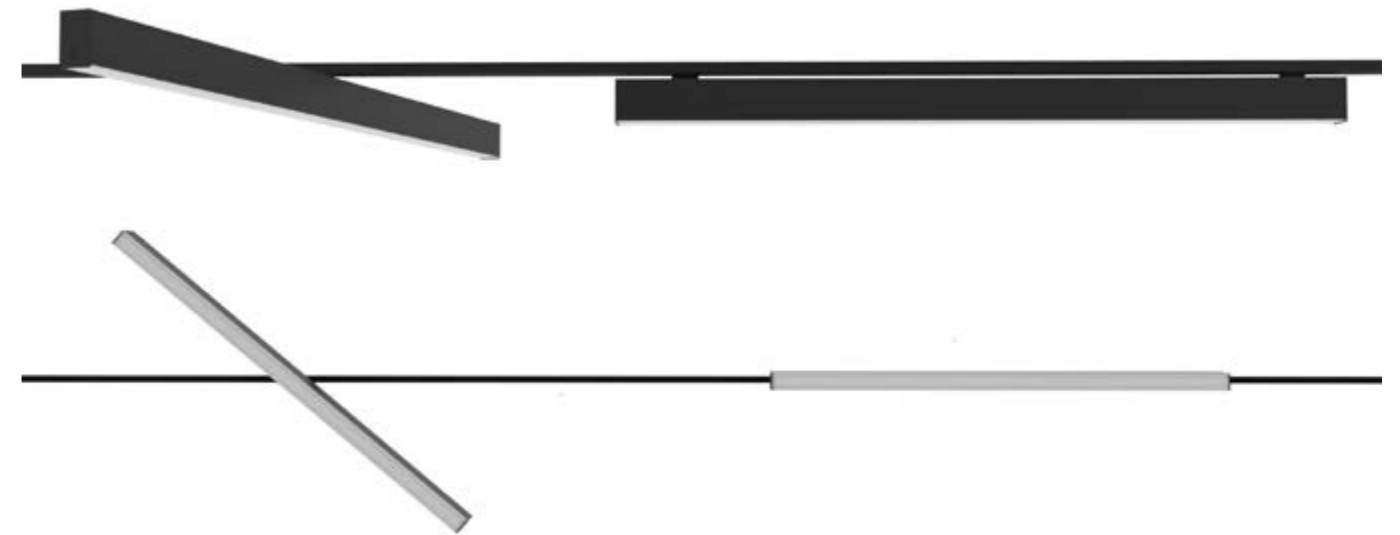

TRACKLIGHT

Select finishes




- ALUMINIUM PC
- 0°
- 0°
- CRI ≥ 90
- IK05
- IP20 / IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOR
- 220-240 V 50-60 Hz
- CE

ALBA

REF 10160.TK

PHOTOMETRY

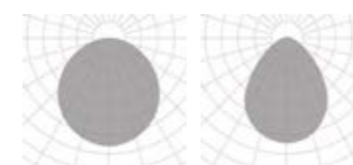


OPAL MICROPRISMATIC

INCLUDED



ACC.ADP

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

new



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

863 | 1144 | 1425 | 1706 | 1987 | 2268

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 |

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

TRACKLIGHT
TK

INSTALLATIONS

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452


.TR
TRIMLESS





·10178 ALBA PLUS|TR
Pag. 652



ALBA PLUS


REF 10178.TK

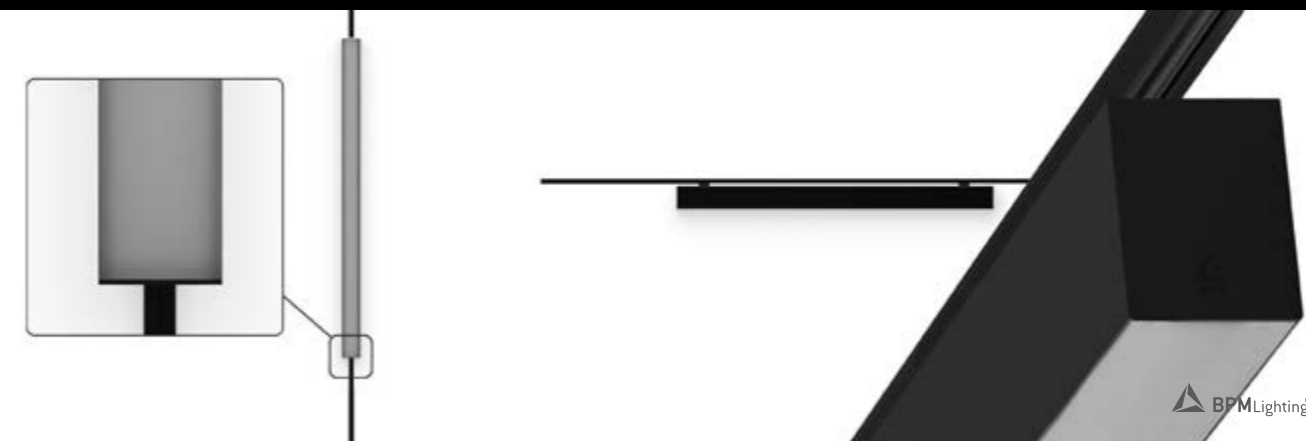


3-CIRCUIT TRACK	REF	DIMENSIONS	INST.	FINISH	DIMM.	SKETCH
	ACC6684	.01 1000	.RF	.BK-BK .GY-GY .WH-WH	.DA	
		.02 2000	.SR*			

* Add pendant mounting to track profile ACC6684.01.SR & ACC6684.02.SR with accessories ACC6666 + ACC6665.
 Añadir instalación colgante al perfil track ACC6684.01.SR & ACC6684.02.SR con los accesorios ACC6666 + ACC6665.


Reference order | ACC6684.XX.XX.XX.XX

L-CORNER ADJUSTABLE	REF	FINISH	DIMM.
	ACC6660	.BK-BK .GY-GY .WH-WH	.DA


Reference order | ACC6660.XX.XX

L-CORNER	REF	FINISH	DIMM.
	ACC6659	.BK-BK .GY-GY .WH-WH	.DA


Reference order | ACC6659.XX.XX

T-ANGLE	REF	FINISH	DIMM.
	ACC6661	.BK-BK .GY-GY .WH-WH	.DA


Reference order | ACC6661.XX.XX

X-ANGLE	REF	FINISH	DIMM.
	ACC6662	.BK-BK .GY-GY .WH-WH	.DA


Reference order | ACC6662.XX.XX

MIDDLE FEED	REF	FINISH	DIMM.
	ACC6681	.BK-BK .GY-GY .WH-WH	.DA


Reference order | ACC6681.XX.XX

MIDDLE FEED	REF	FINISH	DIMM.
	ACC6682	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6682.XX.XX

POWER SUPPLY	REF	FINISH	DIMM.
	ACC6656	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6656.XX.XX

DALI ADAPTER	REF	FINISH
	ACC6685	.BK-BK .GY-GY .WH-WH

Reference order | ACC6685.XX

CONNECTOR COVER L	REF	FINISH
	ACC6687	.BK-BK .GY-GY .WH-WH

Reference order | ACC6687.XX

CONNECTOR COVER T	REF	FINISH
	ACC6686	.BK-BK .GY-GY .WH-WH

Reference order | ACC6686.XX

CONNECTOR COVER X	REF	FINISH
	ACC6664	.BK-BK .GY-GY .WH-WH


Reference order | ACC6664.XX

TRACK COVER STRIP 3M	REF	FINISH
	ACC6688	.BK-BK .WH-WH


Reference order | ACC6688.XX

BRACKET FOR PENDANT INST.	REF	FINISH
	ACC6665	.BK-BK .GY-GY .WH-WH


Reference order | ACC6665.XX

SUSPENSION KIT 5M	REF	FINISH
	ACC6666	.BK-BK .GY-GY .WH-WH


Reference order | ACC6666.XX

END CAP SR	REF	FINISH
	ACC6663	.BK-BK .GY-GY .WH-WH

Reference order | ACC6663.SR.XX




END CAP RF	REF	FINISH
	ACC6689	.BK-BK .GY-GY .WH-WH

Reference order | ACC6689.RF.XX

TOOL FOR ADAPTER WIRING	REF
	ACC6690

Reference order | ACC6690.XX

TK ACCESORIES

THREADED ROD M6	TUBE FOR ROD	NUT M6
		
ACC6667	ACC6669	EXTENSION NUT M6 ACC6668 NUT THREADED ROD M6 ACC6670

TK TRACKLIGHT

WALL SURFACE

VISUAL INDEX

WALLLIGHTS



HURY
10251 PAG. 772



GLIM
410004 PAG. 774



KUU
410014 PAG. 776



KAPI
9000 PAG. 778



IKI
9011 PAG. 780



OKUMA
8105 PAG. 782



ELENA
8106 PAG. 784

ALBA



ALBA
10160 PAG. 786



ALBA DOUBLE
10215 PAG. 790



ALBA ASIMETRIC
210009 PAG. 794

ACOUSTIC



ACOUSTIC ALZIRA
230002 PAG. 798



ACOUSTIC ACCESSORIES
AC.FL PAG. 802

WALL



WALL METIS
10098 PAG. 806



WALL ELARA
10097 PAG. 808



WALL TEBE
10096 PAG. 810




WALL LEDA
10051 PAG. 812



WALL ARCE
10055 PAG. 814



WALL CARPO
10059 PAG. 816

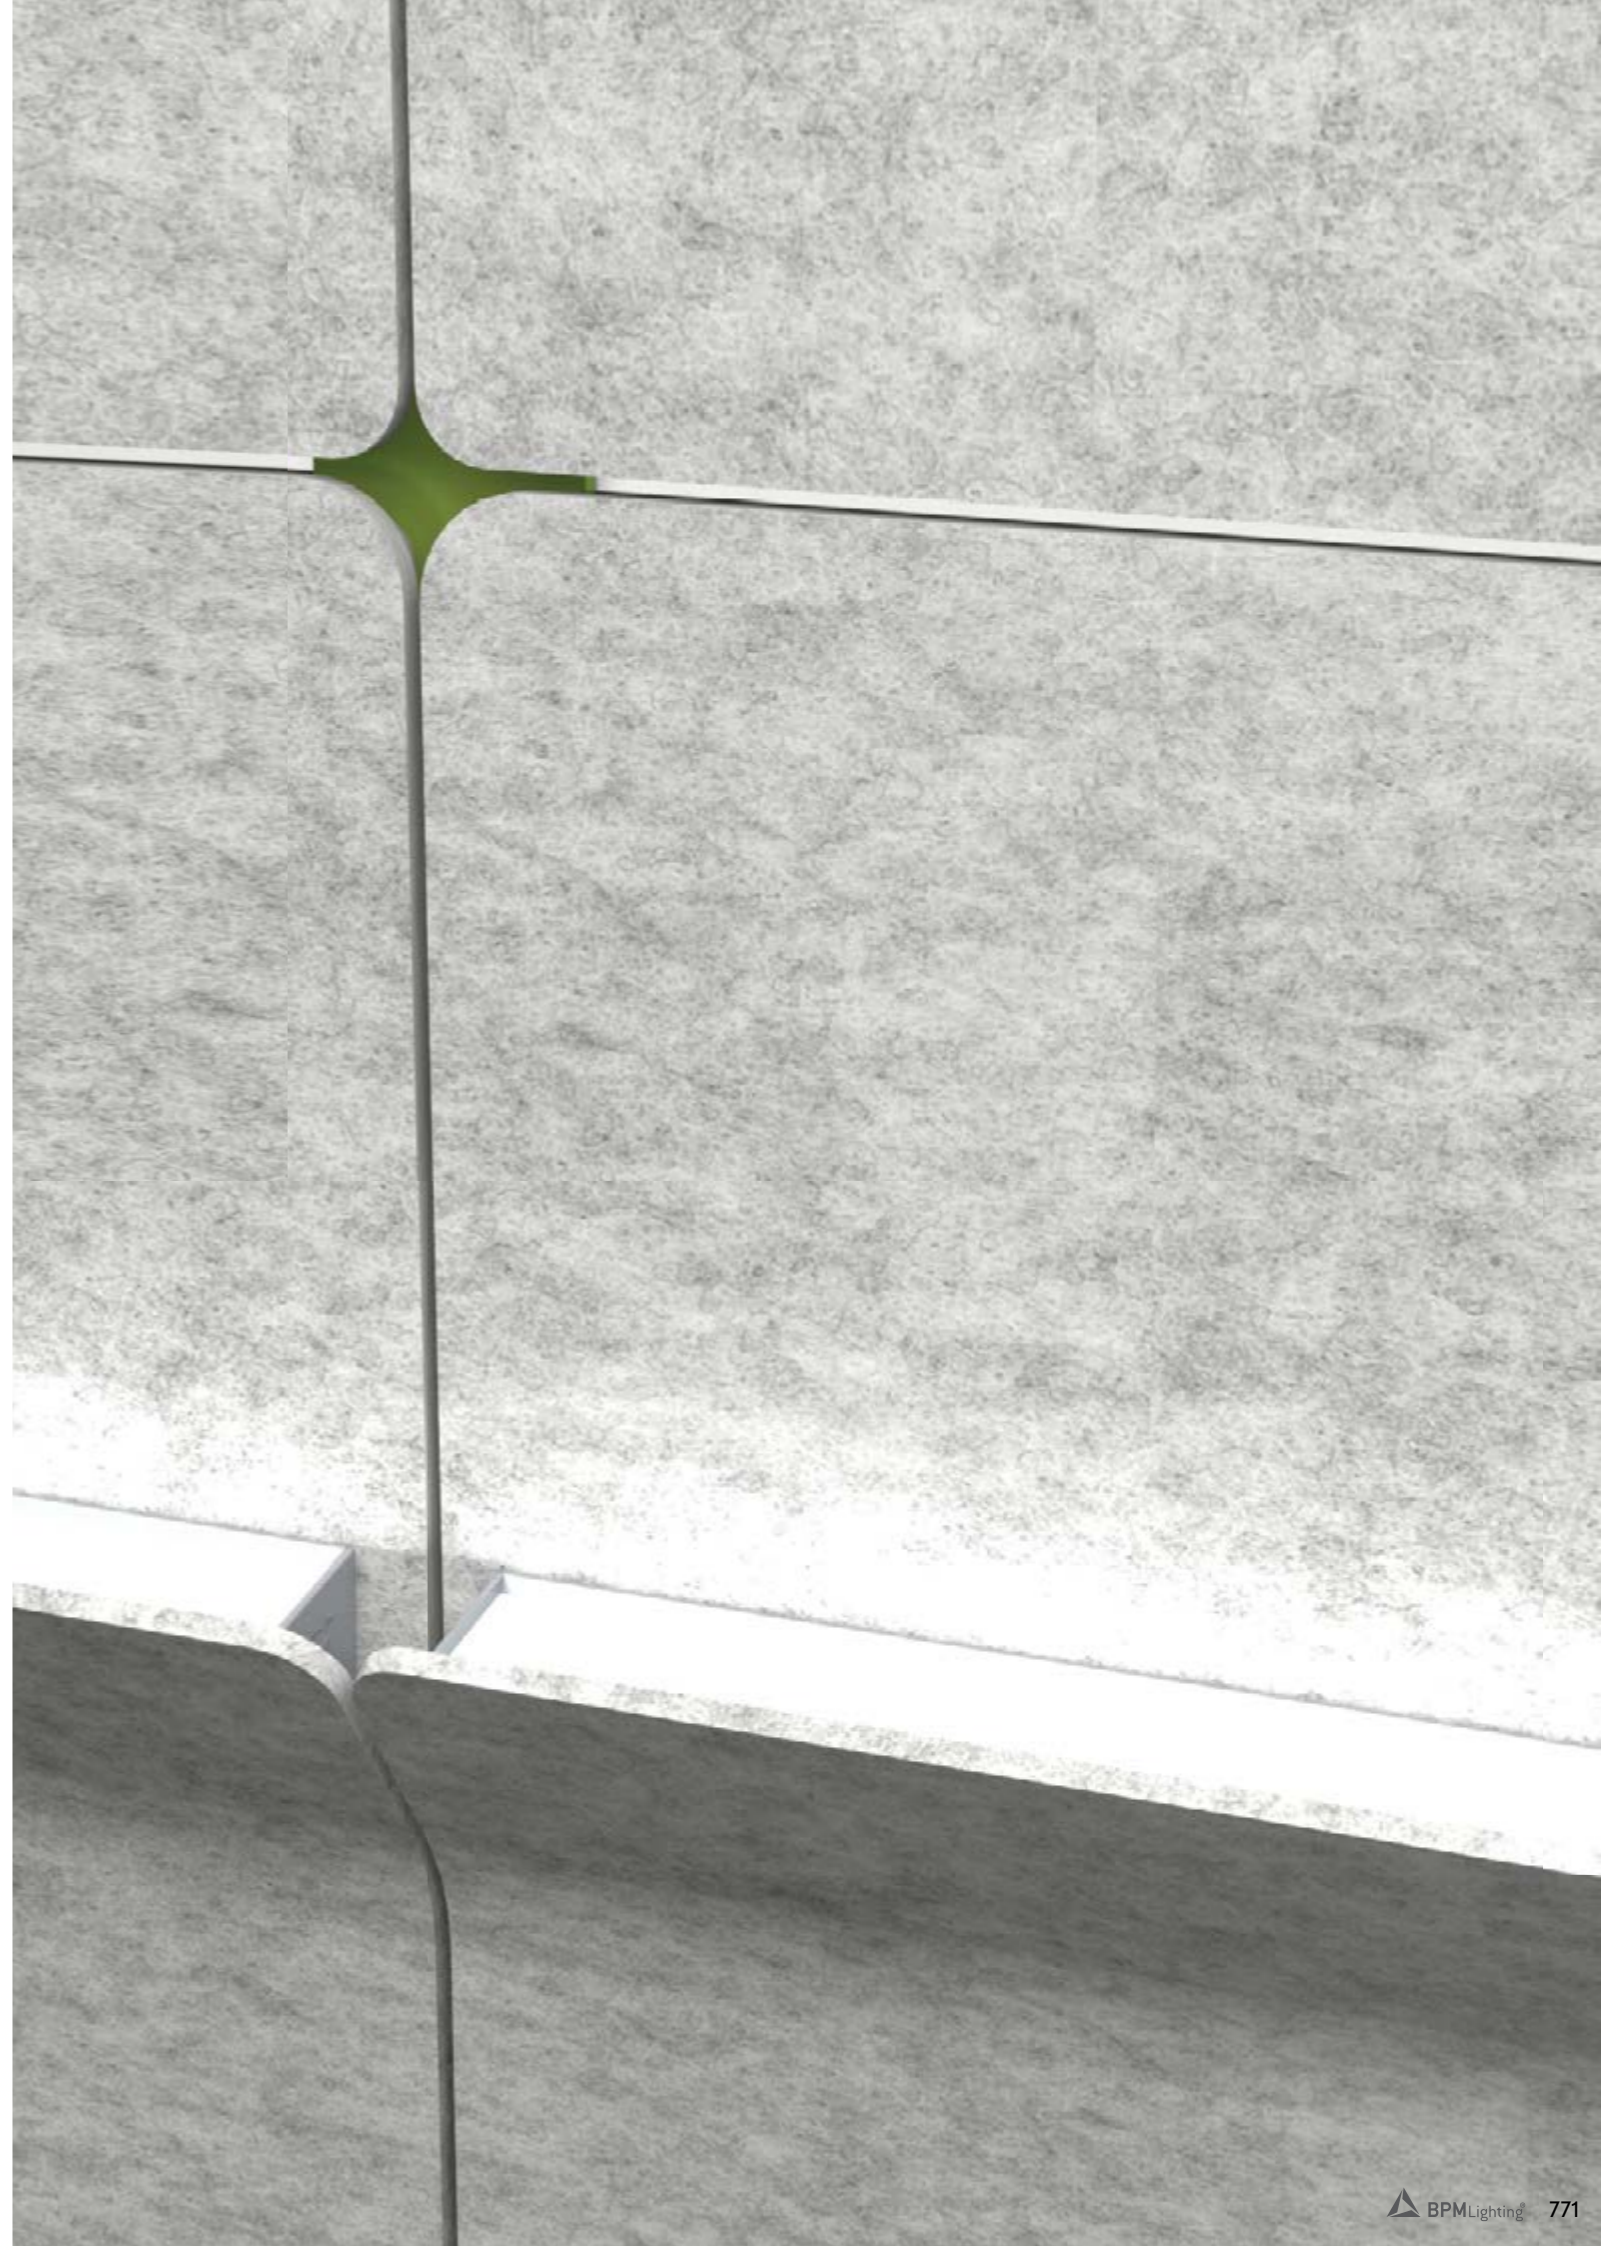



new

FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

320 | 520 | 720

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ADJUSTABLE

LUMINAIRE INCLUDES


Wall surface mounting kit



HURY	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	VdC	DIMM*1	SKETCH
	10251	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	1451	12	24	.DA .PU .D1	 320
	10251	.02	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	2358	19	24	.DA .PU .D1	 520
	10251	.03	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	3265	26	24	.DA .PU .D1	 720

Reference order | 10251.XX.WS.XX.XX.XX.XX.XX.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

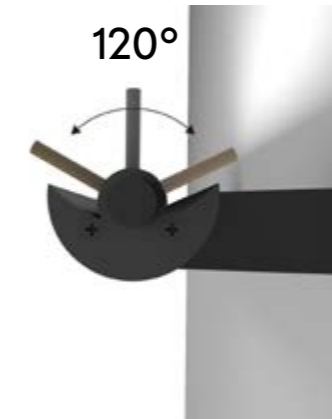

WALL SURFACE

INSTALLATIONS



HURY



REF 10251.WS



.WS
WALL SURFACE

10251 HURY | WS
Pag. 772

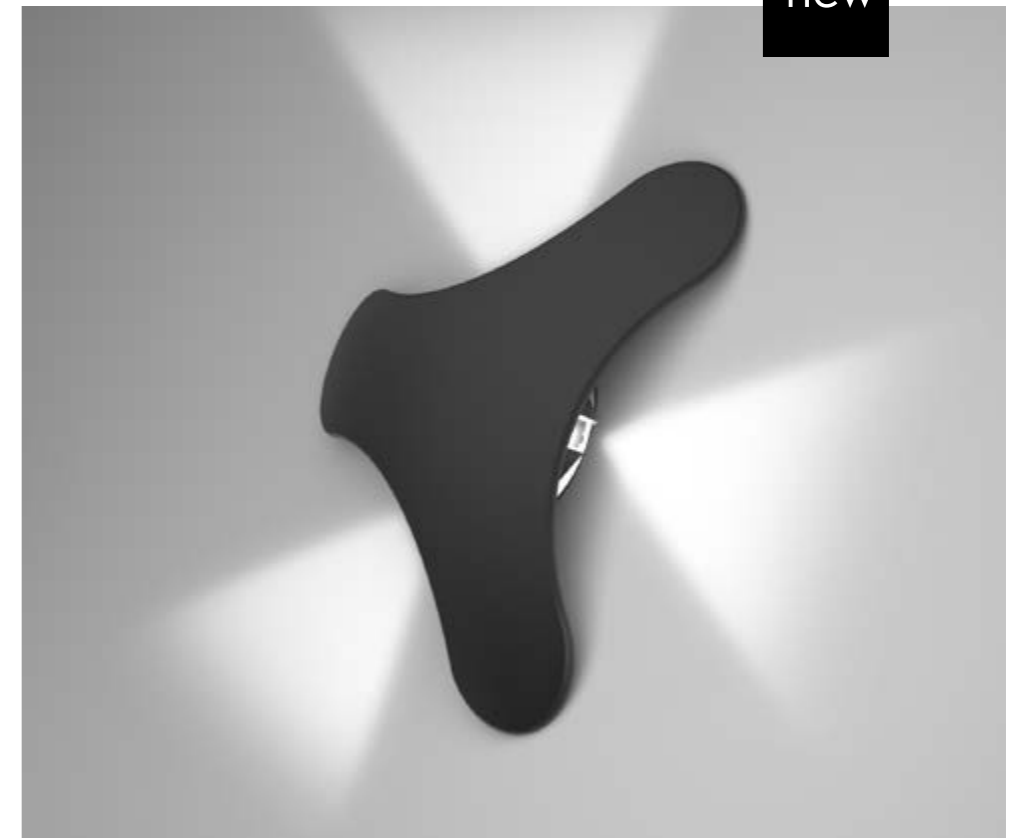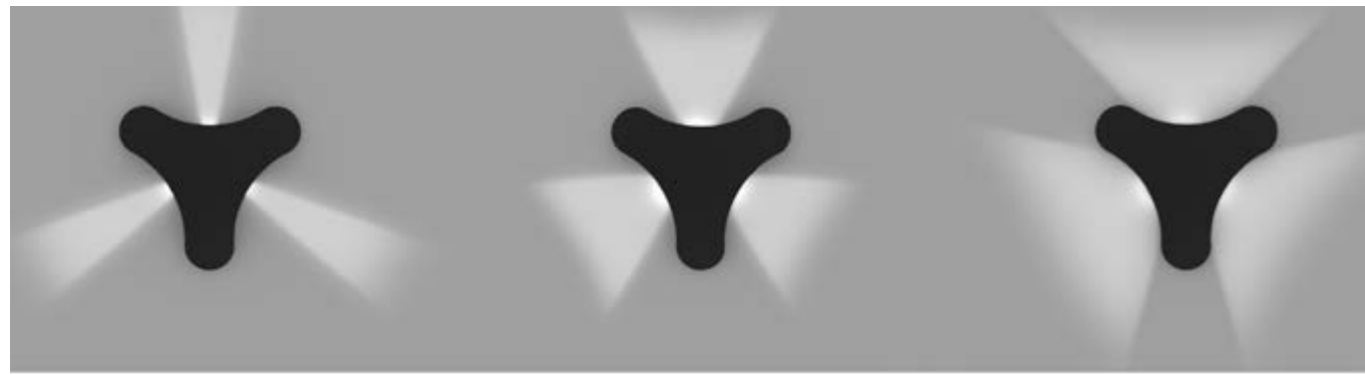

new



GLIM	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	410004	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	400	8	300	-	

Reference order | 410004.XX.WS.XX.XX.ST9.XX

FINISHES

● COLORS



DIMENSIONS

● SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-


▲ LIGHT DISTRIBUTION

SIDE

LUMINAIRE INCLUDES

Wall surface mounting kit

INSTALLATIONS

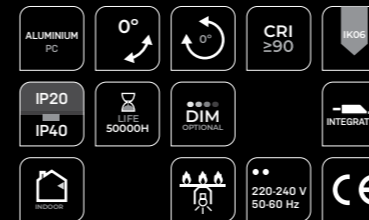

GLIM

REF 410004.WS



.WS
WALL SURFACE

410004 GLIM | WS
Pag. 774



WALL SURFACE

new



FINISHES

● COLORS



DIMENSIONS

◆ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000

▼ DIMMABLE OPTIONS



-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit

KUU	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	410014	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	580	12	100	-	

Reference order

410014.XX.WS.XX.XX.ST9.XX

INSTALLATIONS



KUU

REF 410014.WS

.WS
WALL SURFACE

410014 KUU | WS
Pag. 776



WALL SURFACE



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

150 | 300 | 500

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

UP - DOWN


LUMINAIRE INCLUDES

Wall surface mounting kit



KAPI	REF.	DIMENSIONS ◆	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	9000	.01	.WH-WH	LED	.OP	.ST	.9	.30	250	11	350	-	
	9000	.02	.WH-WH	LED	.OP	.ST	.9	.30	500	11	350	-	
	9000	.03	.WH-WH	LED	.OP	.ST	.9	.30	1000	11	350	-	

Reference order | 9000.XX.WS.XX.XX.ST9.30.XX

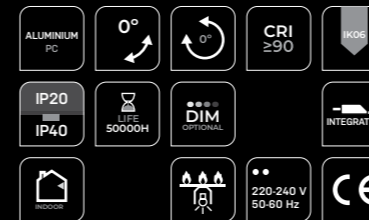

KAPI

REF 9000.WS

.WS
WALL SURFACE

9000 KAPI | WS
Pag. 778

.WS

WALL SURFACE



FINISHES

● COLORS



DIMENSIONS

◆ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN



IKI	REF.	DIMEN- SIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	9011	.01	.WH-WH	LED	.OP	.ST	.9	.30	120	6	300	-	

Reference order | 9011.XX.WS.XX.XX.ST9.XX

LUMINAIRE INCLUDES

Wall surface mounting kit

INSTALLATIONS



IKI

REF 9011.WS

.WS
WALL SURFACE

9011 IKI | WS
Pag. 780



.WS

WALL SURFACE



OKUMA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8105	.01 Ø60 x 230	.WH-WH .BK-BK .SA-SA	LED	.OP	.ST	.8	.27 .30 .40	130 140 150	3	700	-	

Reference order | 8105.XX.WS.XX.XX.ST9.XX

FINISHES

● COLORS



DIMENSIONS

◆ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION


ADJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit



INSTALLATIONS

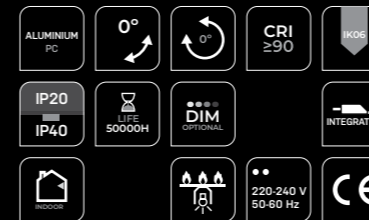

OKUMA

REF 8105.WS



.WS
WALL SURFACE

8105 OKUMA | WS
Pag. 782



FINISHES

● COLORS



DIMENSIONS

◆ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

AJUSTABLE


LUMINAIRE INCLUDES

Wall surface mounting kit

ELENA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *	SKETCH
	8106	.01	.WH-WH .BK-BK	LED	.OP	.ST	.8	.30	269	3	700	-	

Reference order | 8106.XX.WS.XX.XX.ST9.XX

INSTALLATIONS

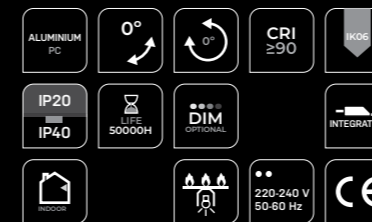

ELENA

REF 8106.WS



.WS
WALL SURFACE

8106 ELENA | WS
Pag. 784



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444


.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



ALBA

REF 10160.WS

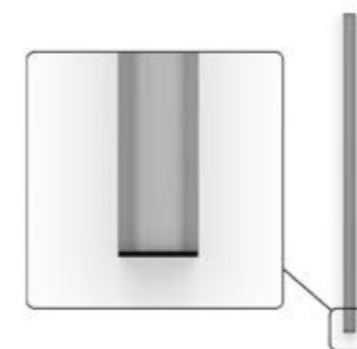


WS
WALL SURFACE

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10160	.01	307	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.02	588					3060	3180	3300	7600-7880	24	51	
	.03	869					3825	3975	4125	9500-9850	30	64	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
10160	.01	307	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.02	588					6120	6356	6608	47		
	.03	869					7650	7945	8260	59		

Reference order | 10160.XX.WS.XX.XX.XX.9.XX.XX

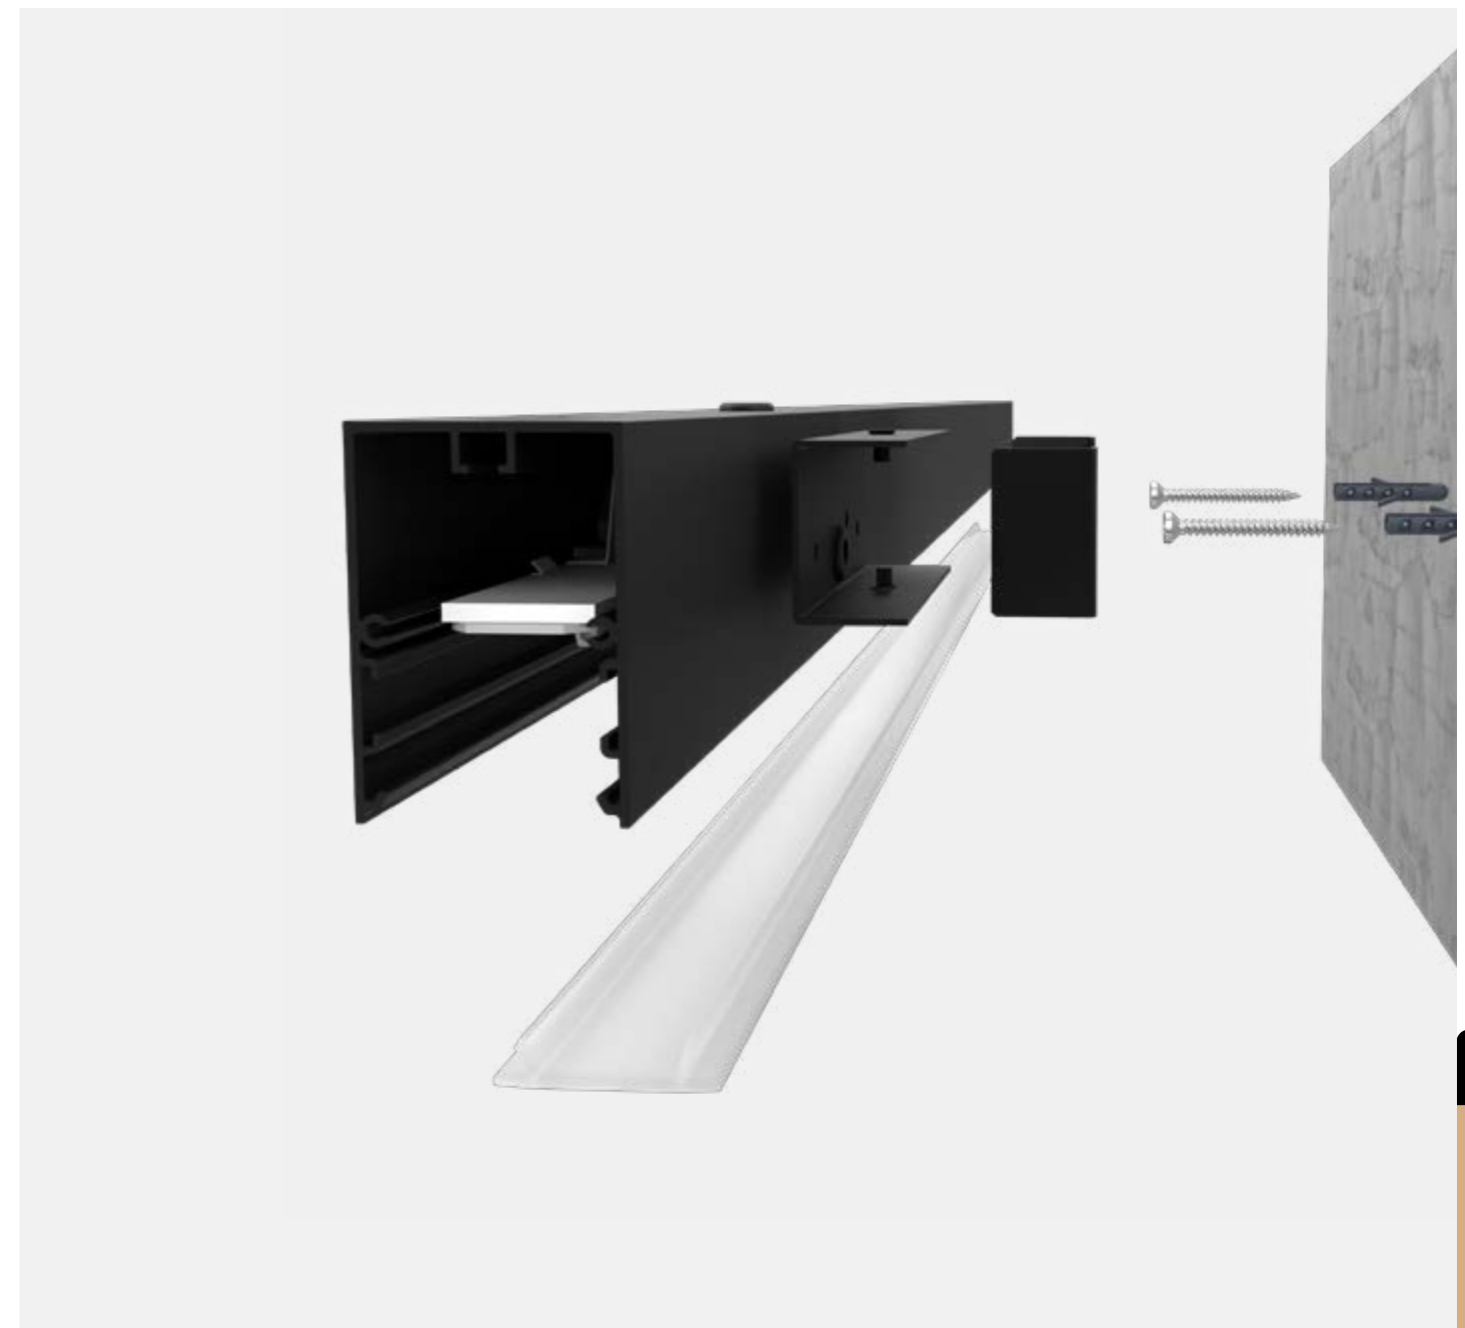


WS
WALL SURFACE

Select finish




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

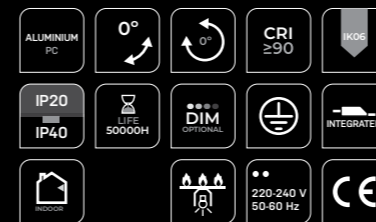

ALBA

REF 10160.WS

PHOTOMETRY

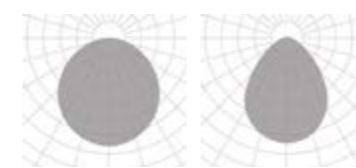


OPAL MICROPRISMATIC

INCLUDED



PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
- TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
HI power

* Delivered separately
(not installed in luminaire).

.WS

WALL SURFACE


INSTALLATIONS

.PN
PENDANT

·10215 ALBA DOUBLE | PN
Pag. 238


.WS
WALL SURFACE

·10215 ALBA DOUBLE | WS
Pag. 790

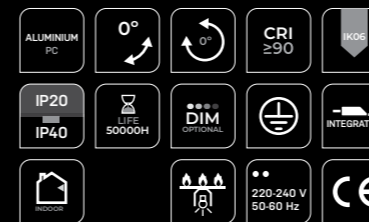

ALBA DOUBLE

REF 10215.WS

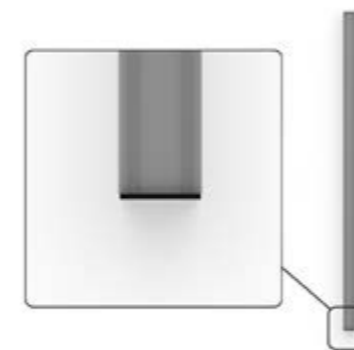

REF.	DIMENSION		FINISH	DIFFUS-ER	POWER	CRI	DOWNLIGHT LUMEN				WATT		UPLIGHT ▲.UP* LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	.27	.30	.40	.TW*2	K	TW	
10215	.01	327	●	.OP .MP	.ST	.9	725	795	825	1900-1970	18	38	725	795	825	1900-1970	18	38	.DA .PU .D1
	.02	608					1450	1590	1650	3800-3940	24	51	1450	1590	1650	3800-3940	24	51	
	.03	889					2295	2385	2475	5700-5910	30	64	2295	2385	2475	5700-5910	30	64	

Reference order | 10215.XX.WS.XX.XX.ST9.XX.XX.XX



WALL SURFACE

Select finish




- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOIL
- 220-240 V 50-60 Hz
- CE

ALBA DOUBLE

REF 10215.WS


PHOTOMETRY

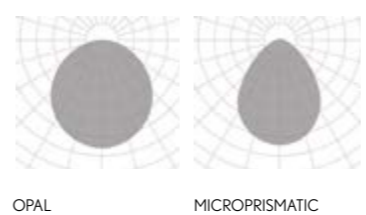

INCLUDED



PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 -TW solo está disponible con protocolo DALI (DA), CRI 80 (8) 700mA.
 *2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.
 *3 Uplight (UP) Tunable White (TW) is defaulted with remote control. When requested with DALI protocol (DA), consult with the sales team. La luz indirecta (UP) en blanco dinámico (TW) viene predeterminada con mando a distancia. Si se pide con protocolo DALI (DA), consultar con el equipo comercial.
 *4 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.WS

WALL SURFACE

INSTALLATIONS



ALBA ASIMETRIC

REF 210009.WS

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALBA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE


·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448

.TR
TRIMLESS


·210009 ALBA ASIMETRIC
| TR - Pag. 648

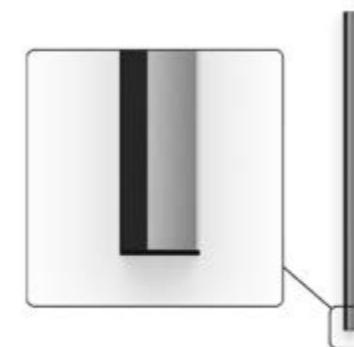

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
210009	.01	307	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.02	588					3060	3180	3300	7600-7880	24	51	
	.03	869					3825	3975	4125	9500-9850	30	64	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
210009	.01	307	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.02	588					6120	6356	6608	47		
	.03	869					7650	7945	8260	59		

Reference order | 210009.XX.WS.XX.XX.XX.9.XX.XX

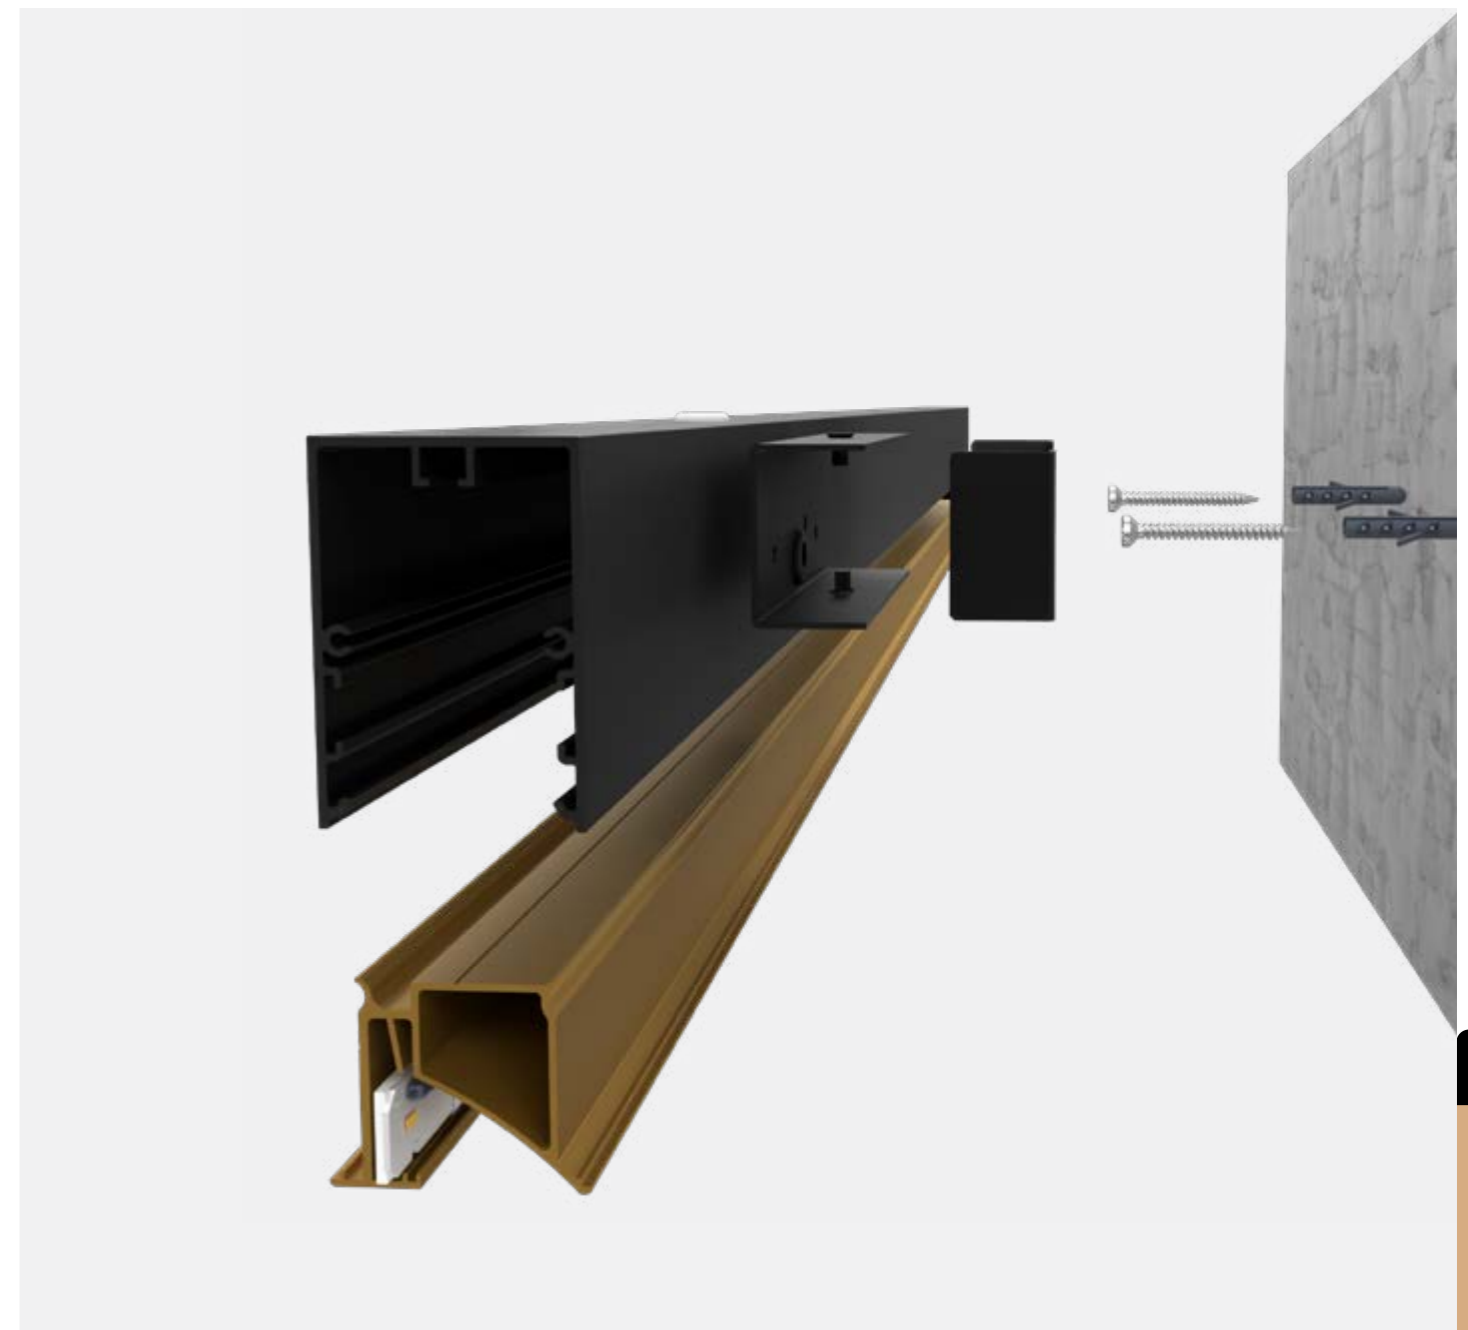

WALL SURFACE

Select finish




ALBA ASIMETRIC

REF 210009.WS

PHOTOMETRY

INCLUDED

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K.
 - TW solo está disponible con protocolo DALI (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 588 | 869

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

Wall surface mounting kit



ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

WALL SURFACE


INSTALLATIONS

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266


.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798

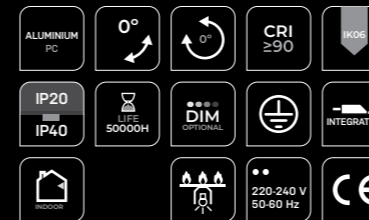

ALZIRA


REF 10169.WS

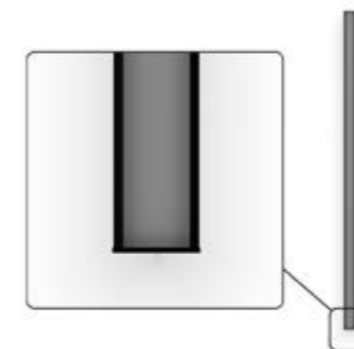

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.01	307	●	.OP .MP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02	588					1530	1590	1650	12	
	.03	869					2295	2385	2475	18	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.01	307	●	.OP .MP	.HI	.9	1530	1590	1650	12	.DA .PU .D1
	.02	588					3060	3180	3300	24	
	.03	869					4590	4770	4950	36	

Reference order | 10169.XX.WS.XX.XX.XX.9.XX.XX

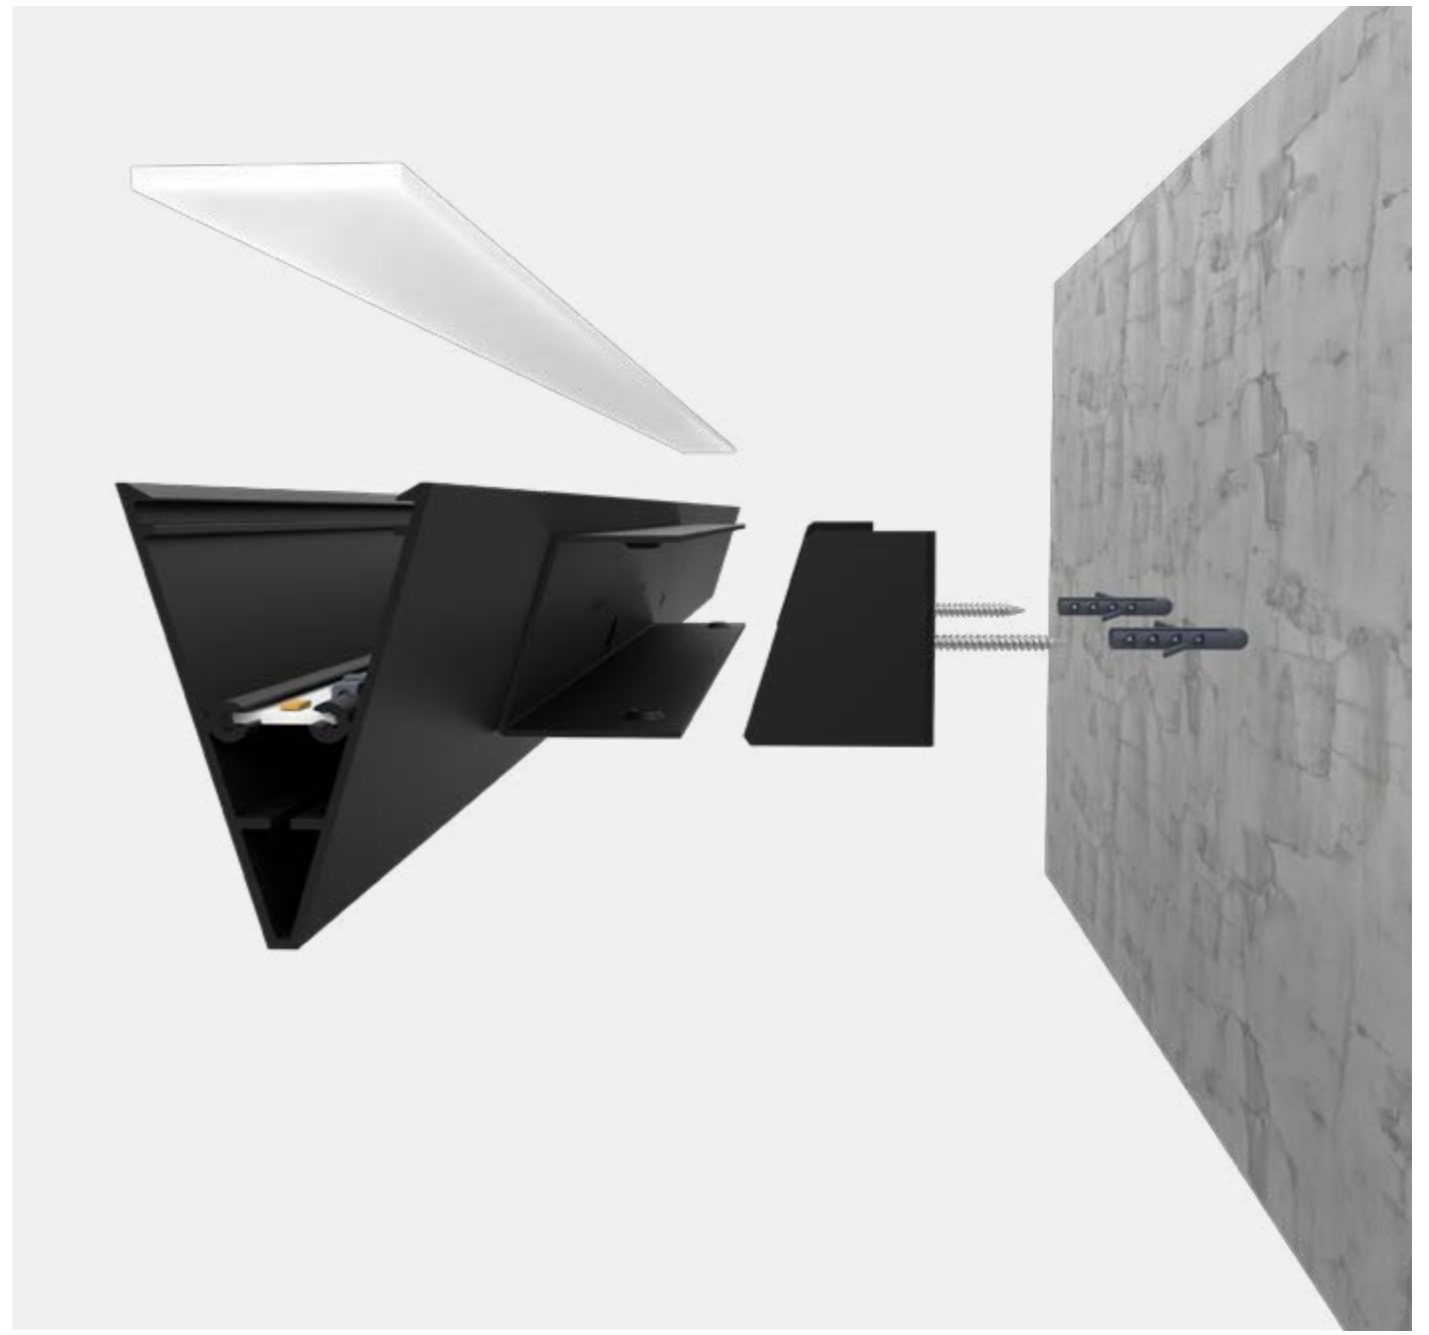

WALL SURFACE


Select finish



ALZIRA

REF 10169.WS


PHOTOMETRY



INCLUDED



PROFILE



FINISHES

● ACOUSTIC COLORS



● PROFILE COLORS



DIMENSIONS

● LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

1.10


PUSH

▲ LIGHT DISTRIBUTION

Up

LUMINAIRE INCLUDES

Diffuser

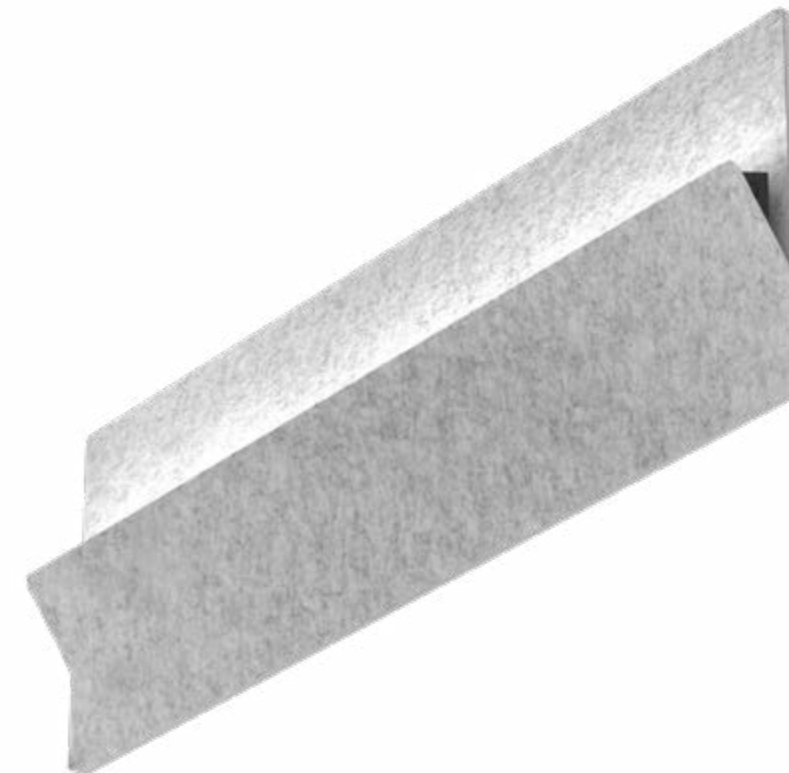

ON DEMAND

- Emergency Lighting*
- Motion Detection
- Well-Certified LED Boards
- Special Color Temperature
- RGB
- Thematic LED
- Wireless Control Options (Casambi)
- CRI 80

* Delivered separately
(not installed in luminaire).



WALL SURFACE



ACOUSTIC ALZIRA WS

Designed by Rafa Ortega

REF 230002.WS




Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.




REF.	DIMENSION ●	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * LUMEN			WATT		DIMM ▼
		.27	.30				.40	K	TW			
230002	.01 1200mm	.50 .51	WH BK	.OP .MP	.ST	.9	3060	3180	3300	24	51	.DA .PU .D1


Reference order | 230002.XX.WS.XX.XX.XX.XX.9.XX.XX

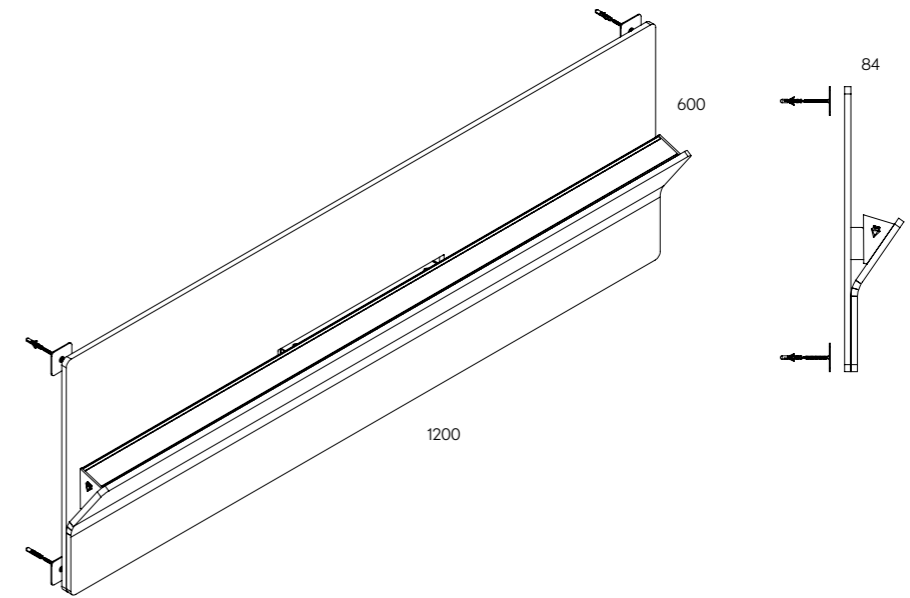

● Select Acoustic finishes



● Select Profile finishes



- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOIL
- 220-240 V 50-60 Hz
- CE

ACOUSTIC ALZIRA WS

Designed by Rafa Ortega
REF 230002.WS


WS
WALL SURFACE

ACOUSTIC PROPERTIES

- ENVIRONMENTAL:**
- FIRE TEST:**
- BAFFLE THICKNESS:**
- BABBLE DENSITY:**
- SOUND ABSORPTION COEFFICIENT:**

Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1 Standards
Classification B-s1, d0 and CTEDB-SI Compliant
190 Kg/m³
12mm
0,92 αw

PHOTOMETRY




OPAL MICROPRISMATIC

INCLUDED



COVERT KIT

PROFILE



47



FINISHES




ACOUSTIC COLORS



DIMENSIONS

SIZES mm.

Ø800	Ø1000	Ø1200
800x800	1000x1000	1200x1200

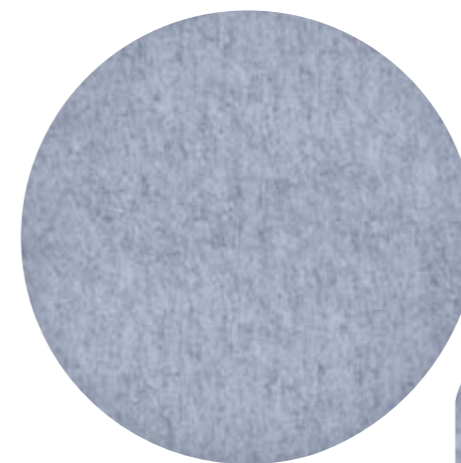

.WS

.WS

RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.RD	.01	●	
		.02		
		.03		


Reference order AC.RD.XX.WS.XX

SQ PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.SQ	.01	●	
		.02		
		.03		

Reference order AC.SQ.XX.WS.XX

ACOUSTIC ACCESORIES RD | SQ PANEL

REF AC.RD | AC.SQ

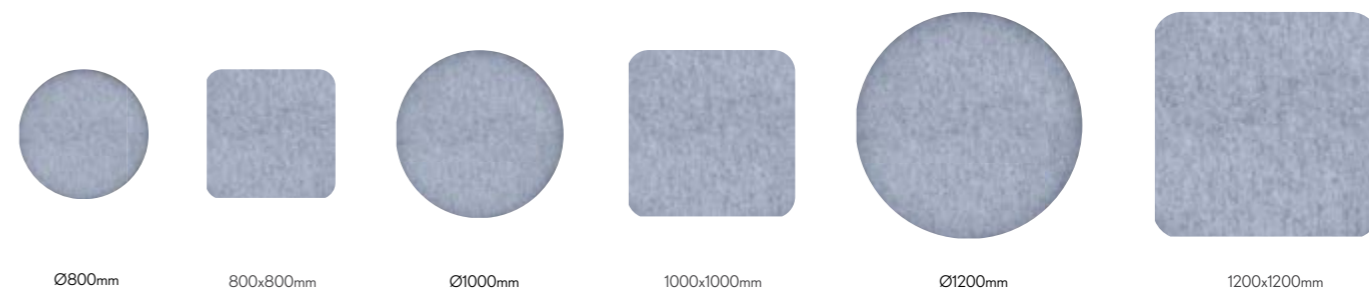

Ø800mm

800x800mm

Ø1000mm

1000x1000mm

Ø1200mm

1200x1200mm

WALL SURFACE

FINISHES


● COLORS



DIMENSIONS

● DIAMETERS mm.

300x1200 | 600x1200



.WS



FL PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.FL	.01	●	
		.02		

Reference order | AC.FL.XX.WS.XX

ACOUSTIC ACCESORIES FL PANEL

REF AC.FL



300 x 1200mm



600 x 1200mm



WALL SURFACE

WALL METIS	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH			
	10098	.01	●	GU5.3		GU5.3	.9	-	680	8	-	-				
				GU10	.GU	GU10										
				LED	.40 .60	.ST								BPM50		
						.HI									BPM300	
						.27										750
						.30										750
				.27	712											
				.30	750											
				.40	825											

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

With opal optic cover.
Con difusor opal.

Recessed with frame mounting kit

Reference order

10098.01.WS.XX.XX.XX.X.XX.XX



WALL SURFACE

Select finishes




.WH-WH



WALL METIS



REF 10098.WS

PHOTOMETRY

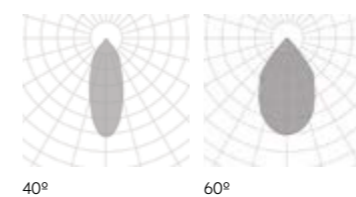

40°

60°

WALL ELARA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10097	.01	●	LED	.OP	.ST	.9	.27	837	8	350	.DA .PU .D1	
						.30		930					
						.40		1020					
						.27		1745	16	700			
						.30		1938					
						.40		2077					

LUMINAIRE INCLUDES

With opal optic cover.
Con difusor opal.

Recessed with frame mounting kit

Reference order | 10097.XX.WS.XX.XX.XX.9.XX.XX



FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

BEAM ANGLE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



• Select finishes



.WH-WH







WALL ELARA



REF 10097.WS

.WS

WALL SURFACE

WALL TEBE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10096	.01	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10096	.02	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10096	.03	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

BEAM ANGLE

40° | 60°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



.WS

WALL SURFACE

LUMINAIRE INCLUDES

Con difusor opal. / *2700K sólo disponible en 10094.
With opal optic cover. / *2700K only available in 10094.

Recessed with frame mounting kit

Reference order | 10096.XX.WS.XX.XX.XX.9.XX.XX

• Select finishes







.WH-WH





WALL TEBE

REF 10096.WS

WALL LEDA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10051	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL LEDA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10051	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL LEDA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10051	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | 10051.XX.WS.XX.XX.XX.9.XX.XX

Select finishes





.WH-WH







WALL LEDA

REF 10051.WS

WALL SURFACE

WALL ARCE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10055	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL ARCE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10055	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL ARCE	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10055	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



WALL SURFACE

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | 10055.XX.WS.XX.XX.XX.9.XX.XX

Select finishes



.WH-WH



WALL ARCE

REF 10055.WS

WALL CARPO	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10059	.01	●	LED	.OP	.ST	.9	.27	2x820	6+6	500	.DA .PU .D1	
								.30	2x870				
								.40	2x910				
						.HI		.27	2x1640	12+12	500		
								.30	2x1730				
								.40	2x1817				

WALL CARPO	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10059	.02	●	LED	.OP	.ST	.9	.27	2x1640	12+12	500	.DA .PU .D1	
								.30	2x1740				
								.40	2x1820				
						.HI		.27	2x3280	24+24	500		
								.30	2x3460				
								.40	2x3634				

WALL CARPO	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10059	.03	●	LED	.OP	.ST	.9	.27	2x2460	18+18	500	.DA .PU .D1	
								.30	2x2610				
								.40	2x2730				
						.HI		.27	2x4920	36+36	500		
								.30	2x5190				
								.40	2x5452				

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP-DOWN



LUMINAIRE INCLUDES

Con diffusor opal.
With opal optic cover.


Recessed with frame mounting kit

Reference order | 10059.XX.WS.XX.XX.XX.9.XX.XX

• Select finishes



.WH-WH

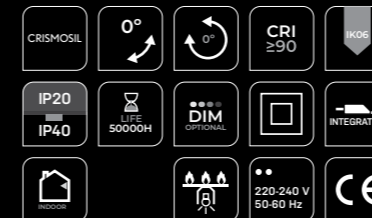

WALL CARPO

REF 10059.WS

WALL SURFACE


WALL RECESSED

VISUAL INDEX

WALL LIGHTS



FLOOR WASHER

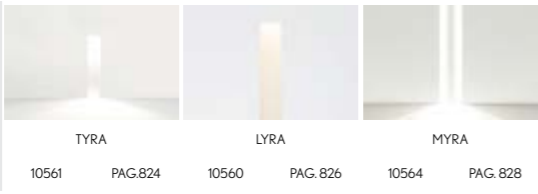




ORBIT






DRACO






MAGRIT	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20127	.01	●	■	.ST	.9	.30	118	2.5	500	-	

Reference order |  20127.01.WR.XX.25.ST.9.30

KLEE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20128	.01	●	■	.ST	.9	.30	118	2.5	500	-	

Reference order |  20128.01.WR.XX.25.ST.9.30

KLEE SQ	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	20129	.01	●	■	.ST	.9	.30	118	2.5	500	-	

Reference order |  20129.01.WR.XX.25.ST.9.30

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

25°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

DIMMABLE OPTIONS

LIGHT DISTRIBUTION

SIDE



WALL RECESSED

Select external-internal finishes





MAGRIT | KLEE | SQ

REF 20127.WR | 20128.WR | 20129.WR



PHOTOMETRY



25°

ADIMA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8104	.01	●	.25	.ST	.9	.30	154	3	700	-	

Reference order **8104.01.WR.XX.XX.XX.X.XX**

ADIMA SQ	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	8103	.01	●	.25	.ST	.9	.30	154	3	700	-	

Reference order **8103.01.WR.XX.XX.XX.X.XX**

FINISHES

COLORS



DIMENSIONS

View in family specifications

.01

LIGHTING OPTIONS

BEAM ANGLE

25°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


3000K

DIMMABLE OPTIONS

-

LIGHT DISTRIBUTION


SIDE

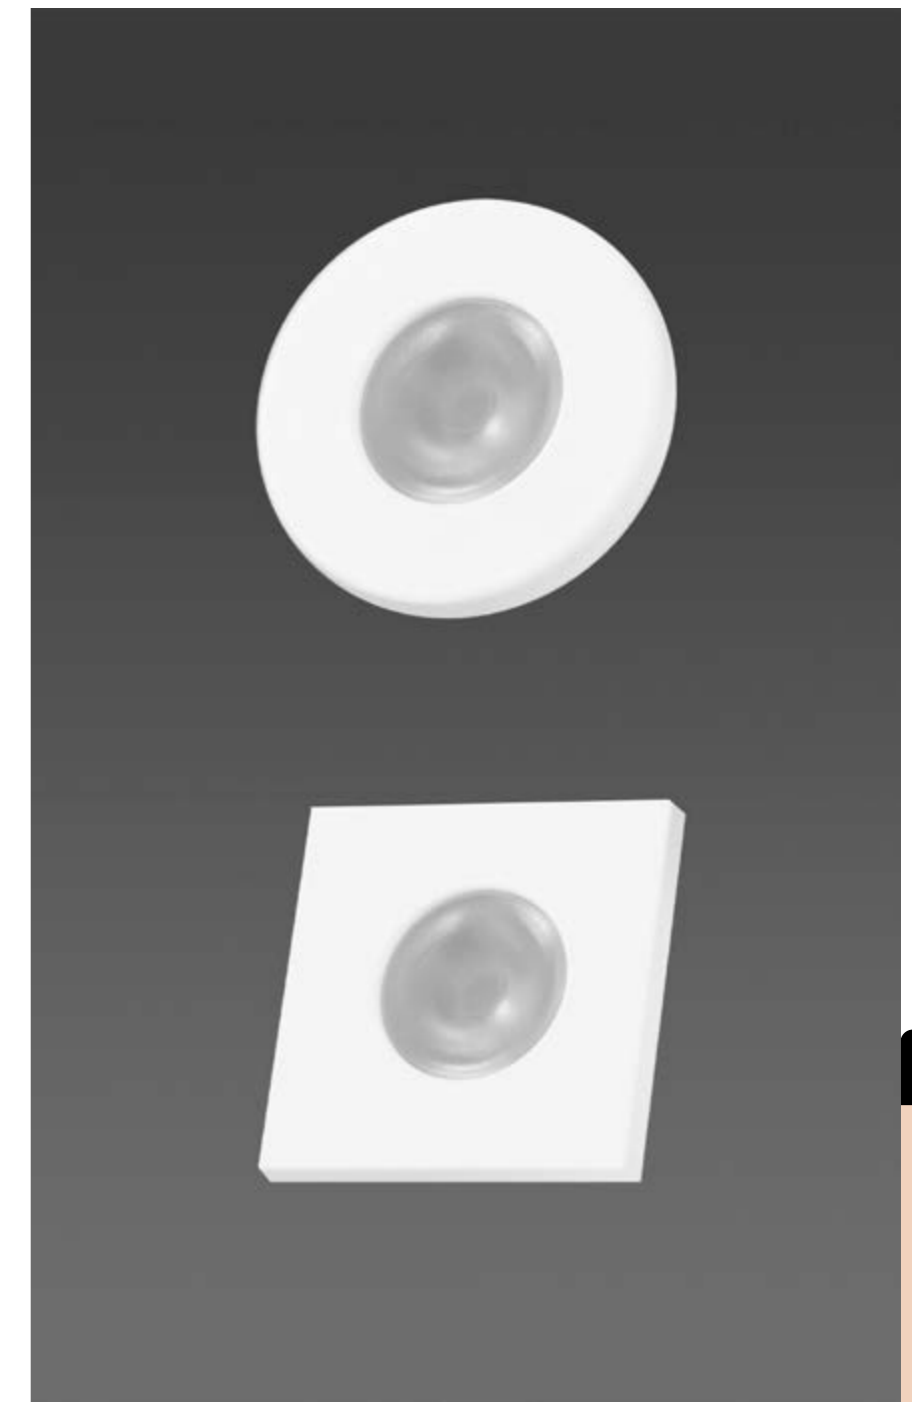

.WR

WALL RECESSED

Select finishes



.WH-WH .BK-BK




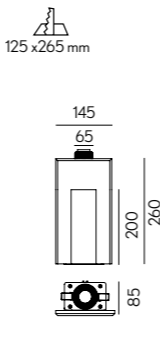

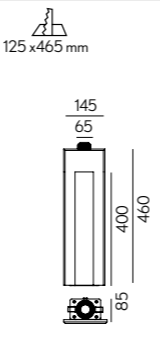

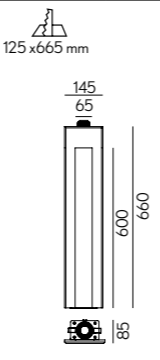
ADIMA ADIMA SQ

REF 8104.WR | 8103.WR

PHOTOMETRY



25°

TYRA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM*1	SKETCH
	10561	.01	●	LED	.40 .60	.ST	.9	.27 .30 .40	237 246 261	3	700	.DA .PU .D1	 125 x 265 mm
	10561	.02	●	LED	.40 .60	.ST	.9	.27 .30 .40	237 246 261	3	700	.DA .PU .D1	 125 x 465 mm
	10561	.03	●	LED	.40 .60	.ST	.9	.27 .30 .40	237 246 261	3	700	.DA .PU .D1	 125 x 665 mm

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



.WR

WALL RECESSED

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order

10561.XX.WR.XX.XX.XX.XX.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• Select finishes


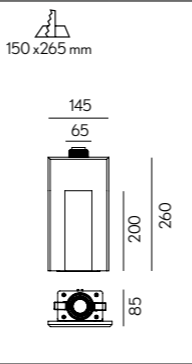



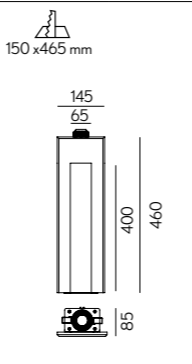
.WH-WH


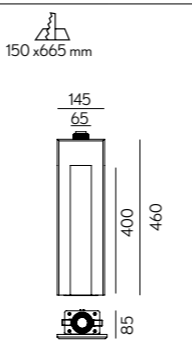


TYRA

REF 10561.WR

LYRA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH			
	10560	.01	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1				
								.30	750							
								.40	780							
								.27	713	10	500			.HI		
															.30	750
															.40	825

	10560	.02	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1				
								.30	750							
								.40	780							
								.27	713	10	500			.HI		
															.30	750
															.40	825

	10560	.03	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1				
								.30	750							
								.40	780							
								.27	713	10	500			.HI		
															.30	750
															.40	825

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

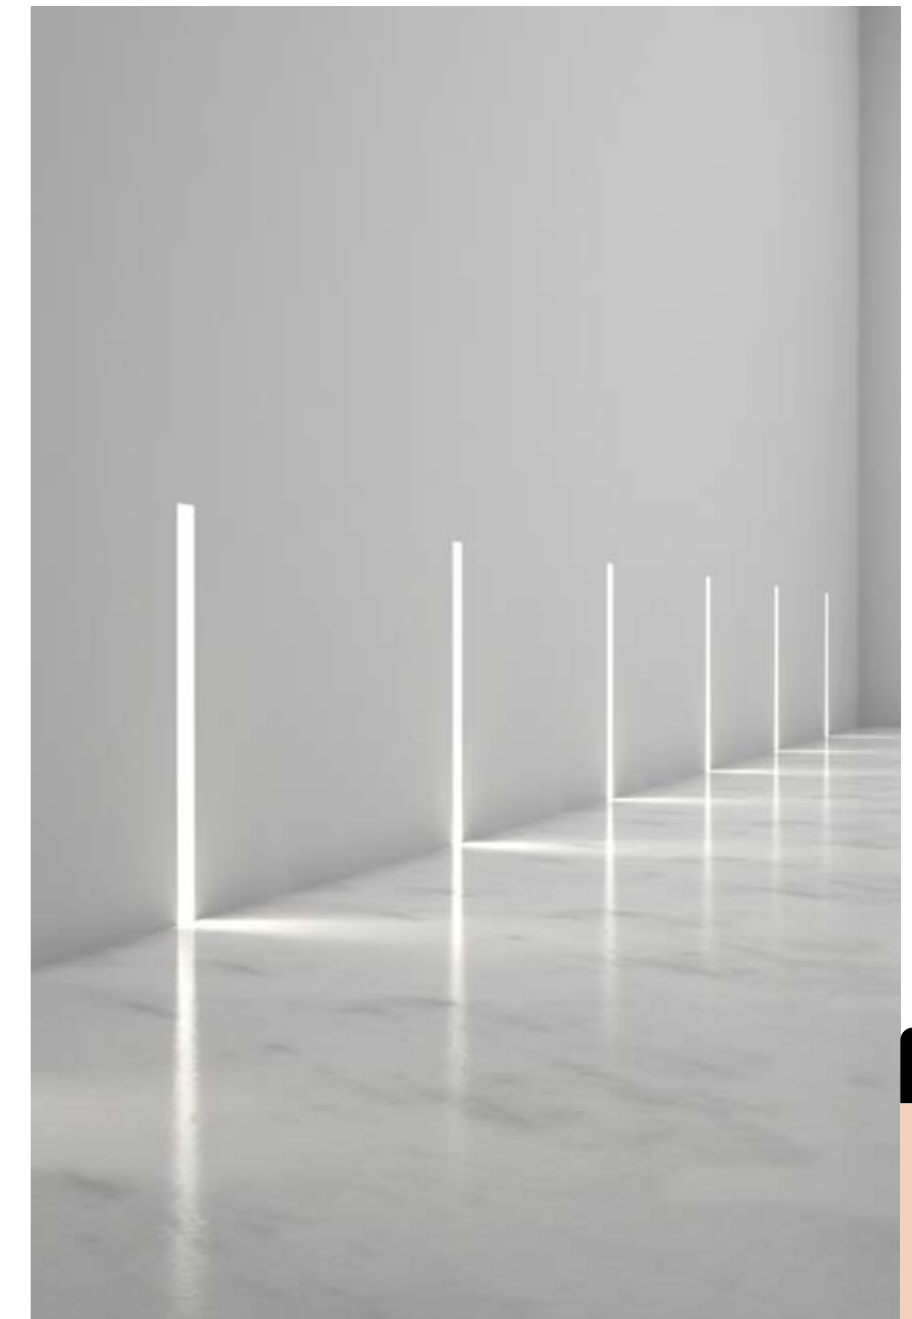

.WR

WALL RECESSED

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | 10560.XX.WR.XX.XX.XX.XX.XX.XX

• Select finishes



.WH-WH



LYRA

REF 10560.WR

MYRA	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	VdC	DIMM	SKETCH				
	10564	.01	●	LED	.OP	.ST	.9	.27	188	3	24	.DA .PU .D1					
								.30	195								
								.40	248								
								.HI	.9	.27	403			6	24		
																.30	417
																.40	530
	10564	.02	●	LED	.OP	.ST	.9	.27	376	6	24	.DA .PU .D1					
								.30	390								
								.40	495								
								.HI	.9	.27	806			12	24		
																.30	834
																.40	1061
	10564	.03	●	LED	.OP	.ST	.9	.27	500	9	24	.DA .PU .D1					
								.30	584								
								.40	743								
								.HI	.9	.27	1210			18	24		
																.30	1252
																.40	1591

FINISHES



DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

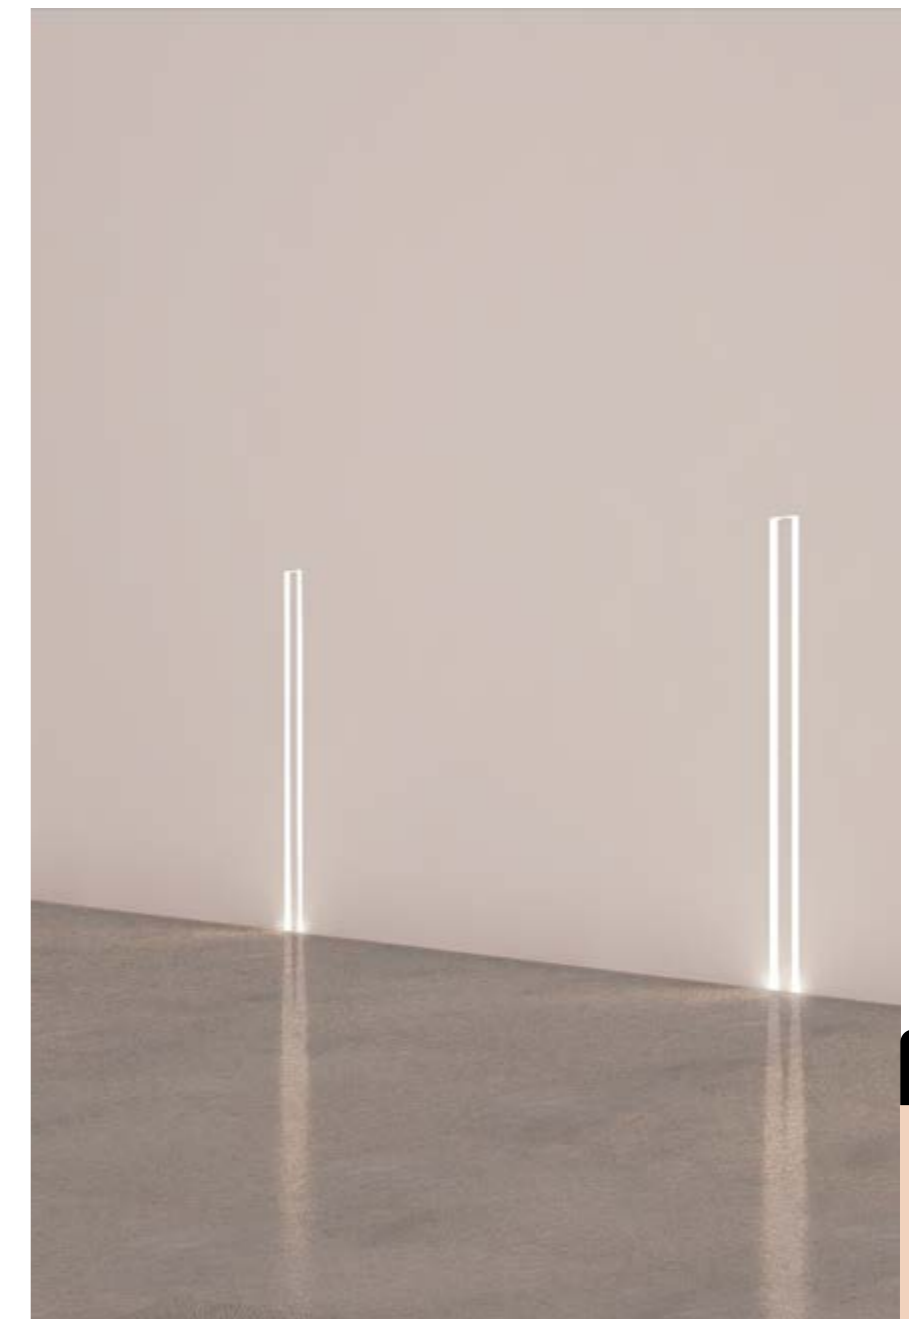

.WR

WALL RECESSED

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order

10564.XX.WR.XX.XX.XX.XX.XX.XX

Select finishes



.WH-WH



MYRA

REF 10564.WR

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



ORBIT	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10091	.01	.WH-WH	LED CITIZEN	.OP	.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

ORBIT SQ	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10090	.01	.WH-WH	LED CITIZEN	.OP	.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10091.01.WR.XX.OP.XX.X.XX.XX

*1 Remote driver when dimmable. Driver remoto cuando es dimable.

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10090.01.WR.XX.OP.XX.X.XX.XX

*1 Remote driver when dimmable. Driver remoto cuando es dimable.



ORBIT

REF 10091.WR


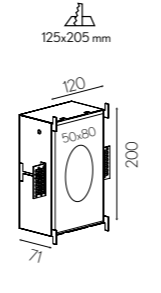



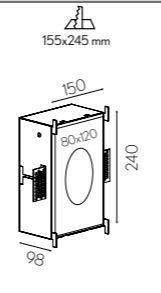
ORBIT

SQ

REF 10090.WR

WALL RECESSED .WR

ORBIT NADIR	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10113	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

ORBIT NADIR	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10113	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10113.XX.WR.XX.XX.XX.XX.XX

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

Select finishes




.WH-WH

- CRISMOSIL
- 0°
- 0°
- CRI ≥ 90
- IK05
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECESSED
- 220-240 V 50-60 Hz
- CE





ORBIT NADIR

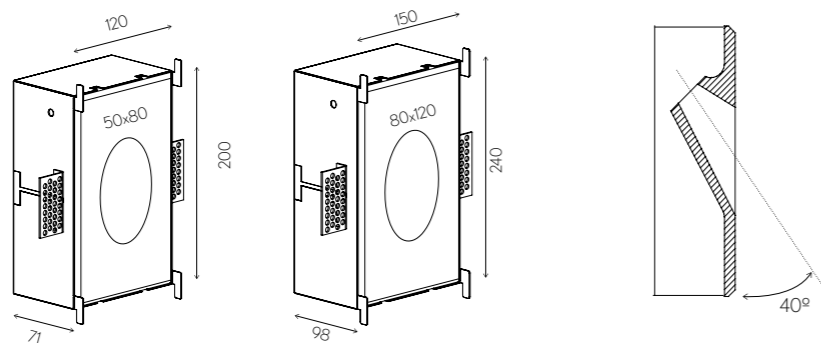



REF 10113.WR



.WR

WALL RECESSED

ORBIT NADIR SQ	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10114	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

ORBIT NADIR SQ	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10114	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10114.XX.WR.XX.XX.XX.XX.XX.XX

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



*1 Remote driver when dimmable. Driver remoto cuando es dimmable.

Select finishes






.WH-WH

- CRISMOSIL
- 0°
- 0°
- CRI ≥ 90
- IK05
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECESSED
- 220-240 V 50-60 Hz
- CE



ORBIT NADIR SQ

REF 10114.WR



.WR

WALL RECESSED

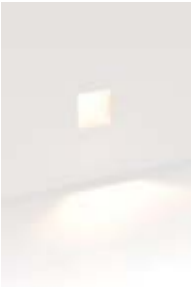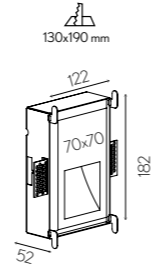ORBIT ARA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10006	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10006.01.WR.XX.XX.XX.XX.XX.XX



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN

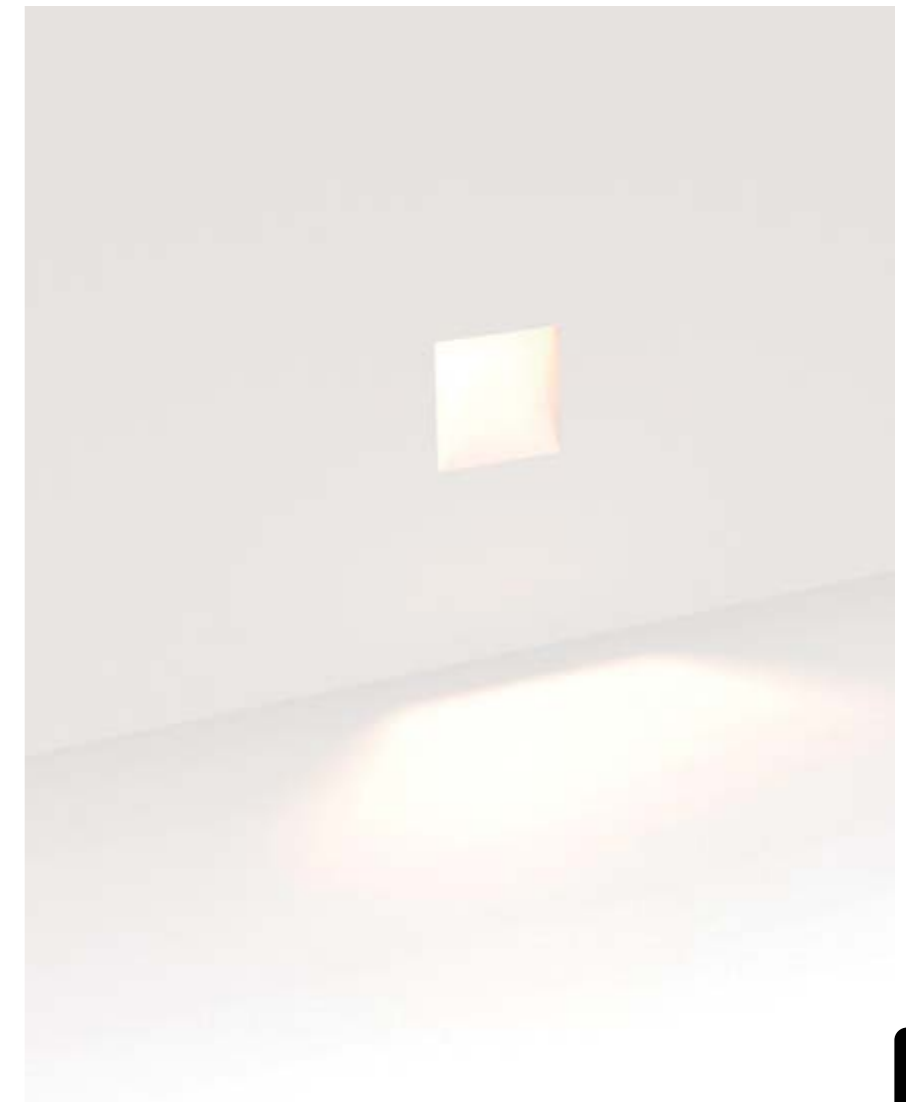


.WR

WALL RECESSED

Select finishes





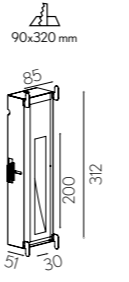
.WH-WH

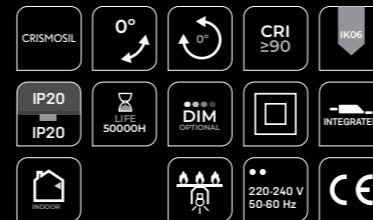
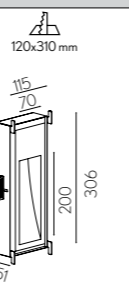


ORBIT ARA

REF 10006.WR

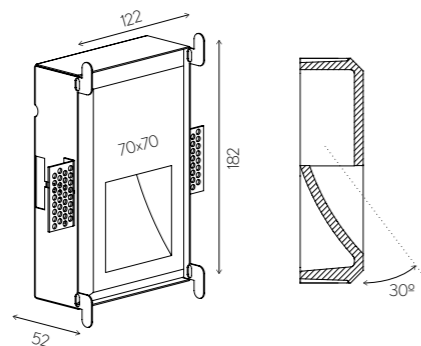

DRACO	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10119	.01	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

DRACO	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10119	.02	●	LED	.OP	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | 10119.XX.WR.XX.XX.XX.XX.XX.XX

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

DOWN



*1 Remote driver when dimmable. Driver remoto cuando es dimable.

Select finishes





.WH-WH

- CRISMOSIL
- 0°
- 0°
- CRI ≥ 90
- IK05
- IP20
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECESSED
- 220-240 V 50-60 Hz
- CE

DRACO

REF 10119.WR

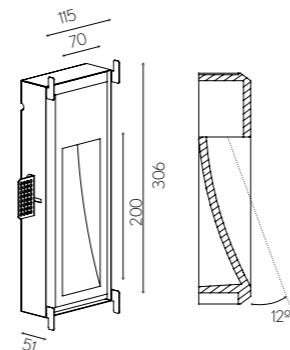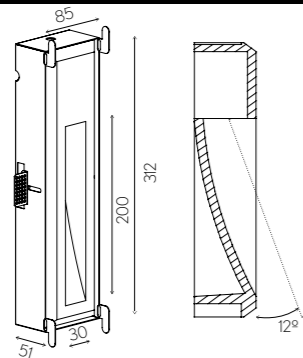

.WR

WALL RECESSED

DRACO TUCANA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1	SKETCH
	10008	.01	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

DRACO TUCANA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10008	.02	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | 10008.XX.WR.XX.XX.XX.XX.XX.XX



FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



.WR

WALL RECESSED

*1 Remote driver when dimmable. Driver remoto cuando es dimmable.

• Select finishes





.WH-WH



DRACO TUCANA

REF 10008.WR

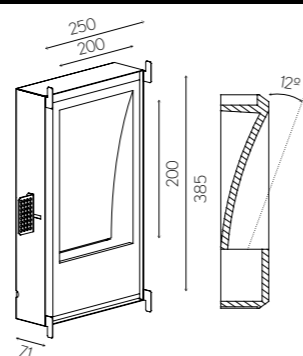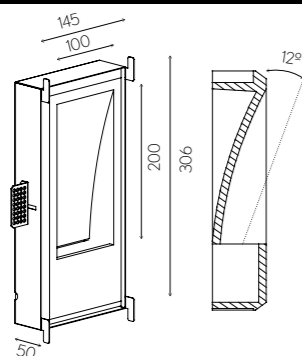

DRACO ZAHARA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10009	.01	●	LED	.OP	.ST	.9	.30	430	3	500	.DA .PU .D1	
						.40		450					
						.HI		.30	870	6	500		
						.40		910					

DRACO ZAHARA	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10009	.02	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
						.30		430					
						.40		450					
						.HI		.27	783	6	500		
						.30		870					
						.40		910					

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP



LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10009.XX.WR.XX.XX.XX.X.XX.XX

Con difusor opal.
With opal optic cover.

• Select finishes





.WH-WH



DRACO ZAHARA

REF 10009.WR

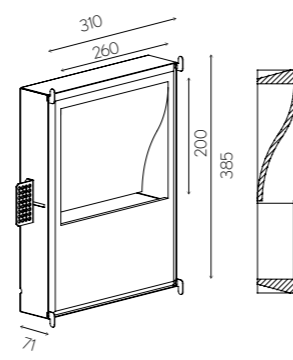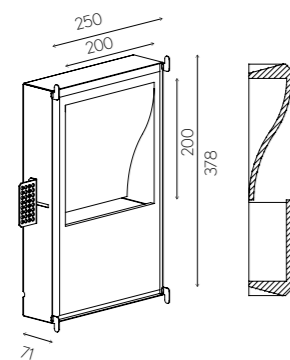

WALL RECESSED

DRACO ORION	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10011	.01	●	LED	.OP	.ST	.9	.27	387	3	500	.DA .PU .D1	
						.30		430					
						.40		450					
						.27		783	6	500			
						.30		870					
						.40		910					

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order

10011.XX.WR.XX.XX.XX.XX.XX.XX

FINISHES



DIMENSIONS

.01

LIGHTING OPTIONS

DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP

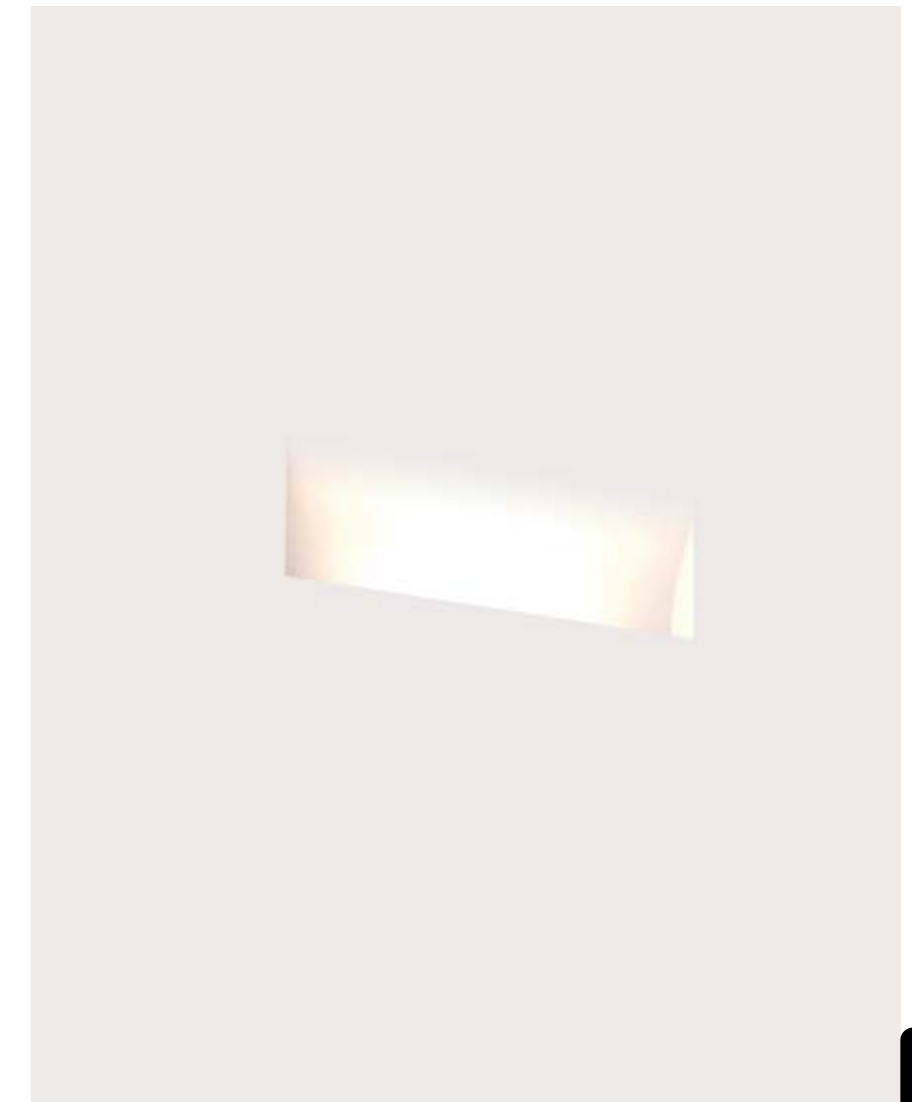

.WR

WALL RECESSED

Select finishes




.WH-WH



DRACO ORION

REF 10011.WR

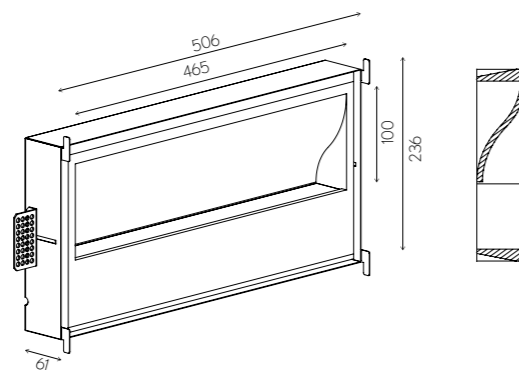

OUTDOOR

VISUAL INDEX

WALL ZEN

IP65



WALL ZEN OUT
11600 PAG. 848

IP65



WALL ZEN SQ OUT
11601 PAG. 850

WALL OUT

IP65



WALL ARA OUT
10006 PAG. 852

IP65



WALL ZAHARA OUT
10009 PAG. 853

IP65



WALL DRACO OUT
10119 PAG. 854



NOCTUA OUT



IP65



new

NOCTUA SQ OUT
10099 PAG. 856

WALL ZEN OUT	REF.	DIMENSIONS	FINISHES	LAMP	LENS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	11600	.01	.CEM	LED	.38	.ST	.9	.27	358	9	400	-	
								.30	511				
								.40	505				

WALL ZEN OUT	REF.	DIMENSIONS	FINISHES	LAMP	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	11600	.02	.CEM	LED	.38	.ST	.9	.27	358	9	400	-	
								.30	511				
								.40	551				

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

LENS

38°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

LIGHT DISTRIBUTION

UP | UP-DOWN(.02)



LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit



Reference order | 11600.XX.OUT.WS.XX.OP.XX.9.XX





OUTDOOR

- CEMENT
- 0°
- 0°
- CRI ≥90
- IP65
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

WALL ZEN OUT
REF 11600.OUT.WS

WALL ZEN SQ OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	11601	.01	.CEM	LED	.38	.ST	.9	.27	358	9	400	-	
								.30	511				
								.40	683				

WALL ZEN SQ OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	11601	.02	.CEM	LED	.38	.ST	.9	.27	358	9	400	-	
								.30	511				
								.40	683				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Recessed with frame mounting kit

Reference order | **11601.XX.OUT.WS.CEM.38.ST9.XX**

FINISHES



DIMENSIONS

.01 | .02

LIGHTING OPTIONS

BEAM ANGLE

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

LIGHT DISTRIBUTION

UP | UP-DOWN(.02)



OUTDOOR

WALL ZEN SQ OUT

REF 11601.OUT.WS

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE


2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

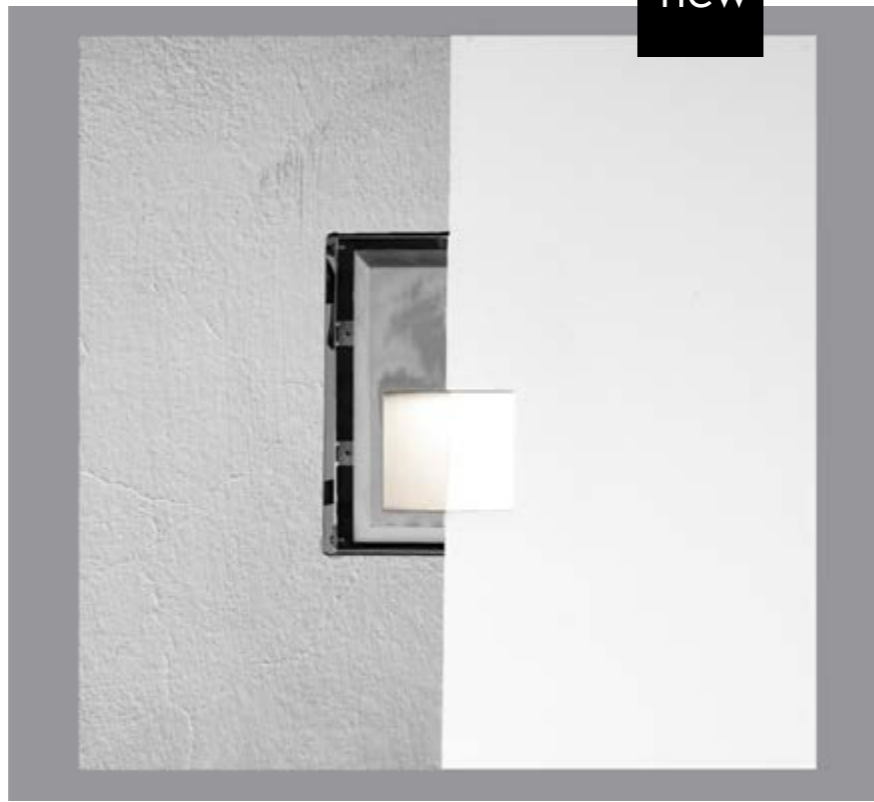

WALL ARA OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10006	.01	.CEM	LED CITIZEN	.38	.ST	.9	.27	226	7	310	-	
								.30	238				
								.40	273				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10006.01.OUT.WR.CEM.38.ST9.XX

• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38°

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN



WALL ZAHARA OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10009	.01	.CEM	LED CITIZEN	.38	.ST	.9	.27	484	11	470	-	
								.30	510				
								.40	534				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10009.01.OUT.WR.CEM.38.ST9.XX



WALL
ARA OUT
REF 10006.OUT.WS



WALL
ZAHARA OUT
REF 10009.OUT.WS

OUTDOOR



new



• FINISHES



• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

WALL DRACO OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10119	.01	.CEM	LED CITIZEN	.38	.ST	.9	.27	392	6	290	-	
								.30	413				
								.40	600				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10119.01.OUT.WR.CEM.38.ST9.XX





OUTDOOR

WALL DRACO OUT

REF 10119.OUT.WR

new

NOCTUA SQ OUT	REF.	DIMENSIONS	FINISHES	LAMP	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10099	.01	CEM	LED	.40	.ST	.8	.30	653	13	550	-	
								.40	786				

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10099.01.OUT.SR.CEM.40.ST.8.XX

FINISHES

■

DIMENSIONS

.03

LIGHTING OPTIONS

BEAM ANGLE / LAMP

40

POWER

STANDARD

CRI

8

COLOR TEMPERATURE

3000K | 4000K

DIMMABLE OPTIONS

-

LIGHT DISTRIBUTION

DOWN




OUTDOOR

- CEMENT
- 0°
- 0°
- CRI ≥90
- IK04
- IP65
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

NOCTUA SQ OUT

REF 10099.OUT.SR

PHOTOMETRY

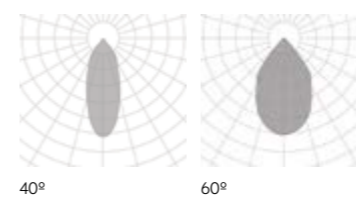



How to create a Reference Order

Como crear la Referencia

When ordering a Florida SQ luminaire, diameter 350 mm, pendant mounting, black external-internal finish, standard power, CRI 90, 2700 K, DALI dimming and indirect light.

Si deseas pedir una luminaria Florida SQ de diámetro 350 mm, suspendida en acabado interior y exterior negro, potencia standard, CRI 90, 2700 K, regulación DALI y con luz indirecta.

FLORIDA SQ	REF.	DIMEN- SION	FINISH	DIFFUS- ER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲ UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10191	.35	.BK-BK	.OP	.ST	.9	.27	2706	27	700	470	7	.DA	

REF.35.PN.BK-BK.OP.ST.9.27.DA.UP
1 2 3 4 5 6 7 8 9 10

1 Select Luminaire's reference
Selecciona la referencia de la luminaria

2 Choose Luminaire's dimensions | See luminaire to confirm dimension criteria
Elige las dimensiones de la luminaria | Ver luminaria para confirmar criterio de dimensiones

3 Confirm Luminaire's Installation
Confirma la instalación de la luminaria

.PN Pendant | Suspendida
.RF Recessed with Frame | Empotrado con marco
.SR Surface | Superficie
.TK Tracklight | Proyector de carril
.TR Trimless | Empotrado
.WR Wall Recessed | Empotrado en pared
.WS Wall Surface | Aplique de pared

4 Pick available finish options
Escoge los acabados de la luminaria

ALUMINIUM | ALUMINIO

- .BK Black | Negro
- .BM Blue Mint | Azul Menta
- .BS Blue Stone | Azul Piedra
- .BC Brown Coffee | Marrón Café
- .CR Copper Rose | Cobre Rosado
- .CB Coral Bronze | Bronce Coral
- .GC Gold Cava | Oro Cava
- .GY Gray | Gris
- .MG Military Green | Verde Militar
- .VC Violet Chiffon | Violeta Chifón
- .WH White | Blanco
- .YM Yellow Mustard | Amarillo Mostaza

5 Select optic options
Selecciona las opciones ópticas

DIFFUSERS | DIFUSORES

- .MP Microprismatic | Microprismático
- .OP Opal | Opal
- .SI Silicone | Silicona

BEAM ANGLES | ÁNGULOS HAZ DE LUZ

Refer to Luminaire's light distribution options and choose from a narrow spot to a wider flood
Consulte las opciones de distribución de la luz de las luminarias desde un punto angosto hasta una inundación más amplia

ACOUSTIC | ACÚSTICO

- .50 Acoustic Gray | Gris Acústico
- .51 Acoustic Dark Gray | Gris Oscuro Acústico
- .52 Acoustic Camel | Camel Acústico
- .53 Acoustic Light Blue | Azul Claro Acústico
- .54 Acoustic Dark Blue | Azul Oscuro Acústico
- .55 Acoustic Green | Verde Acústico
- .56 Acoustic White | Blanco Acústico
- .57 Acoustic Black | Negro Acústico
- .60 Acoustic Yellow | Amarillo Acústico
- .61 Acoustic Red | Rojo Acústico

6 Choose Power options
Elige las opciones de Potencia

.HI High | Alta
.ST Standard | Estándar

7 Confirm CRI (color rendering index)
Confirma las opciones de CRI (color rendering index)

.8 80
.9 90

8 Pick Kelvin degrees
Escoge grados Kelvin

.27 2700
.30 3000
.40 4000
.TW Tunable white

CEMENT | CEMENTO

- .CEM Cement | Cemento

STRUCTURAL

- .WH White | Blanco

ALUMINIUM | ALUMINIO

- .SA Striped Aluminum | Aluminio Rayado

9 Select dimmable options
Selecciona opciones regulación

.D1 1.10
.DA DALI
.PU PUSH / PULSADOR

10 Indirect light
Luz indirecta

- .UP Uplight | Luz indirecta

STEP BY STEP

ALUMINIUM | ALUMINIO



.BK Black | Negro



.BC Brown Coffee | Marrón Café




.GC Gold Cava | Oro Cava



.YM Yellow Mustard | Amarillo Mostaza



.BM Blue Mint | Azul Menta



.CR Copper Rose | Cobre Rosado



.GY Gray | Gris



.VC Violet Chiffon | Violeta Chifón



.BS Blue Stone | Azul Piedra



.CB Coral Bronze | Bronce Coral




.MG Military Green | Verde Militar




.WH White | Blanco

ACOUSTIC | ACÚSTICO



.50
Acoustic Gray
Gris Acústico




.51
Acoustic Dark Gray
Gris Oscuro Acústico




.52
Acoustic Camel
Camel Acústico



.53
Acoustic Light Blue
Azul Claro Acústico




.54
Acoustic Dark Blue
Azul Oscuro Acústico



.55
Acoustic Green
Verde Acústico



.56
Acoustic White
Blanco Acústico




.57
Acoustic Black
Negro Acústico



.60
Acoustic Yellow
Amarillo Acústico



.61
Acoustic Red
Rojo Acústico



CEMENT | CEMENTO
.CEM
Cement | Cemento



ALUMINIUM | ALUMINIO
.SA
Striped Aluminum | Aluminio Rayado



STRUCTURAL
.WH
White | Blanco



Rectangular cut.
Agujero de corte rectangular.



Circular cut.
Agujero de corte circular.



Luminaire not suitable to be covered with thermal insulating material.
Luminaria no adecuada para cubrirse con aislante térmico.



Recessed luminaire suitable for installation on normally inflammable surfaces.
Luminaria empotrada adecuada para montaje en superficies normalmente inflamables.



Surface luminaire suitable for installation on normally inflammable surfaces.
Luminaria superficial adecuada para montaje en superficies normalmente inflamables.



Luminaire with two different IP degrees of protection at the top and bottom.
Grado IP de la luminaria tanto por la parte superior e inferior del empotramiento de la luminaria.



AC input for luminaire is 220-240V / 50-60Hz.
Input AC de luminaria a 220-240V/50-60Hz.



DC output for luminaire is 48 V DC.
Output DC de trabajo de luminaria a 48 V DC.



Driver remote.
Driver remoto.



Driver integrated inside the luminaire.
Driver integrado dentro de la luminaria.



Optional dimmer.
Regulador opcional.



Optional remote dimmer.
Regulador remoto opcional.



Only for indoor use.
Solo para uso interior.



Only for outdoor use.
Solo para uso exterior.



Indoor / outdoor use.
Uso interior / exterior.



Minimum height of the false ceiling.
Altura mínima del falso techo.



Unified Glare Rating.
Índice de Deslumbramiento Unificado.



Luminaire is made of aluminum.
Luminaria fabricada de aluminio.



Luminaire is made of aluminum and silicone.
Luminaria fabricada de aluminio y silicona.



Luminaire is manufactured with trademarked material Crismosil that combines gypsum, fibreglass and acrylic resins.
La luminaria está fabricada con Crismosil, un material registrado que combina un yeso especial con fibra de vidrio y resinas acrílicas.



Luminaire is made out of cement.
La luminaria está fabricada con cemento.



Rotation degrees.
Grados de giro.



Tilting degree.
Grados de basculación.



Protection rate against external mechanical impacts.
Grado de resistencia contra golpes mecánicos externos.



Luminaire's Lifetime.
Vida útil de la luminaria.



Class I: Luminaire in which the protection against electric shocks falls into a protective conductor grounded.
Clase I: Luminaria en que la protección contra los choques eléctricos recae a un conductor de protección puesto a tierra.



Class II: Luminaire in which the protection against electric shocks includes additional safety features such as double insulation or reinforced insulation.
Clase II: Luminaria en que la protección contra los choques eléctricos, comprende medidas de seguridad suplementarias, tales como el doble aislamiento o el aislamiento reforzado.



Class III: Luminaire in which the protection against electric shocks falls on the power supply with very low safety voltage (SELV) and in which no voltages higher than the very low safety voltage are generated.
Clase III: luminaria en la que la protección contra los choques eléctricos recae en la alimentación con muy baja tensión de seguridad (MTBS) y en la que no se generan tensiones superiores a la muy baja tensión de seguridad.



Lamp not included.
Lámpara no incluida.



According to european directives and EN 60598.
Conforme a las directivas europeas y la norma EN 60598.



Surface.
Superficie.



Pendant.
Colgante.



Recessed with frame.
Empotrado con marco.



Trimless.
Empotrado sin marco.



Wall surface.
Aplique de pared.



Wall recessed.
Empotrado en pared.




Tracklight.
Proyector de carril.

ICON FLASH

Connecting your equipment...

Cómo conecto?

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

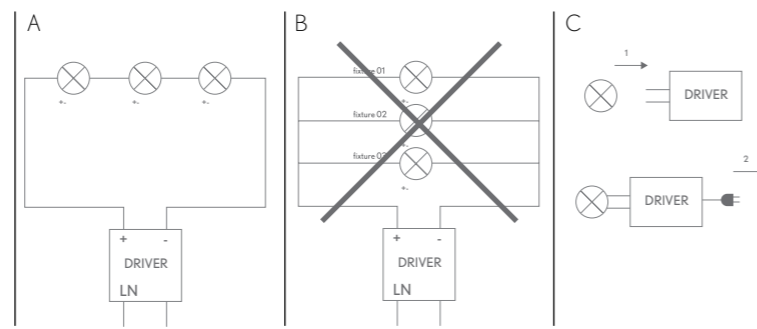

Does

When using a single driver, wire all lighting fixtures in series. LED strips must be wired in parallel.

Don't's

Lighting fixtures must always be connected in no-voltage conditions. The driver must not be connected to the power supply when connecting the lighting fixtures. If there are intermediate connections, follow this diagram to avoid damaging your lighting fixtures. (Diagram) Lighting fixtures must not be connected directly to the AC power source without a driver. Never expose lighting fixtures to heat sources or other electronic equipment.


Consideraciones

Todas nuestras luminarias cuando usan un solo driver se cablearán en serie. Las tiras de led se deberán de cablear en paralelo entre sí.

Advertencias

Las luminarias se deben de conectar siempre apagadas. No se debe de tener el driver conectado a la red encendido al conectar las luminarias. En caso de tener conexiones intermedias se debe de seguir el siguiente esquema para no dañar las luminarias. (Esquema) No se debe de conectar la luminaria directamente al AC sin driver. No se deben de colocar las luminarias cerca de fuentes de calor ni de otros aparatos electrónicos.

Wiring - EM converter LED BASIC with a standard LED Driver and one LED module for main and emergency operation

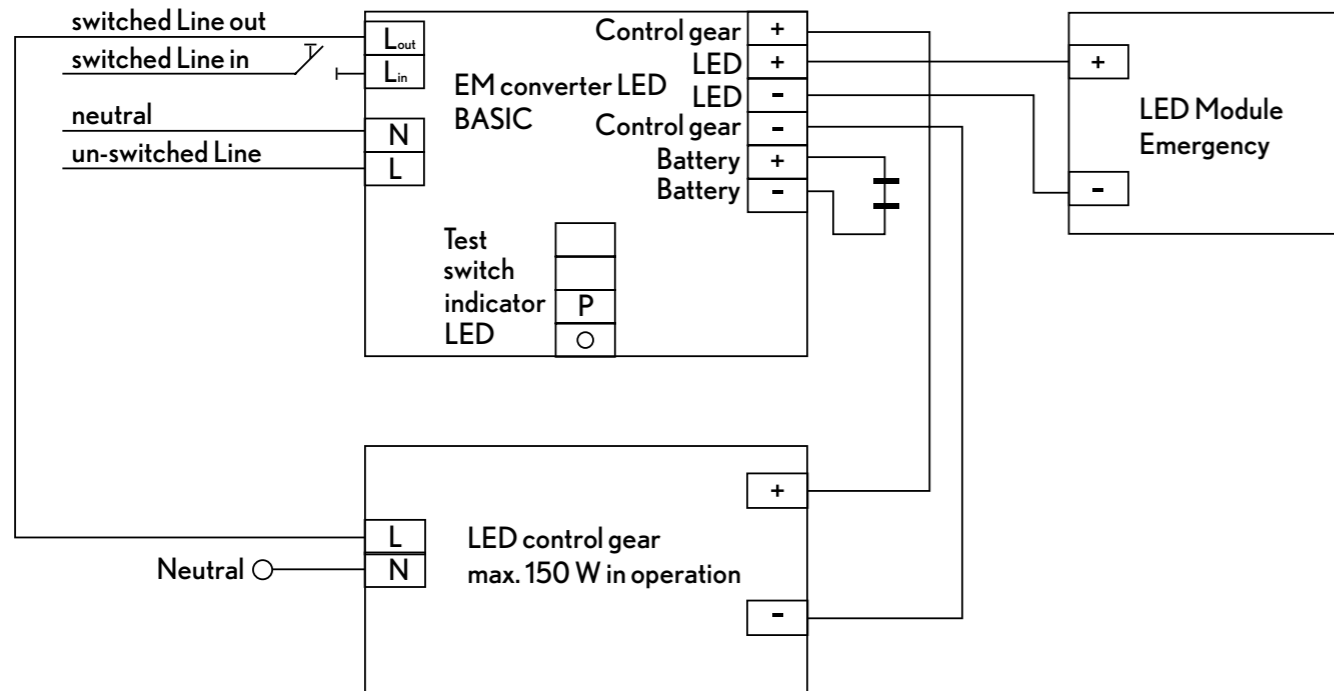

Emergency kit

There are two types of emergency lighting: Centralised and single emergency lighting

Centralised emergency lighting

A large battery or generator supplies energy to the emergency lighting fixtures via a specially protected power supply. In this case, the drivers have a DC recognition function that uses the input voltage to detect the emergency mode. The driver automatically turns on the DC mode and controls the light to the set DC level.

The DC lighting level is generally 15% of nominal. When the installation enters DC mode, all the sensors stop working.

What do I need?

You only need one DC-ready driver in addition to AC-mode, which is used during normal operation of the lighting fixture. An additional battery or generally must be installed to connect the light fixture driver.

Decentralised emergency lighting

This does not have its own mains supply. An emergency kit consisting of emergency lighting equipment, a battery and LED indicator is required.

How does the emergency kit work?

The emergency kits supplied by BPM are for permanent use, and work normally with your driver and when the general mains network fails. The emergency kit driver detects there is voltage in the network and allows the lighting fixture driver work under normal conditions. In case of a power failure in the grid, the emergency kit driver releases the energy in the battery to power the LEDs.

What do I need?

You need a lighting fixture, its driver and LEDs and an emergency kit. The battery in the emergency kit must be installed separately from the lighting fixture and there must be a space to locate it.

How many emergency kits do I need?

An emergency kit can supply one driver with less than 150W. If the lighting fixture has more than one driver and full lighting is required, you need the same number as emergency kits as drivers in the light fixture. If only one kit is fitted, only the part of the lighting fixture that is associated with the driver will light up.

Kit de emergencia

Existen dos tipos de iluminación de emergencia:

Iluminación de emergencia de alimentación centralizada y descentralizada

Emergencia Centralizada

Una batería grande o generador suministran la energía necesaria para la iluminación de emergencia a través de una red de suministro con una protección especial.

En este caso los drivers tienen una función de reconocimiento DC que usa el voltaje de entrada para detectar el modo de emergencia. El driver automáticamente enciende el modo DC y regula la luz al nivel definido DC. Generalmente el nivel DC de iluminación es del 15% del nominal. Cuando la instalación entra en modo DC todos los sensores dejan de funcionar.

¿Qué necesito?

Sólo se necesita un driver preparado para trabajar en modo DC además de en modo AC, que será el que se use durante el funcionamiento habitual de la luminaria. La instalación debe de estar preparada con una batería o generador adicional donde conectar el driver de la luminaria.

Emergencia Descentralizada.

No cuenta con una red de alimentación propia. Se necesita de kit de emergencia compuesto por un equipo de iluminación de emergencia, una batería y un indicador LED.

¿Cómo funciona el Kit de emergencia?

Los Kit de emergencia suministrados por BPM son de uso permanente, es decir, funciona normalmente con su driver y además cuando falla la red general. El driver del Kit de emergencia comprueba que hay tensión en la red dejando que el driver de la luminaria trabaje en condiciones normales de utilización. Cuando hay un fallo de suministro eléctrico en la red, el driver del kit de emergencia permite liberar la energía acumulada en la batería alimentando los LEDs.


¿Qué necesito?

Se necesita la luminaria compuesta de su driver y LEDs y un kit de emergencia. En cualquier caso, la batería de los Kit de emergencia debe de ir externa a la luminaria por lo que se debe de prever un espacio para su alojamiento

¿Cuántos kit de emergencia necesito?

Con un kit de emergencia se puede dar servicio a un solo driver de potencia inferior a 150W.

Si una luminaria lleva más de un driver y se requiere que se ilumine completamente se necesitarán tantos kits de emergencia como drivers lleve la luminaria. En este caso si sólo se coloca un kit se iluminará únicamente la parte de la luminaria que lleve asociado el driver con el kit de emergencia.

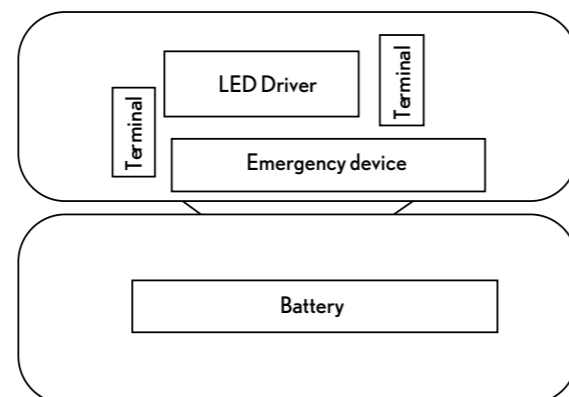

Are BPM light fixtures approved according to standard?

Please note that BPM Lighting luminaires are not in any case, emergency luminaires approved according to the EN-60598-2:22. Our emergency kits provide low anti-panic lighting for between one and three hours in case of a ma in power failure (see ref. ACKITLED1H and ref. ACKITLED3H).

¿Son las luminarias de BPM homologadas según la norma?

Las luminarias de BPM que llevan kit de emergencia en ningún caso son luminarias de emergencia homologadas según la norma EN-60598-2:22. Los kits de emergencia suministrados permiten mantener una iluminación reducida antipánico, durante 1 o 3 horas en caso de fallos de suministro eléctrico de la red (ver ref. ACKITLED1H y ref. ACKITLED3H).

DIMMING OPTIONS

1.10V

How does it work?

The driver generates a 1V (minimum) to 10V (maximum) analogue signal a dimmer switch controller. Dimming from 1 to 100%.

What do I need?

You need an L and N power source plus two control cables with + and - polarity and a compatible 1.10V controller. To switch off, install an ON-OFF switch with a 0.10V driver.

Can I dim the lights in more than one place?

It is not possible to control your lights from more than one point when you install a controller. A conventional switch can be used to switch on and off from several points, but only one of them can be a dimmer.

PHASE CUT

How does it work?

Lights are dimmed by cutting the mains voltage at the beginning (leading) or the end (trailing) of the phase. Dimming: 10/20-100% depending on driver.

The driver may make a noise when dimmed and flickering can occur at the lowest levels.

What do I need?

You only need an L and N power source. An additional control cable is not required, but a phase cut-off regulator is. The dimmer switch must be LED compatible. Always consider the compatibility of the dimmer switch with the driver and whether it is cutting at the trailing or leading end of the phase. The dimmer switch supplier can advise on compatibility.

Can I dim the lights in more than one place?

No. You cannot have more than one dimmer switch. You can only have one from a conventional ON-OFF switch (on and off only).

PUSH

How do they work?

The lights are dimmed with a switch, which is usually on. Press the push button quickly to turn the light on or off, and hold it in for the dimming function. The range is from 1-5% to 100%.

Lighting may go out of synch when a single push button is used. It can usually be synchronised again by holding the button in for a specific time or using a pulse sequence determined by the driver.

What do I need?

All you need is a conventional push button without a pilot light.

No additional control pads are required.

PUSH dimmer switches require an L and N power supply plus an additional cable back to the push button. In some cases the driver needs an additional neutral input which must be bridged with the installation neutral.

Can I control my lights from more than one push button?

You can install several push buttons in a row for multi-point control. In this case, the wire back to the button must enter each driver in parallel and must not be bridged from driver to driver.

You can connect numerous lights to a single button, but the more lights you connect, the greater the risk of loss of synchronisation. The number of devices controlled by a push button depends on the driver (ask the technical team).

DALI

How does it work?

The Digital Addressable Lighting Interface (DALI) system allows you to control each DALI device. By device, we mean the driver and the sensor (not the luminaire). It uses a low-voltage bidirectional communication protocol to send and receive messages. DALI digitally controlled by a standard lighting control protocol under the IEC 62356 standard. Control from 1-5% to 100% DALI keeps your lighting in sync.

Features:

DALI devices per BUS: 64

Number of DALI groups per BUS: 16

Number of DALI scenarios per BUS: 16

DALI Voltage: 9.5-22.5v, typically 16V

DALI system current: Max. 250 mA.

Maximum cable length: 300 m with a cross-section of 1.5 mm²

What do I need?

You need an L and N power supply plus two control signal wires. These control cables must be powered by a DALI BUS.

You also need regulators with DALI protocol support.

Can I dim the lights in more than one place?

There are two options: By means of DALI panels/interfaces directly connected to the DALI BUS that consume a DALI address for each panel placed and must be programmed; or through DALI dimmer switches that are connected to 230Vac and work by means of short presses to turn on/off and long presses to dim.

CÓMO REGULO?

1.10V

¿Cómo funciona?

El driver genera una señal analógica de 1V (mínimo) a 10V (máximo) que llega a un controlador que regula la intensidad lumínica. Regulación del 1 al 100%.

¿Qué necesito?

Se necesita una alimentación L y N más dos cables de control con polaridad + y - y un controlador compatible 1.10V.

Si se quiere apagar se necesita colocar un regulador con ON-OFF o bien regular mediante driver 0.10V.

¿Puedo regular desde varios puntos?

No es posible regular desde varios puntos cuando se coloca un controlador. Se puede utilizar un interruptor convencional conmutado de manera que se pueda encender y apagar desde varios puntos pero sólo uno de ellos podrá regular.

CORTE DE FASE

¿Cómo funciona?

La regulación se realiza mediante corte de la onda de la tensión de red al inicio (leading) o al final (trailing) de la fase.

Regulación: 10/20-100% dependiendo del driver.

Puede generar ruido en el driver y al regular la intensidad al mínimo puede general flickering.

¿Qué necesito?

Sólo necesita alimentación L y N. No necesita cable adicional de control, pero sí un regulador de corte de fase.

El regulador debe de ser compatible con LED. Se debe de tener en cuenta la compatibilidad del regulador con el driver y si es corte por trailing o leading. Dicha compatibilidad la dará el proveedor del regulador.

¿Puedo regular desde varios puntos?

No se puede regular desde varios puntos. Sólo se puede regular desde un punto y conmutar el ON-OFF desde el interruptor convencional (sólo para encender y apagar).

PUSH

¿Cómo funciona?

Regulación a través de un pulsador normalmente abierto. La regulación se realiza con pulsaciones cortas para apagar/encender y una pulsación mantenida para el control de la intensidad lumínica.

Regulación del 1-5% al 100%.

Puede aparecer desincronización en la regulación de las luminarias con un solo pulsador. Se suele re-sincronizar generalmente con una pulsación mantenida durante un tiempo determinado o con una secuencia de pulsación determinada según el driver.

¿Qué necesito?

Se requiere de pulsadores convencionales sin piloto de luz y no necesita ningún tipo de pastilla de regulación adicional.

La regulación PUSH necesita de alimentación L y N más un cable adicional de vuelta al pulsador. En algunos casos el driver puede necesitar una entrada adicional de neutro que debe de puentearse con el neutro de la instalación.

¿Puedo regular desde varios puntos?

Es posible colocar varios pulsadores en paralelo para control desde varios puntos. En este caso, el cable de vuelta al pulsador debe entrar a cada driver en paralelo y no se debe de puentear de un driver a otro.

Es posible colocar varios equipos a un mismo pulsador, pero a mayor cantidad de equipos mayor riesgo de desincronización.

El número de equipos soportados por un pulsador dependerá del driver (Consultar con el equipo técnico).

DALI

¿Cómo funciona?

El sistema de regulación DALI (Digital Adresable Lighting Interface) permite el control de cada dispositivo DALI. Se entiende por dispositivo el driver y el sensor (no la luminaria). Utiliza un protocolo de comunicación bidireccional de bajo voltaje que permite enviar y recibir mensajes.

Se regula de forma digital mediante un protocolo estándar de control de iluminación bajo el estándar IEC 62356. Regulación del 1-5% al 100%

Con DALI se evita cualquier tipo de desincronización.

Características:

Dispositivos DALI por cada BUS: 64

Cantidad de grupos DALI por cada BUS: 16

Cantidad de escenas DALI por cada BUS: 16

Tensión DALI: 9.5-22.5v, normalmente 16V

Corriente del sistema DALI: máx. 250mA.

Máxima longitud del cable: 300m con una sección transversal de 1.5mm²

¿Qué necesito?

Necesita alimentación L y N más dos cables de señal de control.

Estos cables de control deben de estar alimentados mediante un BUS DALI.

Además, son necesarios reguladores que deben de indicar su compatibilidad con protocolo DALI.

¿Puedo regular desde varios puntos?


Existen dos opciones: Mediante paneles/interfaces DALI conectados directamente al BUS DALI que consumen una dirección DALI por cada panel colocado y que deben de ser programados; o a través de interruptores reguladores DALI que van conectados a 230Vac y funcionan mediante pulsaciones cortas para encender/apagar y pulsaciones mantenidas para regular.

TECH RECOMMENDATIONS RECOMENDACIONES TÉCNICAS


PUSH: OPTION 1




PUSH: OPTION 2

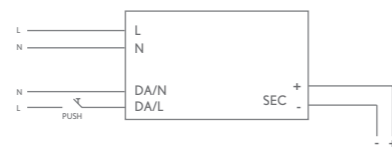

DALI

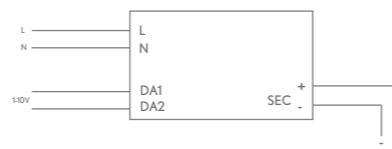

1-10V

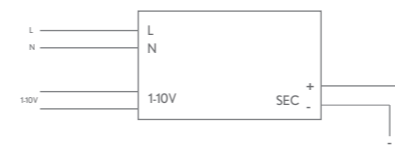

PHASE CUT



As IEC 60529 standard says, the IP protection degree specifies the different protection levels provided by the containers that protect the components in electrical or electronic equipment. The greater the IP protection degree, the more protected the equipment is. An IP XY protection degree indicates the following:

Según la Norma IEC 60529, el grado de protección IP especifica los diferentes niveles de protección aportados por los contenedores que resguardan los componentes de los equipos eléctricos o electrónicos. Cuanto mayor es el grado de protección IP, más protegido está el equipamiento. Un grado de protección IP XY indica lo siguiente:

X: Describes the level of protection against dust and other particles / Describe el nivel de protección contra polvo y otras partículas



X	Protection grade against dust / Grado de protección contra polvo
0	Without protection / Sin protección
1	Protected against solids bigger than 50 mm / Protegida contra sólidos de más de 50 mm
2	Protected against solids bigger than 12 mm / Protegida contra sólidos de más de 12 mm
3	Protected against solids bigger than 2,5 mm / Protegida contra sólidos de más de 2,5 mm
4	Protected against solids bigger than 1 mm / Protegida contra sólidos de más de 1 mm
5	Protection against the entrance of dust / Protegida contra la entrada de polvo
6	Full protected against dust / Totalmente protegida del polvo

Y: Describes the level against liquids / Describe el nivel de protección contra líquidos

Y	Protection grade against liquids / Grado de protección contra líquidos
0	Without protection / Sin protección
1	Protected against drops of water falling vertically / Protegida contra la caída vertical de gotas de agua
2	Protected against drops of water falling at a maximum inclination of 15° / Protegida contra la caída de gotas de agua con una inclinación máxima de 15°
3	Protected against sprayed water / Protegida contra agua pulverizada
4	Protected against splashes of water / Protegida contra las proyecciones de agua
5	Protected against jets of water / Protegida contra los chorros de agua
6	Protected against high pressure jets of water / Protegida contra chorros de agua a alta presión
7	Protected against plunging effects / Protegida contra los efectos de la inmersión
8	Protected against long immersion / Protegida contra la inmersión prolongada

*Specialized cleaning procedures are not covered by IP ratings. It is recommended that manufacturers provide, if necessary, adequate information regarding cleaning procedures. This is in accordance with the recommendations contained in IEC 60529 for special cleaning procedures.

*Los procedimientos especializados de limpieza no están cubiertos por los grados de protección IP. Se recomienda que los fabricantes suministren, si es necesario, una adecuada información en lo referente a los procedimientos de limpieza. Esto está de acuerdo con las recomendaciones contenidas en la Norma IEC 60529 para los procedimientos de limpieza especiales.

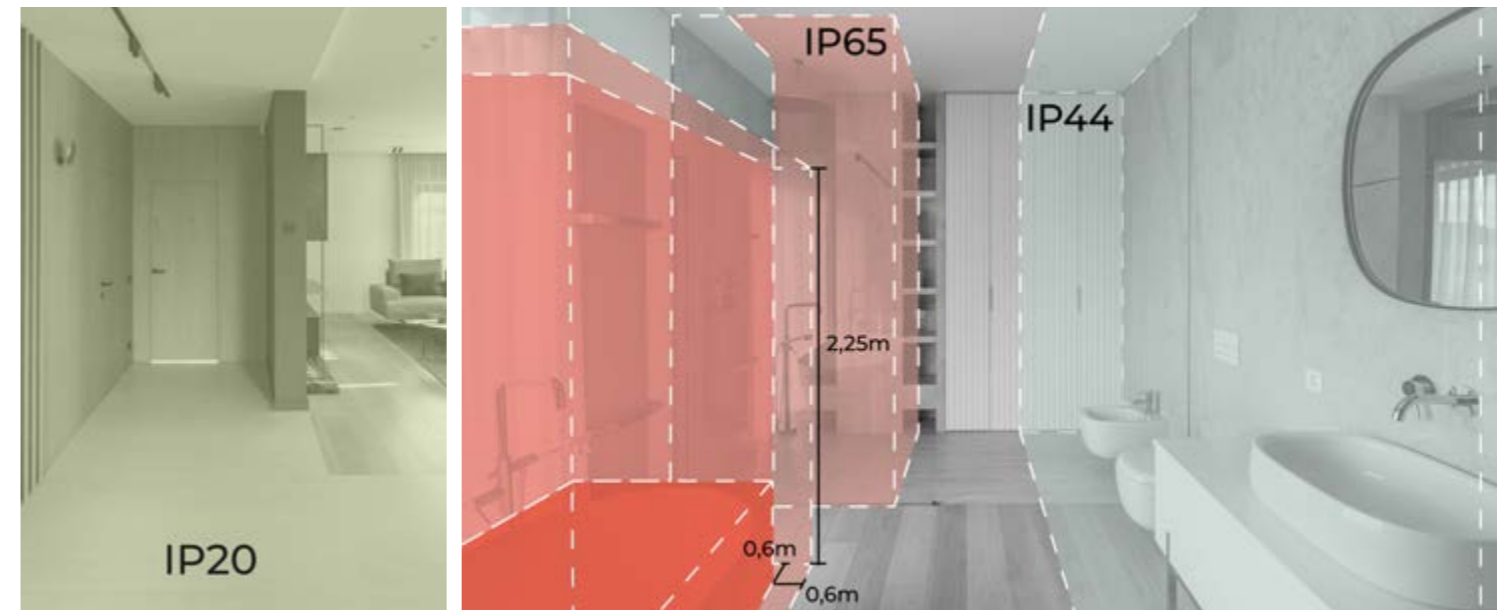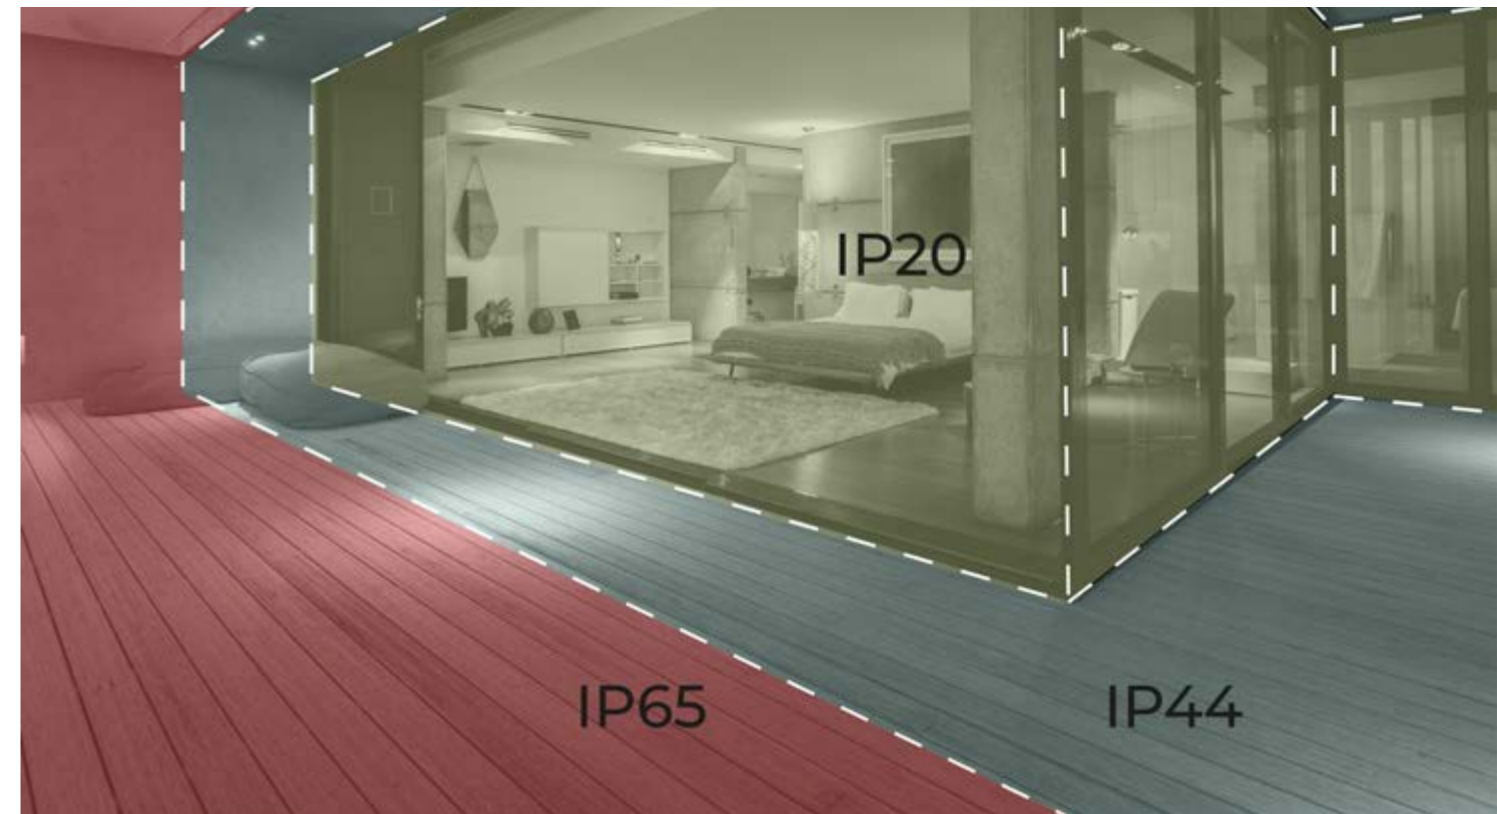

IP DEGREE OF PROTECTION GRADO DE PROTECCIÓN IP

TECH RECOMENDATIONS RECOMENDACIONES TÉCNICAS


IK DEGREE GRADO IK

The degree of protection IK is an international numerical classification for the degrees of protection provided by enclosures of electrical equipment against external mechanical impacts. This provides a means of specifying the ability of an enclosure to protect its contents from shock.

El grado de protección IK es una clasificación numérica internacional para los grados de protección proporcionados por las envolventes de materiales eléctricos contra los impactos mecánicos externos. Esto proporciona un medio para especificar la capacidad de un recinto para proteger su contenido de los golpes.

IK DEGREE GRADO IK	PROTECTION AGAINST EXTERNAL MECHANICAL IMPACTS PROTECCIÓN CONTRA IMPACTOS MECÁNICOS EXTERNOS	DESCRIPTION DESCRIPCIÓN
IK00	No protection / Sin proteger	
IK01	Protected against 0.150J impact. <i>Protegido contra impacto de energía 0.150J.</i>	Resistant against an impact of an object of 200 grs launched from a distance of 7.5 cm. <i>Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 7,5 cm.</i>
IK02	Protected against 0.200J impact. <i>Protegido contra impacto de energía 0.200J.</i>	Resistant against an impact of an object of 200 grs launched from a distance of 10 cm. <i>Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 10 cm.</i>
IK03	Protected against 0.350J impact. <i>Protegido contra impacto de energía 0.350J.</i>	Resistant against an impact of an object of 200 grs launched from a distance of 17.5 cm. <i>Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 17,5 cm.</i>
IK04	Protected against 0.500J impact. <i>Protegido contra impacto de energía 0.500J.</i>	Resistant against an impact of an object of 200 grs launched from a distance of 25 cm. <i>Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 25 cm.</i>
IK05	Protected against 0.700J impact. <i>Protegido contra impacto de energía 0.700J.</i>	Resistant against an impact of an object of 200 grs launched from a distance of 35 cm. <i>Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 35 cm.</i>
IK06	Protected against 1.00J impact. <i>Protegido contra impacto de energía 1.00J.</i>	Resistant against an impact of an object of 500 grs launched from a distance of 20 cm. <i>Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 20 cm.</i>
IK07	Protected against 2.00J impact. <i>Protegido contra impacto de energía 2.00J.</i>	Resistant against an impact of an object of 500 grs launched from a distance of 40 cm. <i>Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 40 cm.</i>
IK08	Protected against 5.00J impact. <i>Protegido contra impacto de energía 5.00J.</i>	Resistant against an impact of an object of 1,7 kg launched from a distance of 29,5 cm. <i>Resistente contra un impacto de un objeto de 1,7 kg lanzado desde una distancia de 29,5 cm.</i>
IK09	Protected against 10.00J impact. <i>Protegido contra impacto de energía 10.00J.</i>	Resistant against an impact of an object of 5 kg launched from a distance of 20 cm. <i>Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 20 cm.</i>
IK10	Protected against 20.00J impact. <i>Protegido contra impacto de energía 20.00J.</i>	Resistant against an impact of an object of 5 kg launched from a distance of 40 cm. <i>Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 40 cm.</i>

CLASS PROTECTION CLASES DE PROTECCIÓN




Class I:

Light fittings in which protection against electric shocks does not depend solely on the mains insulation, but instead contain an extra safety measure in the form of a circuit from the accessible conductive parts with an grounded protective conductor forming part of the installation's fixed wiring, so that the accessible conductive parts do not become dangerous should there be a defect in the mains insulation. Ground conductor is coloured green&yellow in most countries, and just green in the U.S., Canada and Japan.

Clase I:

Luminarias en la que la protección contra los choques eléctricos no recae exclusivamente sobre el aislamiento principal, sino que comprende una medida de seguridad suplementaria bajo la forma de medios de conexión de las partes conductoras accesibles con un conductor de protección puesto a tierra, formando parte del cableado fijo de la instalación, de tal manera que las partes conductoras accesibles no puedan llegar a ser peligrosas, en caso de defecto del aislamiento principal. La toma tierra es de color amarillo y verde en la mayoría de los países, y verde en los Estados Unidos, Canadá y Japón.




Class II:

A Class II or double insulated electrical appliance is one which has been designed in such a way that it does not require a safety connection to electrical ground. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that this is achieved without relying on an earthed metal casing. This is achieved having two layers of insulating material surrounding live parts or by using reinforced insulation.

Clase II:

Dispositivo de Clase II o aparato con doble aislamiento eléctrico es uno que ha sido diseñado de tal forma que no requiere una toma a tierra de seguridad eléctrica. El requisito básico es que un fallo simple no puede dar lugar a tensiones peligrosas que puedan causar una descarga eléctrica. Esto se consigue mediante dos capas de material aislante rodeando las partes con tensiones peligrosas o utilizando un aislamiento reforzado.



Class III:

A Class III appliance is designed to be supplied from a separated/safety extra-low voltage (SELV) power source. The voltage from a SELV supply is low enough that under normal conditions a person can safely come into contact with it without risk of electrical shock. The extra safety features built into Class I and Class II appliances are therefore not required. For medical devices compliance with Class III is not considered sufficient protection.

Clase III:

Un aparato de Clase III está diseñado para ser alimentado por una fuente de alimentación SELV (por sus siglas en inglés: "Separated or Safety Extra-Low Voltage"). La tensión de una fuente de SELV es lo suficientemente baja para que, en condiciones normales, una persona puede entrar en contacto con ella sin correr el riesgo de descarga eléctrica. Por tanto, no es necesario incorporar la seguridad que llevan los aparatos de Clase I y Clase II. Para el cumplimiento de los dispositivos médicos la Clase III no se considera suficiente para su protección.



GENERAL TERMS AND CONDITIONS OF SALE

All orders must be placed with BPM Iluminación S.L in writing by email, and customers hereby accept the terms and conditions detailed below. Goods supplied by the Company shall remain the property of BPM Iluminación S.L until payment is received, even if the goods have been sold to a third party. Delivery times are approximate and non-binding. BPM Iluminación S.L will not accept claims for damages due to late delivery. BPM Iluminación S.L reserves the right to amend, supplement or delete, without prior warning, the characteristics or designs of the products in this catalogue, as well as the corresponding prices. Therefore, customers are advised to contact BPM Iluminación S.L directly for the latest information. BPM Iluminación S.L is not responsible for the loss or damage of goods during transport by agencies. In accordance with Article 1 of Royal Decree 5/1997 of 14 January, complaint forms are available to our customers at the Company's registered office.

CANCELLING AN ORDER

Orders must be cancelled in writing and sent to BPM Iluminación S.L by email. If the order has already been dispatched, please request a refund, in accordance with the terms and conditions detailed in the following section.

RETURNING GOODS BPM

Lighting reserves the right to accept or reject return requests received. Returns must be made within 2 weeks of the invoice date, and a minimum depreciation rate of 5% will be applied to cover handling costs.

RETURN TERMS AND CONDITIONS

Return requests must be made in writing by email. Please send all returns correspondence to the following email address: info@bpmlighting.com. In order to submit a request, please use the returns form provided by BPM Iluminación S.L, stating, at the very least, the reason for the return, article reference number(s), quantity, item condition, date and invoice number. If the return is authorised: The item must be returned in its original packaging and in perfect condition. BPM Iluminación S.L must receive the goods within a maximum of 10 days after the return has been authorised. Any costs for returning the goods are the responsibility of the customer. Returned goods will not be accepted in the case of discontinued or customised items (manufactured specifically for the customer). Please send the item, together with the documentation required by the Sales Department, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain.

WARRANTY

BPM Iluminación S.L guarantees its luminaires and all the components it distributes.

1. BPM Iluminación S.L products are guaranteed against any manufacturing defects (components and labor) for a period of 5 years from the date of purchase.
2. On the basis of this warranty, BPM Iluminación S.L. is only obliged to repair or replace the product or defective part returned to BPM Iluminación S.L.
3. In any case, the guarantee does not include installation, assembly or disassembly costs....

The warranty period starts from the date of issue of the original invoice from BPM Iluminación S.L, and under no circumstances shall it be renewed by replacing a component in a repair or by replacing the complete item.

WARRANTY TERMS AND CONDITIONS

Incident claims (for products that are damaged, faulty, incorrect, or any other cause for complaint upon delivery) must be made in writing by email. Please send all incident claims to the following email address: info@bpmlighting.com. In order to submit an incident claim, please use the incident form provided by BPM Iluminación S.L, stating, at the very least, the reason for the incident, article reference number(s), quantity, date and invoice number. If the incident claim is authorised by invoking the warranty: The Sales Department will provide an incident code to process the claim. Please send the item, together with the documentation required by the Sales Department and the incident code, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain. Once BPM Iluminación S.L has authorised the collection of the item due to an incident, and once the Technical Department has verified that BPM Iluminación S.L is responsible for the source of the incident, the postage will be covered by BPM Iluminación S.L. These warranty terms and conditions do not affect the consumer's statutory rights under the current applicable legislation.

WARRANTY INVALIDATION CLAUSES

Improper use, handling or maintenance of a device, luminaire or component by the customer.
Improper repair, modification or extension of a luminaire or device by the customer.
Deterioration, removal or concealment of the BPM Iluminación S.L identification label by the customer. In any event, the warranty shall not be valid for items with obvious signs of improper handling.
Defects and damage caused by external events, accidents (in particular electrical accidents), wear and tear, and use not in accordance with BPM Iluminación S.L's instructions are excluded from any warranty.
BPM Iluminación S.L is not responsible for any product errors or breakages during shipping. - If a defect or breakage is not approved by BPM Iluminación S.L's Technical Department, the item will be returned cash on delivery.

SALES CONDITIONS

CONDICIONES GENERALES DE VENTA

Todos los pedidos deberán ser formulados a BPM Iluminación S.L. por escrito vía e-mail, quedando aceptadas por el cliente las condiciones escritas a continuación. La mercancía suministrada por la Empresa, será propiedad de BPM Iluminación S.L. hasta el momento de pago, aunque dicha mercancía hubiese sido vendida a un tercero.

Los plazos de entrega son aproximados y sin compromiso. BPM Iluminación S.L. no aceptará demandas por daños y perjuicios por la demora en la entrega.

BPM Iluminación S.L. se reserva el derecho de modificar, complementar o suprimir, sin previo aviso, las características o diseños de los productos presentes en este catálogo, así como sus correspondientes tarifas. Por este motivo, se recomienda al cliente ponerse en contacto directamente con BPM Iluminación S.L. para obtener una información actualizada.

La pérdida o deterioro de la mercancía durante el transporte por agencia no es responsabilidad de BPM Iluminación S.L.

De acuerdo con el art. 1 del RD 5/1997 14 Enero, existen a disposición de nuestros clientes hojas de reclamación en el domicilio social de la Empresa.

ANULACIÓN DE PEDIDOS

Las anulaciones de pedidos deberán hacerse por escrito y notificarse a BPM Iluminación S.L. vía e-mail. En caso de que el pedido ya se hubiese enviado, deberá solicitarse la devolución del mismo, acogiéndose a las condiciones detalladas en el siguiente apartado.

DEVOLUCIÓN DE MERCANCÍA

BPM Iluminación S.L. se reserva el derecho de autorizar y aceptar las solicitudes de devolución recibidas. En cualquier caso, se requerirá que no hayan transcurrido 15 días desde la fecha de la factura, y se aplicará una depreciación mínima del 5% por los costes de gestión.

CONDICIONES DE DEVOLUCIÓN

La solicitud de devolución deberá formalizarse por escrito vía e-mail. Las devoluciones deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la solicitud deberá utilizarse el formulario de devolución habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la devolución, referencia de artículo/s, cantidad, estado del material, fecha y número de factura.

En el caso de que la devolución fuera autorizada:

El material deberá devolverse en su embalaje original y en perfecto estado de conservación.

BPM Iluminación S.L. deberá recibir la mercancía en un plazo máximo de 10 días desde la autorización de la devolución.

Los portes de la devolución serán asumidos por el cliente.

No se admitirán devoluciones de mercancía en el caso de material des-catalogado o customizado (fabricado expresamente para el cliente).

El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

GARANTÍA

BPM Iluminación S.L. garantiza sus luminarias, así como los equipos que distribuye.

1 - Los productos de BPM Iluminación, S.L. están garantizados contra cualquier defecto de fabricación (componentes y mano de obra) durante un periodo de 5 años a partir de la fecha de compra.

2 - En razón de esta garantía, sólo incumbe a BPM Iluminación, S.L. la obligación de reparar o reemplazar el producto, o la pieza reconocidos como defectuosos y devueltos a BPM Iluminación, S.L.

3 - En cualquier caso, la garantía no incluye los gastos de instalación, montaje o desmontaje...

El plazo de garantía se inicia a partir de la fecha de emisión de factura originaria de BPM Iluminación S.L., no pudiendo ser renovado en ningún caso por sustitución de un componente en una reparación o reposición del artículo completo.

CONDICIONES DE GARANTÍA

La reclamación por incidencia (que el producto se entregue deteriorado, averiado, equivocado, o cualquier otra causa susceptible de reclamación), deberá formalizarse por escrito vía e-mail.

Las reclamaciones por incidencia deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la reclamación de incidencia deberá utilizarse el formulario de incidencia habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la incidencia, referencia de artículo/s, cantidad, fecha y número de factura.

En el caso de que la reclamación por incidencia fuera autorizada invocando la garantía:

El Área Comercial proporcionará un código de incidencia para la tramitación. El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, con referencia al código de incidencia facilitado, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

Autorizada por BPM Iluminación S.L. la recogida del material por incidencia, y una vez verificada por el Área Técnica la responsabilidad del origen de la incidencia de BPM Iluminación S.L., los portes serán asumidos por BPM Iluminación S.L.

Estas condiciones de garantía no afectan a los derechos estatutarios del consumidor amparados por la legislación vigente aplicable.

CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Incorrecta utilización, manipulación o mantenimiento por parte del cliente de un equipo, luminaria o componente.

Incorrecta reparación, modificación o ampliación por parte del cliente de una luminaria o un equipo.

Deterioro, eliminación u ocultación, por parte del cliente, de la etiqueta identificativa de BPM Iluminación S.L.

En cualquier caso, no se asumirá la garantía del material con muestras evidentes de una manipulación incorrecta.

Quedan excluidos de toda garantía los defectos y deterioros producidos por hechos externos, accidentes, principalmente accidentes eléctricos, por desgaste y por utilización no conforme a las instrucciones de BPM Iluminación S.L.

BPM Iluminación S.L. no se responsabiliza de los errores o roturas producidas en el envío del producto.

En caso de defecto o rotura no validada por el Área Técnica de BPM Iluminación S.L., se procederá a la devolución del material a portes debidos.

CONDICIONES DE VENTA



Let's get brighter, let's co-create, let us support you step by step, because our goal is to help you design the perfect lighting solution for your project.

Co-creemos, déjanos ayudarte con lo que mejor sabemos hacer, luz, porque nuestro objetivo es diseñar la perfecta solución lumínica para tu proyecto.



ALARIK SLIM COMPOSITION | BUSINESS HUB VISUALIZATION
ARCHITECTURE: IN COLLABORATION WITH CRYSTALZOO

Scan to find out more detail about our products
Escanea y descubre todo sobre nuestros productos



BPM Lighting S.L. reserves the right to reproduce total or partially this catalogue as Copyright owner.

The content is up to date at the day of print, nevertheless, due to continuous product development and improvement, BPM Lighting reserves the right to alter it without prior notice.

Last catalogue version in bpmlighting.com

BPM Lighting S.L. se reserva el derecho de reproducción total o parcial de este catálogo como propietario del Copyright.

El contenido está actualizado en la fecha de impresión, sin embargo, debido al continuo desarrollo y mejora de los productos, BPM Lighting se reserva el derecho de modificarlo sin previo aviso.

Última versión de catálogo en bpmlighting.com

BPM Lighting Copyright © 2022

Design and layout / Diseño y maquetación
BPM Lighting Team / Equipo BPM Lighting



BPMLIGHTING.COM