




DURA
LAMP

PANTH ST

versatile floodlights

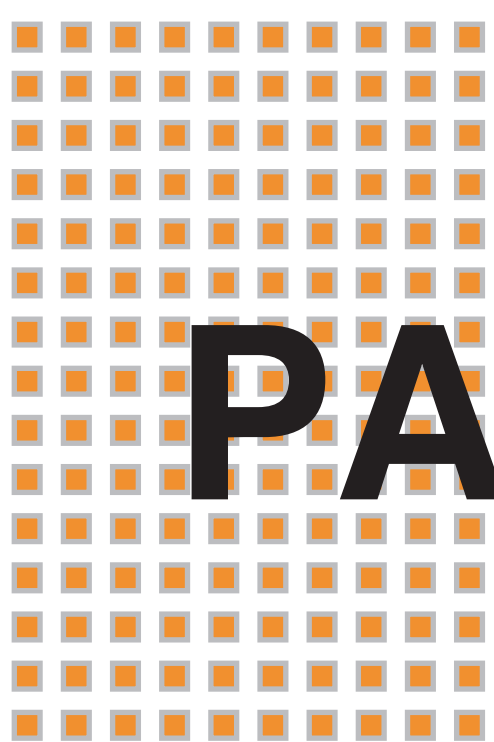

PANTH ST



Wide choice of powers and color temperature.

- 10W
850lm
- 20W
1600lm
- 30W
2400lm
- 50W
4000lm
- 100W
8000lm
- 150W
12000lm
- 200W
17000lm
- 250W
25000lm
- 350W
35000lm

BASIC

SIZE:
10 to 49 CM

COLOUR TEMPERATURE:
3000K - 4000K - 6500K

LIFETIME:
20000H L70 B30

WARRANTY:
2 ANNI

1
2
3

TYPE

High power, ultra-thin LED projector; can be used outdoor and indoor.

CHARACTERISTICS

It can be connected to motion or twilight sensors. High power items are equipped with a GORE-TEX® valve to compensate for pressure variations due to thermal changes and to prevent the formation of condensation in the fixture.

MATERIALS

Painted diecast aluminium. Black and white colour.

4


NB
Free wire for professional use



10W/20W/30W/50W =
300mm

100W/150W/200W/250W/350W =
950mm

DURA
LAMP

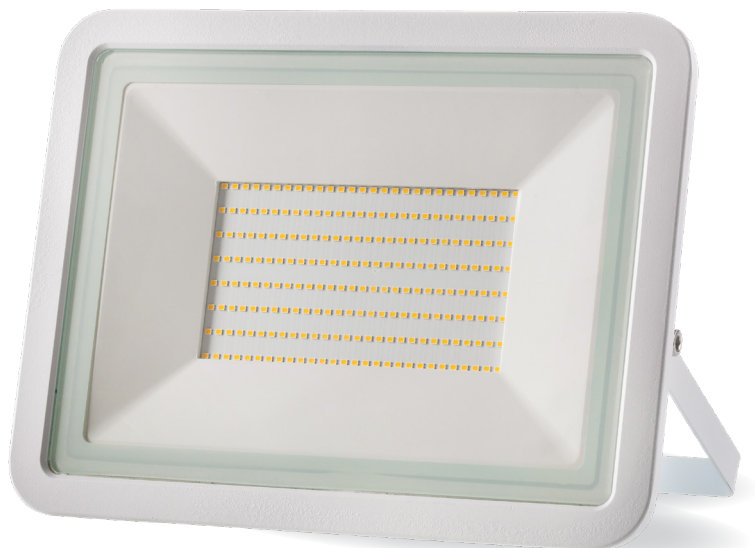

PANTH ST is a truly versatile product!

It looks good everywhere, from heavy duty to design environments: construction site, sports field, production spaces with great heights, façade lighting.

Thanks to its linear and pleasing design, it is also suitable for use in commercial and residential interiors: receptions, corridors, stairwells, up to the living room at home where, with its 3000K colour, it replaces halogen floodlights with **great energy saving.**

BASIC	220-240V 50/60Hz	Ra>80		20000h L70 B30	IP65	-25° +35°C		G2	Risk Group 1
-------	---------------------	-------	--	-------------------	------	---------------	--	----	-----------------

art.		W	lm	cd	K	PF		L	H	L1		
PANTH-ST10W		10	800	320	3000	0,9	120°	103	83	26	185	5 •
PANTH-ST10N		10	850	340	4000	0,9	120°	103	83	26	185	5 •
PANTH-ST10C		10	850	340	6500	0,9	120°	103	83	26	185	5 •
PANTH-ST20W		20	1600	600	3000	0,9	120°	121	95	26	320	5 •
PANTH-ST20N		20	1600	660	4000	0,9	120°	121	95	26	320	5 •
PANTH-ST20C		20	1600	660	6500	0,9	120°	121	95	26	320	5 •
PANTH-ST30W		30	2400	890	3000	0,9	120°	160	123	30	610	5 •
PANTH-ST30N		30	2400	950	4000	0,9	120°	160	123	30	610	5 •
PANTH-ST30C		30	2400	950	6500	0,9	120°	160	123	30	610	5 •
PANTH-ST50W		50	4000	1400	3000	0,9	120°	206	160	31,5	870	10
PANTH-ST50N		50	4000	1540	4000	0,9	120°	206	160	31,5	870	10
PANTH-ST50C		50	4000	1540	6500	0,9	120°	206	160	31,5	870	10
PANTH-ST100W		100	8000	3100	3000	0,9	120°	270	210	35	1410	10
PANTH-ST100N		100	8000	3300	4000	0,9	120°	270	210	35	1410	10
PANTH-ST100C		100	8000	3300	6500	0,9	120°	270	210	35	1410	10
PANTH-ST150W		150	12000	4700	3000	0,9	120°	330	250	35	2790	5
PANTH-ST150N		150	12000	5000	4000	0,9	120°	330	250	35	2790	5
PANTH-ST150C		150	12000	5000	6500	0,9	120°	330	250	35	2790	5
New PANTH-ST200N		200	16000	6510	4000	0,9	120°	388	288	36	4270	5
New PANTH-ST200C		200	16000	6510	6500	0,9	120°	388	288	36	4270	5
PANTH-ST250W		250	22000	8200	3000	0,9	120°	445	334	45,5	4270	4
PANTH-ST250N		250	25000	8200	4000	0,9	120°	445	334	45,5	4270	4
PANTH-ST250C		250	25000	8200	6500	0,9	120°	445	334	45,5	4270	4
New PANTH-ST350N		350	35000	11000	4000	0,9	120°	490	370	49	6000	2
New PANTH-ST350C		350	35000	11000	6500	0,9	120°	490	370	49	6000	2

• Minimum Order Quantity






BASIC	220-240V 50/60Hz	Ra>80		20000h L70 B30	IP65	-25° +35°C		G2	Risk Group 1
--------------	---------------------	-------	--	-------------------	------	---------------	--	-----------	--------------

art.		W	lm	cd	K	PF		L	H	L1			
New	PANTH-STWH10N	<input type="checkbox"/>	10	800	350	4000	0,9	120°	103	83	26	185	5•
New	PANTH-STWH10C	<input type="checkbox"/>	10	800	350	6500	0,9	120°	103	83	26	185	5•
New	PANTH-STWH20N	<input type="checkbox"/>	20	1600	650	4000	0,9	120°	121	95	26	320	5•
New	PANTH-STWH20C	<input type="checkbox"/>	20	1600	650	6500	0,9	120°	121	95	26	320	5•
New	PANTH-STWH30N	<input type="checkbox"/>	30	2400	950	4000	0,9	120°	160	123	30	610	5•
New	PANTH-STWH30C	<input type="checkbox"/>	30	2400	950	6500	0,9	120°	160	123	30	610	5•
New	PANTH-STWH50N	<input type="checkbox"/>	50	4000	1500	4000	0,9	120°	206	160	31,5	870	10
New	PANTH-STWH50C	<input type="checkbox"/>	50	4000	1500	6500	0,9	120°	206	160	31,5	870	10
New	PANTH-STWH100N	<input type="checkbox"/>	100	8000	3400	4000	0,9	120°	270	210	35	1410	10
New	PANTH-STWH100C	<input type="checkbox"/>	100	8000	3400	6500	0,9	120°	270	210	35	1410	10
New	PANTH-STWH150N	<input type="checkbox"/>	150	12000	5100	4000	0,9	120°	330	250	35	2790	5
New	PANTH-STWH150C	<input type="checkbox"/>	150	12000	5100	6500	0,9	120°	330	250	35	2790	5
New	PANTH-STWH200N	<input type="checkbox"/>	200	16000	6800	4000	0,9	120°	388	288	36	4270	5
New	PANTH-STWH200C	<input type="checkbox"/>	200	16000	6800	6500	0,9	120°	388	288	36	4270	5
New	PANTH-STWH250N	<input type="checkbox"/>	250	25000	8800	4000	0,9	120°	445	334	45,5	4270	4
New	PANTH-STWH250C	<input type="checkbox"/>	250	25000	8800	6500	0,9	120°	445	334	45,5	4270	4
New	PANTH-STWH350N	<input type="checkbox"/>	350	35000	12000	4000	0,9	120°	490	370	49	6000	2
New	PANTH-STWH350C	<input type="checkbox"/>	350	35000	12000	6500	0,9	120°	490	370	49	6000	2

• Minimum Order Quantity



For photometries please consult the website.

