



DURA
LAMP

ON TRACK

direct lighting



LED TRACK PROJECTORS

1 TYPE

Track-mounted orientable LED projectors. Electronic driver integrated in the luminaire body. Adjustable from 0° to -90° on the vertical plane and 350° on the horizontal plane.

2 OPTIC

High efficiency LED Chip on Board. Precision optics with dichroic effect and replaceable lens option for different beam.



RA>90

12W - 20W

30W - 40W

FROM 900 UP
TO 3700 LM

15° - 36°(-->24°)

PLUS


50.000H L70B20
WARRANTY:
4 YEARS*



CHARACTERISTICS

Linear design perfect
anywhere

DIMENSIONS:
Ø 50/60/80 CM



PLUS	220-240V 50/60Hz	Ra>90		50000h L70 B20	IP20	-25° +35°C		G4	Risk Group 1
------	---------------------	-------	--	-------------------	------	---------------	--	----	-----------------

DURA BEAM

art.				W	lm	K		Ø	L	H
TB50L130-W	<input type="checkbox"/>	TB50L130-B	<input checked="" type="checkbox"/>	12	920	3000	15°	50	136	136
TB50L140-W	<input type="checkbox"/>	TB50L140-B	<input checked="" type="checkbox"/>	12	990	4000	15°	50	136	136
TB60L130-W	<input type="checkbox"/>	TB60L130-B	<input checked="" type="checkbox"/>	20	1700	3000	36°	60	148	146
TB60L140-W	<input type="checkbox"/>	TB60L140-B	<input checked="" type="checkbox"/>	20	1800	4000	36°	60	148	146
TB80L130-W	<input type="checkbox"/>	TB80L130-B	<input checked="" type="checkbox"/>	30	2500	3000	36°	80	190	166
TB80L140-W	<input type="checkbox"/>	TB80L140-B	<input checked="" type="checkbox"/>	30	2700	4000	36°	80	190	166
TB80L230-W	<input type="checkbox"/>	TB80L230-B	<input checked="" type="checkbox"/>	40	3500	3000	36°	80	200	166
TB80L240-W	<input type="checkbox"/>	TB80L240-B	<input checked="" type="checkbox"/>	40	3700	4000	36°	80	200	166

DURA
LAMP

3 MATERIALS
Die-cast painted aluminium body; black or white colour.

4 ACCESSORIES
Choice of accessories to better aim or modify the beam.

MOUNTING

All articles of this section are equipped with a safety lock to fix to the tracks and can be used with Eurostandard Plus tracks as well as with other brands: Staff, Nordlux, Nordic, Global, etc.



RA>85

10W - 15W
22W - 38W
FROM 900 UP TO
4000 LM
24° - 40° (-->24°- 60°)

PRO


50.000H L70B20
WARRANTY:
5 YEARS*



DIMENSIONS:
Ø 60/100/111 CM
95/108/141 CM

CHARACTERISTICS


Strong design and increased efficiency.



PRO	110-240V 50/60Hz	Ra>85		50000h L70 B20	IP20	-25° +35°C		G5/ h24	Risk Group 1
-----	---------------------	-------	--	-------------------	------	---------------	--	------------	-----------------

DURA TL

art.				W	lm	K		Ø	L	H
TD10S-3K8L-MSP-W	<input type="checkbox"/>	TD10S-3K8L-MSP-B	<input checked="" type="checkbox"/>	10	855	3000	24°	60	95	167
TD10S-4K8L-MSP-W	<input type="checkbox"/>	TD10S-4K8L-MSP-B	<input checked="" type="checkbox"/>	10	900	4000	24°	60	95	167
TD15M-3K8L-FL-W	<input type="checkbox"/>	TD15M-3K8L-FL-B	<input checked="" type="checkbox"/>	15	1235	3000	40°	100	108	184
TD15M-4K8L-FL-W	<input type="checkbox"/>	TD15M-4K8L-FL-B	<input checked="" type="checkbox"/>	15	1300	4000	40°	100	108	184
TD22M-3K8L-FL-W	<input type="checkbox"/>	TD22M-3K8L-FL-B	<input checked="" type="checkbox"/>	22	2185	3000	40°	100	108	184
TD22M-4K8L-FL-W	<input type="checkbox"/>	TD22M-4K8L-FL-B	<input checked="" type="checkbox"/>	22	2300	4000	40°	100	108	184
TD38L-3K8L-FL-W	<input type="checkbox"/>	TD38L-3K8L-FL-B	<input checked="" type="checkbox"/>	38	3800	3000	40°	111	141	189
TD38L-4K8L-FL-W	<input type="checkbox"/>	TD38L-4K8L-FL-B	<input checked="" type="checkbox"/>	38	4000	4000	40°	111	141	189

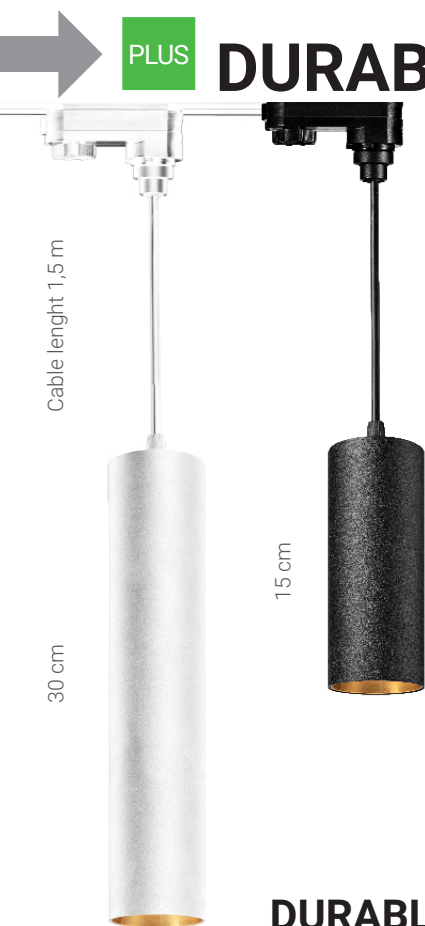


PLUS DURABLE TRACK PENDANTS DURABLE PROJECTORS

- TYPE**
DURABLE range is conceived for **GU10 base lamps** on both suspension for direct lighting and on orientable projectors.
- OPTIC**
Can be used with all GU10 lamps on Duralamp's catalogue: **select the desired power and beam opening.**




DIMENSIONS:
Ø 6 CM 13 CM

DURABLE SUSPENSION



PLUS	220-240V 50/60Hz	IP20	-25° +35°C		G3
art.			Ø	L	
DBSP215-W	<input type="checkbox"/>	GU10	60	150	
DBSP215-B	<input checked="" type="checkbox"/>	GU10	60	150	
DBSP230-W	<input type="checkbox"/>	GU10	60	300	
DBSP230-B	<input checked="" type="checkbox"/>	GU10	60	300	

DURABLE PROJECTORS



PLUS	220-240V 50/60Hz	IP20	-25° +35°C		G3
art.			Ø	L	H
DBTR160-W	<input type="checkbox"/>	GU10	60	130	170
DBTR160-B	<input checked="" type="checkbox"/>	GU10	60	130	170


BASIC SPOT SP01-W

DIMENSIONS:
Ø10,8 CM 27,7 CM

WARRANTY:
3 YEARS*



- TYPE** Adjustable fitting complete with adaptor for track mounting and **E27 lampholder**. Suitable for PAR20, PAR30, PAR38, REFLECT LED, A60 lamps. Max 30W.
- MATERIALS** Die-cast painted aluminium body, white color; steel adjustable arm.



BASIC	220-240V 50/60Hz	IP20	-25° +35°C		G3
art.			Ø	L	Ø1
SP01-W	<input type="checkbox"/>	E27	108	127	43