


wholesale edition



lighting guide

TRONIX guided by light

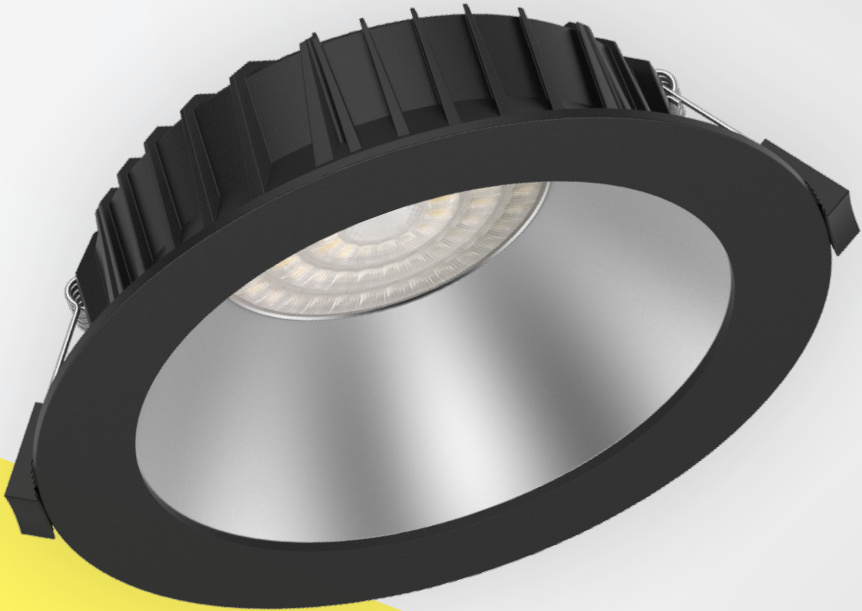

lighting guide

Welcome to the Tronix Lighting Guide for Electrical Wholesalers

This guide is your key to the essential Tronix lighting solutions. Inside, you'll find a carefully selected range of high-quality, best-selling products designed to support wholesalers in serving their customers quickly and efficiently.

With all products available from stock, plus options for dropshipping and single-unit orders, you have everything you need to keep your business running smoothly. This guide provides a clear and structured overview of specifications, article numbers, and essential details, ensuring quick access to the right information.

Tronix makes selecting the perfect lighting straightforward, so you can focus on what matters most; delivering quality and reliability to your customers.





This compact catalog contains a **selection of our assortment**.
Explore the full range of lighting and at tronixlighting.com.



Order online?

Ask for your personal
login account at sales@tronixlighting.com

Orders placed before
12.00h (GMT+1) will be
shipped the same day





*Downlights (136-454), LED panels (173-063) and emergency Lighting
(600-018 en 600-032) in the office building Strijbosch - Nistelrode, Netherlands*

Reflector | Downlights & Spots

SPOT | DIMMABLE | BLACK

This downlight spot has the size of a spotlight but the functionality of a downlight. Ideal for small spaces.



Input voltage: 220-240V

Power: 6/9 Watt

Driver: Included interne dimbare driver

Dimming method: Triac

UGR: <17

Beam: 40°

IP rate: IP44 (mounted)

Mounting: Recessed

Connection: Push-in connector

Housing material: Aluminium (thermal coating)

Housing color: Black



ART. NR.	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-178	6 Watt	300 Lm	2200K	● Warm white++	Ø 81 mm	87,7 mm	Ø 68 mm
136-179	6 Watt	370 Lm	2700K	● Warm white+	Ø 81 mm	87,7 mm	Ø 68 mm
136-103	6 Watt	400 Lm	3000K	● Warm white	Ø 81 mm	87,7 mm	Ø 68 mm
136-104	6 Watt	480 Lm	4000K	○ Natural white	Ø 81 mm	87,7 mm	Ø 68 mm
136-191	9 Watt	460 Lm	2700K	● Warm white+	Ø 103 mm	90,7 mm	Ø 90 mm
136-107	9 Watt	500 Lm	3000K	● Warm white	Ø 103 mm	90,7 mm	Ø 90 mm
136-108	9 Watt	500 Lm	4000K	○ Natural white	Ø 103 mm	90,7 mm	Ø 90 mm

SPOT | DIMMABLE | WHITE

This downlight spot has the size of a spotlight but the functionality of a downlight. Ideal for small spaces.



Input voltage: 220-240V

Power: 6/9 Watt

Driver: Included interne dimbare driver

Dimming method: Triac

UGR: <17

Beam: 40°

IP rate: IP44 (mounted)

Mounting: Recessed

Connection: Push-in connector

Housing material: Aluminium (thermal coating)

Housing color: White



ART. NR.	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-176	6 Watt	370 Lm	2200K	● Warm white++	Ø 81 mm	87,7 mm	Ø 68 mm
136-177	6 Watt	440 Lm	2700K	● Warm white+	Ø 81 mm	87,7 mm	Ø 68 mm
136-101	6 Watt	470 Lm	3000K	● Warm white	Ø 81 mm	87,7 mm	Ø 68 mm
136-102	6 Watt	480 Lm	4000K	○ Natural white	Ø 81 mm	87,7 mm	Ø 68 mm
136-190	9 Watt	580 Lm	2700K	● Warm white+	Ø 103 mm	90,7 mm	Ø 90 mm
136-105	9 Watt	600 Lm	3000K	● Warm white	Ø 103 mm	90,7 mm	Ø 90 mm
136-106	9 Watt	650 Lm	4000K	○ Natural white	Ø 103 mm	90,7 mm	Ø 90 mm

TRIAC LED DIMMERS

ART. NR.	POWER
215-131	2W - 350W
215-135	2X 2W - 100W

Downlights & Spots | Reflector

DOWNLIGHT REFLECTOR MATT | 3-CCT | BLACK

With a switch for setting the color temperatures 3000K - 4000K - 5700K and a power switch on the external driver.



Input voltage: 220-240V
Power: 7~11/6~15/13~25 Watt
Driver: Non-dimmable external driver included
Dimmable: Optional
UGR: <19
Beam: 60°
IP rate: IP54 (mounted)
Mounting: Recessed
Cable length: 200 cm
Connection: EU-plug/GST18i3
Housing material: PC/aluminium (black coated)



EU PLUG

ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-135	7~11 Watt	1342 Lm	3-CCT	Ø 145 mm	55 mm	Ø 118 mm
136-136	6~15 Watt	1837 Lm	3-CCT	Ø 170 mm	58 mm	Ø 138 mm
136-137	6~15 Watt	1942 Lm	3-CCT	Ø 190 mm	61 mm	Ø 158 mm
136-138	13~25 Watt	3265 Lm	3-CCT	Ø 228 mm	61 mm	Ø 199 mm

GST18i3

ART. NR.	POWER	MAX. LUM	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-395	7~11 Watt	1342 Lm	3-CCT	Ø 145 mm	55 mm	Ø 118 mm
136-396	6~15 Watt	1837 Lm	3-CCT	Ø 170 mm	58 mm	Ø 138 mm
136-397	6~15 Watt	1942 Lm	3-CCT	Ø 190 mm	61 mm	Ø 158 mm
136-398	13~25 Watt	3265 Lm	3-CCT	Ø 228 mm	61 mm	Ø 199 mm

DIMMABLE DRIVERS

POWER	TRIAC	1-10V	DALI	RF	ZIGBEE	CASAMBI
10 Watt	215-205	215-601	215-272	214-184	214-260	215-295
15 Watt	215-380	215-601	215-267	214-184	214-261	215-295
25 Watt	215-206	215-601	215-605	214-184	214-261	215-296

Reflector | Downlights & Spots

DOWNLIGHT REFLECTOR MATT | 3-CCT | WHITE

With a switch for setting the color temperatures 3000K - 4000K - 5700K and a power switch on the external driver.



Input voltage: 220-240V

Power: 7~11/6~15/13~25 Watt

Driver: Non-dimmable external driver included

Dimmable: Optional

UGR: <19

Beam: 60°

IP rate: IP54 (mounted)

Mounting: Recessed

Cable length: 200 cm

Connection: EU-plug/GST18i3 (136-139 terminal block)

Housing material: PC/aluminium (white coated)



EU PLUG

ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE	SENSOR
136-131	6~10 Watt	1362 Lm	3-CCT	Ø 145 mm	55 mm	Ø 118 mm	No
136-132	6~15 Watt	1854 Lm	3-CCT	Ø 170 mm	58 mm	Ø 138 mm	No
136-133	6~15 Watt	1952 Lm	3-CCT	Ø 190 mm	61 mm	Ø 158 mm	No
136-134	13~25 Watt	3287 Lm	3-CCT	Ø 228 mm	61 mm	Ø 199 mm	No
136-139	6~10 Watt	1143 Lm	3-CCT	Ø 180 mm	65 mm	Ø 165 mm	Yes

GST18i3

ART. NR.	POWER	MAX. LUM	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE	SENSOR
136-391	7~11 Watt	1362 Lm	3-CCT	Ø 145 mm	55 mm	Ø 118 mm	No
136-392	6~15 Watt	1854 Lm	3-CCT	Ø 170 mm	58 mm	Ø 138 mm	No
136-393	6~15 Watt	1952 Lm	3-CCT	Ø 190 mm	61 mm	Ø 158 mm	No
136-394	13~25 Watt	3287 Lm	3-CCT	Ø 228 mm	61 mm	Ø 199 mm	No

ACCESSORIES

ART. NR.	ACCESSORIES
136-154	Surface-mount kit for Downlight 136-131
136-155	Surface-mount kit for Downlight 136-133
136-156	Surface-mount kit for Downlight 136-134
136-157	Surface-mount kit for Downlight 136-135
136-158	Surface-mount kit for Downlight 136-137
136-159	Surface-mount kit for Downlight 136-138
136-256	Adapter ring for Downlight 200~260mm 136-134
136-259	Adapter ring for Downlight 200~260mm 136-259



Downlights & Spots | Reflector

REFLECTOR DOWNLIGHT ECO | 3-CCT | BLACK

With a switch for setting the color temperatures 3000K - 4000K - 6000K and a power switch on the external driver.



Input voltage: 220-240V
Power: 7~10/10~15/15~20/20~28 Watt
Driver: Non-dimmable external driver included
Dimmable: Optional
UGR: <19
Beam: 50°
IP rate: IP44 (mounted)
Mounting: Recessed
Cable length: 120 cm
Connection: EU-plug
Housing material: PC/aluminium (black coated)



ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-195	7~10 Watt	1010 Lm	3-CCT	Ø 113 mm	65,5 mm	Ø 90 mm
136-196	10~15 Watt	1393 Lm	3-CCT	Ø 145 mm	81,8 mm	Ø 120 mm
136-197	15~20 Watt	2052 Lm	3-CCT	Ø 174 mm	90 mm	Ø 145 mm
136-198	20~28 Watt	3024 Lm	3-CCT	Ø 232 mm	118 mm	Ø 195 mm

DIMMABLE DRIVERS

POWER	TRIAC	1-10V	DALI	RF	ZIGBEE	CASAMBI
10 Watt	215-380	215-601	215-272	214-184	214-260	215-295
15 Watt	215-280	215-601	215-267	214-184	214-261	215-295
20 Watt	215-281	215-601	215-267	214-184	214-261	215-295
28 Watt	215-282	215-602	215-605	214-184	-	215-296

Reflector | Downlights & Spots

REFLECTOR DOWNLIGHT ECO | 3-CCT | WHITE

With a switch for setting the color temperatures 3000K - 4000K - 6000K and a power switch on the external driver.



Input voltage: 220-240V

Power: 7~10/10~15/15~20/20~28 Watt

Driver: Non-dimmable external driver included

Dimmable: Optional

UGR: <19

Beam: 50°

IP rate: IP44 (mounted)

Mounting: Recessed

Cable length: 120 cm

Connection: EU-plug

Housing material: PC/aluminium
(white coated)



ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT	MOUNTING HOLE
136-112	7~10 Watt	1010 Lm	3-CCT	Ø 113 mm	65,5 mm	Ø 90 mm
136-115	10~15 Watt	1393 Lm	3-CCT	Ø 145 mm	81,8 mm	Ø 120 mm
136-118	15~20 Watt	2052 Lm	3-CCT	Ø 174 mm	90 mm	Ø 145 mm
136-121	20~28 Watt	3024 Lm	3-CCT	Ø 232 mm	118 mm	Ø 195 mm

ACCESSORIES

ART.NR.

600-028 LED emergency pack | 10-60V - 70mA




LED Panels | 60x60

LED PANEL 60X60 CM | 36W | 3-CCT

Flicker-free LED panel with a switch for setting the color temperatures 3000K - 4000K - 5700K. High luminous efficiency and UGR <19.



Input voltage: 220-240V
Power: 36 Watt
Luminous flux: 4030/4090 Lm
Luminous efficiency: >110/120 Lm/W
Driver: Non-dimmable external driver included
Dimmable: Optional
Beam: 120° / 90° UGR<19
IP rate: IP20
Length: 595 mm
Width: 595 mm
Height: 25 mm
Cable length: 200 cm
Connection: EU-plug
Housing material: Aluminium (white coated)

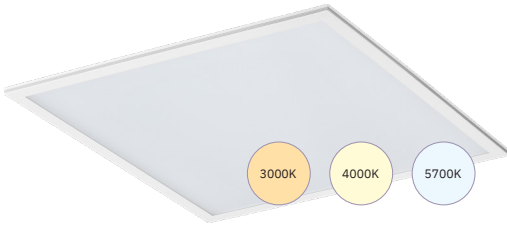


ART. NR.	SIZE	POWER	LUMINOUS FLUX	LM/WATT	UGR
173-052	60x60 cm	36 Watt	4030 Lm	110 Lm/W	19
173-050	60x60 cm	36 Watt	4090 Lm	120 Lm/W	22

LED PANEL 60X60 CM | 25W | 3-CCT

Flicker-free LED panel with a switch for setting the color temperatures 3000K - 4000K - 5700K. Very high luminous efficiency and UGR <19.



Input voltage: 220-240V
Power: 25 Watt
Luminous flux: 3790 Lm
Luminous efficiency: >150 Lm/W
Driver: Non-dimmable external driver included
Dimmable: Optional
Beam: 120° / 90° UGR<19
IP rate: IP20
Length: 595 mm
Width: 595 mm
Height: 25 mm
Cable length: 200 cm
Connection: EU-plug/GST18i3
Housing material: Aluminium (white coated)

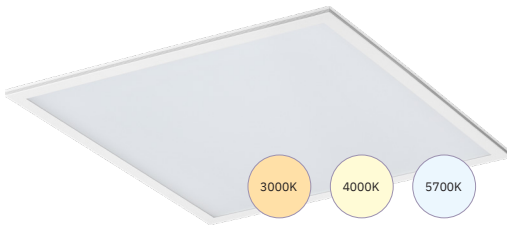

ART. NR.	SIZE	POWER	LUMINOUS FLUX	LM/WATT	UGR	CONNECTION TYPE
173-015	60x60 cm	25 Watt	3790 Lm	150 Lm/W	19	GST18i3
173-005	60x60 cm	25 Watt	3790 Lm	150 Lm/W	19	EU-plug
173-016	60x60 cm	25 Watt	3790 Lm	150 Lm/W	22	GST18i3
173-006	60x60 cm	25 Watt	3790 Lm	150 Lm/W	22	EU-plug

30x120 | LED Panels

LED PANEL 30X120 CM | 36W | 3-CCT

Flicker-free LED panel with a switch for setting the color temperatures 3000K - 4000K - 5700K. High luminous efficiency and UGR <19.



Input voltage: 220-240V

Power: 36 Watt

Luminous flux: 3815/4090 Lm

Luminous efficiency: >110/120 Lm/W

Driver: Non-dimmable external driver included

Dimmable: Optional

Beam: 120° / 90° UGR<19

IP rate: IP20

Length: 1195 mm


Width: 295 mm

Height: 25 mm

Cable length: 200 cm

Connection: EU-plug

Housing material: Aluminium (white coated)

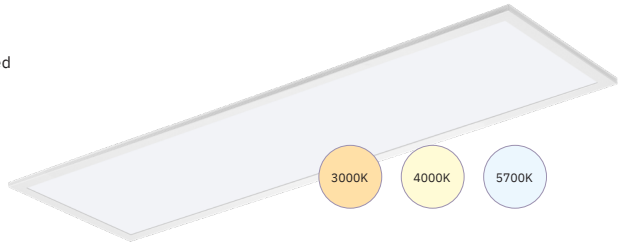

ART. NR.	SIZE	POWER	LUMINOUS FLUX	LM/WATT	UGR
173-053	30x120 cm	36 Watt	3815 Lm	110 Lm/W	19
173-051	30x120 cm	36 Watt	4090 Lm	120 Lm/W	22

LED PANEL 30X120 CM | 25W | 3-CCT

Flicker-free LED panel with a switch for setting the color temperatures 3000K - 4000K - 5700K. Very high luminous efficiency and UGR <19.



Input voltage: 220-240V

Power: 25 Watt

Luminous flux: 3750/3800 Lm

Luminous efficiency: >150 Lm/W

Driver: Non-dimmable external driver included

Dimmable: Optional

Beam: 120° / 90° UGR<19

IP rate: IP20

Length: 1195 mm


Width: 295 mm

Height: 25 mm

Cable length: 200 cm

Connection: EU-plug/GST18i3

Housing material: Aluminium (white coated)

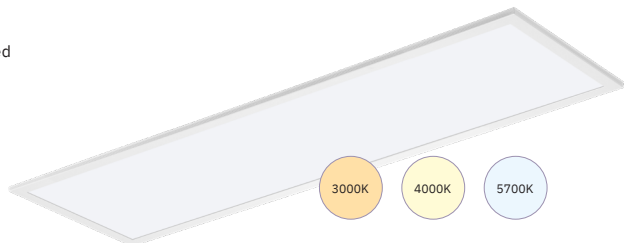

ART. NR.	SIZE	POWER	LUMINOUS FLUX	LM/WATT	UGR	CONNECTION TYPE
173-035	30x120 cm	25 Watt	3750 Lm	150 Lm/W	19	GST18i3
173-025	30x120 cm	25 Watt	3750 Lm	150 Lm/W	19	EU-plug
173-036	30x120 cm	25 Watt	3800 Lm	150 Lm/W	22	GST18i3
173-026	30x120 cm	25 Watt	3800 Lm	150 Lm/W	22	EU-plug



Track lighting (169-296) and LED panels (173-063) in the office space of Strijbosch BV - Mistelrode, Netherlands


Specials | LED Panels

LED PANEL 60X60 CM | 3-CCT | UGR<17

With a switch for setting the color temperatures 3000K - 4000K - 5700K. Available in black or white. Also available in Tunable White. Contact us for more information.



Input voltage: 220-240V
Power: 26 Watt
Luminous flux: 3750 Lm
Luminous efficiency: >140 Lm/W
Driver: Non-dimmable external driver included
Dimmable: Optional, check dimmable drivers online
Beam: 70°
IP rate: IP20
Length: 595 mm
Width: 595 mm
Height: 16 mm
Cable length: 200 cm
Connection: EU-plug/GST18i3
Housing material: Aluminium (black/white coated)

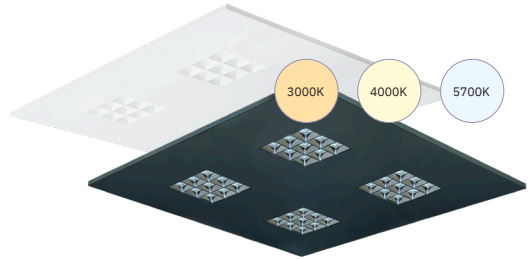


ART. NR.	FRAME COLOR	CONNECTION TYPE
173-063	● Black frame	EU-plug
173-062	○ White frame	EU-plug
173-065	● Black frame	GST18i3
173-064	○ White frame	GST18i3

LED PANEL | BUTTERFLY | 3-CCT | UGR<19

With a switch for setting the color temperatures 3000K - 4000K - 5700K. Triac dimmable.



Input voltage: 220-240V
Power: 36 Watt
Luminous flux: 3654/3507 Lm
Luminous flux efficiency: >100 Lm/W
Dimmable: Dimmable external driver included
Dimming method: Triac
Beam: 90°
IP rate: IP20
Length: 595 mm / 1195 mm
Width: 595 mm / 295 mm
Height: 49 mm
Cable length: 200 cm
Connection: EU-plug
Housing material: Aluminium (white coated)

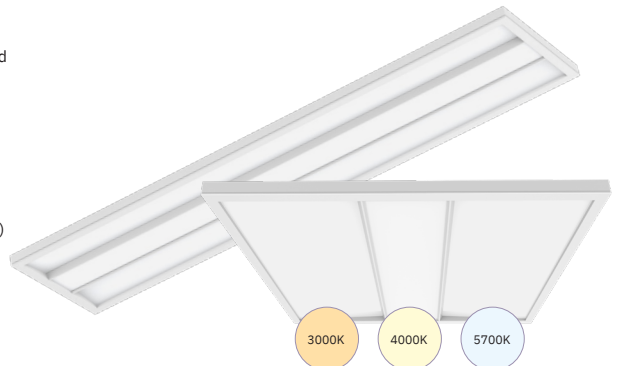

ART. NR.	SIZE	POWER	LUMINOUS FLUX	LM/WATT	UGR	CONNECTION TYPE
174-275	60x60 cm	36 Watt	3654 Lm	100 Lm/W	19	EU-plug
174-276	30x120 cm	36 Watt	3507 Lm	100 Lm/W	19	EU-plug

LED Panels | Accessories

SURFACE-MOUNT FRAME FOR PANELS | WHITE

ART. NR.	LENGTH	WIDTH	HIGHT
173-101	600 mm	600 mm	58 mm
173-103	1200 mm	300 mm	58 mm
174-105	600 mm	300 mm	40 mm
174-106	1200 mm	600 mm	40 mm



SURFACE-MOUNT FRAME FOR PANELS | BLACK


ART. NR.	LENGTH	WIDTH	HIGHT
173-107	600 mm	600 mm	65 mm
173-108	1200 mm	300 mm	58 mm



SUSPENSION CABLES FOR PANELS | MAX. 200 CM

For 60x60 and 30x120 cm LED panels.


ART. NR.	QUANTITY	LED PANEL SIZE
173-100	4 pcs	60x60 of 30x120 cm



RECESSED CLIPS FOR PANELS

For 60*60 cm and 30*120 cm LED panels.

ART. NR.	QUANTITY
173-110	4 pcs



LED EMERGENCY PACK | 10-60V | 70MA | AUTO TEST

Suitable for equipping LED panels, downlights, or other ceiling lighting with an external driver with an emergency function.

ART. NR.	SIZE	OPERATION TIME
600-028	145 x 36,8 x 23,5 mm	Min. 3 hrs.



Accessories | Led Panelen

IR MOTION SENSOR | RECESSED | IP20

Infrared motion sensor. Use 595-039 for connection LED panels.



Input voltage: 220V -240V

Time delay: 10 sec. - 15 min. (adj.)

Detection speed: 0,6 - 1,5 m/sec

Size: Ø76mm (recessed Ø61,5x75,6 mm)

IP rate: IP20

Connection: Push-in connector



ART. NR.	DETECTION RANGE	LOAD CAPACITY	DETECTION DISTANCE	SWITCH-ON THRESHOLD
214-051	360°	300 Watt	Max. 6 meter	3-2000 Lux (adj.)

CONNECTORSET

Connectorset voor Tuneable White (TW) of Single Color (SC) LED panels 25W.



ART. NR. CONNECTOR TYPE

173-095	Tuneable White (TW) 25W LED panel
173-096	Single Color (SC) 25W LED panel



POWER CABLE | 1,5 METER

With stripped wire. With or without ground wire.



ART. NR. TYPE

595-021	Without ground wire 2-wire
595-022	With ground wire 3-wire



GST18/3 ACCESSORIES



ART. NR. CONNECTION

595-040	Plug male
595-036	Connection cable 3 meter
595-035	Extension cable 2 meter
595-037	Extension cable 3 meter
595-034	T-connector
595-030	Male to female Schuko
595-033	Male to female EU plug
595-039	Sensor connector
595-042	Cable met stripped wire 0,3M
595-038	Cable met stripped wire 1M



595-040



595-036



595-035/595-037



595-034



595-030



595-033



595-039



595-042/ 595-038

Ceiling & Wall Lights | Batten Lights

BATTEN LIGHT | 20/40W | 3-CCT | IP20

With a switch for setting the color temperatures 3000K - 4000K - 5700K. Easily linkable through the side of the fixture without additional wiring. Connect up to 20 fixtures of 40W or 42 fixtures of 20W in a single line.

Input voltage: 220-240V

Power: 20/40 Watt

Dimmable: No

Beam: 120°

IP rate: IP20

IK rate: IK08

Connection: Push-in connector

Housing material: Aluminium & PC



ART. NR.	POWER	LUMINOUS FLUX	LIGHT COLOR	LENGTH	WIDTH	HIGHT
136-300	20 Watt	2200 Lm	3-CCT	603 mm	71 mm	64 mm
136-301	40 Watt	4600 Lm	3-CCT	1203 mm	71 mm	64 mm

BATTEN LIGHT | 600MM | 10~25W | 3-CCT | IP20

With a switch for setting the color temperatures 3000K - 4000K - 5700K and an adjustable power switch 10~25W. Easily linkable through the side of the fixture without additional wiring. Connect up to 42 fixtures in a single line.

Input voltage: 220-240V

Power: 10~25 Watt

Dimmable: No

Beam: 120°

IP rate: IP20

IK rate: IK08

Connection: Push-in connector

Housing material: Aluminium & PC



ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	LENGTH	WIDTH	HIGHT
136-305	10~25 Watt	2500 Lm	3-CCT	600 mm	124 mm	68 mm

BATTEN LIGHT FLAT | 18/30W | 3-CCT | IP20

Adjustable with a side switch to set the color temperatures 3000K, 4000K and 5700K. 60 cm power cable on the back (stripped wire).

Input voltage: 200-240V

Power: 18/30 Watt

Dimmable: No

Beam: 120°


IP rate: IP20

IK rate: IK06

Connection: Stripped wire

Length kabel: 60 cm (on the back)

Housing material: PC

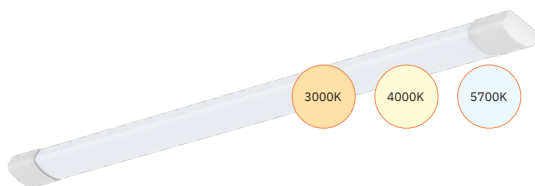

ART. NR.	POWER	LUMINOUS FLUX	LIGHT COLOR	LENGTH	WIDTH	HIGHT
136-310	18 Watt	1750 Lm	3-CCT	690 mm	56,5 mm	27,5 mm
136-311	30 Watt	3400 Lm	3-CCT	1200 mm	56,5 mm	27,5 mm

Ceiling Lights | Ceiling & Wall Lights

CEILING LIGHT | 3-CCT | 8/12W | IP20

With a switch for setting the color temperatures 3000K - 4000K - 5700K. Available with or without a microwave motion sensor, which detects movement even through glass or thin walls.

Input voltage: 230V

Power: 8/12 Watt

Dimmable: No

Beam: 120°

IP rate: IP20

IK rate: IK02

Connection: Push-in connector

Housing material: Aluminium & PC



ART. NR.	POWER	LUMINOUS FLUX	LIGHT COLOR	DIAMETER	HIGHT	SENSOR
136-006	8 Watt	800 Lm	3-CCT	Ø 180 mm	70 mm	No
136-002	12 Watt	1020 Lm	3-CCT	Ø 280 mm	95 mm	No
136-003	12 Watt	1020 Lm	3-CCT	Ø 280 mm	95 mm	Yes

CEILING LIGHT | 3-CCT | 10~15W | IP55

With a switch for setting the color temperatures 3000K - 4000K - 5700K and a 10/15W power switch. Available with or without a PIR motion sensor for precise motion detection.

Input voltage: 230V

Power: 10~15 Watt

Dimmable: No

Beam: 110°

IP rate: IP55

IK rate: IK08

Connection: Push-in connector

Housing material: PC



ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT	SENSOR
136-047	10~15 Watt	1725 Lm	3-CCT	Ø 280 mm	68 mm	No
136-049	10~15 Watt	1725 Lm	3-CCT	Ø 280 mm	68 mm	Yes

CEILING LIGHT | 2-CCT | 5~10W | IP44

With a switch for setting the color temperatures 3000K - 4000K and a 5/10W power switch. Equipped with high-quality LED chips and an adjustable microwave sensor that detects movement even through glass or thin walls.

Input voltage: 220-240V

Power: 5~10 Watt

Dimmable: No

Beam: 120°

IP rate: IP44

IK rate: IK10

Connection: Push-in connector

Housing material: PC



ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	DIAMETER	HIGHT
136-222	5~10 Watt	1100 Lm	2-CCT	Ø 283 mm	90 mm



Wall lamp cube (149-144) in atmospheric restaurant STOKED - Uden, the Netherlands

Wall Lights | Ceiling & Wall Lights

WALL LIGHT | CUBE | 10X10X10CM | 6W

With two independently adjustable beams from 0 to 120°.



Input voltage: 220-240V

Power: 6 Watt

Dimming method: Triac

Beam: 2 x 0° to 120° (independently adjustable)

IP rate: IP65

Connection: Push-in connector

Housing material: Aluminium

Housing color: Black, white or grey (RAL7016)



ART.NR.	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	SIZE (LXWXH)
149-138	● Black	6 Watt	2 x 110 Lm	2300K	● Warm white++	100 x 100 x 101 mm
149-139	○ White	6 Watt	2 x 110 Lm	2300K	● Warm white++	100 x 100 x 101 mm
149-134	● Grijs	6 Watt	2 x 110 Lm	2300K	● Warm white++	100 x 100 x 101 mm
149-144	● Black	6 Watt	2 x 110 Lm	2700K	● Warm white+	100 x 100 x 101 mm
149-145	○ White	6 Watt	2 x 110 Lm	2700K	● Warm white+	100 x 100 x 101 mm
149-133	● Grijs	6 Watt	2 x 110 Lm	2700K	● Warm white+	100 x 100 x 101 mm
149-142	● Black	6 Watt	2 x 110 Lm	3000K	○ Warm white	100 x 100 x 101 mm
149-143	○ White	6 Watt	2 x 110 Lm	3000K	○ Warm white	100 x 100 x 101 mm
149-132	● Grijs	6 Watt	2 x 110 Lm	3000K	○ Warm white	100 x 100 x 101 mm

WALL LIGHT | CUBE | 200X101X100 | 20W

With two independently adjustable beams from 0 to 120°.



Input voltage: 220-240V

Power: 20 Watt

Dimming method: Triac

Beam: 2 x 0° to 120° (independently adjustable)

IP rate: IP65

Connection: Push-in connector

Housing material: Aluminium

Housing color: Black



ART.NR.	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	SIZE (LXWXH)
149-244	● Black	20 Watt	2 x 254 Lm	2700K	● Warm white+	200 x 100 x 101 mm
149-242	● Black	20 Watt	2 x 287 Lm	3000K	○ Warm white	200 x 100 x 101 mm

TRIAC LED DIMMERS

ART.NR.	POWER
215-131	2W - 350W
215-135	2X 2W - 100W

Track Lights | spots

TRACK SPOT | 3-PHASE | 3-CCT | BLACK

With a switch for setting the color temperatures 2500K - 2700K - 3000K or 3000K - 3500K - 4000K. Extended lifespan due to a separate driver and light source.

Input voltage: 220-240V
Power: 8/20/30 Watt
Power factor: >0.90
Led type: SMD
Dimmable: Yes
Beam: 40°
CRI rate: >90
IP rate: IP20
Connection: 3-phase adapter



ART.NR.	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	LENGTH	DIAMETER
169-274	● Black	8 Watt	660 Lm	2500/2700/3000K	3-CCT	125 mm	Ø 60 mm
169-276	● Black	8 Watt	660 Lm	3000/3500/4000K	3-CCT	125 mm	Ø 60 mm
169-292	● Black	20 Watt	1600 Lm	3000/3500/4000K	3-CCT	186 mm	Ø 80 mm
169-296	● Black	20 Watt	1600 Lm	2500/2700/3000K	3-CCT	186 mm	Ø 80 mm
169-362	● Black	30 Watt	2500 Lm	3000/3500/4000K	3-CCT	210 mm	Ø 90 mm

TRACK SPOT | 3-PHASE| 3-CCT | WHITE

With a switch for setting the color temperatures 2500K - 2700K - 3000K or 3000K - 3500K - 4000K. Extended lifespan due to a separate driver and light source.

Input voltage: 220-240V
Power: 8/20/30 Watt
Power factor: >0.90
Led type: SMD
Dimmable: Yes
Beam: 40°
CRI rate: >89
IP rate: IP20
Connection: 3-phase adapter



For more design options, every Track Spot, comes with a white and black inner ring.

ART.NR.	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	LENGTH	DIAMETER
169-275	○ White	8 Watt	660 Lm	2500/2700/3000K	3-CCT	125 mm	Ø 60 mm
169-277	○ White	8 Watt	660 Lm	3000/3500/4000K	3-CCT	125 mm	Ø 60 mm
169-297	○ White	20 Watt	1600 Lm	2500/2700/3000K	3-CCT	186 mm	Ø 80 mm
169-293	○ White	20 Watt	1600 Lm	3000/3500/4000K	3-CCT	186 mm	Ø 80 mm
169-363	○ White	30 Watt	2500 Lm	3000/3500/4000K	3-CCT	210 mm	Ø 90 mm

ART. NR.	ACCESSORIES
169-279	60° reflector for 8W Track Spot
169-299	60° reflector for 20W Track Spot
169-369	60° reflector for 30W Track Spot




Linear | Track Lights

TRACK SPOT | 3-PHASE | LINEAR | 3-CCT

With a switch for setting the color temperatures 3000K - 4000K - 5700K. Equipped with an opal cover. Ideal for spaces requiring uniform light distribution, such as warehouses.



Input voltage: 220-240V
Power: 16 Watt
Power factor: >0.9
Led type: SMD
Dimmable: Yes
Beam: 110°
CRI rate: >80
IP rate: IP20
Length: 650 mm
Width: 32,5 mm
Height: 52 mm
Connection: 3-phase adapter

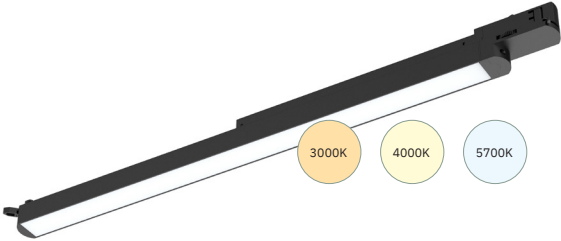


ART. NR.	COLOR	POWER	LUMINOUS FLUX	LIGHT COLOR
169-307	● Black	16 Watt	1620 Lm	3-CCT
169-308	○ White	16 Watt	1620 Lm	3-CCT

TRACK SPOT | 3-PHASE | LINEAR | 2700K/3000K

Track Spot with reflector and a wide 60°x70° beam. Featuring recessed LEDs, ideal for spaces where reduced glare is desired, such as offices or retail environments.



Input voltage: 100-240V
Power: 16 Watt
Power factor: >0.9
Led type: SMD2835
Dimmable: Yes
Beam: 60°x 70°
CRI rate: >90
IP rate: IP20
Length: 650 mm
Width: 32 mm
Height: 52 mm
Connection: 3-phase adapter

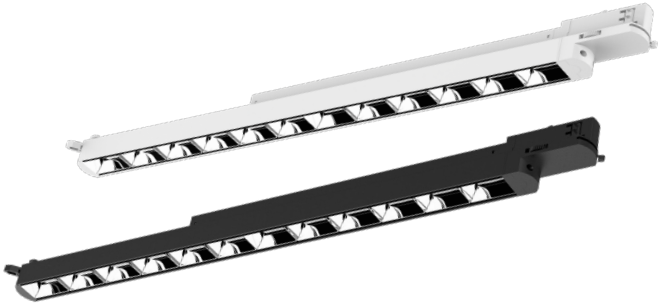

ART.NR	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR
169-313	● Black	16 Watt	1600 Lm	2700K	● Warm white+
169-314	○ White	16 Watt	1600 Lm	2700K	● Warm white+
169-310	● Black	16 Watt	1600 Lm	3000K	● Warm white
169-311	○ White	16 Watt	1600 Lm	3000K	● Warm white




Railspots (169-292) at Jacob's Conceptstore - Antwerpen, Belgium

Spots | Track Lights

TRACK SPOT | 3-PHASE | GU10 | 50MM

With GU10 socket, suitable for 50 mm GU10 spots. Lamp not included. See our website for compatible LED light sources.

Input voltage: 220-240V
Length: 212 mm
Length tube: 143 mm
Diameter: Ø 60 mm
IP rate: IP20
Connection: 3-phase adapter



ART. NR. COLOR

169-153	● Black
169-152	○ White

ART. NR. GU10 50MM TYPE

175-137	GU10 silver 5W 2700K 24° CRI>92
175-143	GU10 silver 5W 2700K 35° dimmable
175-142	GU10 silver 5W 2000-2700K 45° dtw CRI>97
175-144	GU10 silver 7W 2700K 35° dimmable



175-137



175-143



175-142

TRACK SPOT | 3-PHASE | GU10 | AR70

With GU10 socket, suitable for AR70 GU10 spots. Lamp not included. See our website for compatible LED light sources.

Input voltage: 220-240V
Length: 185 mm
Length tube: 116 mm
Diameter: Ø 80 mm
IP rate: IP20
Connection: 3-phase adapter



ART. NR. COLOR

169-151	● Black
169-150	○ White

ART. NR. GU10 AR70 TYPE

175-343	AR70 6 Watt 2700K 24° dimmable
175-344	AR70 6 Watt 2000-2700K 24° dim to warm
175-350	AR70 7 Watt 2000-2700K 36° dim to warm
175-347	AR70 6 Watt 3000K 36° dimmable




175-343, 175-344, 175-350, 175-347



See tronixlighting.com for more GU10 lamps.

Track Lights | 3-phase rail & Accessories

POWER CONNECTOR




ART. NR.	COLOR	ART. NR.	COLOR
169-042	● Black	169-043	● Black
169-007	● Silver	169-026	○ White
169-025	○ White		

ENDCAP




ART. NR.	COLOR
169-041	● Black
169-006	● Silver
169-024	○ White

L-CONNECTOR

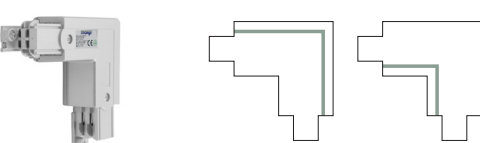


ART. NR.	COLOR	ART. NR.	COLOR
169-048	● Black	169-049	● Black
169-011	● Silver	169-017	● Silver
169-031	○ White	169-032	○ White

X-CONNECTOR

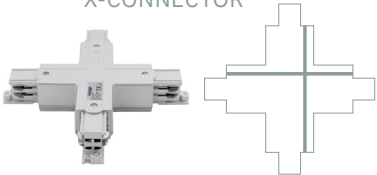

ART. NR.	COLOR
169-045	● Black
169-009	● Silver
169-028	○ White

FLEXIBLE CONNECTOR




ART. NR.	COLOR
169-072	● Black
169-035	○ White

INTERNAL CONNECTOR



ART. NR.	COLOR
169-040	● Black
169-005	● Silver
169-023	○ White

3-PHASE ADAPTER




ART. NR.	COLOR
169-074	● Black
169-020	● Silver
169-037	○ White

I-CONNECTOR



ART. NR.	COLOR
169-044	● Black
169-008	● Silver
169-027	○ White


T-CONNECTOR



ART. NR.	COLOR	ART. NR.	COLOR	ART. NR.	COLOR	ART. NR.	COLOR
169-046	● Black	169-047	● Black	169-101	● Black	169-104	● Black
169-010	● Silver	169-016	● Silver	169-102	● Silver	169-105	● Silver
169-029	○ White	169-030	○ White	169-103	○ White	169-106	○ White


3-phase rail & Accessories | Track Lights

EMERGENCY TRACK LIGHT



ART. NR.	COLOR	LUMINOUS FLUX
600-033	● Black	200 Lm
600-034	○ White	200 Lm

PENDING



ART. NR.	COLOR
169-073	● Black
169-014	● Silver
169-036	○ White

SUSPENSION KIT

5M suspension system with EasyClick (for connecting 3-phase Track Rails).



ART. NR.	COLOR
169-118	● Black

MOUNTING BRACKET

For screwless mounting of 3-phase Track Rails to suspended ceilings.



ART. NR.	COLOR
169-120	● Black
169-119	○ White

SURFACE MOUNTED FIXTURE

For mounting 3-phase Track Rails to ceilings.



ART. NR.	COLOR
169-113	● Black
169-112	○ White

REINFORCEMENT PLATE

Plate for reinforcing longer lengths of 3-phase Track Rails



ART. NR.	COLOR
169-108	● Black
169-107	● Silver
169-109	○ White

3-PHASE RAILS



Rail 2 meter

ART. NR.	COLOR
169-038	● Black
169-002	● Silver
169-021	○ White

Rail 3 meter

ART. NR.	COLOR
169-039	● Black
169-003	● Silver
169-022	○ White

Led Light Sources | Ø 50 mm Lamps

LED SPOT | Ø50MM | 5 WATT | 38° | 2700K | 2000K-2700K

Ø 50 mm LED spot, designed for stable and flicker-free dimming. The spots are only 26 mm high (31 mm including cable thickness) with an integrated driver. Equipped with a terminal block with strain relief for direct connection to 230V. Use the Tronix universal Triac LED dimmer (art. no. 215-131) for perfectly stable dimming.

Input voltage: 220-240V
Power: 5 Watt
Led type: SMD
CRI rate: >80
Dimmable: Yes <1% (Triac)
Beam: 38°

IP rate: IP20
Height: 26 mm (31 mm incl. cable)
Diameter: Ø 50 mm
Connection: Push-in connector




ART. NR.	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	LIGHT COLOR	DIMMABLE
175-570	● Black	5 Watt	400 Lm	2700K	○ Warm white+	Yes
175-550	○ White	5 Watt	400 Lm	2700K	○ Warm white+	Yes
175-575	● Black	5 Watt	550 Lm	2000K-2700K	○ Warm white++ ~ warm white+	Yes, dtw*
175-555	○ White	5 Watt	550 Lm	2000K-2700K	○ Warm white++ ~ warm white+	Yes, dtw*

*dim to warm

LED DIMMER UNIVERSAL | TRIAC | 2-350W

This universal LED dimmer works with Triac LED lighting and is compatible with cover frames from well-known brands such as Busch-Jaeger, Berker, Gira, and Jung.

Input voltage: 220 - 240V
Dimming method: Triac
Power: 2 - 350W
IP rate: IP20

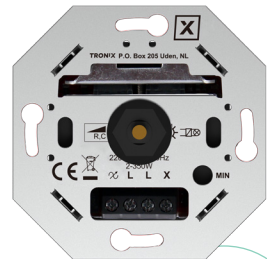

ART. NR.	MIN-MAX	LENGTH	WIDTH	DEVICE DEPTH
215-131	2 ~ 350 Watt	70 mm	70 mm	24 mm



Art.nr. 215-132 for LED dimmer 215-131

Exit Signs | Emergency Lights

EMERGENCY BULK HEAD | 3W | AUTO TEST

Pictograms included: up, down, left, right, up-right, up-left, down-right, and down-left. Features automatic periodic testing of the light source, electronics, and battery.

Input voltage: 220-240V
Power: 3 Watt
Led type: SMD2835
IP rate: IP65
Operation time: 3 hours
Pictograms: 8x included
Viewing distance: 20 meter
Connection: Push-in connector
Material: PC/clear cover



ART. NR.	MOUNTING	POWER	LUMINOUS FLUX	COLOR TEMP.	SIZE (LXWXH)
600-021	Wall	3 Watt	200 Lm	5000K	340 x 61,8 x 105 mm



*Pictograms included

EXIT SIGN | SURFACE | AUTO TEST

Waterproof emergency exit sign (IP65). Pictograms included: up, down, left, right, up-right, up-left, down-right, down-left, and blank. Features automatic periodic testing of the light source, electronics, and battery.

Input voltage: 220-240V
Power: 5 Watt
Led type: SMD2835
Luminous flux: 240 Lm
IP rate: IP65
Operation time: 3 hours
Pictograms: 9x included
Viewing distance: 30 meter
Connection: Push-in connector
Material: PC/clear cover



ART. NR.	MOUNTING	POWER	LUMINOUS FLUX	COLOR TEMP.	SIZE (LXWXH)
600-043	Ceiling	5 Watt	240 Lm	5000K	340 x 194 x 108 mm



*Pictograms included

Emergency Lights | Exit Signs


EXIT SIGN | SURFACE | AUTO TEST

Pictograms included: up, down, left, right, up-right, up-left, down-right, down-left, and blank. Suitable for ceiling and wall mounting. Features automatic periodic testing of the light source, electronics, and battery.

- Input voltage: 220-240V
- Power: 1 Watt
- Led type: SMD2835
- Luminous flux: 35 Lm
- IP rate: IP20
- Operation time: 3 hours
- Pictograms: 9x included
- Viewing distance: 20 meter (small) / 25 meter (large)
- Connection: Push-in connector
- Material: Metal/steel housing with acrylic panel



*Ceiling or wall mounting

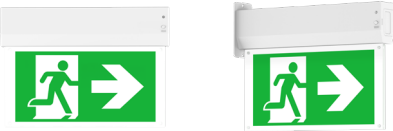


*Pictograms included



ART. NR.	MOUNTING	COLOR	VIEWING DISTANCE	LUMINOUS FLUX	COLOR TEMP.	SIZE (LXWXH)
600-044	Ceiling/wall	○ White	20 meter	26 Lm	6000K	235 x 163 x 38 mm
600-045	Ceiling/wall	● Black	20 meter	26 Lm	6000K	235 x 163 x 38 mm
600-022	Ceiling/wall	○ White	25 meter	35 Lm	5000K	315 x 223 x 45 mm
600-018	Ceiling/wall	● Black	25 meter	35 Lm	5000K	315 x 223 x 45 mm
600-060	3-phase rail	○ White	25 meter	35 Lm	5000K	315 x 289 x 45 mm
600-061	3-phase rail	● Black	25 meter	35 Lm	5000K	315 x 289 x 45 mm

ACCESSORIES


ART. NR.	SUITABLE FOR	MOUNTING	COLOR	SIZE (LXWXH)	MOUNTING HOLE	MOUNTING HIGHT
600-046	600-044	Recessed	○ White	344 x 80 x 59 mm	360 x 59 mm	75 mm
600-047	600-045	Recessed	● Black	344 x 80 x 59 mm	360 x 59 mm	75 mm
600-030	600-022	Recessed	○ White	385 x 80 x 52 mm	360 x 55 mm	75 mm
600-032	600-018	Recessed	● Black	385 x 80 x 52 mm	360 x 55 mm	75 mm
169-037	All of the above	3-phase rail	○ White	34 x 35 x 95 mm	-	-
169-074	All of the above	3-phase rail	● Black	34 x 35 x 95 mm	-	-
600-031	600-022	Pendant	○ White	200 x 25 x 10 mm	-	1.5 m (max. pendant)



Art. nr. 600-046 | 600-030
Recessed set | white



Art. nr. 169-037
3-phase adapter | white



Art. nr. 600-047 | 600-032
Recessed set | black

Art. nr. 169-074
3-phase adapter | black

Art. nr. 600-031 pendant set

Exit Signs | Emergency Lights

EXIT SIGN | LARGE | WALL MOUNT | AUTO TEST

Includes reversible pictograms: up, down, left, up-right, and down-right. Features automatic periodic testing of the light source, electronics, and battery.




Input voltage: 220-240V
Power: 1 Watt (exit). 0,5 Watt (downlight)
LED type: SMD3014
Luminous flux: 35 Lm
IP rate: IP40
Operation time: 3 hours
Pictograms: 5x included (reversible)
Viewing distance: 30 meter
Connection: Push-in connector
Material: PC/clear cover



ART. NR.	MOUNTING	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	SIZE (LXWXH)
600-019	Wand	○ White	1 Watt	35 Lm	5000K	330 x 190 x 45 mm
600-020	Wand	● Black	1 Watt	35 Lm	5000K	330 x 190 x 45 mm

*Pictograms included (reversible)



*In maintenance mode, only the pictograms are illuminated (35 lm). Upon emergency detection, the emergency mode is activated. The two LEDs provide 50 lm of illumination at the bottom of the fixture, ensuring additional lighting along the escape route.

Emergency Lights | Downlights & Spots

EMERGENCY DOWNLIGHTS | 3W | Ø140MM | AUTO TEST

Comes with two optional lenses (round & oval) for tailored illumination. The round lens is ideal for square spaces, while the oval lens ensures optimal lighting in narrow, elongated areas like corridors. Designed for surface or recessed mounting, with automatic periodic testing of the light source, electronics, and battery for reliable performance.

Input voltage: 220-240V
Power: 3 Watt
Beam: 150° (round), 65° x 160° (oval)
IP rate: IP20
Operation time: min. 3 hours (internal battery)
Connection: Push-in connector
Material: PC




ART. NR.	MOUNTING	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	DIAMETER	HIGHT
600-026	Surface	● Black	3 Watt	240 Lm	5000K	Ø 140 mm	61,55 mm
-	Recessed	● Black	3 Watt	240 Lm	5000K	Ø 112,5 mm	55,34 mm
600-025	Surface	○ White	3 Watt	240 Lm	5000K	Ø 140 mm	61,55 mm
-	Recessed	○ White	3 Watt	240 Lm	5000K	Ø 112,5 mm	55,34 mm

EMERGENCY DOWNLIGHT | 3W | Ø55-80MM | AUTO TEST

Comes with two optional lenses (round & oval) for tailored illumination. The round lens is ideal for square spaces, while the oval lens ensures optimal lighting in narrow, elongated areas like corridors. Designed for surface or recessed mounting, with automatic periodic testing of the light source, electronics, and battery for reliable performance.

Includes an extra ring for larger recessed sizes.

Input voltage: 220-240V
Power: 3 Watt
Beam: 148° (rond), 68° x 165° (ovaal)
IP rate: IP20
Operation time: min. 3 hours (external battery)
Connection: Push-in connector
Material: PC

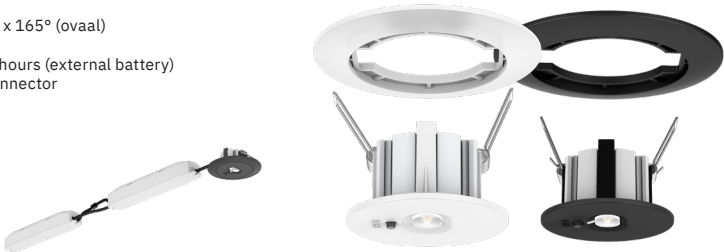

ART. NR.	MOUNTING	COLOR	POWER	LUMINOUS FLUX	COLOR TEMP.	DIAMETER	MOUNTING HOLE	HIGHT
600-024	Recessed	● Black	3 Watt	240 Lm	5000K	Ø 55 mm	Ø 42-50 mm	30 mm
-	Recessed	● Black	3 Watt	240 Lm	5000K	Ø 80 mm	Ø 42-70 mm	30 mm
600-023	Recessed	○ White	3 Watt	240 Lm	5000K	Ø 55 mm	Ø 42-50 mm	30 mm
-	Recessed	○ White	3 Watt	240 Lm	5000K	Ø 80 mm	Ø 42-70 mm	30 mm

Industrial Lighting

TRI-PROOF LIGHT BAR | IP65 | 3-CCT

With DIP switch for adjustable power and a switch for setting the color temperatures 3000K - 4000K - 5700K. Connectable up to 1500 watts. 4x 2.5mm² wiring. Also available with an emergency function (includes auto-test), microwave sensor (140°/4-6 m range), or a combination of both.

Input voltage: 200-240V

Power: 12~20/25~40/35~60 Watt

Powerfactor: >0,90

Beam: 120°

IP rate: IP65

IK rate: IK08

Connection: Push-in connector

Cover: PC opal

Accessories included: Mounting clip (2 pcs) en cable gland (2 pcs)



How many fixtures
can be connected in
one line?

Max. 1500 Watt
Power

650 MM

ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	LENGTH	WIDTH	HIGHT	SENSOR	EMERGENCY
950-086	12~20 Watt	2420 Lm	3-CCT	650 mm	89 mm	70 mm	No	No

1260 MM

ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	LENGTH	WIDTH	HIGHT	SENSOR	EMERGENCY
950-087	25~40 Watt	5380 Lm	3-CCT	1260 mm	89 mm	70 mm	No	No
950-180	25~40 Watt	5380 Lm	3-CCT	1260 mm	89 mm	70 mm	No	Yes
950-181	25~40 Watt	5380 Lm	3-CCT	1260 mm	89 mm	70 mm	Yes	No
950-182	25~40 Watt	5380 Lm	3-CCT	1260 mm	89 mm	70 mm	Yes	Yes

1560 MM

ART. NR.	POWER	MAX. LUM.	LIGHT COLOR	LENGTH	WIDTH	HIGHT	SENSOR	EMERGENCY
950-088	35~60 Watt	8100 Lm	3-CCT	1560 mm	89 mm	70 mm	No	No
950-183	35~60 Watt	8100 Lm	3-CCT	1560 mm	89 mm	70 mm	No	Yes
950-184	35~60 Watt	8100 Lm	3-CCT	1560 mm	89 mm	70 mm	Yes	No
950-185	35~60 Watt	8100 Lm	3-CCT	1560 mm	89 mm	70 mm	Yes	Yes

Area Lighting

POST TOP LIGHT | 3-CCT

Easily adjust power (12~40W) with the DIP switch and set the perfect ambience with color temperatures (2700K - 3300K - 4000K). Designed for gardens and parking areas at shops and commercial buildings, these fixtures provide flicker-free illumination, ensuring a safe and professional lighting experience.

Input voltage: 230V
Power: 12~40 Watt
Beam: 120°
IP rate: IP66
IK rate: IK09
Connectie diameter: Ø 60 mm
Connection: Aansluitblokje
Material: Aluminium



ART. NR.	COLOR	POWER	MAX. LUMINOUS FLUX	LIGHT COLOR	DIAMETER	HIGHT
220-041	● Black	12~40 Watt	3960 Lm	3-CCT	Ø 371 mm	420 mm
220-042	● Silver	12~40 Watt	3960 Lm	3-CCT	Ø 371 mm	420 mm



Art. nr. 220-045



Art. nr. 220-046



ART. NR.	COLOR	ACCESSORIES
220-045	● Black	Post top light wall bracket black
220-046	● Silver	Post top light wall bracket silver

Area Lighting

PARKING LIGHT FIXTURE | E27 SOCKET

Easily mountable on (existing) poles with a Ø 60 mm diameter, making this fixture ideal for parking and area lighting.



Input voltage: E27 lamp (excluded)
IP rate: IP54
IK rate: IK09
Connection diameter: Ø 60 mm
Material: Aluminium + PET



ART. NR.	DIAMETER	HIGHT
220-040	Ø 590 mm	459 mm



CORN LAMP | E27

ART. NR.	POWER	LUMINOUS FLUX	COLOR TEMP.
175-536	18 Watt	2340 Lm	3000K
175-537	18 Watt	2340 Lm	5000K
175-538	26 Watt	3380 Lm	3000K
175-539	26 Watt	3380 Lm	5000K





Check our complete
catalog range online



Notes

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



CARE



SHARE



CONNECT



Tronix / Vluchtoord 41, 5406 XP Uden / Postbus 205, 5400 AE Uden / The Netherlands
+31 (0)413 330 380 / sales@tronixlighting.com / www.tronixlighting.com

