



## Product Specification



### Features:

- \*Constant voltage design (C.V. mode)
- \*Fully encapsulated with IP67 level
- \*100% full load burn-in testing
- \*Cooling by free air convection
- \*Protections: Short circuit / Over loading
- \*Aluminum housing, abradable & easy for heat dissipation
- \*Suitable for LED lighting and moving sign applications
- \*2 years warranty


CE IP67

### SPECIFICATION


MODEL		215-301
OUTPUT	DC Voltage	24±0.5V
	Rated Current	2.5A
	Rated Power	60W
	Ripple & Noise	≤500mVp-p
	Hold up time	≤2s
INPUT	Voltage Range	90~264VAC
	Frequency Range	50/60Hz
	Input current	≤1.5A
	Power Factor	/
	Efficiency	86%
	Inrush current	Cold Start: 15A/115VAC, 30A/230VAC
	Leakage Current	≤0.75mA/240VAC
Protection	Over Loading	101~150%
	Short Circuit	Protection type: Hiccup mode, recovers automatically after fault condition is removed.
	High Temp	95°C±5°C( Shut down, re-power on to recover)

Environment	Working Temp.	-25°C ~ +40°C
	Working Humidity	10-90% RH non-condensing
	Storage Temp.	-40°C ~ +60°C, 10 ~ 95% RH
Voltage Resistance	Input-Output	AC 1.5KV/5mA 60s
	Input-Housing	AC 1.5KV/5mA 60s
Cables	Input	VDE H03VV-F 3*0.75mm <sup>2</sup> Black*230mm
	Output	VDE H03VV-F 2*0.75mm <sup>2</sup> White *230mm
Others	Housing Material	Aluminum Housing
	IP Rating	IP67
	Dimension	L192*W47*H36mm
	Packing	10.5kg/20PCS/ Carton


### Mechanical Specification

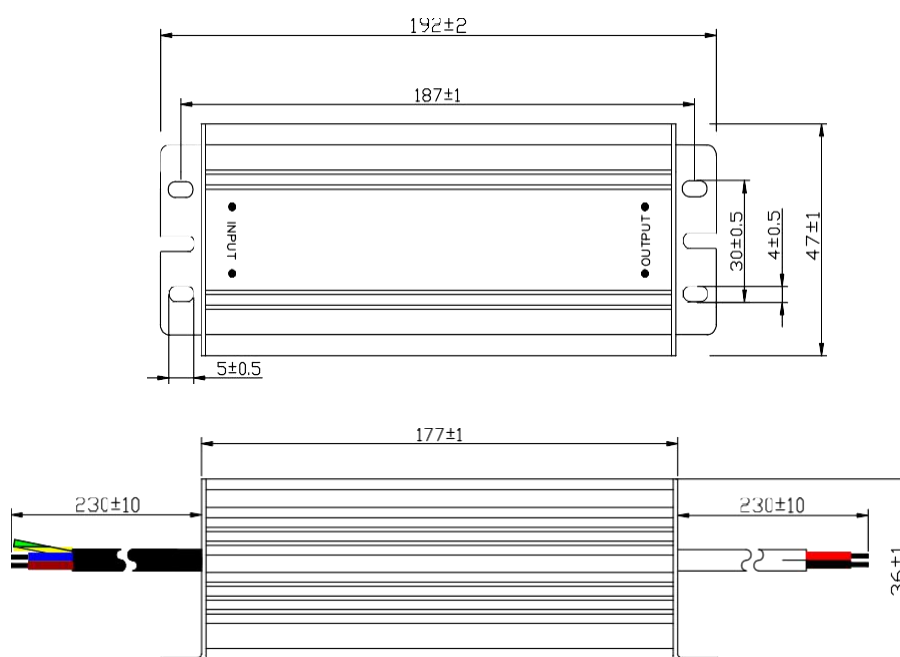

### Packing Specification

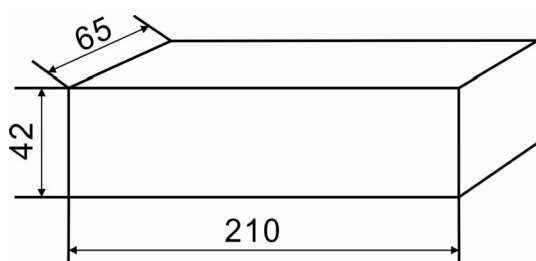

Inner Box size

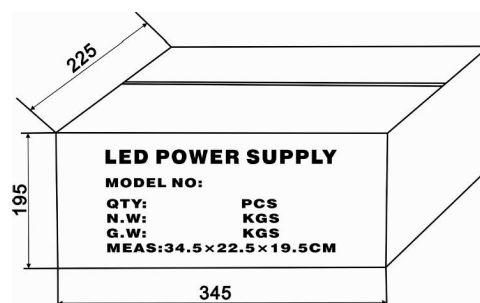

Carton Size