




Product Specification 215-300

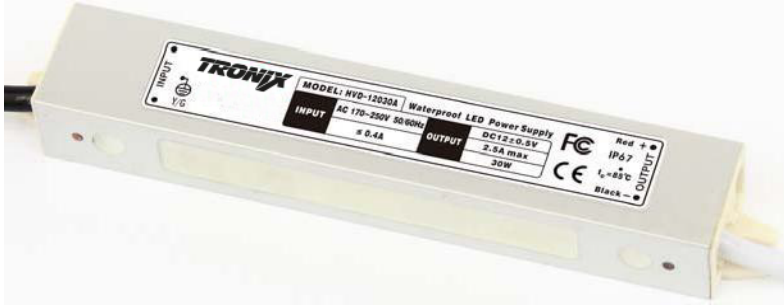

Features:

- *Constant voltage design (C.V. mode)
- *Fully encapsulated with IP67 level
- *100% full load burn-in testing
- *Cooling by free air convection
- *Protections: Short circuit / Over loading
- *Aluminum housing, abrasable & easy for heat dissipation
- *Suitable for LED lighting and moving sign applications
- *2 years warranty


CE IP67

SPECIFICATION


MODEL		215-300
OUTPUT	DC Voltage	24±0.5V
	Rated Current	1.25A
	Rated Power	30W
	Ripple & Noise	≤600mVp-p
	Hold up time	≤2s
INPUT	Voltage Range	170-250VAC
	Frequency Range	50/60Hz
	Input current	≤0.4A
	Power Factor	/
	Efficiency	85%
	Inrush current	Cold Start: 30A/230VAC
	Leakage Current	≤0.75mA/240VAC
Protection	Over Loading	120~150%
	Short Circuit	Protection type: Hiccup mode, recovers automatically after fault condition is removed.

Environment	Working Temp.	-25°C ~ +40°C
	Working Humidity	10-90% RH non-condensing
	Storage Temp.	-40°C ~ +60°C, 10~95% RH
Voltage Resistance	Input-Output	AC 1.5KV/5mA 60s
	Input-Housing	AC 1.5KV/5mA 60s
Cables	Input	VDE H03VV-F 3*0.75mm ² Black*230mm
	Output	VDE H03VV-F 2*0.75mm ² White *230mm
Others	Housing Material	Aluminum Housing
	IP Rating	IP67
	Dimension	L182*W29*H20mm
	Packing	11.6kg/50pcs/ Carton
Note	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.</p>	


Mechanical Specification

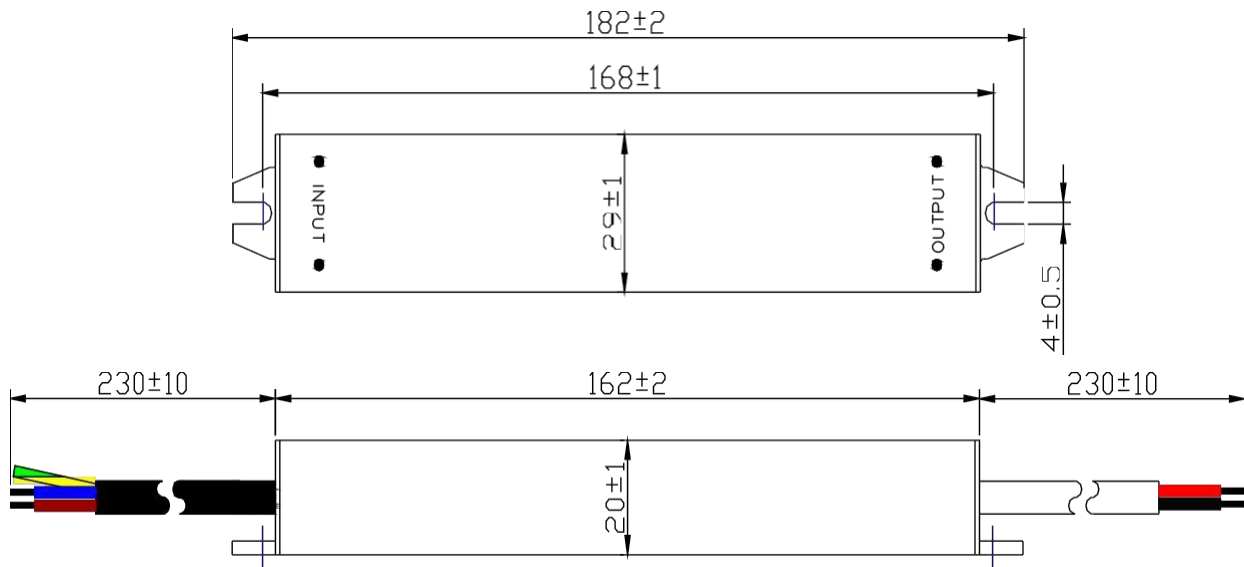

Packing Specification

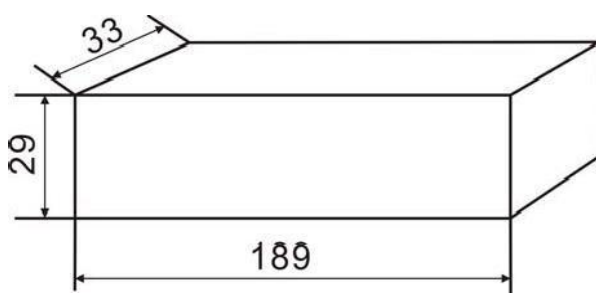

Inner Box size

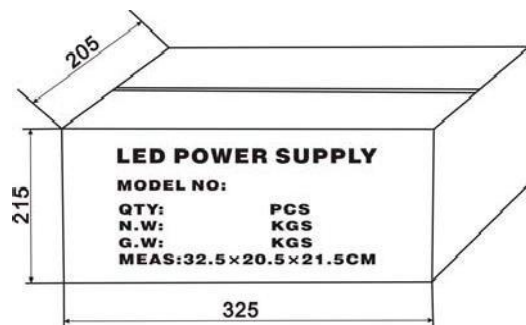

Carton Size