



## LED T5 Batten S with switch

- Linear LED batten with power switch
- Uniform, diffused light, creating a pleasant atmosphere
- Available in 300, 600, 900 and 1200 mm
- Battens connect up to 15 meters
- Incl. power cable, mounting and connection pieces (fixed and flexible)
- Including integrated switch
- Energy saving up to 50%



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level	Weight (kg/pc)
140044293	LED E T5 batten 1200 13W S 3000K BL	TL 1x30W	13	1200	92	3000	A+	0.25

## Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140044293	LED E T5 batten 1200 13W S 3000K BL	1525x29x37	0.45	6956712612731	1

### Technical Specifications

Lifetime (L70)	40,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	140
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

### Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No

### Mechanical Properties

Material housing	Polycarbonate (PC)
------------------	--------------------


### Ambient Conditions

Operating temperature	-20~+40 °C
Application temperature	+25 °C
Storage environment	-25~+50 °C




## Dimensional Drawing (mm)

LED E T5 batten 1200

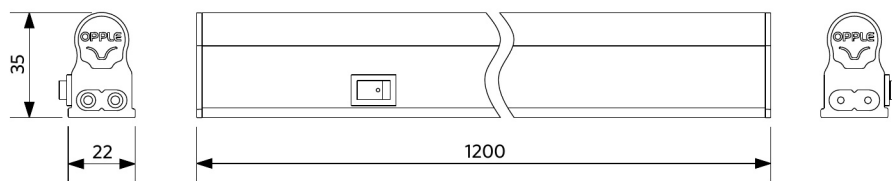

## Photometric Data

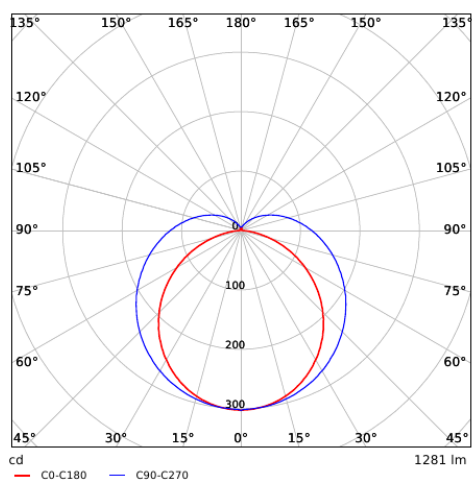

## Accessories



Accessories included