



LESELI DOWNLIGHT

Typology

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire.

Features

Soft satin effect polycarbonate anti-glare diffuser.
Non removable internal power supply.

Installation

Complete with springs for easy fastening into false ceilings.
Connection to the mains with terminal block.

Material


Thermally conductive body; extremely light and manageable.

220-240 Vac	Ra >80		25000 h	IP20 VI IP43 VO	Wire	-25°C +35°C	RG1	A+	BASIC
		G3							

Characteristic data

Power	24 W	Beam	90°	Dimmable	No	Input	220-240 Vac
Base	Wire	IP	20	Optical compartment IP	43	Flux	2200 lm
PF	0,94	Tc	4000 K	Ra	>80	LED Warranty	G3
Axis	1010 cd	RG	RG1				

Dimensional characteristics

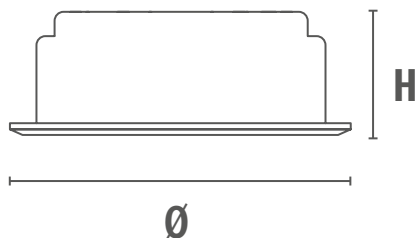

Ø	230 mm
H	61 mm

Cutting hole	200
--------------	-----

Lighting and photometric features

Beam opening	90°
Flux	2200 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	25000 h
LED lifespan	L70B20
Trigger time	<0,2 s
LM80 - Luminous flux maintenance at end of life	70
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	24 W
Input voltage	220-240 Vac
undefined	50 Hz
Dimmable	No
Power factor (PF)	0,94
Input current	0.11 A
Weighted energy consumption	24 kWh/1000h
Energy class	A+
Number of cycles	100000
Operating temperature	-25°C / +35°C

Photometry

	4000K	H(m)	D(m)	E _{max} (lx)
	Ra80		92°	
Fixture Power	24W	1	2.06	1001
Source Flux	2200lm	2	4.11	250
Fixture Flux	2200lm	3	6.17	111
Efficacy	92lm/W	4	8.23	63
843205 I _{max} =455cd/klm	I _{max}	1001cd	10.29	40

EulumDat file on the site

Other Infotech

Reflector	Yes
-----------	-----

LED Warranty

G3	Up to 3 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

Standards and Directives

2009/125/EC, 1194/2012, 2015/1428, 2010/30/EU	CEI EN 61000-3-3:2014
874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU	CEI EN 61547:2010
2014/35/EU, 2015/863	CEI EN 62031:2009
CEI EN 55015:2020	CEI EN 62031/A1/A2:2015
CEI EN 60598-1:2015	CEI EN 62471:2010
CEI EN 60598-1/A1:2019	IEC TR 62471-2:2009
CEI EN 60598-2-2:2012	CEI EN 62493:2015
CEI EN 61000-3-2:2019	CEI 34-141:2014

Logistics data

Item net weight	455 gr
Barcode single item	8011905843205
Number of pieces multiple pack	6
Barcode multiple pack	8011905788483
Minimum order quantity	6