



# TM.ONTEC C M1U 301 NM ST

TM-OC.MUSTN300W




## PARAMETERS



Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Temperature range	10-35 °C
Material	PC
Colour	white
Duration time	3 h
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.8 W
Insulation class	2
Luminous flux	158 lm
Battery	Ni-Cd HT 3.6V 1.5Ah



## PHOTOMETRY [m]

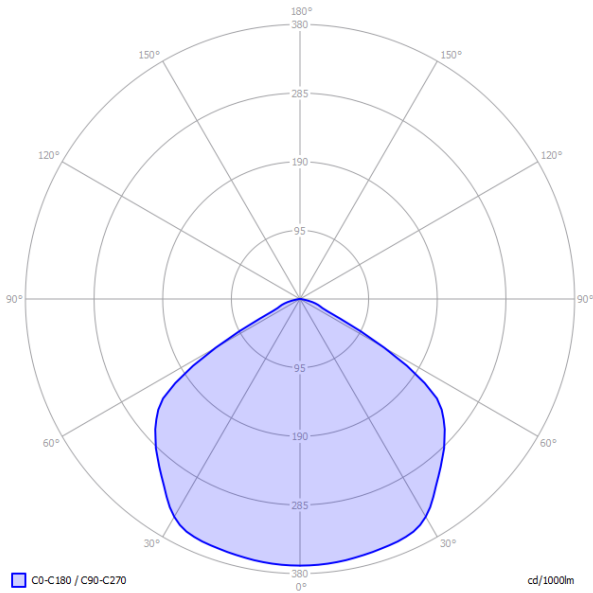

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

3,3  
3,6  
4,1  
4,1  
4,0  
3,9  
3,8  
3,4  
3,1

### Distance fitting - fitting

7,1  
8,1  
9,7  
11,4  
12,5  
12,9  
13,2  
12,5  
11,7

