


I.OCDV1.11/22.09.2020

TM TECHNOLOGIE
emergency & evacuation lighting




IP 20 **LED** **3h** **850 °C** **210 ± 250 V AC**
50 / 60 Hz
186 ± 254 V DC


TM.ONTEC C (D)

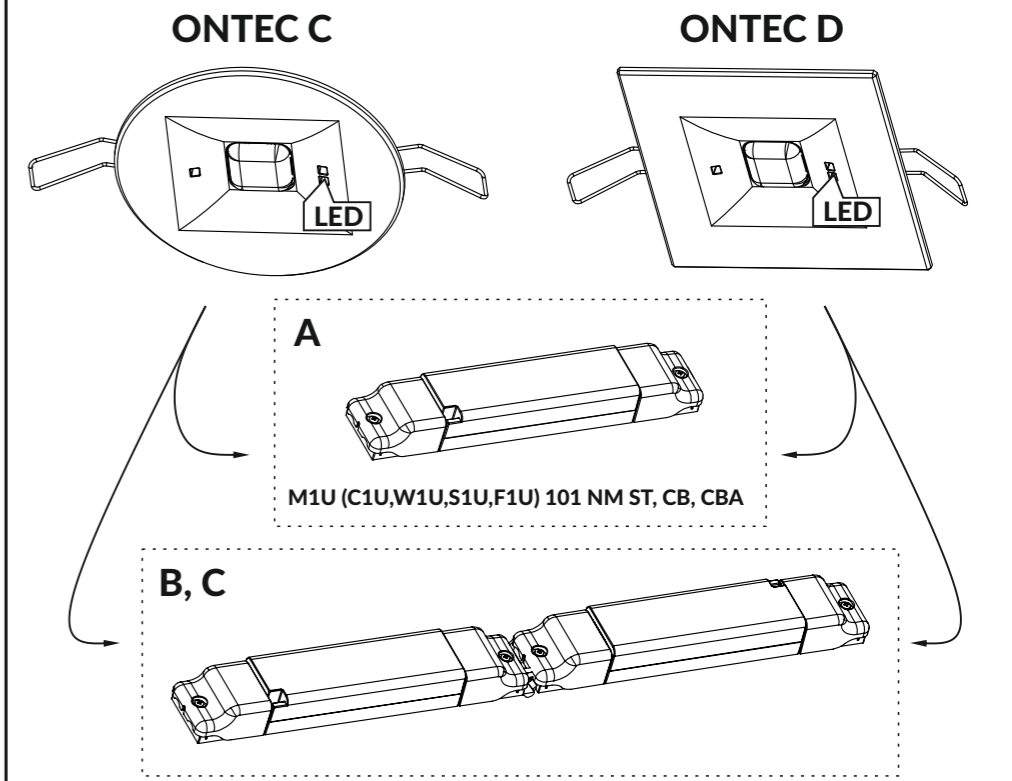

! ±1 [mm] ! **M2H (C1H, W1H, S1H, F1H)

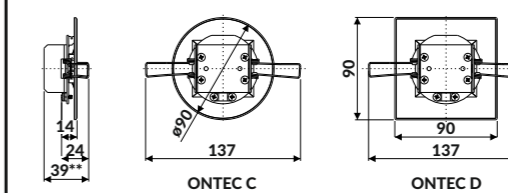

CBA / D2 / D2R / DA

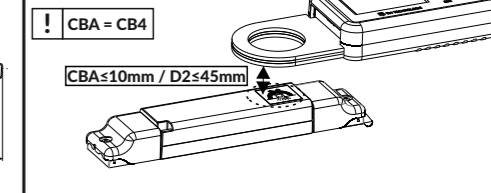

1 B, C

