



## CATENARIA IN SERIES VERSION - PENDANT

### Typology

Long run conductive cable with 15 factory attached lamp holders.  
Cable type: H05RR-F 300/500 V.

### Features

Two different models: with lamp holder on the cable or with pendant.  
Lamp holders are fitted with IP44 protection rings.  
Catenaria is suitable for non-permanent outdoor installations.  
This version can be linked in series (daisy chain connection).

### Installation


Catenaria with 15 lamp holders can be connected consecutively up to a maximum length of 45 metres.

### Applications

Widely used for festoons indoor and outdoor garden lighting decoration, patio umbrella lighting, etc.  
Suggested lamps: PING BALL, color GLS or Stargazer lamp.  
Also available in white colour, perfect for reception areas, weddings, etc..

### Notes


Only Catenaria with 15 lamp holders can be connected in serie with the IP44 Schuko plug and socket on the sides.  
Both are IP44.



### Characteristic data

Input	220-240 Vac	Base	E27	IP	44	LED Warranty	G2
Color	White						

### Dimensional characteristics

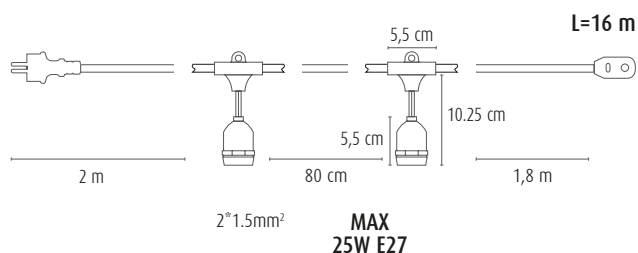

L	15000 mm
---	----------

### Electrical characteristics

Input voltage	220-240 Vac
Frequency	50-60 Hz
Operating temperature	-25°C / +35°C

## LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

## Standards and Directives

2009/125/EC, 1194/2012, 2015/1428, 2010/30/EU	CEI EN 61000-3-3:2014
874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU	CEI EN 61547:2010
2014/35/EU, 2015/863	CEI EN 62031:2009
CEI EN 55015:2020	CEI EN 62031/A1/A2:2015
CEI EN 60598-1:2015	CEI EN 62471:2010
CEI EN 60598-1/A1:2019	IEC TR 62471-2:2009
CEI EN 60598-2-1:1997	CEI EN 62493:2015
CEI EN 61000-3-2:2019	CEI 34-141:2014

## Logistics data

Item net weight	4000 gr
Barcode single item	8011905950736
Number of pieces multiple pack	4
Barcode multiple pack	8011905951665
Minimum order quantity	1