

- Corrosion protection by double layered electrostatic powder coated body
- Aluminum injection body
- Plastic injection blind casing
- Underwater cable joint
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CF1Y03	WW-NW-CW	220-240V AC	4	430	1,1
CF1Y03	RGB	7,5V DC	8	-	0,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
		● A: Amber	590nm

*Different colors are optional.

E Additional Piece Options



01: Single sided

02: Double sided

04: Four sided




Order Code

P . W . C . E



Product Diagrams

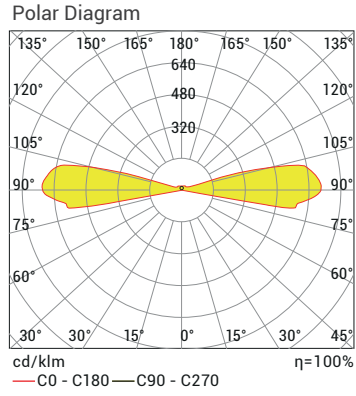

Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW		•					
R,G,B,A		•					
RGB							
RGBA/W							
RGB DMX							
WHITE DMX							

