

- Electrostatic coated aluminum injection body
- Electrostatic coated aluminum injection assembly stand  
(adjustable for vertical- horizontal-angle mounting)
- Customizable use with 6 operating scenarios
- 5mm, tempered, polyurethane gasket armature glass
- Stainless steel fittings and clips
- Ø60mm and Ø90mm pole options
- Durable and highly efficient Li-on battery

## P W Product & Power Options

Product Name	Light Color	Power (W)	Luminous Flux (lm)	Weight (kg)
AYFER-9-SOLAR	WW-NW-CW	30	3.450	3,80

\*Power and Lumen values provided are based off of a cold white (CW) LED.

### Solar Panel

Product name	: Solar Panel
Explanation	: 20V / 80Wp 4A Polycrystal
Charging Time	: 4 hours
Autonomous Time	: 8 hours Full Capacity / 2 days Sensor Mode
Battery Capacity	: 14450 mAh
Battery Voltage	: 14.2 V/ 4S
Sensor Distance	: 4m
Panel Dimensions	: 674x784x37mm


### Operating Modes:

- Continuous open 15W
- Continuous open 30W
- Operates continuously at night 15W
- Operates continuously at night 30W
- Operates when it detects motion 24W; without detection 9W
- Operates when it detects motion 30W; without detection 6W

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K


## O Lens Options



## G Housing Color Options



## J Connection Options



01: Cable




Order code

P . C . O . G . J





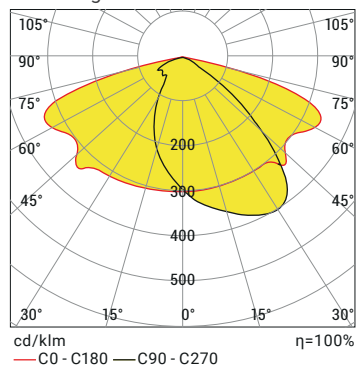


## Product Diagrams

Polar Diagram



## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	
R,G,B,A 						
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 