



ITECH W2 05 CB

TM-IT.W2CB0060W




PARAMETERS

| | |
|---|--|
| Standards | PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |
| Warranty | 24 months - ST 36 months - AT 60 months - DATA, CB |
| Application | lighting of the final exit / fire-protection devices |
| IP | IP65 |
| IK | IK06 |
| Version | for central battery |
| Power supply | 210+250 V AC |
| Power supply CB | 186+254 V DC |
| Temperature range | -25-55 °C |
| Material | PC |
| Colour | RAL9003 |
| Duration time | - |
| Operating mode | - |
| Maximum light power (the luminaire can power the light source with a different power) | 4.5 W |
| Active power | 5.9 W |
| Insulation class | 2 |
| Luminous flux | 470 lm |
| Dimming mode | no |



PHOTOMETRY [m]

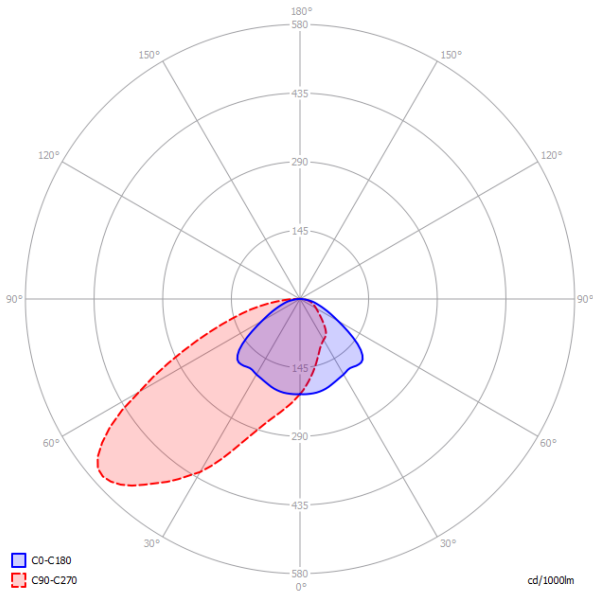

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

4,1
4,2
4,4
4,5
4,3

Distance fitting - fitting

9,6
10,0
10,8
11,1
11,0

