



Downlight Compact

- Stylish and compact LED downlight
- Sturdy full metal housing
- Integrated driver for easier installation
- Low height of only 35mm
- IP44 on light emitting side



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
540001291600	LEDDownlightCo-E Rd200-24W-840	CFL 2x26W	24	2400	100	4000	0.40

Accessories



140060652
LEDDownlightRc-HZdim-Adapter-200-225



542098030700
Junction-Box-WH

140060649
LEDDownlightRc-HZdim-Adapter-200-250

Packaging Information

Item			Box			
Item Code	Item Description	Commodity Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
540001291600	LEDDownlightCo-E Rd200-24W-840	94051190	243x52x245	0.70	6941408895734	1
140060649	LEDDownlightRc-HZdim-Adapter-200-250	94059900	275x275x0.8	0.18	6956321894153	1
140060652	LEDDownlightRc-HZdim-Adapter-200-225	94059900	250x250x0.8	0.11	6956321894184	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.07	6941408868684	1

5 YEARS WARRANTY



Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Beam angle	100°
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
IP front side	IP44
IP recessed part	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	1 %
Displacement factor (DF)	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No
230V Cable length	0.3 m

Mechanical Properties


Housing material	Aluminium
Optical material	Polycarbonate

Ambient Conditions


Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-25-+45°C

Dimensional Drawing (mm)

LEDDownlightCo-E Rd200



Photometric Data

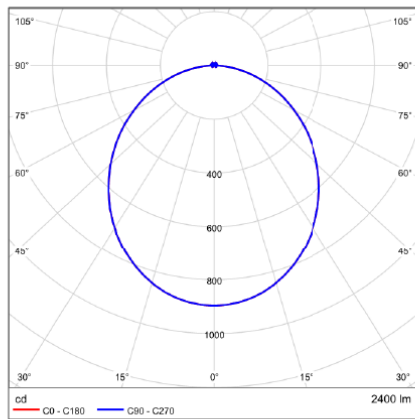

Installation Opening Drawing (mm)

LEDDownlightCo-E Rd200
Ø200

