



TM.ONTEC C M1 60 NM AT



Catalog number	TM-OC.M1ATN600W
Application	anti-panic lighting
Duration time	1 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	338 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

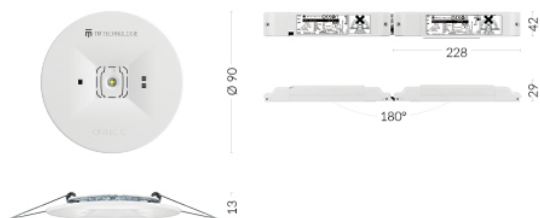

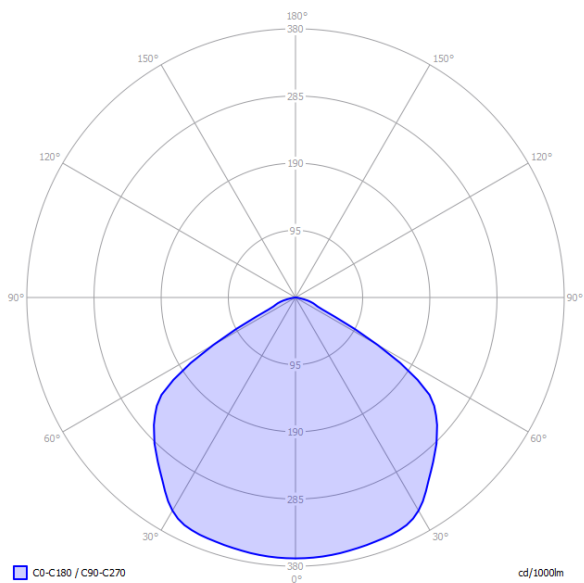

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,5 - 1h/CB 3,0 - 3 h	8,0 - 1h/CB 7,5 - 3h
3,0	4,0 - 1h/CB 3,5 - 3 h	9,0 - 1h/CB 8,5 - 3h
4,0	5,0 - 1h/CB 4,0 - 3h	11,0 - 1h/CB 10,0 - 3h
5,0	5,5 - 1h/CB 4,5 - 3h	13,0 - 1h/CB 11,5 - 3h
6,0	5,5 - 1h/CB 4,0 - 3h	15,0 - 1h/CB 13,0 - 3h
7,0	6,0 - 1h/CB 3,5 - 3h	16,5 - 1h/CB 14,0 - 3h
8,0	6,0 - 1 h/CB 2,5 - 3h	18,0 - 1h/CB 15,0 - 3h
9,0	5,5 - 1h/CB 2,5 - 3h	19,0 - 1h/CB 15,0 - 3h
10,0	5,0 - 1 h/CB 2,0 - 3h	20,0 - 1h/CB 15,0 - 3h

