


TM.ONTEC C C1 60 NM AT



Catalog number	TM-OC.C1ATN600W
Application	escape route lighting
Duration time	1 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	297 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



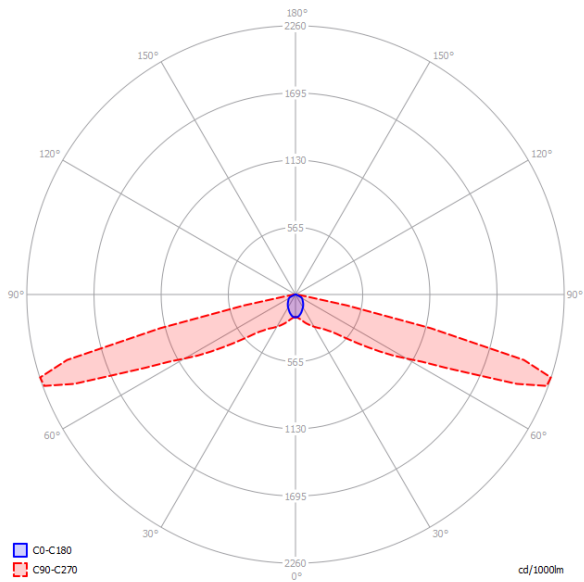

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	9,5 - 1h/CB 8,5 - 3h	21,0 - 1h/CB 19,0 - 3h
3,0	11,0 - 1h/CB 9,0 - 3h	24,0 - 1h/CB 21,0 - 3h
4,0	13,0 - 1h/CB 7,5 - 3h	29,0 - 1h/CB 23,0 - 3h
5,0	13,5 - 1h/CB 3,0 - 3h	32,0 - 1h/CB 20,0 - 3h
6,0	10,5 - 1h/CB 3,0 - 3h	34,0 - 1h/CB 14,0 - 3h
7,0	5,0 - 1h/CB	32,0 - 1h/CB
8,0	3,0 - 1h/CB	26,0 - 1h/CB
9,0	4,0 - 1h/CB	19,0 - 1h/CB
10,0	/	/

