



## Ceiling Light Luna

- Stylish and compact ceiling luminaire
- Clean "twist-and-lock" mounting system
- High quality full metal body
- Low height of only 46mm
- Suitable for ceiling and wall mounting



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
540001295200	LEDceilingLu-E Rd112-14W-830-WH	CFL 1x26W	14	1190	85	3000	0.17

## Accessories



542098030700  
Junction-Box-WH

## Packaging Information

Item		Box				
Item Code	Item Description	Commodity Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
540001295200	LEDceilingLu-E Rd112-14W-830-WH	94051190	115x52x119	0.23	6941408895765	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1

### Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	100°
Finishing	White RAL9003
Colour rendering index (CRI)	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Displacement factor (DF)	≥ 0.9

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No

### Mechanical Properties

Housing material	Aluminium
Optical material	Polycarbonate

### Ambient Conditions


Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C

**5 YEARS WARRANTY**



## Dimensional Drawing (mm)

LEDceilingLu-E Rd112

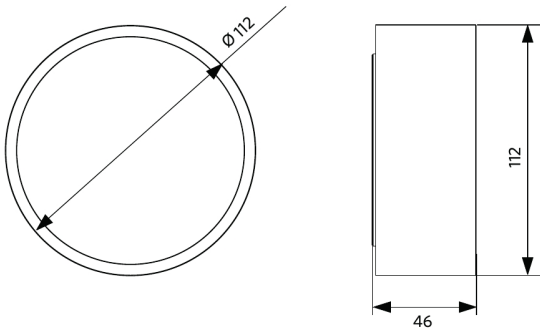

## Photometric Data

