

CATENARIA IN SERIES VERSION

Typology

Long run conductive cable with 15 factory attached lamp holders.
Cable type: H05RR-F 300/500 V.

Features

Two different models: with lamp holder on the cable or with pendant.
Lamp holders are fitted with IP44 protection rings.
Catenaria is suitable for non-permanent outdoor installations.
This version can be linked in series (daisy chain connection).

Installation


Catenaria with 15 lamp holders can be connected consecutively up to a maximum length of 45 metres.

Applications

Widely used for festoons indoor and outdoor garden lighting decoration, patio umbrella lighting, etc.
Suggested lamps: PING BALL, color GLS or Stargazer lamp.
Also available in white colour, perfect for reception areas, weddings, etc..

Notes

Only Catenaria with 15 lamp holders can be connected in serie with the IP44 Schuko plug and socket on the sides.
Both are IP44.




220-240 Vac	IP44	E27	-25°C +35°C	BASIC		G2
-------------	------	-----	----------------	--------------	--	----

Characteristic data

Input	220-240 Vac	Base	E27	IP	44	LED Warranty	G2
Color	Black						

Dimensional characteristics

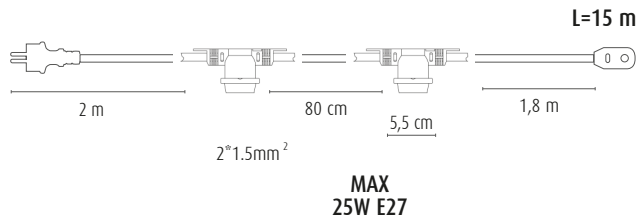

L	15000 mm
---	----------

Electrical characteristics

Input voltage	220-240 Vac
Frequency	50-60 Hz
Operating temperature	-25°C / +35°C

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC (Compatibilità Elettromagnetica)
 2014/35/EU * LVD (Bassa Tensione)
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-1:2022
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	4000 gr
Barcode single item	8011905856168
Number of pieces multiple pack	4
Barcode multiple pack	8011905856175
Minimum order quantity	1