

TM TECHNOLOGIE
emergency & evacuation lighting


TM.PRIMO R

IP 20 LED 3h

210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC

LED**

A1, A1*
E25, E30*, E40

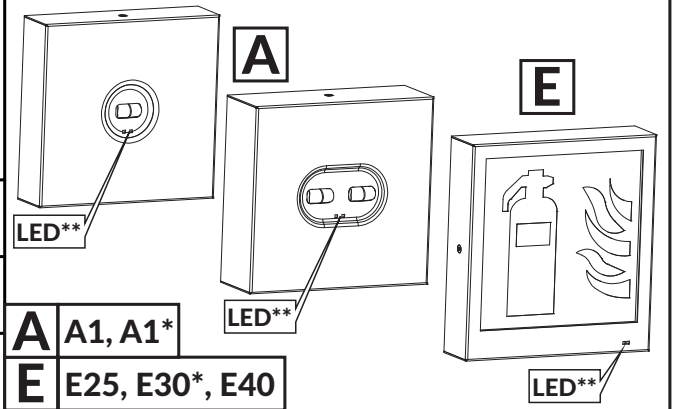

A1, A1* ! ±1 [mm]

PRIMO R	C ₁	C ₂
A1	36	38
A1*	47	49

E ! ±1 [mm]

PRIMO R	E25	E30	E40
A	146	171	221
B	157	182	232
E	40	35	27
F	19	26	35
E ₂	4	48	78
F ₂	78	27	50
L ₁	120	140	180

1

A

TM-PROG

≤50mm

1.3

CBA

1

E

4 **ST / AT / DATA / DATA 2 / DALI 4.1 3.1▶3.2▶3.3▶3.4 **A**

4.2 4.3 4.4 4.5 4.6 4.7 4.8 3.7▶3.8▶3.9

4 **ST / AT / DATA / DATA 2 / DALI 4.1 3.1▶3.2▶3.3 **E30*, E40**

4.2 4.3 4.4 4.5 4.6 4.7 4.8 3.8▶3.9▶3.10▶3.11 **E25**

PRIMO R	25P (10 x LED)	30P (12 x LED)	40P (16 x LED)
t		75°C	



