


ITECH M2 302 M AT



Catalog number	TM-IT.M2ATM360W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	270 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-40 °C
Material	PC
Appliance classes	2
IP	IP65
IK	IK06
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour



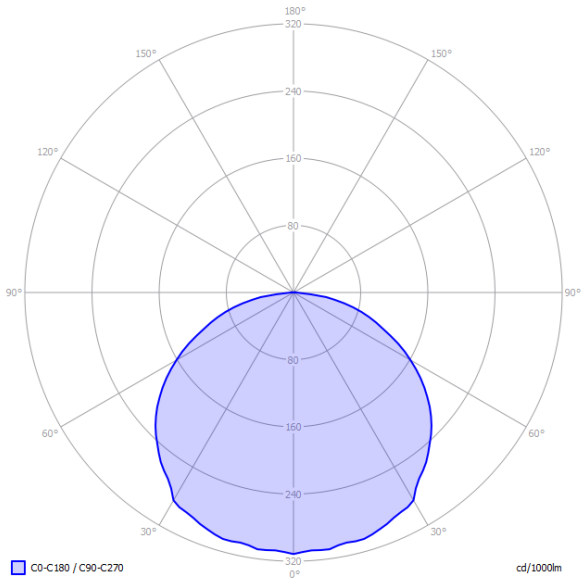

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,0	9,3
3,0	4,2	10,5
4,0	4,5	12,0
5,0	4,7	13,5
6,0	4,9	14,4
7,0	4,8	15,0
8,0	4,8	15,7
9,0	4,7	16,0
10,0	4,5	16,2

