

21 Industrial & Floodlights>The IP65 LED Slim Range PC

38118LA/D



IP65 slim LED fitting .

Stainless steel clips included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

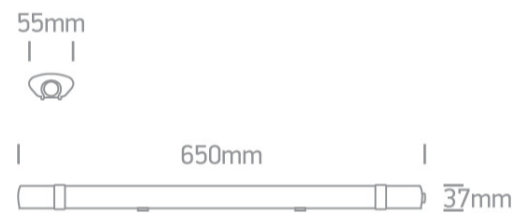

Gallery



Must be ordered separately



050084

Physical Specification


Item Group	21 Industrial & Floodlights
Family	The IP65 LED Slim Range PC
Order Code	38118LA/D
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	650mm
Width	65mm
Height	37mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
------	----------

Fitting + Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	

Fitting

Input Type	Constant Current
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	6000K
Lumen Output	1600lm
Light Efficiency	88,9lm/W
CRI	80

Beam Angle

120°

Illumination Diagram



Packing Info

Box Length

66cm

Box Width

9,5cm

Box Height

9,2cm

Box Weight

0,25Kg

Pcs/Carton

20

Barcode

5291889051107

HS Code

9405104090

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

