



## Surface Spot Selena

- Stylish and compact surface mounted spot
- Clean “twist-and-lock” mounting system
- High quality full metal body
- Standard CRI 90



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off, Adjustable							
541003589700	LEDSpotRA-Selena-E 5W-930-55D-BL	Halogen 35W	4.8	400	83	3000	0.22

## Packaging Information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541003589700	LEDSpotRA-Selena-E 5W-930-55D-BL	94051190	61x61x120	0.26	6941497787149	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	See catalogue appendix
Colour consistency (SDCM)	4	Connection	Specifications
Dimmability	On-Off	Mechanical Properties	
Beam angle	55°	Housing material	Aluminium
Maximum tilt angle	90°	Optical material	Polycarbonate
Finishing	Matte Black	Ambient Conditions	
Colour rendering index (CRI)	≥ 90	Operating temperature	-10-+40°C
Degree of protection (IP)	IP20	Application temperature	+25°C
Impact strength	IK02	Storage environment	-25-+50°C
Protection class	II		
Risk group (EN 62471)	RG1		
With control gear	Yes		
Glow wire test	650°C		



## Dimensional Drawing (mm)

LEDSpotRA-Selena-E 5W

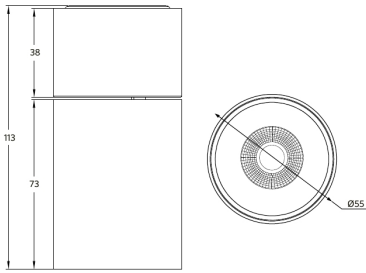

## Photometric Data

