



Surface Spot Selena

- Stylish and compact surface mounted spot
- Clean "twist-and-lock" mounting system
- High quality full metal body
- Standard CRI 90



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|-------------------------|--------------------------------------|-------------------|-----------|-------|-----------------|---------|----------------|
| Dimmable (Triac), Fixed | | | | | | | |
| 541003590400 | LEDSpotRF-Selena-E 7W-DIM-930-55D-WH | Halogen 50W | 7 | 560 | 80 | 3000 | 0.38 |

Accessories



821017003600
LEDSmart-BLE2-Relay-250W-DIM

Packaging Information

| Item | | | Box | | | |
|--------------|--------------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 541003590400 | LEDSpotRF-Selena-E 7W-DIM-930-55D-WH | 94051190 | 81x81x115 | 0.43 | 6941497787217 | 1 |
| 821017003600 | LEDSmart-BLE2-Relay-250W-DIM | 94059200 | 90x40x30 | 0.09 | 6931783007594 | 1 |

Technical Specifications

| | |
|------------------------------|-------------|
| Lifetime (L70) | 50,000 h |
| Lifetime (L80) | 30,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 4 |
| Dimmability | Triac |
| Beam angle | 55° |
| Maximum tilt angle | n/a |
| Finishing | Matte White |
| Colour rendering index (CRI) | ≥ 90 |
| Degree of protection (IP) | IP20 |
| Impact strength | IK02 |
| Protection class | II |
| Risk group (EN 62471) | RG1 |
| With control gear | Yes |
| Glow wire test | 650°C |

Electrical Supply

| | |
|------------------|--|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | See catalogue appendix Connection Specifications |

Mechanical Properties

| | |
|------------------|---------------|
| Housing material | Aluminium |
| Optical material | Polycarbonate |

Ambient Conditions


| | |
|-------------------------|-----------|
| Operating temperature | -10-+40°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |

5 YEARS WARRANTY



Dimensional Drawing (mm)

LEDSpotRF-Selena-E 7W-DIM

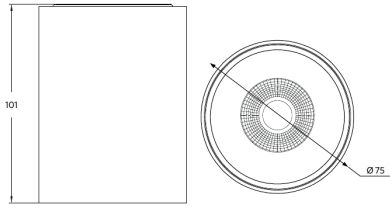

Photometric Data

