




## PS230 | Icicle | 2x0,4m | BI.Wire | 2400K WW+ & Flash CW 8/1



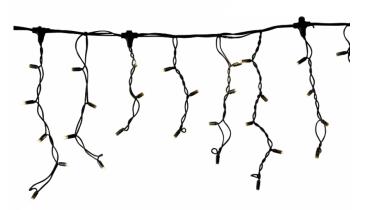

Article number:	007-029
CHANGED_LAST:	21-06-2022
Brand:	Tronix Lighting
Туре:	Icicle Light 2M x 40CM
ETIM Group:	EG000027 - Luminaires
ETIM Classes:	EC002761 - Festive lighting
SYNONYM:	Bulb luminaire, Candle, Candle stick light, Chandelier, Christmas lighting, Christmas tree lighting, Curtain light, Festive lighting Illumination cable set



Page: 1/3















## Feature

Model:	Curtain light	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Number of light centres:	76	Constant light output (CLO):	No
Lamp type:	LED not exchangeable	Degree of protection (IP):	IP65
With light source:	Yes	Protection class:	II
Colour:	Other	Fire resistance according to UL94:	C
Voltage type:	AC	Colour of light:	White
Nominal voltage:	230 ~ 230 V	Power factor:	0.95
Connected load:	5.5 W	Width:	0 mm
Battery power supply:	No	Height/depth:	400 mm
Suitable for outdoor use:	Yes	Total length:	2 m
With power bridge:	No	Diameter:	0 mm
Connectable:	Yes	Type of wiring:	Through wiring included
Type of control gear:	LED operating device voltage-controlled	Number of poles:	2
Exchangeable control gear:	No	Conductor cross section:	0.5 mm <sup>2</sup>
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)	Connection type:	Other
Rated life time L70/B50 at 25 °C:	20000 h	commerial, christmas or both:	NA
Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %		

## Packaging data

Weight	680 gr
Width	80 mm
Height	120 mm
Length	220 mm
Customs code	9405310000

Page: 2/3














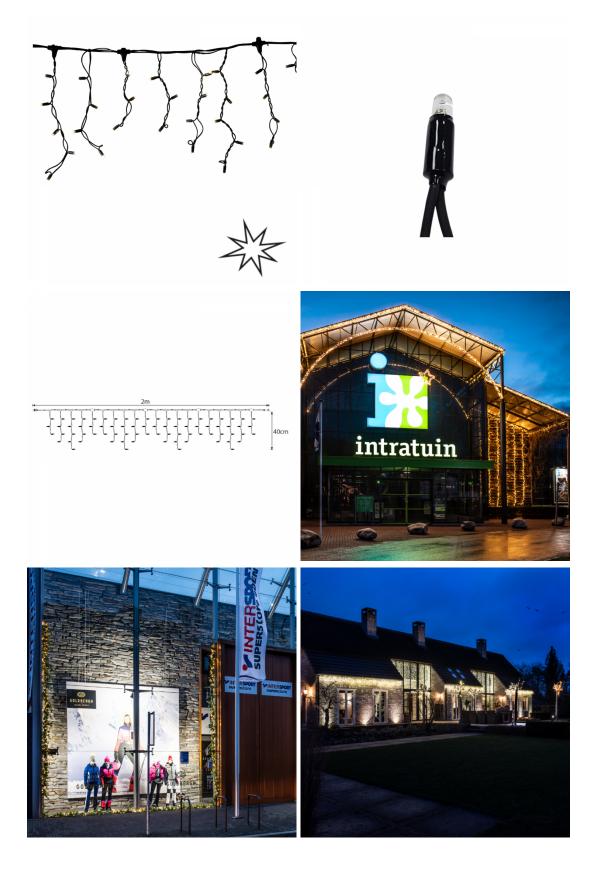

Page: 3/3

guided by light







tronixlighting.com

TRONIX