


ITECH M5 105 M AT



Catalog number	TM-IT.M5ATM160B
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9005
Luminous flux	524 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-40 °C
Material	PC
Appliance classes	2
IP	IP65
IK	IK06
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour



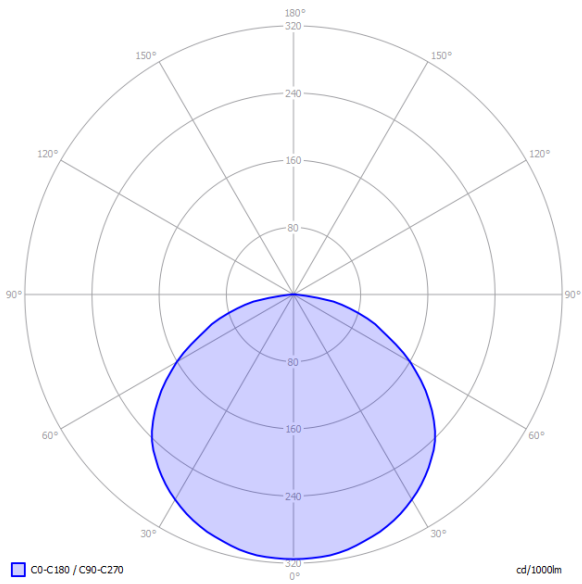

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,6	11,5
3,0	5,0	12,8
4,0	5,6	14,4
5,0	6,0	15,6
6,0	6,5	17,0
7,0	6,6	18,6
8,0	6,7	19,5
9,0	6,6	20,5
10,0	6,6	21,3

