


ONTEC S W1 302 M ST COLD



Catalog number	TM-OS.W1STM36CW
Application	lighting of the final exit / fire-protection devices
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Luminous flux	204 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.5 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-15-40 °C
Material	PC
Appliance classes	2
IP	IP65
IK	IK08
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



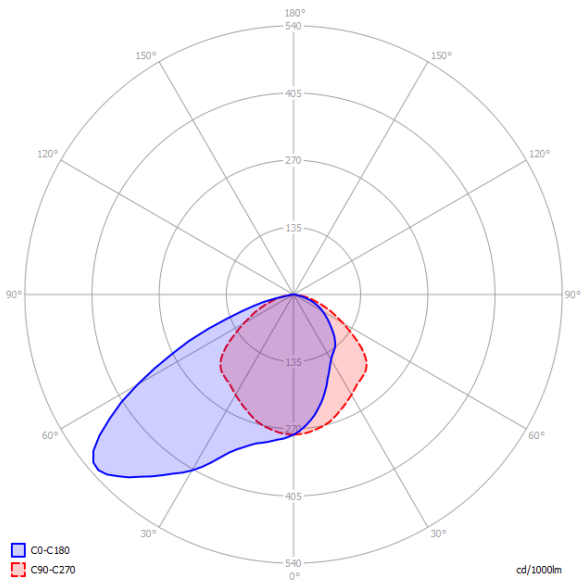

PHOTOMETRY [m]

Ceiling height

- 2,5
- 3,0
- 4,0
- 5,0
- 6,0
- 7,0
- 8,0
- 9,0
- 10,0

Distance wall - fitting

Distance fitting - fitting

