



# ONTEC S M5 105 M ST COLD



Catalog number	TM-OS.M5STM16CW
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Colour of reflector	for TM-OS.M1ATM860B reflector is white
Luminous flux	576 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6.8 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC, 92+130 V DC, 20.5+40 V DC, 38+72 V DC
Dimming mode	no
Temperature range	-15-40 °C
Material	PC
Appliance classes	2
IP	IP65
IK	IK08
COLD	yes
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

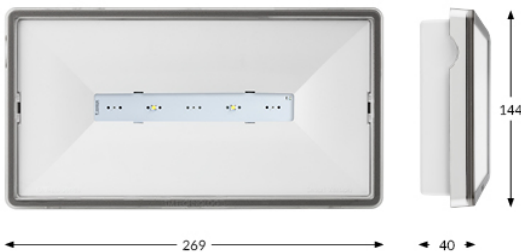

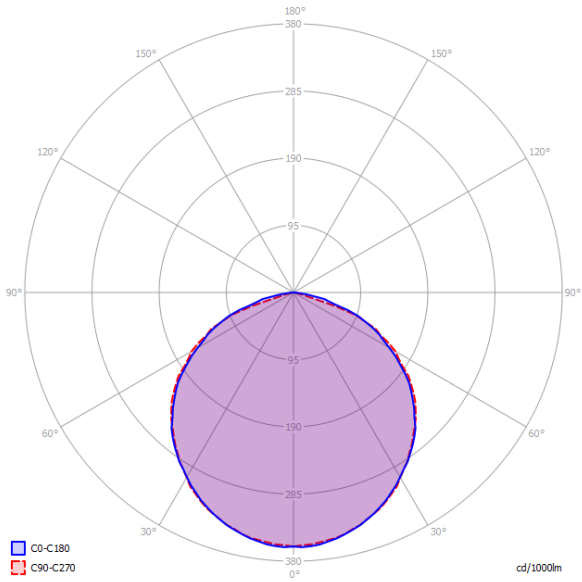

## PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,7	11,6
3,0	5,1	13,0
4,0	5,9	14,8
5,0	6,2	16,4
6,0	6,6	17,8
7,0	6,7	19,2
8,0	6,8	20,0
9,0	6,9	20,9
10,0	7,0	22,0

