




Product Datasheet

14 Plafo>The LED Plafo Outdoor Round

67280BN/W/W

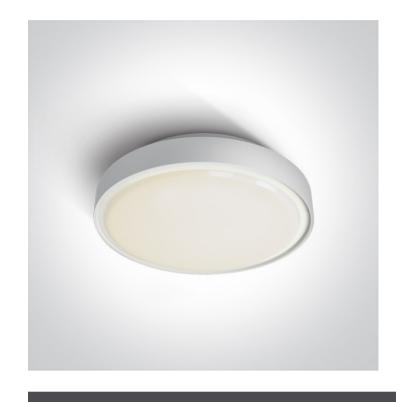

30W LED plafo light, IP65, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads









Dimensions



Physical Specification

| Item Group | 14 Plafo |
|-------------------|-----------------------------|
| Family | The LED Plafo Outdoor Round |
| Order Code | 67280BN/W/W |
| Colour | White |
| Material | Plastic |
| Diffuser Material | PC |
| Shape | Circular |
| Height | 83mm |
| Diameter | 360mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Outdoor | Yes |

| Adjustable | No |
|----------------------------|------------------|
| IK Rating | 8 |
| | |
| Electrical Characteristics | |
| | |
| Gear | Built In |
| Eittin a Dairean | |
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class | |
| Power(Watts) | 30W |
| IP Rating | IP65 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark | F |
| | |
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 38V |
| Power(Watts) | 28W |
| IP Rating | IP65 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Epistar |
| LED Number | 144 |
| F Mark | F |
| | |
| Gear | |
| Gear Type | Led Driver |
| | |

| Input Voltage | 220-240V |
|--|--|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 18,2-30W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 700mA | 26-43,5V |
| IP Rating | IP20 |
| Safety Class | |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Connector |
| Brand | Eaglerise |
| | |
| Ilumination Data | |
| narimation Bata | |
| | |
| Colour Temperature | 3000K |
| | 3000K 1800lm |
| Colour Temperature | |
| Colour Temperature Lumen Output | 1800lm |
| Colour Temperature Lumen Output Light Efficiency | 1800lm 60lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI | 1800lm 60lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram | 1800lm 60lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI | 1800lm 60lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram | 1800lm 60lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram | 1800lm 60lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Length | 1800lm 60lm/W 80 37cm |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Length Box Width | 1800lm 60lm/W 80 37cm 37cm |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Length Box Width Box Height | 1800lm 60lm/W 80 37cm 37cm 9cm |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Length Box Width Box Height Box Weight | 1800lm 60lm/W 80 37cm 37cm 9cm 1.700kg |
| Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Length Box Width Box Height Box Weight Pcs/Carton | 1800lm 60lm/W 80 37cm 37cm 9cm 1.700kg |

Certification & Warranty

| Warranty | 2 Years |
|----------------|---------|
| Weee Directive | Yes |



