



Panel Performer Surface Mounted

- No need to repaint the ceiling due to wide dimensions
- Easy to install with mounting bracket
- Office compliant, UGR19
- Integrated CCT switch for color selection (3000K-4000K)



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen Efficacy (lm/W)	CCT (K)	Colour rendering index (CRI)	Weight (pc/kg)
542003155900	LEDPanelS-Sf-P L12-40W-830/840	TL 2x36W	40	5000 125	3K/4K	> 80	4.5

Available on request with Wieland GST18 or WAGO WINSTA connector, or Euro/Schuko plug. DALI2 versions are compatible with central emergency lighting according to EN 50172.

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542003155900	LEDPanelS-Sf-P L12-40W-830/840	94051190	1290x381x61	4.81	6941491742083	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Beam angle	90 °
Finishing	White RAL9003
RAL-Number	9003
UGR	19
Ingress Protection (IP)	IP20
Impact strength (IK)	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties


Housing material	Aluminium
Optical material	Polycarbonate

Ambient Conditions

Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C



Dimensional Drawing (mm)

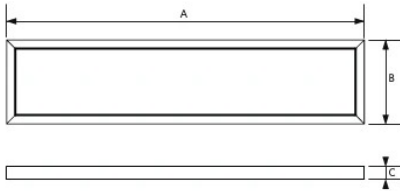

	A	B	C
L12	1274	370	55
L15	1574	370	55

Motion Sensors



Photometric Data

