



Mirror Light

- Decorative wall luminaire with delicate design
- IP44 waterproof, suitable for bathrooms and comparable spaces
- Excellent lighting uniformity
- Integrated CCT switch for color selection (3000K-4000K)



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
521028002900	LEDLinear-Fiji L900 20W-830/840-BL	TL 1x18W	20	2600 130	3K/4K	160	1.3

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
521028002900	LEDLinear-Fiji L900 20W-830/840-BL	94051190	915x120x65	1.89	6941491775128	1

Technical Specifications

Lifetime (L70)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Finishing	Black RAL 9004
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP44
Impact strength (IK)	IK02
Protection class	I
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	750 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

Mechanical Properties

Housing material	Aluminium
Optical material	Polycarbonate


Ambient Conditions

Operating temperature	-10 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C

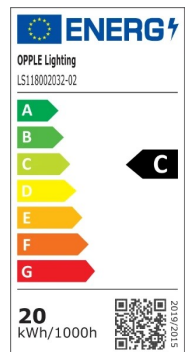


Dimensional Drawing (mm)


Ball	A	B	C
8W	600	182	82
12W	900	182	82

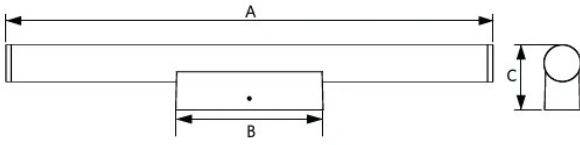

Fiji	A	B	C
12W	600	72	46
20W	900	72	46

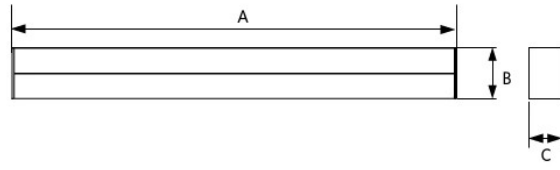

Java	A	B	C
10W	580	72	66

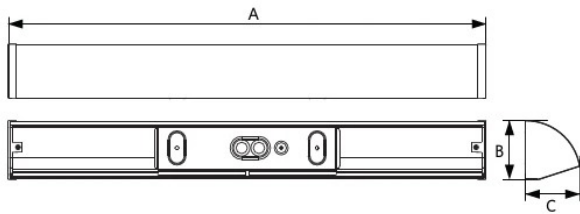

Photometric Data

