


ITECH C2 305 M AT



| | |
|---|--|
| Catalog number | TM-IT.C2ATM360W |
| Application | escape route lighting |
| Duration time | 3 h |
| Operating mode | M |
| Version | AT - auto-test / self-test |
| Colour | RAL9003 |
| Luminous flux | 478 lm |
| Maximum light power (the luminaire can power the light source with a different power) | 4.5 W |
| Active power | 6 W |
| Power supply | 210+250 V AC 50+60 Hz |
| Power supply CB | 186+254 V DC |
| Dimming mode | no |
| Temperature range | 10-40 °C |
| Material | PC |
| Appliance classes | 2 |
| IP | IP65 |
| IK | IK06 |
| Battery | LiFePO4/C 6.4V 3.0Ah |
| Warranty | 24 months - ST 36 months - AT 60 months - DATA, CB |
| LED Lifetime | 50 000 work hour |
| Standards | PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |



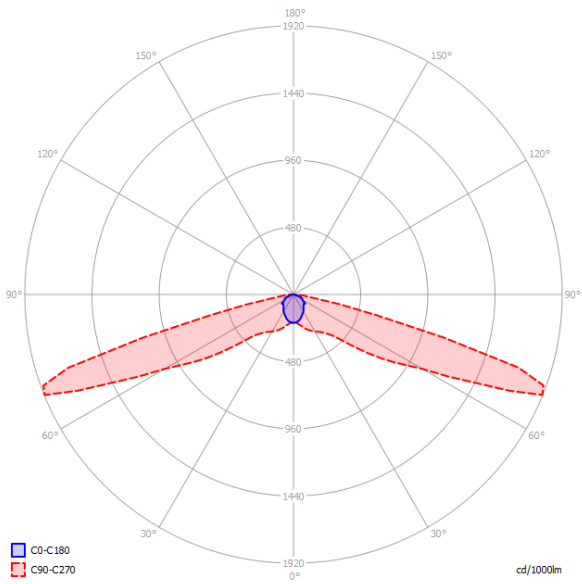

PHOTOMETRY [m]

| Ceiling height | Distance wall - fitting | Distance fitting - fitting |
|----------------|-------------------------|----------------------------|
| 2,5 | 8,9 | 19,8 |
| 3,0 | 10,1 | 22,7 |
| 4,0 | 12,6 | 28,2 |
| 5,0 | 14,2 | 33,0 |
| 6,0 | 15,4 | 37,2 |
| 7,0 | 14,6 | 40,5 |
| 8,0 | 10,5 | 33,2 |
| 9,0 | 5,8 | 29,0 |
| 10,0 | 5,2 | 27,0 |

