




Product Datasheet

New 2025 Edition 2>Downlights Fixed LED

10110U/W/V

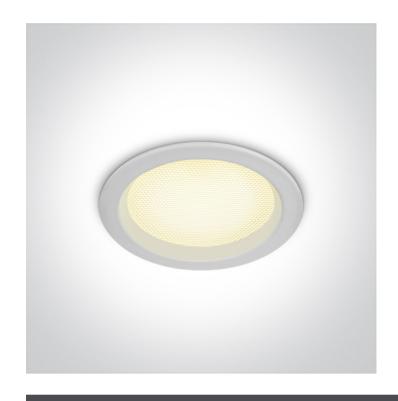

10W SMD LED UGR19 CCT Variable downlight, IP44.

Complete with 200mA driver.

Complies with standard EN60598-1 and any other specific standards.















Downloads







Dimensions







Gallery





Physical Specification

Item Group Family Order Code Colour Material **Diffuser Material** Shape

New 2025 Edition 2

Downlights Fixed LED

10110U/W/V

White

Die Cast

Plastic

Circular

Height	35mm
Diameter	95mm
Cutout Hole Diameter	86mm
Recessed Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No
IK Rating	4
Electrical Characteristics	
Gear	External-Included
Fitting I Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	200mA
Safety Class	
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
IP Rating	IP44
Safety Class	
Dimmable	No
umination Data	
Colour Temperature	3000K-4000K-6000K
	3000K-4000K-6000K 850lm
Colour Temperature	
Colour Temperature Lumen Output	850lm
Colour Temperature Lumen Output Light Efficiency	850lm 85lm/W
Colour Temperature Lumen Output Light Efficiency CRI	850lm 85lm/W
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	850lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	850lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram UGR	850lm 85lm/W 80 19
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram UGR	850lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram UGR	850lm 85lm/W 80 19
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram UGR acking Info Box Weight	85lm/W 80 19 0.280kg

Certification & Warranty

switch to one light!

