



# LED Downlight Performer G2

# OPPLE

Version date 10-03-2024  
www.opple.com

# OPPLE

Item Code	Luminaire Description	CCT	kg
540001383900	LEDDownlightMW-P2 Rd125-8W-930/940	3000K/4000K	0.4kg
540001384900	LEDDownlightMW-P2 Rd125-8W-DALI-930/940	3000K/4000K	0.4kg
540001385800	LEDDownlightMW-P2 Rd125-8W-BLE2-930/940	3000K/4000K	0.53kg
540001387100	LEDDownlightHG-P2 Rd125-8W-930/940	3000K/4000K	0.4kg
540001388100	LEDDownlightHG-P2 Rd125-8W-DALI-930/940	3000K/4000K	0.4kg
540001389000	LEDDownlightHG-P2 Rd125-8W-BLE2-930/940	3000K/4000K	0.53kg
540001384000	LEDDownlightMW-P2 Rd150-12W-930/940	3000K/4000K	0.56kg
540001385000	LEDDownlightMW-P2 Rd150-12W-DALI-930/940	3000K/4000K	0.56kg
540001385900	LEDDownlightMW-P2 Rd150-12W-BLE2-930/940	3000K/4000K	0.69kg
540001387200	LEDDownlightHG-P2 Rd150-12W-930/940	3000K/4000K	0.56kg
540001388200	LEDDownlightHG-P2 Rd150-12W-DALI-930/940	3000K/4000K	0.56kg
540001389100	LEDDownlightHG-P2 Rd150-12W-BLE2-930/940	3000K/4000K	0.69kg
540001384100	LEDDownlightMW-P2 Rd200-15W-930/940	3000K/4000K	0.82kg
540001385100	LEDDownlightMW-P2 Rd200-15W-DALI-930/940	3000K/4000K	0.82kg
540001386000	LEDDownlightMW-P2 Rd200-15W-BLE2-930/940	3000K/4000K	0.97kg
540001387300	LEDDownlightHG-P2 Rd200-15W-930/940	3000K/4000K	0.82kg
540001388300	LEDDownlightHG-P2 Rd200-15W-DALI-930/940	3000K/4000K	0.82kg
540001389200	LEDDownlightHG-P2 Rd200-15W-BLE2-930/940	3000K/4000K	0.97kg
540001384200	LEDDownlightMW-P2 Rd200-22W-930/940	3000K/4000K	0.82kg
540001385200	LEDDownlightMW-P2 Rd200-22W-DALI-930/940	3000K/4000K	0.82kg
540001386100	LEDDownlightMW-P2 Rd200-22W-BLE2-930/940	3000K/4000K	0.97kg
540001387400	LEDDownlightHG-P2 Rd200-22W-930/940	3000K/4000K	0.82kg
540001388400	LEDDownlightHG-P2 Rd200-22W-DALI-930/940	3000K/4000K	0.82kg
540001389300	LEDDownlightHG-P2 Rd200-22W-BLE2-930/940	3000K/4000K	0.97kg
540001384300	LEDDownlightMW-P2 Rd200-30W-930/940	3000K/4000K	0.85kg
540001385300	LEDDownlightMW-P2 Rd200-30W-DALI-930/940	3000K/4000K	0.85kg
540001386200	LEDDownlightMW-P2 Rd200-30W-BLE2-930/940	3000K/4000K	0.97kg
540001387500	LEDDownlightHG-P2 Rd200-30W-930/940	3000K/4000K	0.85kg
540001388500	LEDDownlightHG-P2 Rd200-30W-DALI-930/940	3000K/4000K	0.85kg
540001389400	LEDDownlightHG-P2 Rd200-30W-BLE2-930/940	3000K/4000K	0.97kg
540001384400	LEDDownlightMW-P2 Rd200-40W-930/940	3000K/4000K	0.92kg
540001387600	LEDDownlightHG-P2 Rd200-40W-930/940	3000K/4000K	0.92kg
540001386700	LEDDownlightMW-P2 Rd150-12W-DALI-TW	2700K-6500K	0.65kg
540001386800	LEDDownlightMW-P2 Rd150-12W-BLE2-TW	2700K-6500K	0.69kg
540001389900	LEDDownlightHG-P2 Rd150-12W-DALI-TW	2700K-6500K	0.65kg
540001390000	LEDDownlightHG-P2 Rd150-12W-BLE2-TW	2700K-6500K	0.69kg
540001386900	LEDDownlightMW-P2 Rd200-24W-DALI-TW	2700K-6500K	0.92kg
540001387000	LEDDownlightMW-P2 Rd200-24W-BLE2-TW	2700K-6500K	0.97kg
540001390100	LEDDownlightHG-P2 Rd200-24W-DALI-TW	2700K-6500K	0.92kg
540001390200	LEDDownlightHG-P2 Rd200-24W-BLE2-TW	2700K-6500K	0.97kg

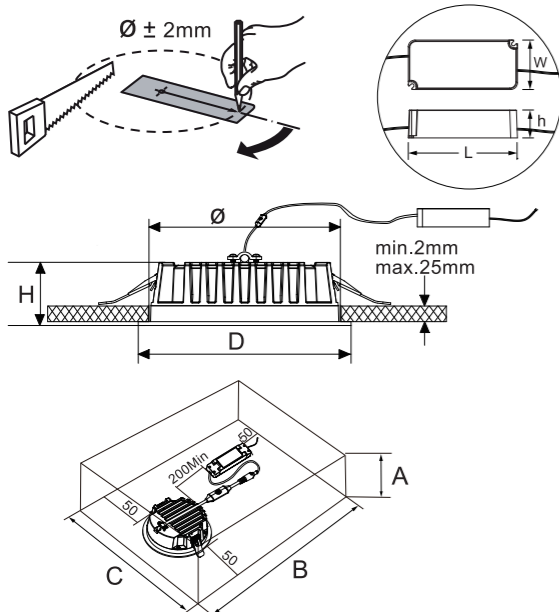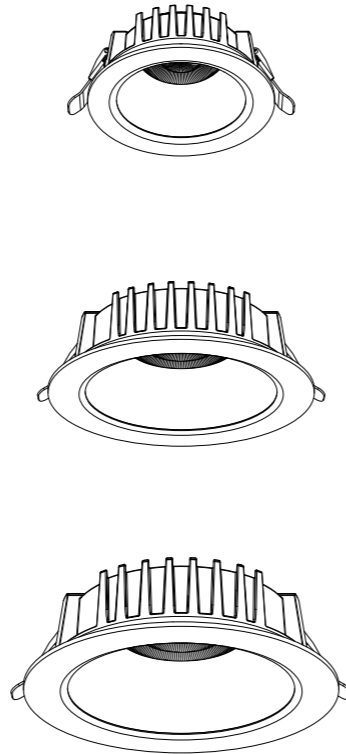

Driver Model	L (mm)	W (mm)	h (mm)
OP-IESCH0080200E1-01	100	38	22
OP-IESCH0140350E1-01	100	38	25
OP-IESCH0190450E1-01	100	38	25
OP-IESCH0220550E1-01	100	38	25
OP-IESCH0401100E1-02	173	45	33
OP-IESCH0080350D1-01	142	30	20
OP-IESCH0150350D1-01	119	40	21.5
OP-IESCH0260700D2-01	160	74	30
OP-IESCH0290700D1-01	131	43	30
OP-IESCH0441050D1-01	131	43	30
OP-IDSCH0401050B2-01	180	51	30.6

Model Name	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	Cut out $\phi$ (mm)
Rd125	123	705	325	140	100	125
Rd150	123	705	325	173	100	150
Rd200	123	705	325	226	100	200

## Light Source

Product Code	Product Description	N	Light source code	QR Code	Energy Label
540001383900	LEDDownlightMW-P2 Rd125-8W-930/940	1	LS109000733		
540001384900	LEDDownlightMW-P2 Rd125-8W-DALI-930/940	1			
540001385800	LEDDownlightMW-P2 Rd125-8W-BLE2-930/940	1			
540001387100	LEDDownlightHG-P2 Rd125-8W-930/940	1			
540001388100	LEDDownlightHG-P2 Rd125-8W-DALI-930/940	1			
540001389000	LEDDownlightHG-P2 Rd125-8W-BLE2-930/940	1			
540001384000	LEDDownlightMW-P2 Rd150-12W-930/940	1	LS109001033		
540001385000	LEDDownlightMW-P2 Rd150-12W-DALI-930/940	1			
540001385900	LEDDownlightMW-P2 Rd150-12W-BLE2-930/940	1			
540001387200	LEDDownlightHG-P2 Rd150-12W-930/940	1			
540001388200	LEDDownlightHG-P2 Rd150-12W-DALI-930/940	1			
540001389100	LEDDownlightHG-P2 Rd150-12W-BLE2-930/940	1			
540001384100	LEDDownlightMW-P2 Rd200-15W-930/940	1	LS109001233		
540001385100	LEDDownlightMW-P2 Rd200-15W-DALI-930/940	1			
540001386000	LEDDownlightMW-P2 Rd200-15W-BLE2-930/940	1			
540001387300	LEDDownlightHG-P2 Rd200-15W-930/940	1			
540001388300	LEDDownlightHG-P2 Rd200-15W-DALI-930/940	1			
540001389200	LEDDownlightHG-P2 Rd200-15W-BLE2-930/940	1			
540001384200	LEDDownlightMW-P2 Rd200-22W-930/940	1	LS109002033		
540001385200	LEDDownlightMW-P2 Rd200-22W-DALI-930/940	1			
540001386100	LEDDownlightMW-P2 Rd200-22W-BLE2-930/940	1			
540001387400	LEDDownlightHG-P2 Rd200-22W-930/940	1			
540001388400	LEDDownlightHG-P2 Rd200-22W-DALI-930/940	1			
540001389300	LEDDownlightHG-P2 Rd200-22W-BLE2-930/940	1			
540001384300	LEDDownlightMW-P2 Rd200-30W-930/940	1	LS109002533		
540001385300	LEDDownlightMW-P2 Rd200-30W-DALI-930/940	1			
540001386200	LEDDownlightMW-P2 Rd200-30W-BLE2-930/940	1			
540001387500	LEDDownlightHG-P2 Rd200-30W-930/940	1			
540001388500	LEDDownlightHG-P2 Rd200-30W-DALI-930/940	1			
540001389400	LEDDownlightHG-P2 Rd200-30W-BLE2-930/940	1			
540001384400	LEDDownlightMW-P2 Rd200-40W-930/940	1	LS109003433		
540001387600	LEDDownlightHG-P2 Rd200-40W-930/940	1			
540001386700	LEDDownlightMW-P2 Rd150-12W-DALI-TW	1	LS109001035-01		
540001386800	LEDDownlightMW-P2 Rd150-12W-BLE2-TW	1			
540001389900	LEDDownlightHG-P2 Rd150-12W-DALI-TW	1			
540001390000	LEDDownlightHG-P2 Rd150-12W-BLE2-TW	1	LS109002035-01		
540001386900	LEDDownlightMW-P2 Rd200-24W-DALI-TW	1			
540001387000	LEDDownlightMW-P2 Rd200-24W-BLE2-TW	1			
540001390100	LEDDownlightHG-P2 Rd200-24W-DALI-TW	1			
540001390200	LEDDownlightHG-P2 Rd200-24W-BLE2-TW	1			

**For On/Off**  
8W/ 12W/ 15W/ 22W

① ② ③ ④

5mm 7mm L  
2×0.75~1.5mm<sup>2</sup>

---

**30W/ 40W**

① ② ③ 0.5-0.9 N·m

5mm 6mm L  
2×0.75~1.5mm<sup>2</sup>

---

**For DALI**  
8W

① ② ③ ④

5mm 6mm DIM+/DA  
DIM-/DA  
4×0.75~1.5mm<sup>2</sup>

---

**12W**

① ② ③ ④

5mm 6mm DIM+/DA  
DIM-/DA  
4×0.75~1.5mm<sup>2</sup>

---

**15W/ 22W**

① ② ③ ④

5mm 6mm DIM+/DA  
DIM-/DA  
4×0.75~1.5mm<sup>2</sup>

---

**30W**

① ② ③ ④

5mm 6mm DIM+/DA  
DIM-/DA  
4×0.75~1.5mm<sup>2</sup>

---

**For DALI TW**  
12W/ 24W

① ② ③ ④

5mm 6mm DIM+/DA  
DIM-/DA  
4×0.75~1.5mm<sup>2</sup>

---

**For BLE2**  
8W/ 12W/ 15W/ 22W/ 30W

① ② ③ 0.5-0.9 N·m

5mm 6mm L  
2×0.75~1.5mm<sup>2</sup>

Bluetooth Operating Frequency: 2402-2480 MHz  
Bluetooth Max Transmission Power: <20dBm

**For BLE TW**  
12W/ 24W

① ② ③ 0.5-0.9 N·m

5mm 6mm L  
2×0.75~1.5mm<sup>2</sup>

Bluetooth Operating Frequency: 2402-2480 MHz  
Bluetooth Max Transmission Power: <20dBm

---

**Recessed Mounting**

①  $\varnothing \pm 2\text{mm}$

②

③

④ IP20  
IP44

For indoor use.

---

**Caution**

Terminal block not included. Installation may require advice from a qualified person.  
Only use suitable connection boxes with internal terminal blocks conform to EN60998-2-1 or EN60998-2-2 Terminal should be capable for at least 450V 16A, 2×0.75mm<sup>2</sup> wiring.  
For non-user replaceable light sources:  
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.  
Caution: Any operation on LED module is forbidden while power-on.  
Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.  
Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.

Luminaires not suitable for covering with thermally insulating material.  
Leuchten sind nicht mit thermisch isolierenden Materialien abzudecken.  
In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

LED	IP20 IP44	CE	25	For Downlight	For driver
EN 60598					

Opplé Lighting B.V.  
Meerenakkerweg 1-07  
5652 AR Eindhoven  
The Netherlands  
service@opple.com

OPPLE Lighting Co., Ltd.  
Room 411, Building 1 No. 6111,  
Longdong Avenue, Pudong New District,  
Shanghai City 201201, P. R. China  
www.opple.com

Data subject to change / Les données sont sujettes à modifications / Änderungen vorbehalten