



Dodo 300

LL14305L3


Lombardo.

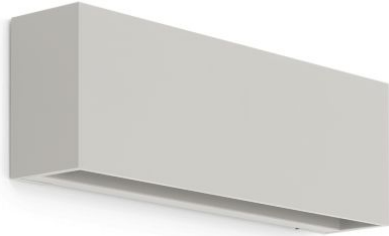

Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Light Grey RAL 7044
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	20
Lumen:	2900
Real Lumen:	1220
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	30-38-45-57
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 54
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK EA

Adjustable light beam angle.



Dodo 300

LL14305L3


Lombardo.




Installation images:



Lighting simulation:

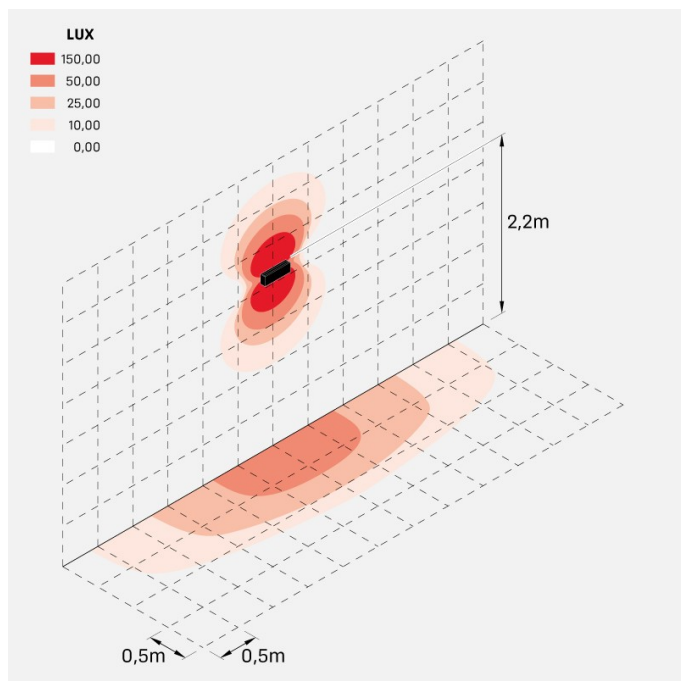

dodo_300_open

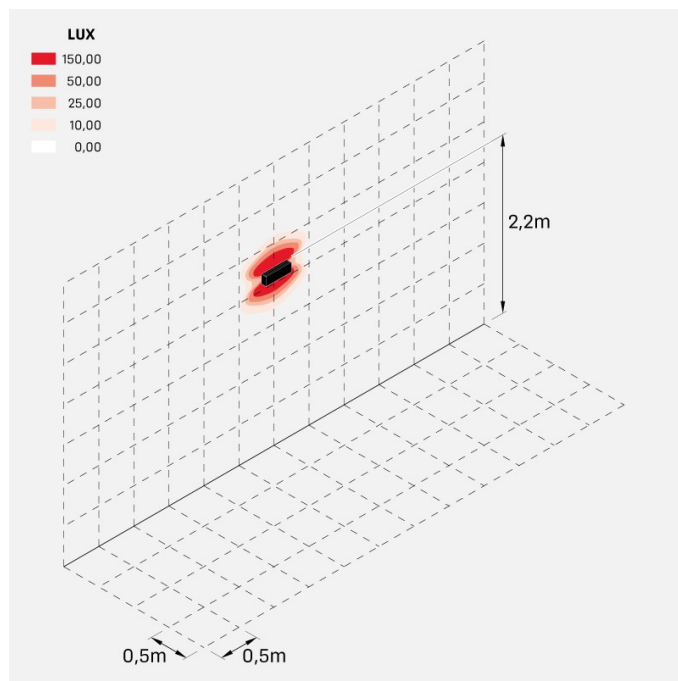

dodo_300_close

Photometric curves:

