


MLX PL RIO LED PANELEK



HL0019963
HL0019969
HL0019962
HL0019973
HL0019816
HL0019961
HL0019974
HL0019817
HL0019821




Alumínium keret




SMD 2835







MLX PL RIO LED PANELEK



Méretetek

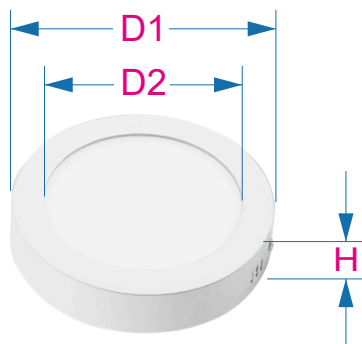


Cikkszám	Power	D1	D2	H
HL0019963	6W	Φ120mm	Φ80mm	32mm
HL0019962	12W	Φ170mm	Φ128mm	32mm
HL0019961	18W	Φ223mm	Φ177mm	32mm
HL0019816	18W	Φ300mm	Φ249mm	32mm

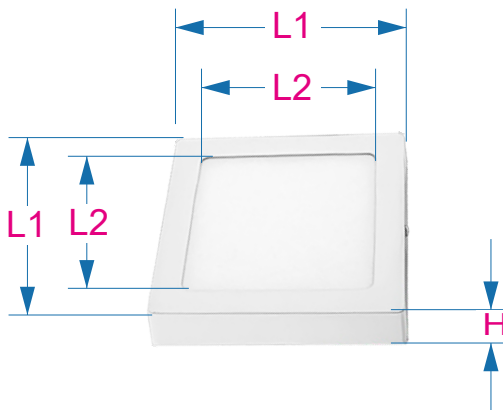


Cikkszám	Power	L1	L2	H
HL0019969	6W	120x120mm	78x78mm	32mm
HL0019973	12W	170x170mm	126x126mm	32mm
HL0019974	18W	223x223mm	176x176mm	32mm
HL0019821	24W	300x300mm	246x246mm	32mm





MLX PL RIO LED PANELEK



HL0019816

CIKKSZÁM

HL0019963


HL0019962

HL0019961


HL0019821

Norminal Wattage	6W	12W	18W	24W
LED Qty	30 PCS	60 PCS	96 PCS	120 PCS
Input Voltage	AC200-240V 50/60Hz			
Luminaires Class	Class III			
LED Type	2835 SMD			
Driver Type	Flicker Free			
Operating Temperature	-20°C to +50°C			
Power Factor(PF)	≥0.5			
THD	<20%			
Lumen Output (+/- 5%)	510 lm	1020 lm	1530 lm	2040 lm
Luminaire efficacy (+/- 5%)	85LM/W	85LM/W	85LM/W	85LM/W
Beam Angle	120°			
CRI	≥80 Ra			
CCT	3000K (Warm White), 4000K (Nature White), 6000K (Cool White)			
Rating	IP41			
Material	Die-cast aluminum + PS			
Optional dimming type	Triac dimming/1-10V dimming /DALI dimming			
Fixing Ways	Mounting			
Operating Voltage/Current	DC18V/270mA	DC36V/300mA	DC36V/420mA	DC36V/560mA
Product Size(mm)	Φ120*H32mm	Φ170*H32mm	Φ223*H32mm	Φ300*H32mm
Packaging Type	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton
Packaging size(mm)	L400*W265*H140	L400*W363*H190	L470*W400*H245	L625*W400*H320
N.W.	0.125KG/PCS	0.23KG/PCS	0.4KG/PCS	0.6KG/PCS
G.W.	3.5KG/ Carton	5.6KG/ Carton	10.8KG/ Carton	13.2KG/ Carton
Life Time	> 49999 hours			
Certifications	CE, RoHS			






MLX PL RIO LED PANELEK





CIKKSZÁM	HL0019969	HL001919973	HL0019974	HL0019821
Norminal Wattage	6W	12W	18W	24W
LED Qty	30 PCS	60 PCS	96 PCS	120 PCS
Input Voltage	AC200-240V 50/60Hz			
Luminaires Class	ClassIII			
LED Type	2835 SMD			
Driver Type	Flicker Free			
Operating Temperature	-20°C to +50°C			
Power Factor(PF)	≥0.5			
THD	<20%			
Lumen Output (+/- 5%)	510 lm	1020 lm	1530 lm	2040 lm
Luminaire efficacy (+/- 5%)	85LM/W	85LM/W	85LM/W	85LM/W
Beam Angle	120°			
CRI	≥80 Ra			
CCT	3000K (Warm White), 4000K (Nature White), 6000K (Cool White)			
Rating	IP41			
Material	Die-cast aluminum + PS			
Optional dimming type	Triac dimming/1-10V dimming /DALI dimming			
Fixing Ways	Mounting			
Operating Voltage/Current	DC18V/270mA	DC36V/300mA	DC36V/420mA	DC36V/560mA
Product Size(mm)	120*120*H32mm	170*170*H32mm	223*223*H32mm	300*300*H32mm
Packaging Type	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton
Packaging size(mm)	L385*W300*H155	L300*W260*H175	L370*W300*H220	L465*W300*H270
N.W.	0.165KG/PCS	0.3KG/PCS	0.39KG/PCS	0.7KG/PCS
G.W.	4.3KG/ Carton	7.13KG/ Carton	10.76KG/ Carton	15.7KG/ Carton
Life Time	> 49999 hours			
Certifications	CE, RoHS			






MLX PL RIO LED PANELEK




Teszt eredmények

SRPL225-18W

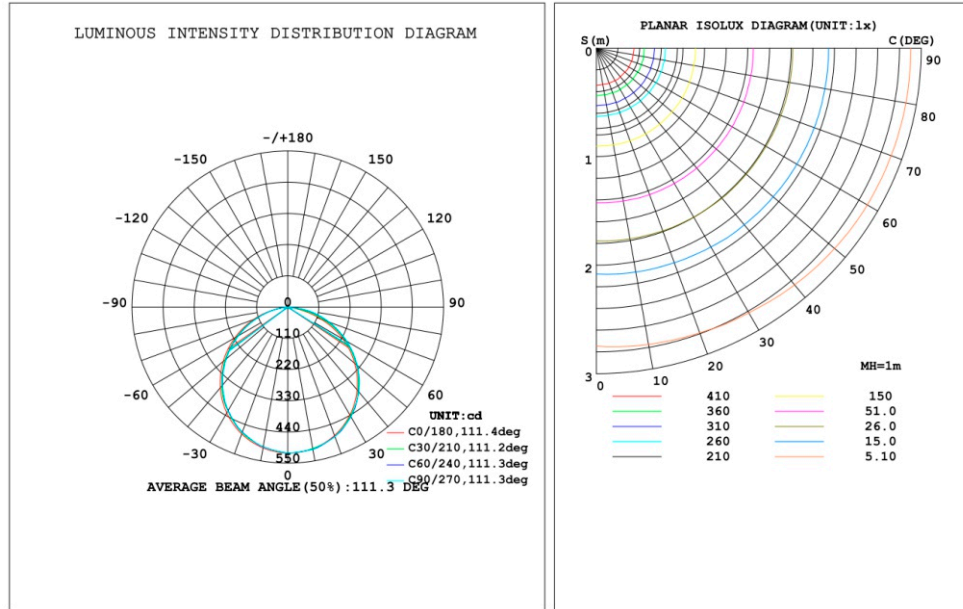


Flux out: 1059 lm

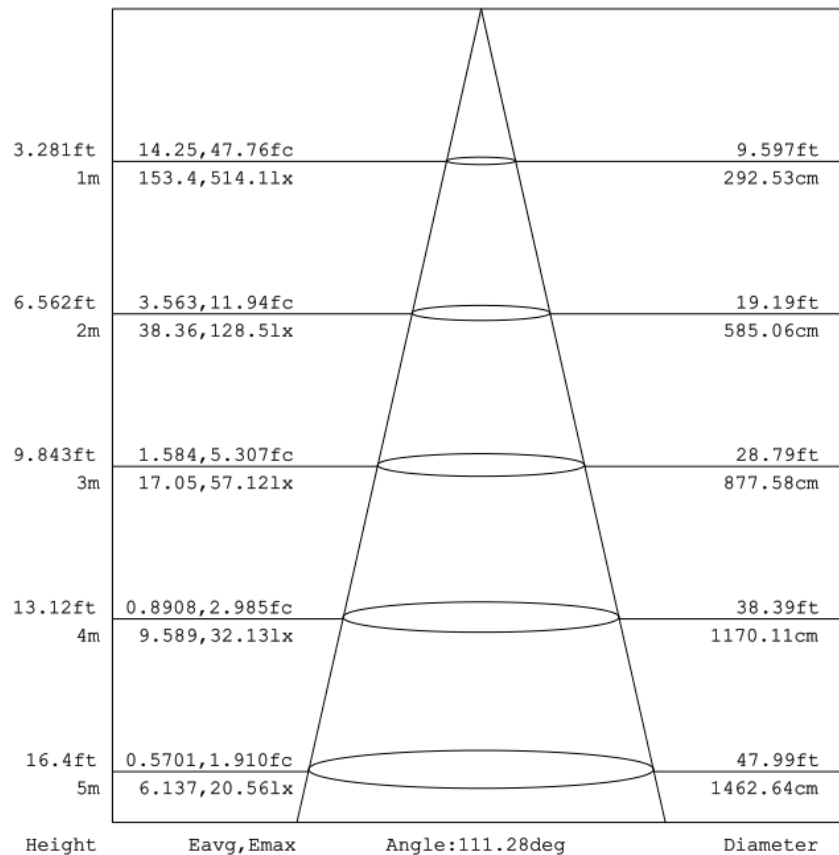


Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.










MLX PL RIO LED PANELEK




(A)		1 db
(B)		2 db
(C)		2 db
(D)		2 db

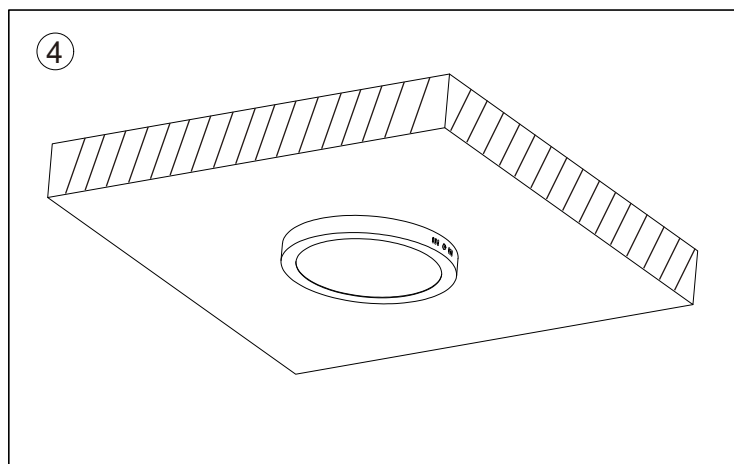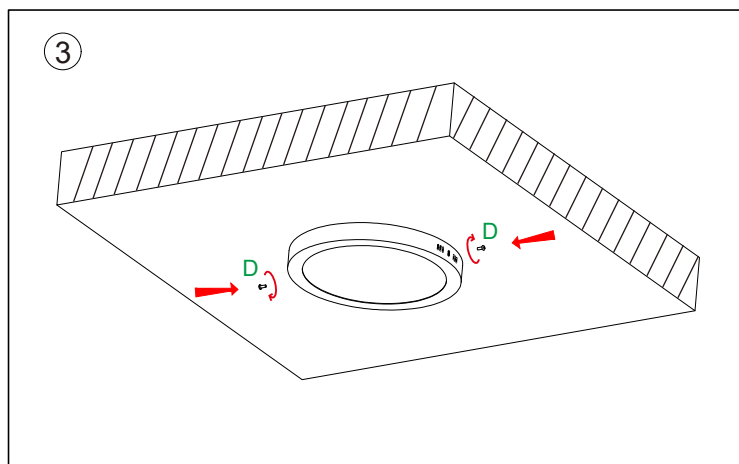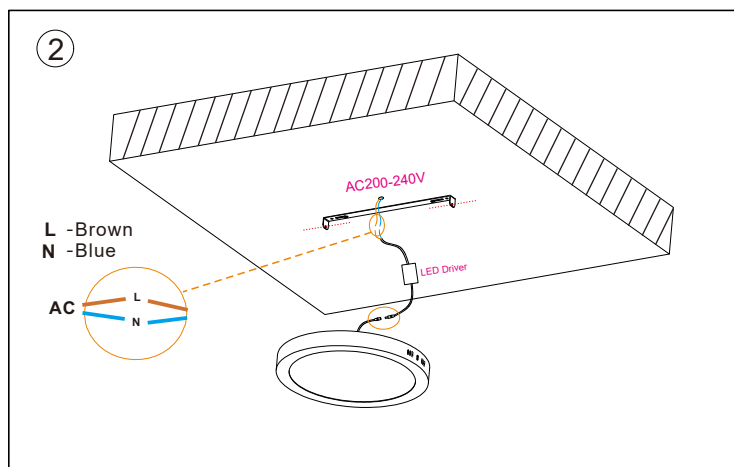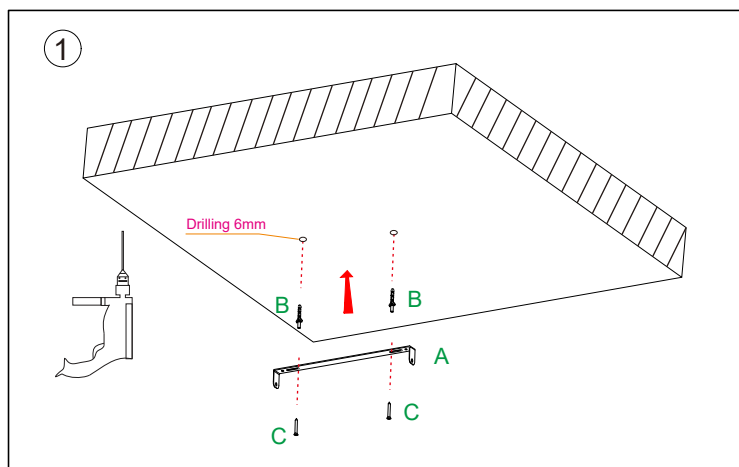



MLX PL RIO LED PANELEK



Csomagolás




1db




6W	20 db/karton
12W	20 db/karton
18W	20 db/karton
24W	20 db/karton





MLX PL RIO LED PANELEK



Jellemzők

Kiváló minőségű, nagy fényerejű LED fényforrásként, nagy hatékonyságú és energiatakarékos, tükröződés- és villódzásmentes, (FLICKER FREE) átlagos világító felülettel rendelkezik.

Alumínium hűtőbordával ellátott, tükröződés mentes

Több mint 90%-os fényáteresztő képességű lámpaernyő anyagok, a lámpatest pedig nagy hővezető képességű alumíniumötvözet.

Bemeneti feszültség: AC200-240V.

Új, nagy hatékonyságú meghajtó.

Azonnali indítás, nincs villogás, nincs zúgás.

Speciális áramköri kialakítás, hatékonyabban és egyenletesebben világít.

Zöld környezetvédelem, ólommentes anyag, megfelel az ROHS-nek.

Nincs RF interferencia.

Alkalmazási terület:

Hotelek

Irodák

Üzletek, plázák

Iskolák, kollégiumok

Intézmények

Kórházak

Ipari létesítmények

