

HL0019826
HL0019825
HL0019827
HL0019828
HL0019829
HL0019830

MLX FL STRATOS STADION LED FÉNYVETŐK



220-
240V
AC

IP
66

5 EV
GARANCIA

50 000 h

170
LM/W

-20
+50
°C



250W



500W



750W



1000W



1250W



1500W




PHILIPS LED Driver

Túlfeszültség-védelem



IP67





MLX FL STRATOS STADION LED FÉNYVETŐK



220-240V
AC

IP
66

5 EV
GARANCIA

50 000 h

170
LM/W

-20
+50
°C



5050SMD Leds




Optikai lencse



Objektív opcionális szöge

HL0019831

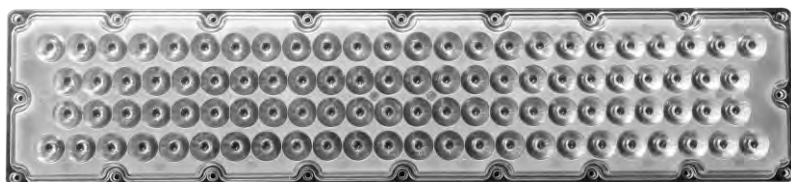

20°

HL0019832



40°

HL0019833




60°

HL0019834





90°






MLX FL STRATOS STADION LED FÉNYVETŐK




250W

L590xW190xH200mm

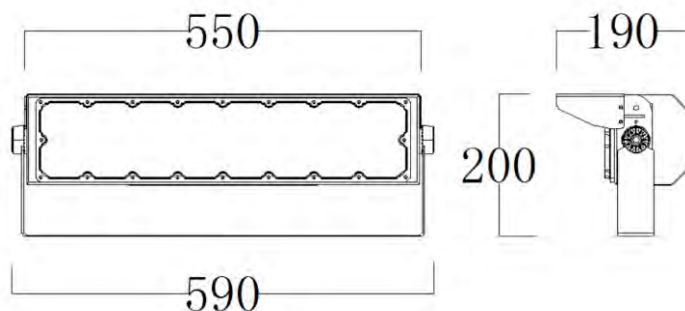


500W


L630xW240xH280mm

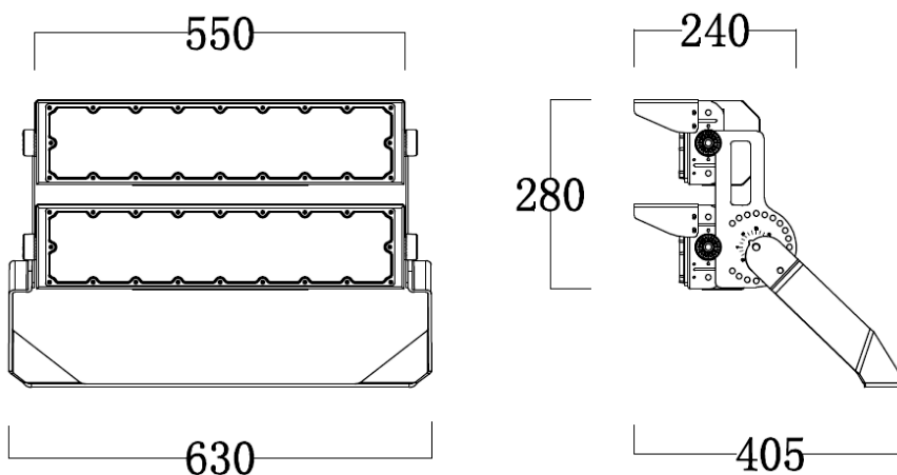

750W

L630xW240xH435mm

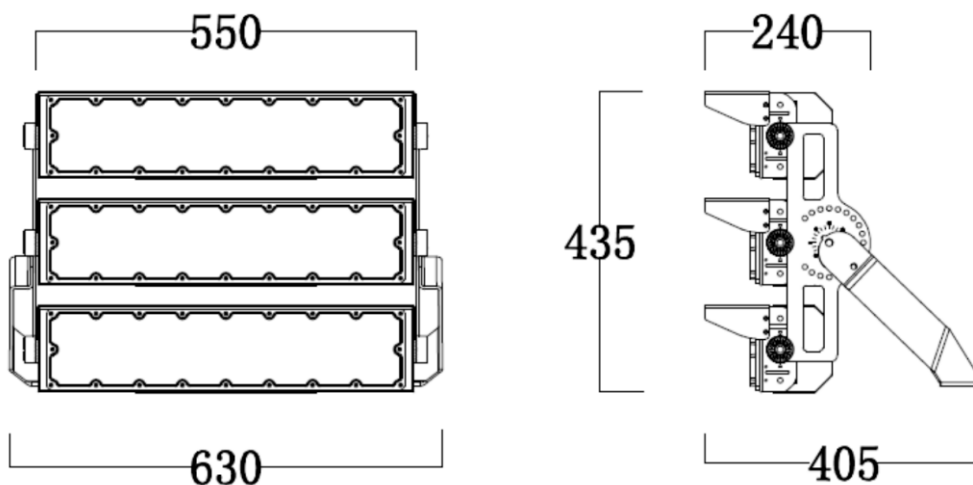



MLX FL STRATOS STADION LED FÉNYVETŐK



220-
240V
AC

IP
66

5 EV
GARANCIA

50 000 h



170
LM/W

-20
+50
°C





1000W


L630xW240xH590mm

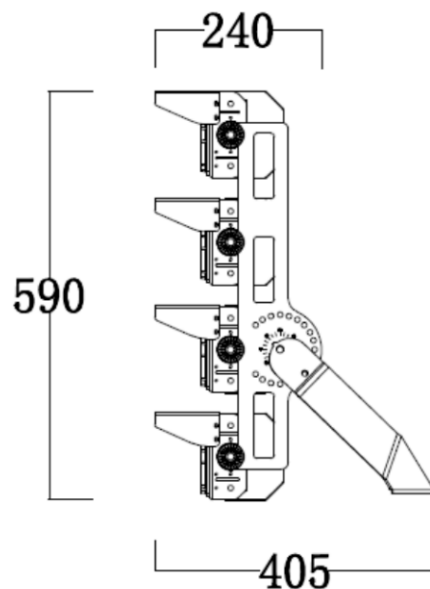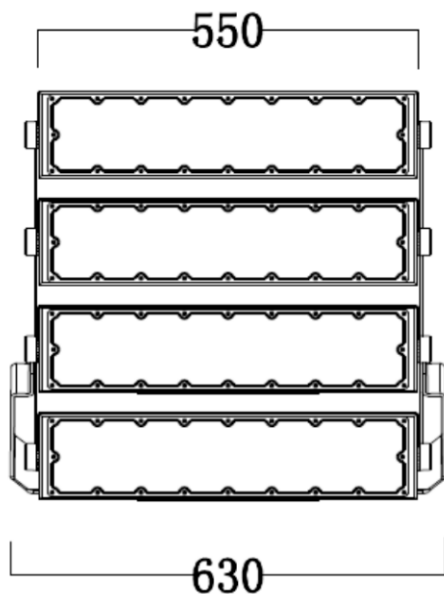




1250W

L630xW240xH745mm

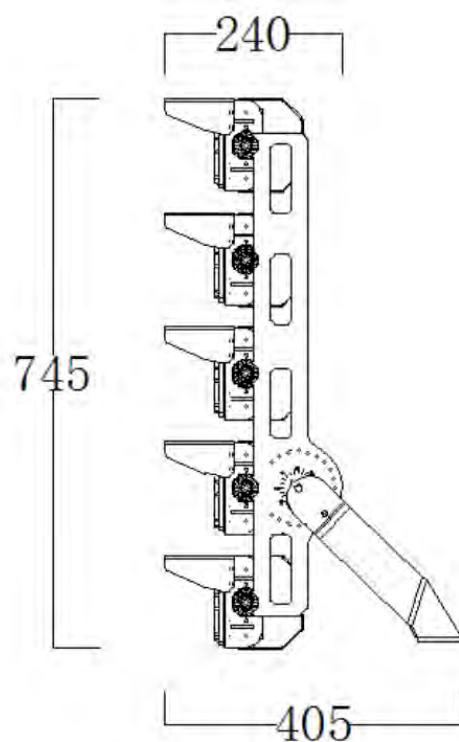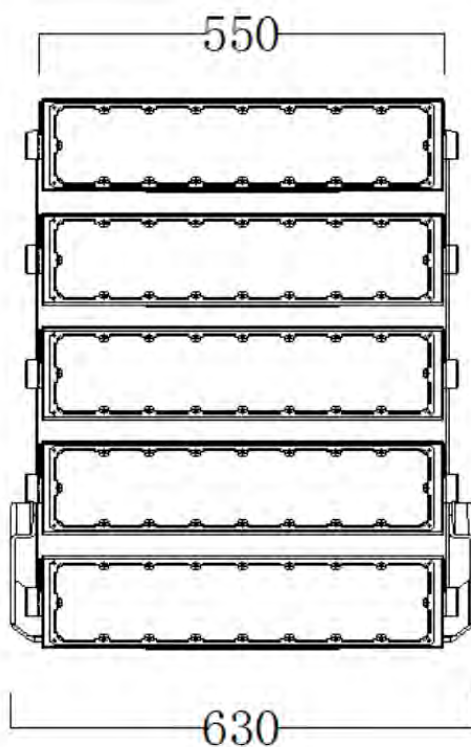





MLX FL STRATOS STADION LED FÉNYVETŐK





1500W

L630xW240xH900mm

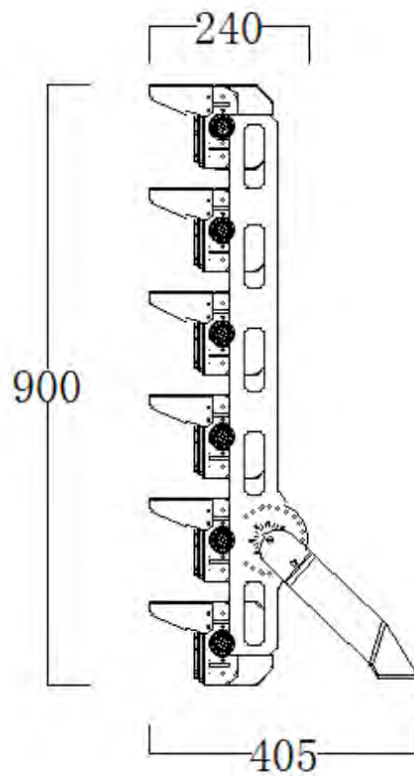
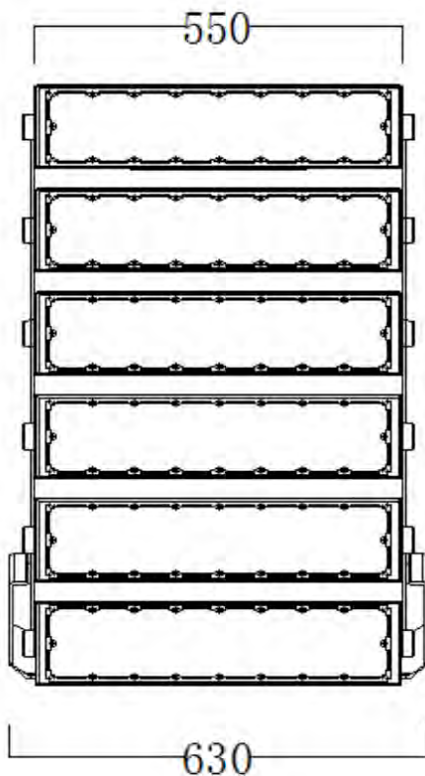


SZERELŐKONZOLOK

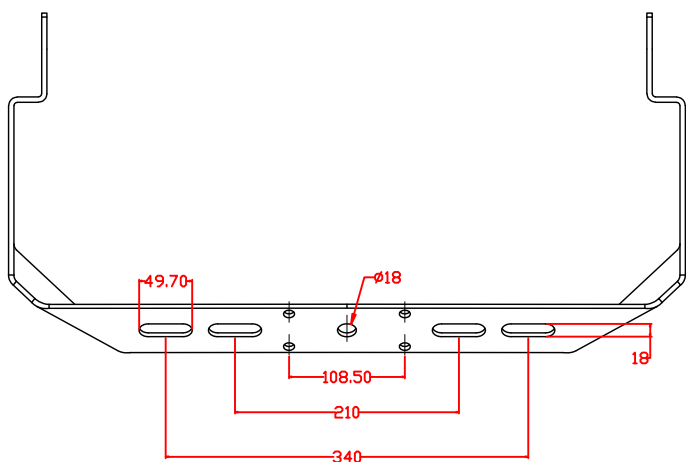



MLX FL STRATOS STADION LED FÉNYVETŐK




250W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A	DC216V	1.05A	250W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
			Luminous flux	42500LM±10%	42500LM±10%	42500LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
SMD5050	96PCS	≥70Ra				
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L590xW190xH200mm	6.0Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W255*H240mm	7.2Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L645*W255*H240mm,GW:7.2KG					



500W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A*2	DC216V*2	1.05A*2	500W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
			Luminous flux	85000LM±10%	85000LM±10%	85000LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
SMD5050	192PCS	≥70Ra				
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L630xW240xH280mm	16.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W390*H275mm	18.2Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L645*W390*H275mm,GW:18.2KG					





MLX FL STRATOS STADION LED FÉNYVETŐK




750W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A*3	DC216V*3	1.05A*3	750W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
			Luminous flux	127500LM±10%	127500LM±10%	127500LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L630xW240xH435mm	23Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W545*H275mm	25.1Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L645*W545*H275mm,GW:25.1KG					

1000W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A*4	DC216V*4	1.05A*4	1000W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
			Luminous flux	170000LM±10%	170000LM±10%	170000LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L630xW240xH590mm	30Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L700*W645*H275mm	32.5Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L700*W645*H275mm,GW:32.5KG					





MLX FL STRATOS STADION LED FÉNYVETŐK




1250W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A*5	DC216V*5	1.05A*5	1250W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
SMD5050	480PCS	≥70Ra	Luminous flux	212500LM±10%	212500LM±10%	212500LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L630xW240xH745mm	37Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L855*W645*H275mm	39.5Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L855*W645*H275mm,GW:39.5KG					




1500W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.02A*6	DC216V*6	1.05A*6	1500W±5%	≥0.95	
LED Type	LED Q'ty	CRI	CCT	4000-4500K	5000-5200K	5500-6000K
			Luminous efficiency	170LM/W	170LM/W	170LM/W
SMD5050	576PCS	≥70Ra	Luminous flux	255000LM±10%	255000LM±10%	255000LM±10%
			Beam Angle	20° / 40° / 60° / 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L630xW240xH900mm	44Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1010*W645*H275mm	46.5Kg	
Outer carton package	1*1layer=1PCS/carton,K=K corrugated paper, L1010*W645*H275mm,GW:46.5KG					






MLX FL STRATOS STADION LED FÉNYVETŐK





250W-230V


Flux out: 22362 lm

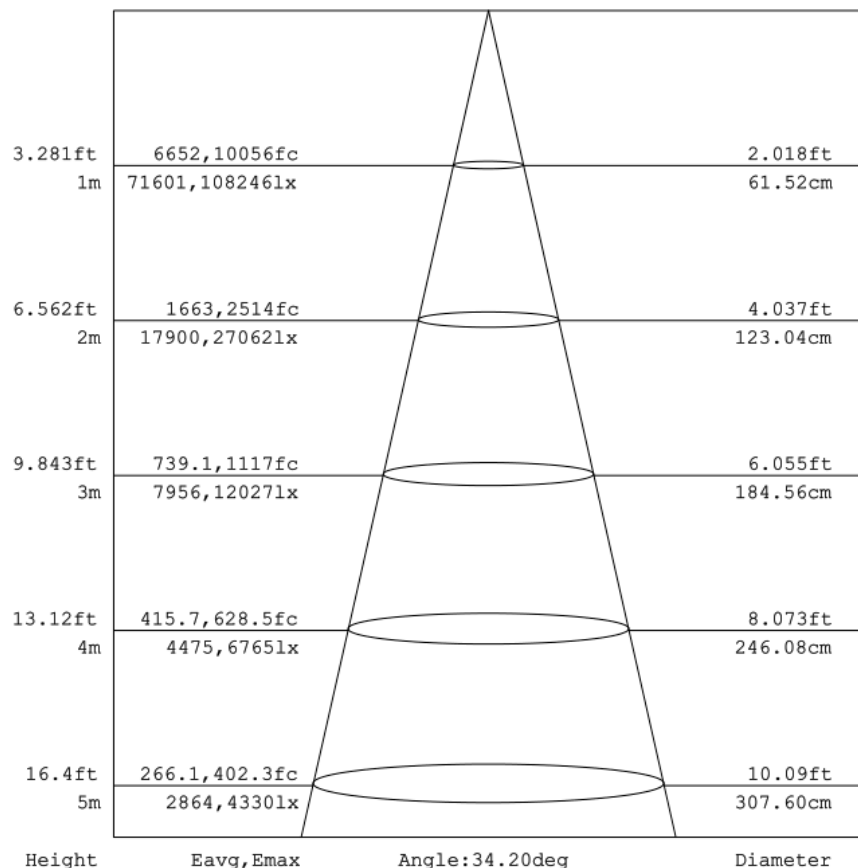

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

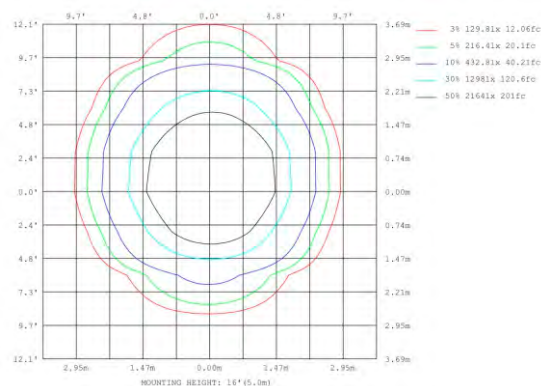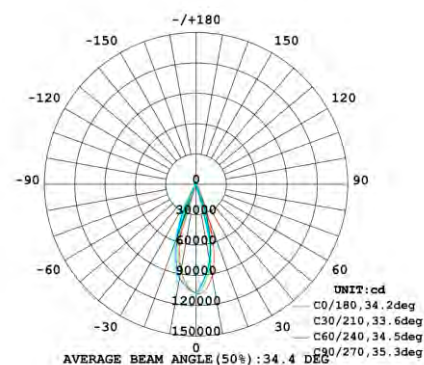



MLX FL STRATOS STADION LED FÉNYVETŐK

