

MLX PL MILAN LED PANELEK



Választható diffúzor réteg


Normál



Texture PS

Fényszög 120°


UGR<19



Texture PS

Fényszög 90°






MLX PL MILAN LED PANELEK




Technikai paraméterek

60X60-36WH-BL

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.3A	DC36V	900mA	36W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	105LM/W	110LM/W	110LM/W
SMD2835	48PCS	≥80Ra	Luminous flux	3780LM	3960LM	3960LM
			Beam Angle	120° / 90°(UGR<19)		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP41	ClassIII	595*595*35MM	1.9Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W95*H645MM	4.1Kg	
Outer carton package	4*2layer=8PCS/carton,K=K corrugated paper, L665*W405*H670mm,GW:18KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

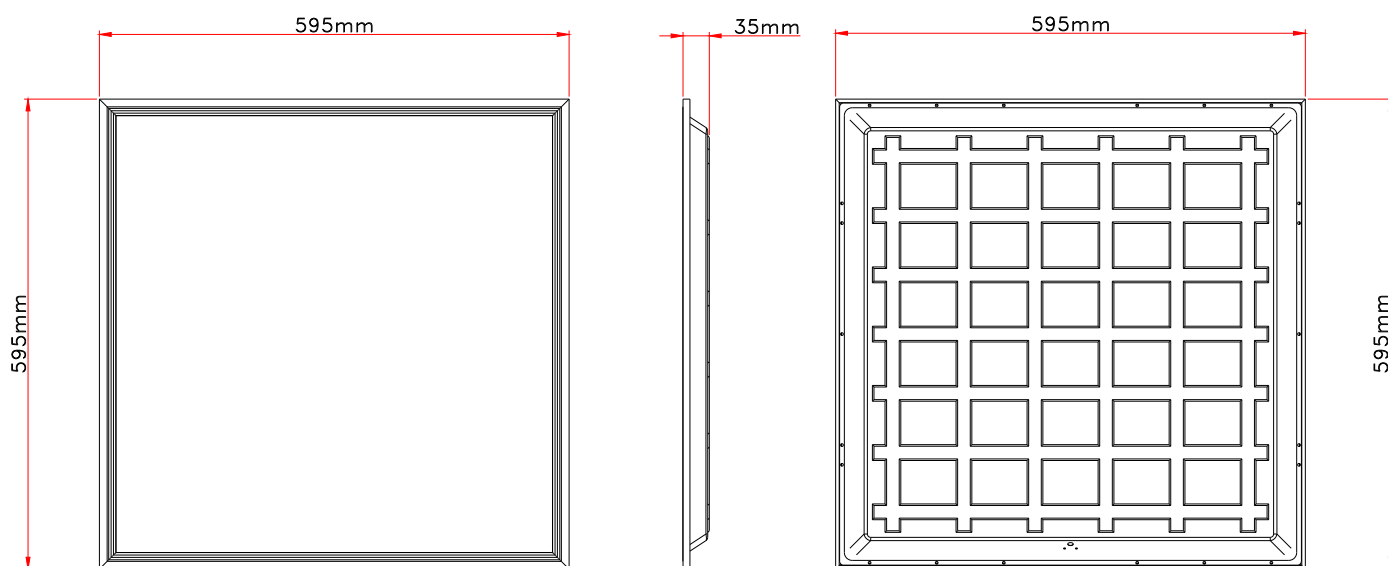






MLX PL MILAN LED PANELEK




Technikai paraméterek

62X62-40WH-BL

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.3A	DC36V	1000mA	40W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	105LM/W	110LM/W	110LM/W
SMD2835	48PCS	≥80Ra	Luminous flux	4200LM	4400LM	4400LM
			Beam Angle	120° / 90°(UGR<19)		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP41	ClassIII	620*620*35MM	2.0Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L670*W95*H670MM	4.3Kg	
Outer carton package	4*2layer=8PCS/carton,K=K corrugated paper, L690*W405*H695mm,GW:19.2KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

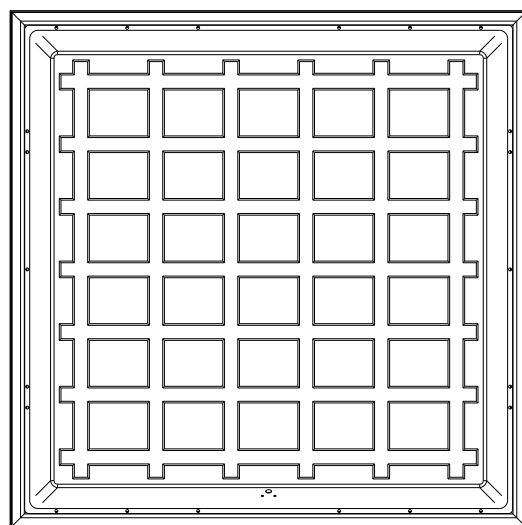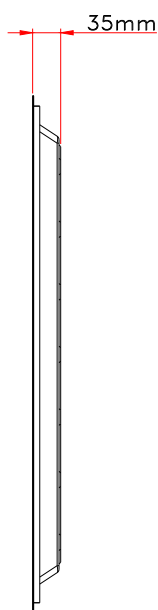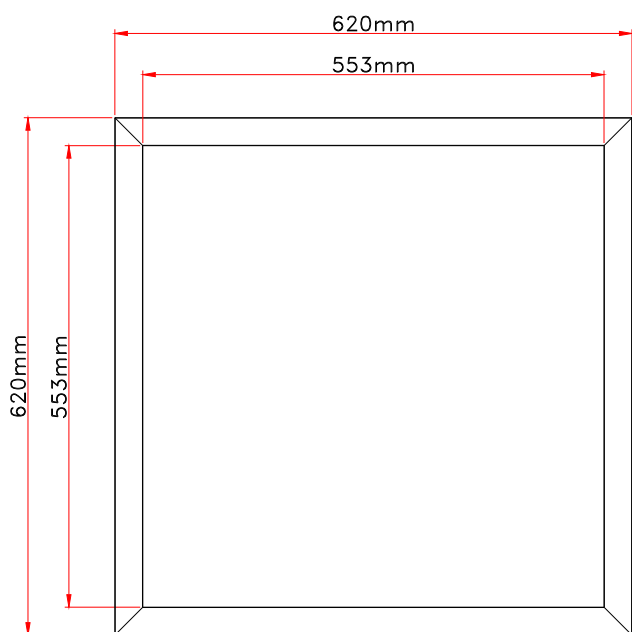





MLX PL MILAN LED PANELEK




Technikai paraméterek

30X120-36WH-BL

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.3A	DC36V	900mA	36W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	105LM/W	110LM/W	110LM/W
SMD2835	48PCS	≥80Ra	Luminous flux	3780LM	3960LM	3960LM
			Beam Angle	120° / 90°(UGR<19)		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP41	ClassIII	295*1195*35MM	1.9Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1245*W95*H345MM	4.1Kg	
Outer carton package	4*2layer=8PCS/carton,K=K corrugated paper, L1265*W405*H370mm,GW:18KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

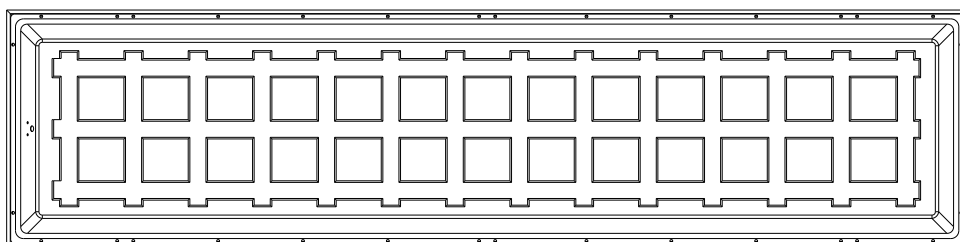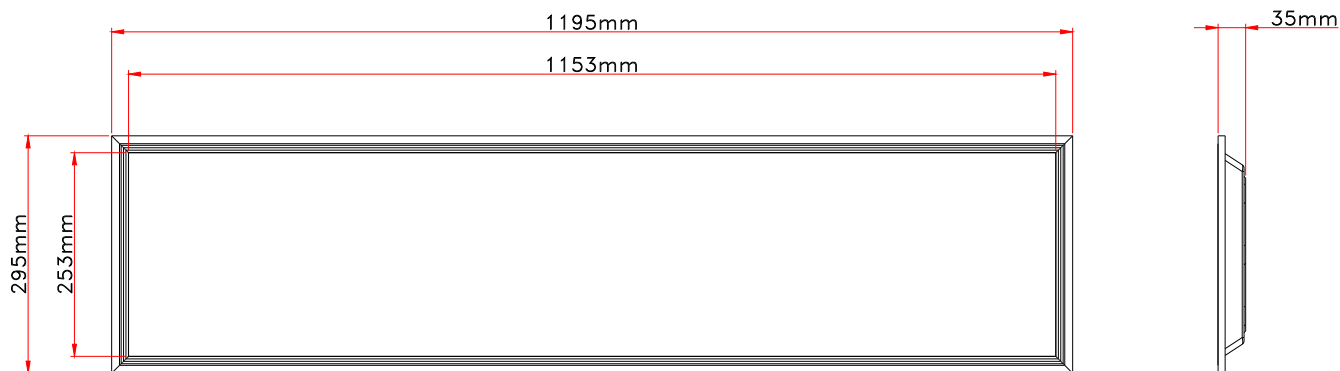




MLX PL MILAN LED PANELEK



Technikai paraméterek

60X120-60WH-BL

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.4A	DC36V	800mA×2	60W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	105LM/W	110LM/W	110LM/W
SMD2835	96PCS	≥80Ra	Luminous flux	6300LM	6600LM	6600LM
			Beam Angle	120° / 90°(UGR<19)		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP41	ClassIII	595*1195*35MM	4.1Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1245*W95*H645MM	8.6Kg	
Outer carton package	3*2layer=6PCS/carton,K=K corrugated paper, L1265*W310*H670mm,GW:27KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

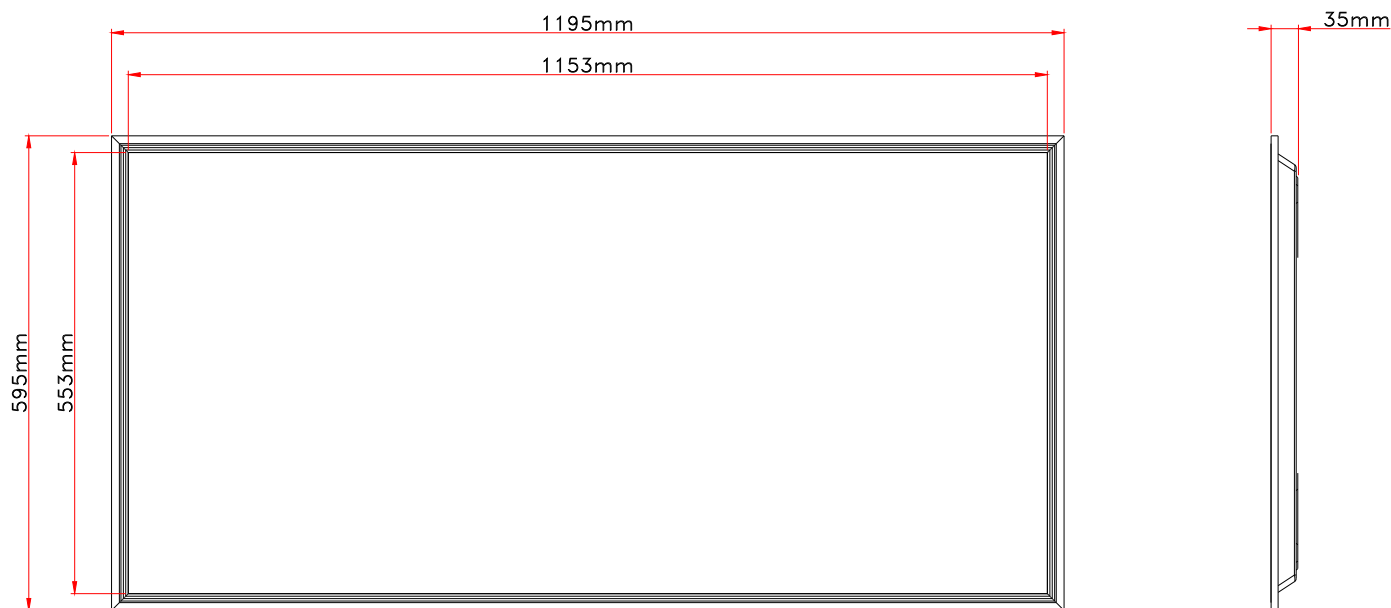





MLX PL MILAN LED PANELEK




60X60-36WH-BL

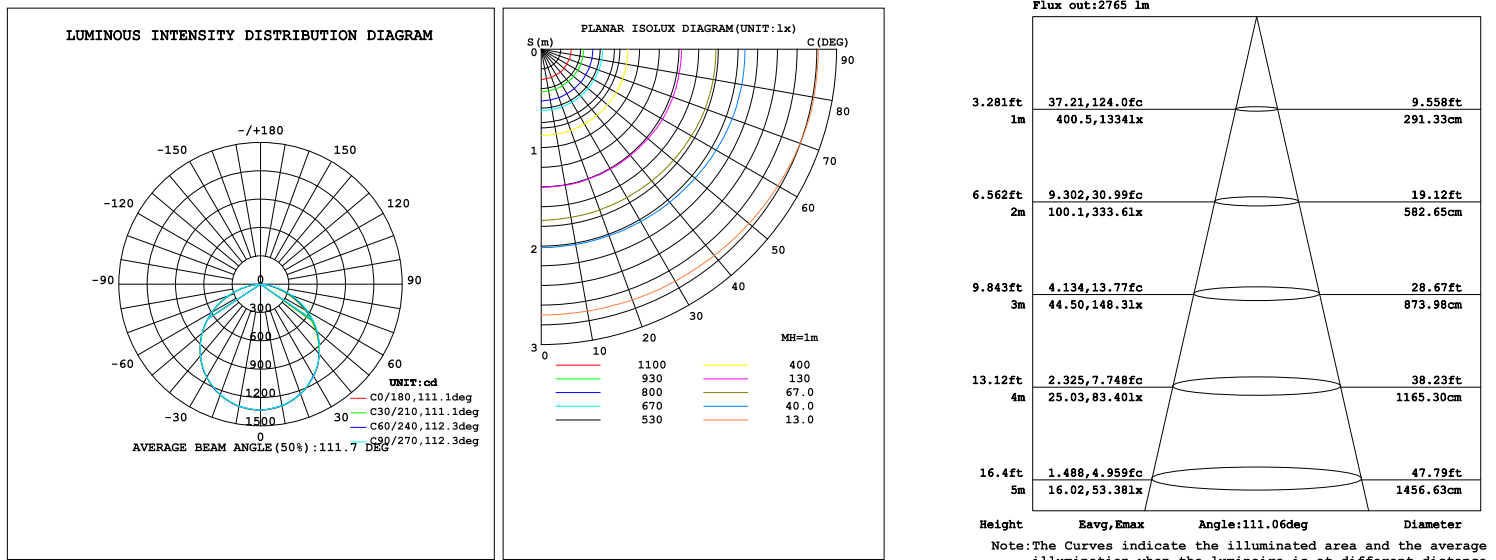

62X62-40WH-BL



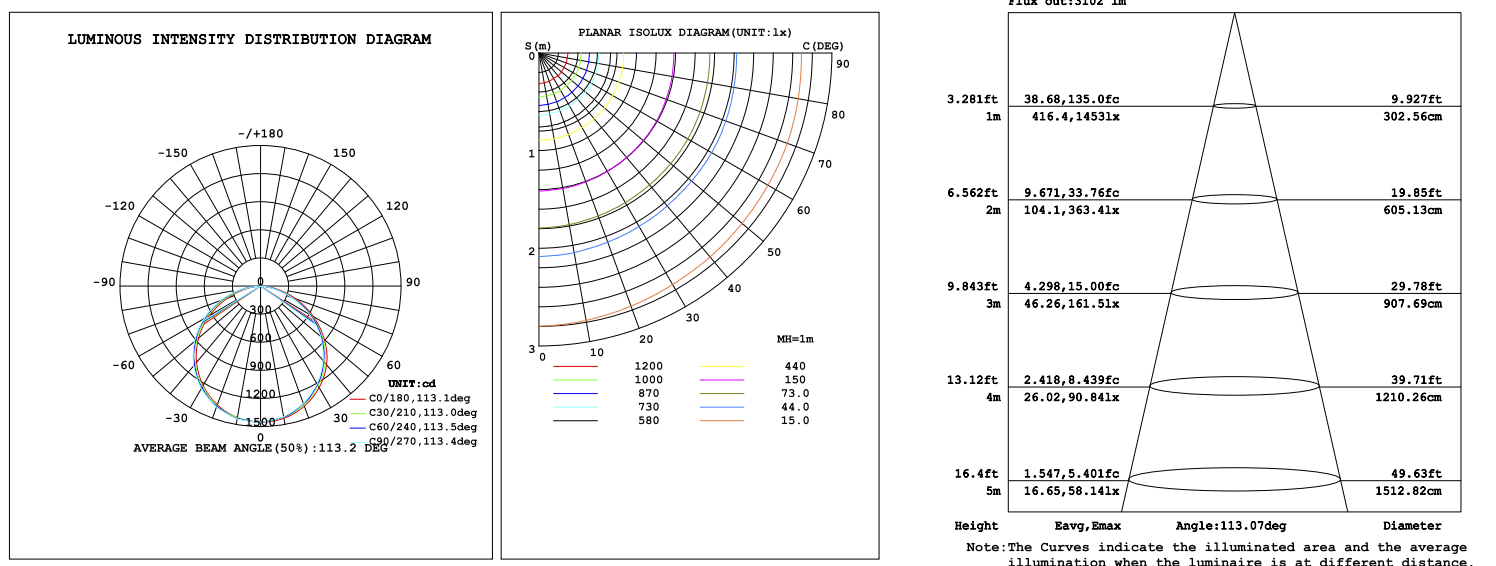







MLX PL MILAN LED PANELEK



30X120-36WH-BL

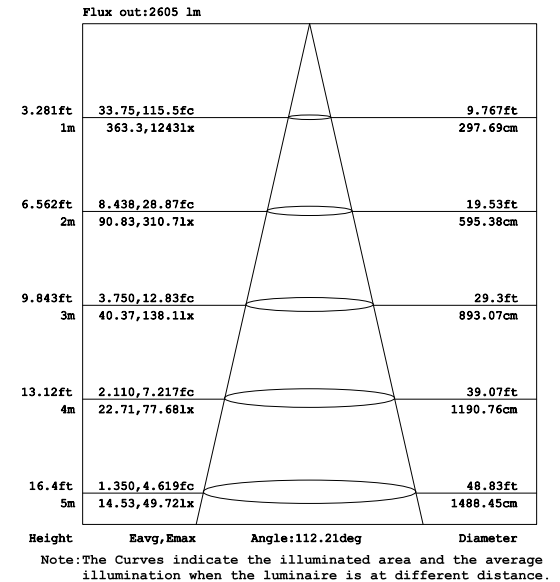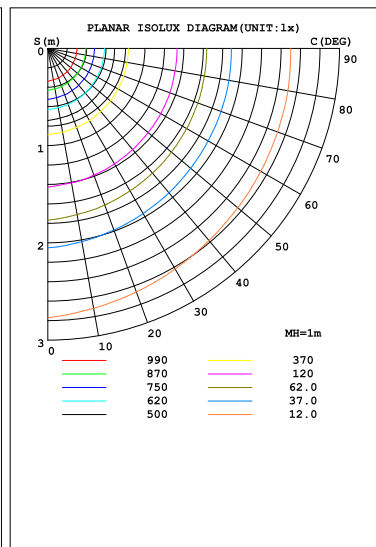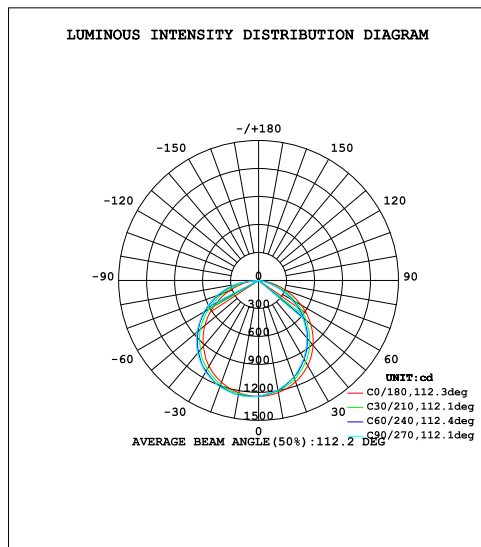

60X120-60WH-BL


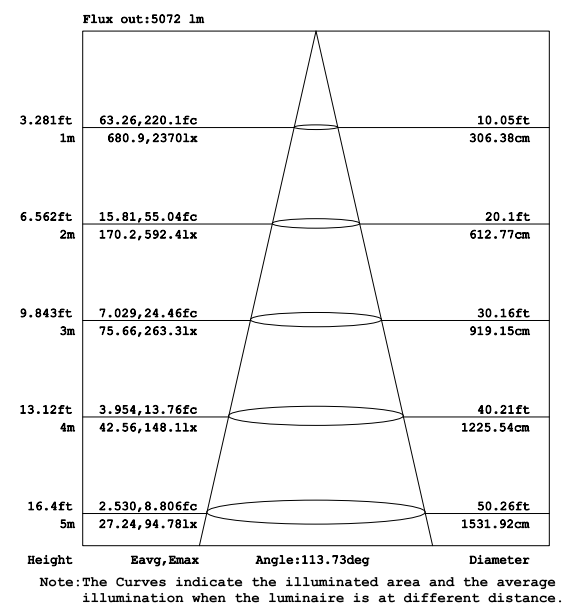
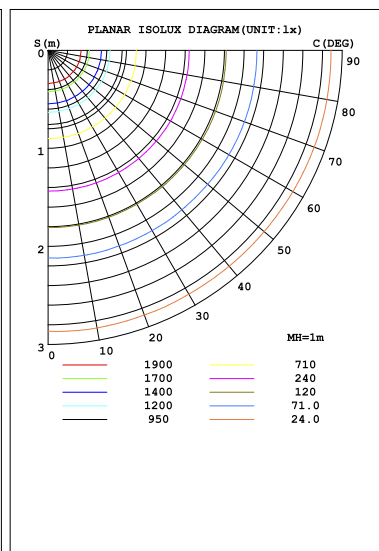
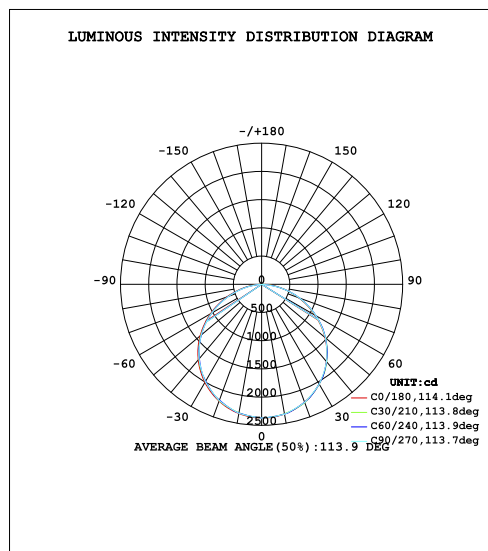




MLX PL MILAN LED PANELEK



Szerelési útmutató

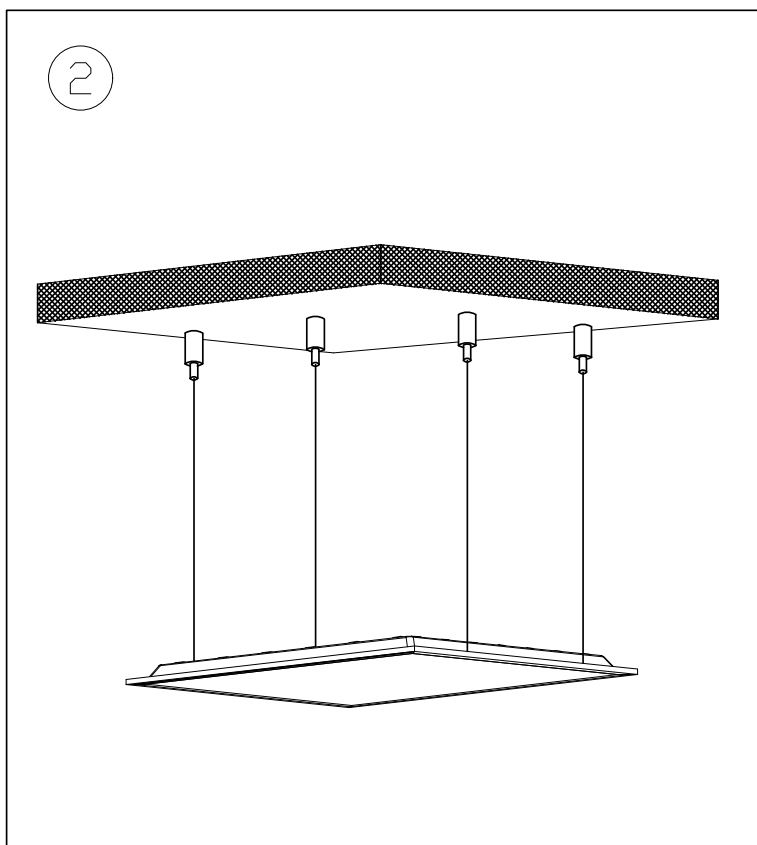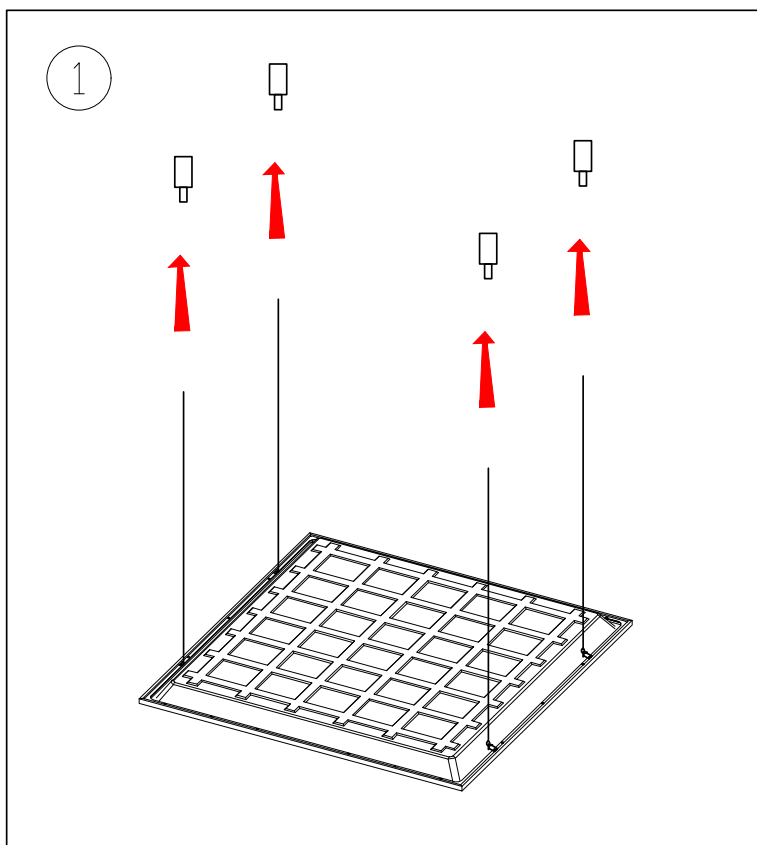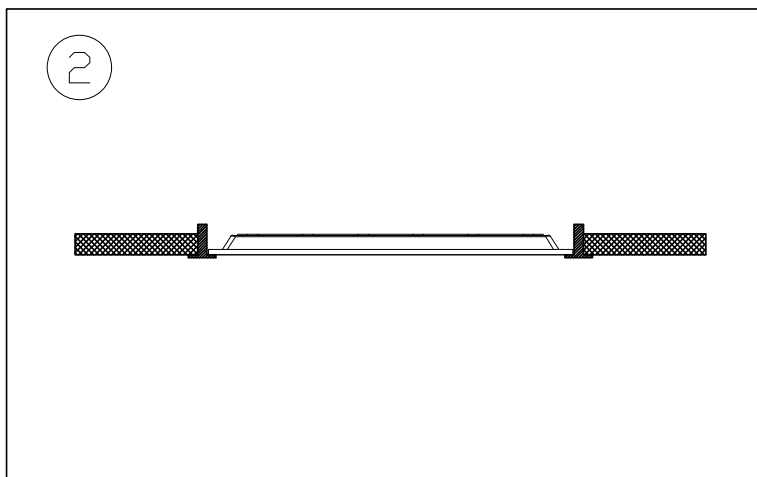
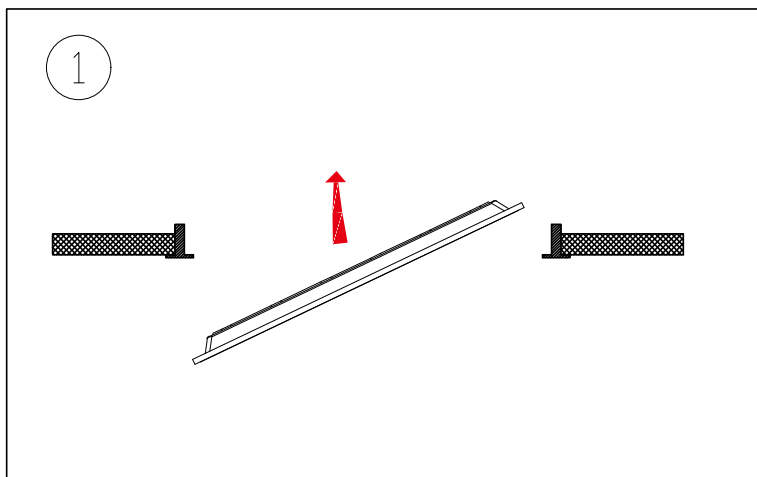







MLX PL MILAN LED PANELEK



Szerelési útmutató

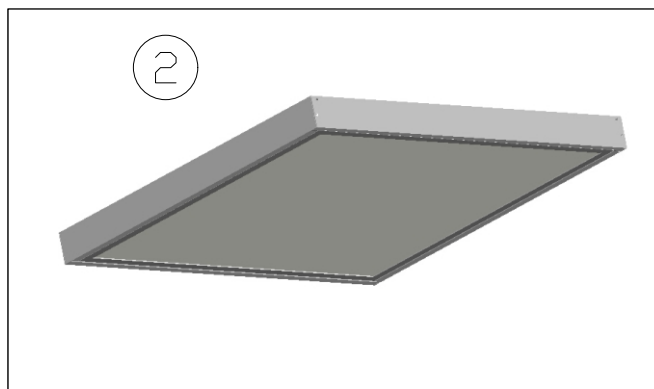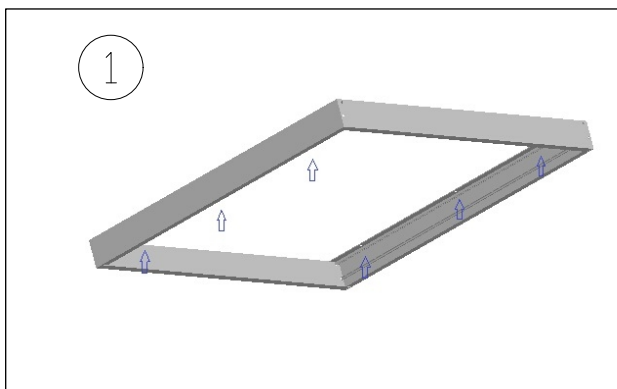


Rugó

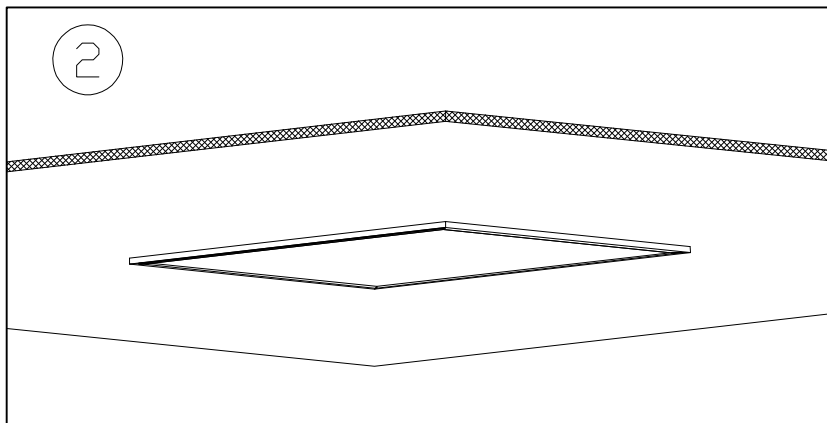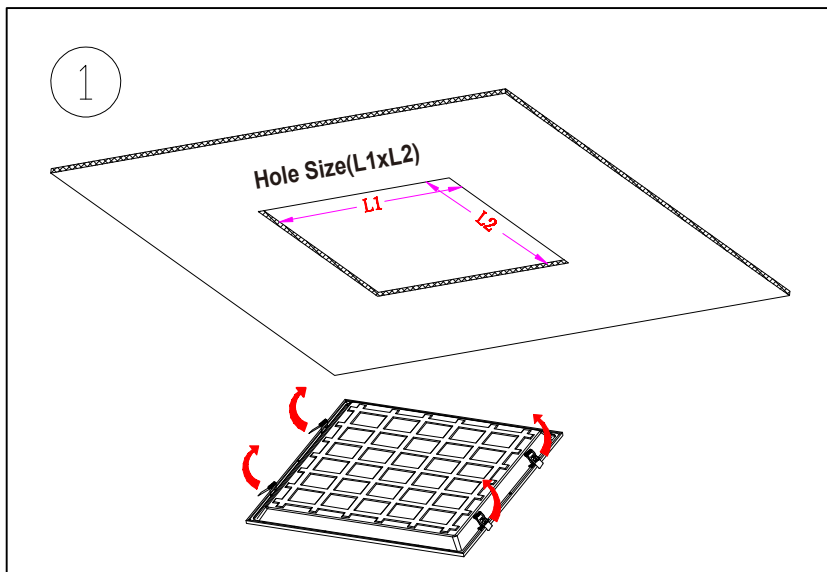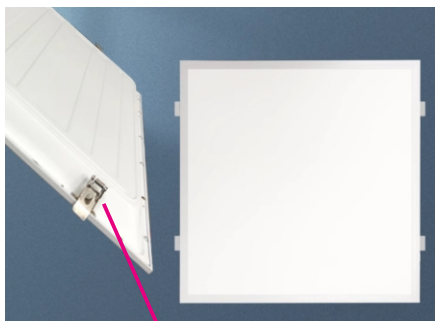

		Kivágási méret
60X60-36WH-BL	595x595x35mm	575x575mm
62X62-40WH-BL	620x620x35mm	600x600mm
30X120-36WH-BL	1195x295x35mm	1175x275mm
60X120-60WH-BL	1195x595x35mm	1175x575mm





MLX PL MILAN LED PANELEK




Telepítés:

1. Ezt a terméket képzett villanszerelőnek kell telepítenie.
2. A csomagolás felbontása után ellenőrizze a termékek épségét.
3. A lámpa és a gyúlékony anyagok közötti távolság nem lehet kevesebb, mint 0,2 m. A beépített lámpa felső része és a mennyezet közötti távolság nem lehet kevesebb, mint 2 cm. A lámpát tilos hőszigetelő anyagot tartalmazó mennyezetbe vagy falba szerelni. A főkábel nem szabad kifestültségű kábelhez vagy a falra szerelt lámpákhoz csatlakoztatni.
4. Vezesse át a lámpák csatlakozókábeleit a kifúrt lyukon, és rögzítse a falra szerelt lámpákat az előre felszerelt bilincsekkel. Győződjön meg arról, hogy ezek biztonságosan csatlakoznak az alaphoz.
5. A kábelek fektetésekor ügyeljen arra, hogy a kábelek és a csatlakozódugók ne legyenek kitéve húzó- vagy csavaróerőnek. Szerelje fel a kábelfeszítő-mentesítő mechanizmusokat a falra szerelt lámpák csatlakozási pontjaira.
Ne törje meg a kábeleket. A kimeneti kábeleket külön és a többi kábeltől távol kell fektetni.
6. A telepítés után csatlakoztassa a transzformátort a hálózati áramforráshoz.
7. Folytassa a kábelek csatlakoztatásával a lámpatestekhez. Általában a barna vezeték az élő vezeték, csatlakoztassa az „L” jelölésű csatlakozóhoz. A kék vezeték a „Naughty” vezeték, csatlakoztassa az „N” jelölésű csatlakozóhoz.
8. Csak a mellékelt LED-meghajtót használja, és ne csatlakoztassa a felületre szerelt lámpákat más terhelésekhez.
9. Ne távolítsa el a tápegység és a lámpa meghajtójának adattábláját.

Karbantartás:

1. A lámpa tisztítása előtt győződjön meg arról, hogy le van választva a tápegységről.
2. A tisztításhoz használjon száraz vagy enyhén nedves ruhát.
3. Soha ne használjon vegyszereket vagy súrolószereket a tisztításhoz.





MLX PL MILAN LED PANELEK



Jellemzők

Kiváló minőségű, nagy fényerejű LED fényforrásként, nagy hatékonyságú és energiatakarékos, tükröződés- és villódzásmentes, (FLICKER FREE) átlagos világító felülettel rendelkezik.

Alumínium hűtőbordával ellátott, tükröződés mentes

Több mint 90%-os fényáteresztő képességű lámpaernyő anyagok, a lámpatest pedig nagy hővezető képességű alumíniumötvözet.

Bemeneti feszültség: AC200-240V.

Új, nagy hatékonyságú meghajtó.

Azonnali indítás, nincs villogás, nincs zúgás.

Speciális áramköri kialakítás, hatékonyabban és egyenletesebben világít.

Zöld környezetvédelem, ólommentes anyag, megfelel az ROHS-nek.

Nincs RF interferencia.

Alkalmazási terület:

Hotelek

Irodák

Üzletek, plázák

Iskolák, kollégiumok

Intézmények

Kórházak

Ipari létesítmények

