


MLX PLATHEN LED PANELEK




HL0019850
HL0019851

A távirányító nem tartozék, külön rendelhető.
Cikkszám: HL0019852





MLX PLATHEN LED PANELEK







2.4G remote control effective distance $\geq 30M$
Transparent crystal face cover, fashionable and beautiful
Noctilucent frame design
Help you find remote control easily in dark.





iPhone control interface

Andrews system or ios system

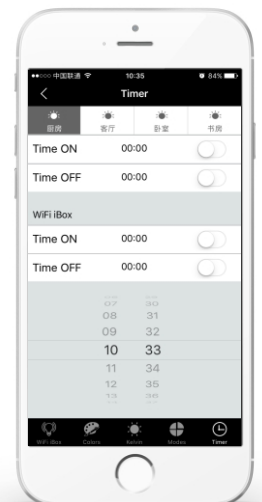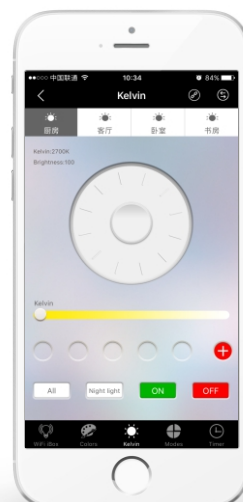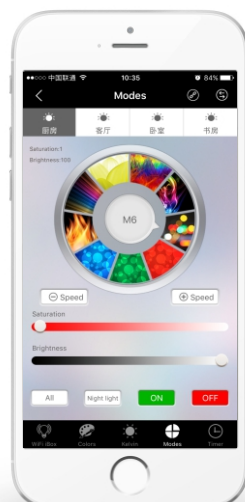




MLX PLATHEN LED PANELEK

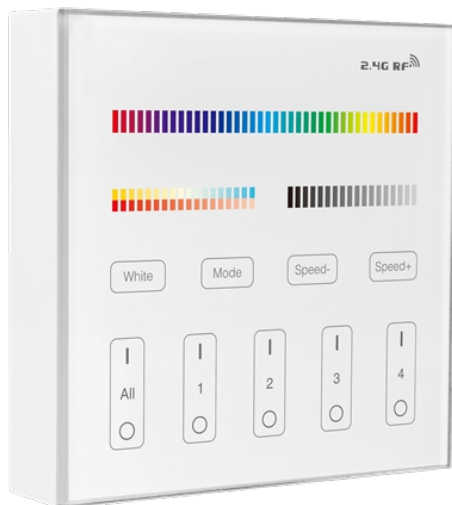


Button Function Diagram

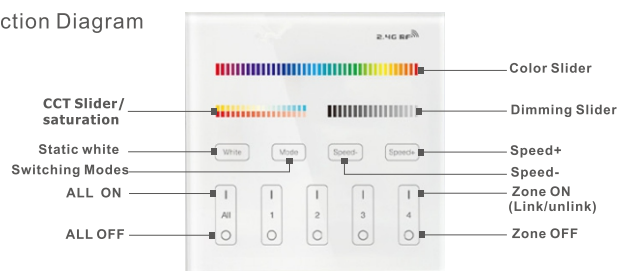


Unique Design

Transparent crystal face cover, fashionable and beautiful
 Noctilucent frame design
 Help you find remote control easily in dark

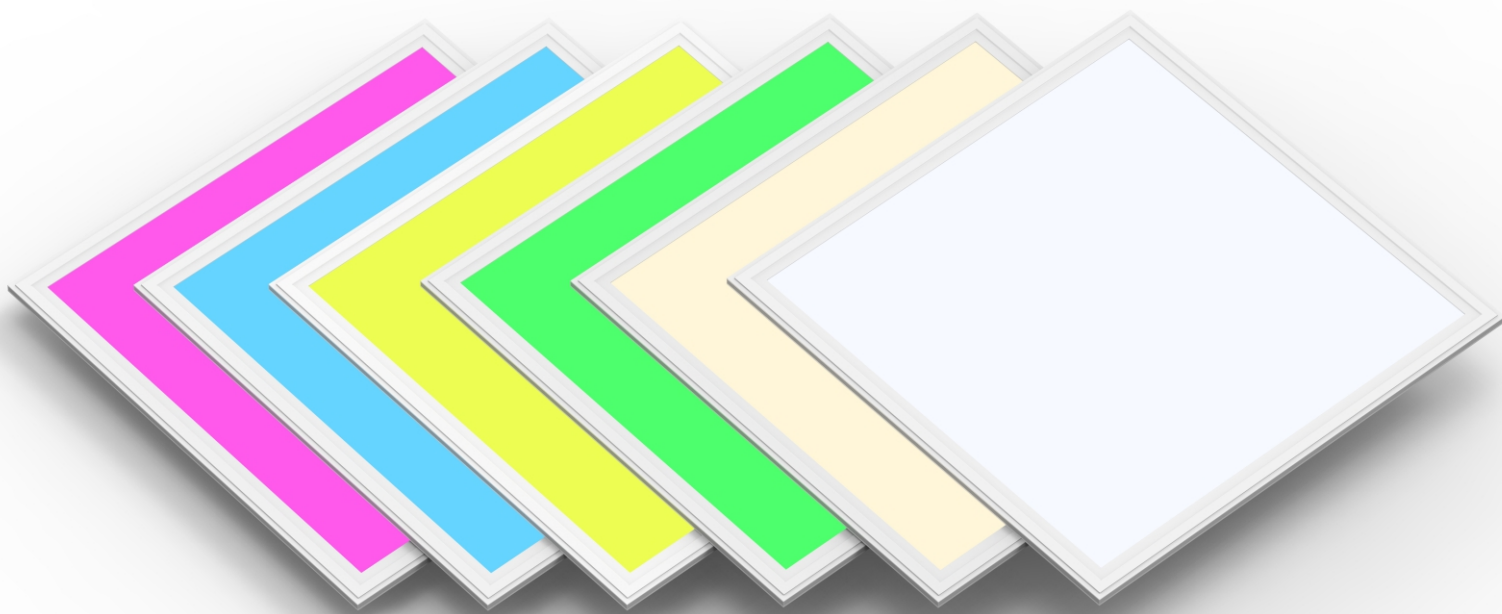



MLX PLATHEN LED PANELEK




	30X30-18W	30X60-24W	60X60-36W	62X62-48W	30X120-48W	60X120-48W
Power(watt)	18W±5%	24W±5%	36W±5%	48W±5%	48W±5%	48W±5%
LED Chip/Original	SMD 5050 RGB /SMD 4014 CCT					
Color Temperature	CCT (3000k-6000k) + RGB					
Lumious Flux(lm)	1850lm±5%	2500lm±5%	3900lm±5%	5200lm±5%	5200lm±5%	5200lm±5%
Input Voltage	AC100-240V 50/60HZ					
Beam Angle(°)	120°					
IP Rate	IP20					
CRI(Ra)	CCT(RA>80)					
Material	Aluminum + PMMA + PS					
Dimension	295x295x11.6mm	295x595x11.6mm	595x595x11.6mm	620x620x11.6mm	295x1195x11.6mm	595x1195x11.6mm
Net Weight	1.1kg	1.9kg	3.2kg	3.5kg	3.8kg	6.5kg



Installation instructions

Operating temperature	-20°C ~ +40°C
Storage temperature	-20°C ~ +60°C
Warranty	5 Years
Average Lifetime(hrs)	50000Hrs
Certificate	CE RoHS
Control method	2.4G handle remote control/2.4G wall remote control/APP LONG Distance Control
Installation	Hanging installation/Ceiling installation/Ceiling surface mounted
Installation	Hanging installation/Ceiling installation/Ceiling surface mounted






MLX PLATHEN LED PANELEK

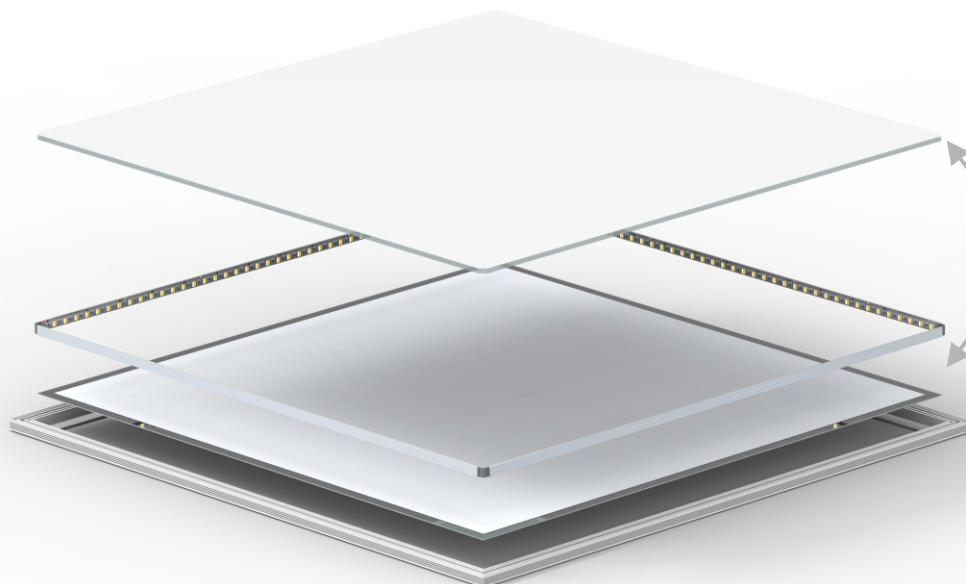


Four into the light
Uniformity > 90

Optical parameters


Light distribution curve




Average illumination intensity diagram




Light distribution curve




Average illumination intensity diagram




Light distribution curve




Average illumination intensity diagram




Light distribution curve





Average illumination intensity diagram






MLX PLATHEN LED PANELEK

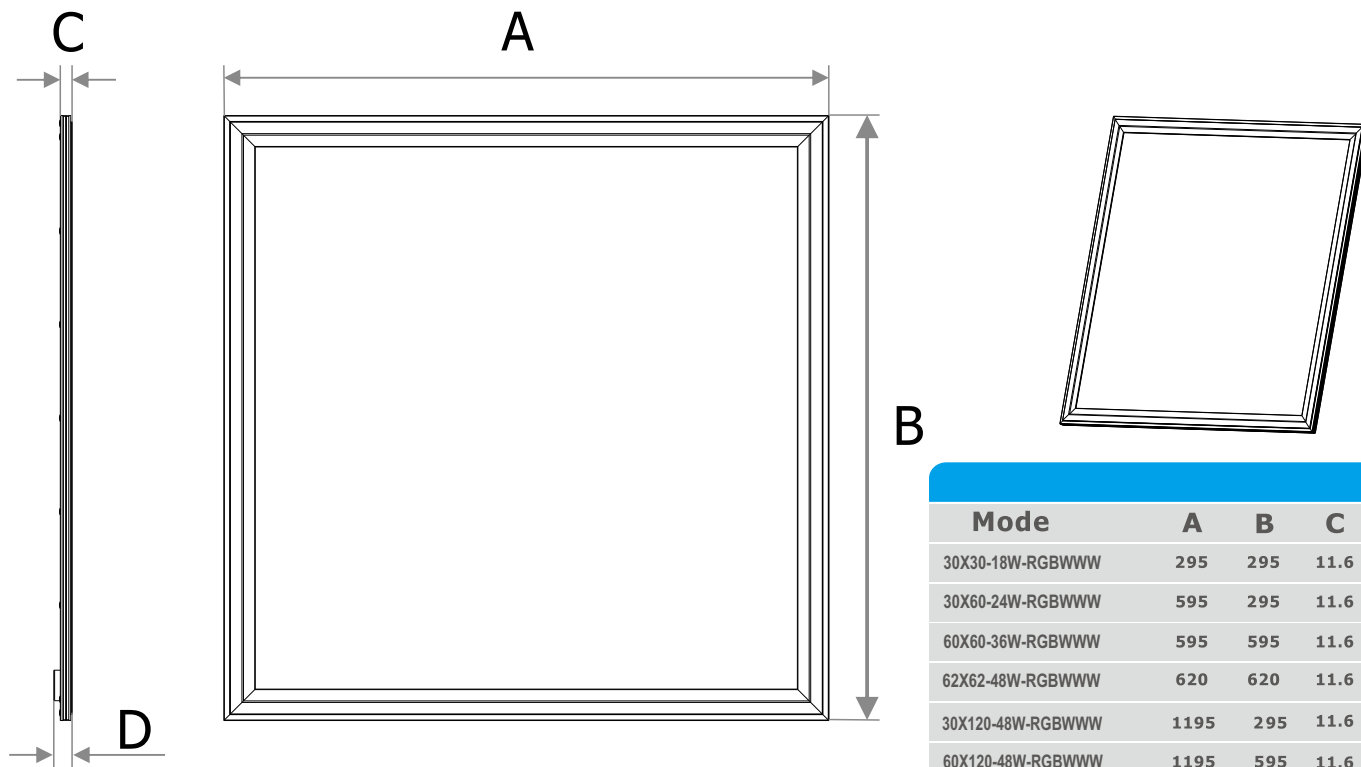

Mode	A	B	C	D
30X30-18W-RGBWWW	295	295	11.6	19
30X60-24W-RGBWWW	595	295	11.6	19
60X60-36W-RGBWWW	595	595	11.6	19
62X62-48W-RGBWWW	620	620	11.6	19
30X120-48W-RGBWWW	1195	295	11.6	19
60X120-48W-RGBWWW	1195	595	11.6	19

Chameleon Series LED Panel Light

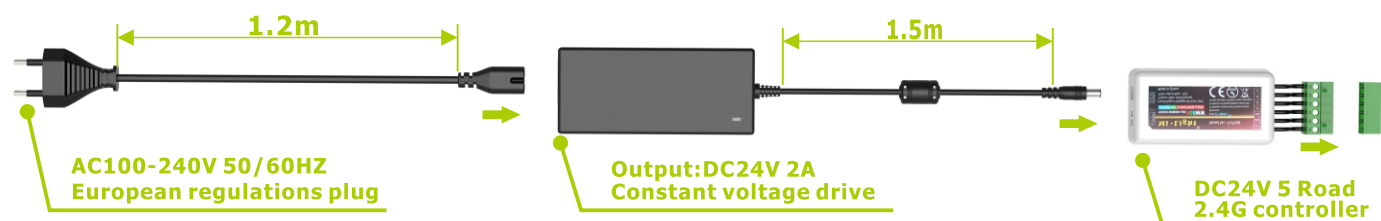

Remote control use



- 1: According to the above diagram to access the electricity and test light.
- 2: For remote control of the code in the access to electricity of the moment three seconds.


Connect the remote control:

make the lamp access to electricity, press the code key for 3-5 times, When the lamp began to flash green light, the fixture is set successfully

Disconnect the remote control:


the lights connected to electricity, press the code key to press 5-6 times, the lights began to flash red light, the fixture set cleared





MLX PLATHEN LED PANELEK





220-240V AC	III FÖLDELES	IP 40	5 ÉV GARANCIA	50 000 h	120°	FLICKER FREE	UGR RA<19	IK 06
----------------	-----------------	----------	------------------	----------	------	-----------------	--------------	----------

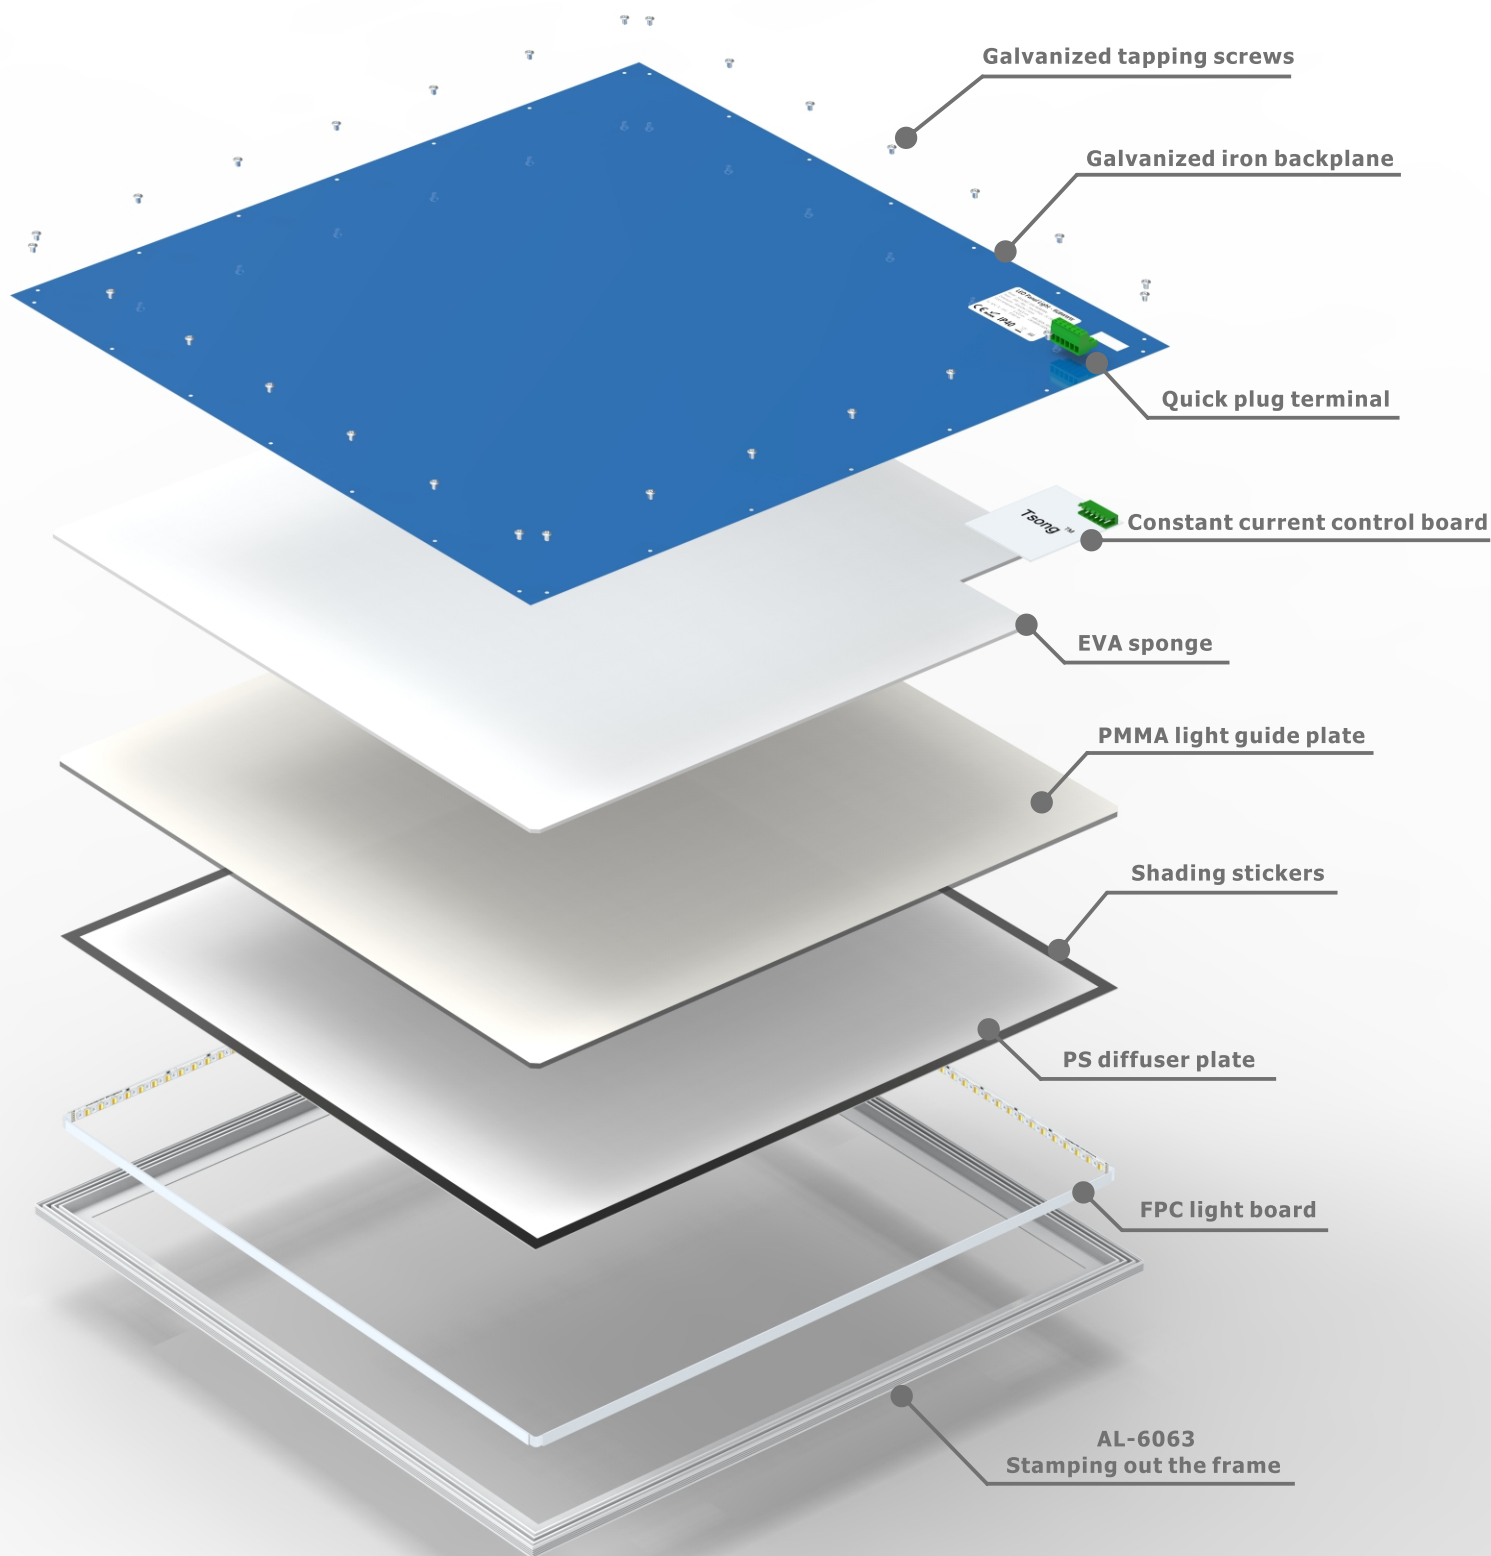



MLX PLATHEN LED PANELEK

220-240V AC	FÖLDELES	IP 40	5 ÉV GARANCIA	50 000 h	120°	FLICKER FREE	UGR RA<19	IK 06
----------------	----------	----------	------------------	----------	------	-----------------	--------------	----------

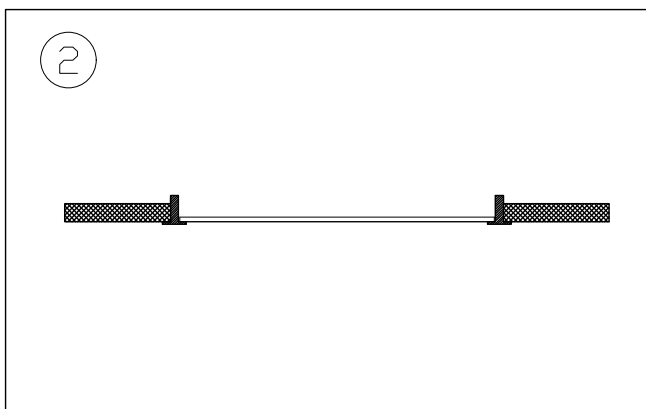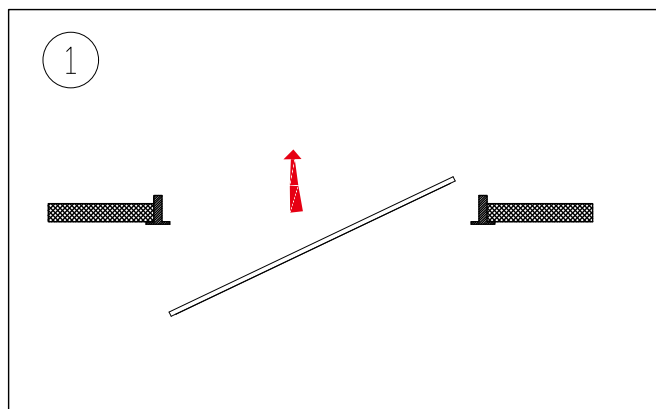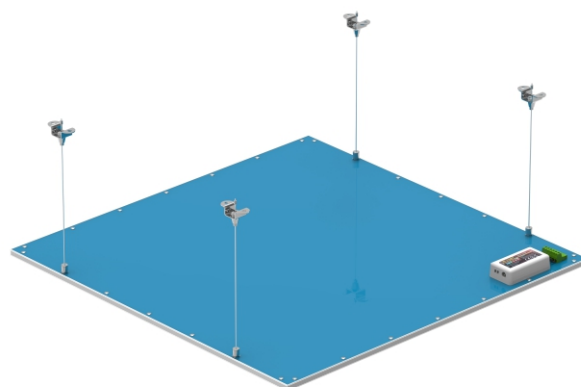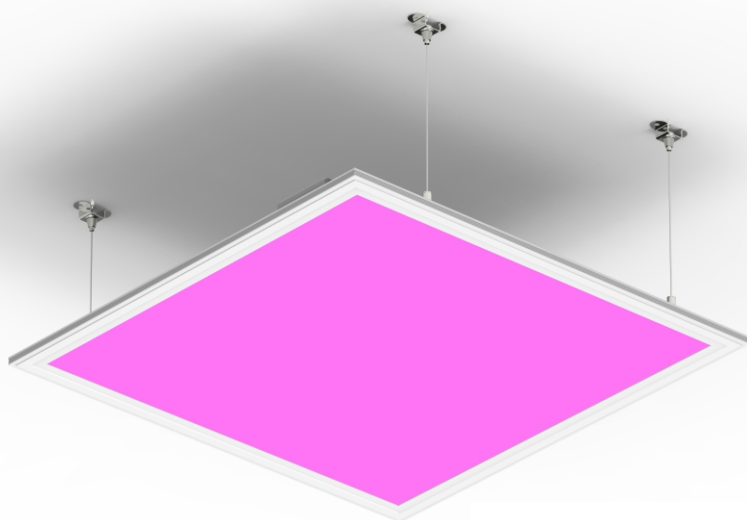

Remarks:




1: Please refer to the installation of the required size .

2: This accessory is sold separately to make a purchase, if you need, please inform our sales staff. 1 set for 4PCS.





MLX PLATHEN LED PANELEK

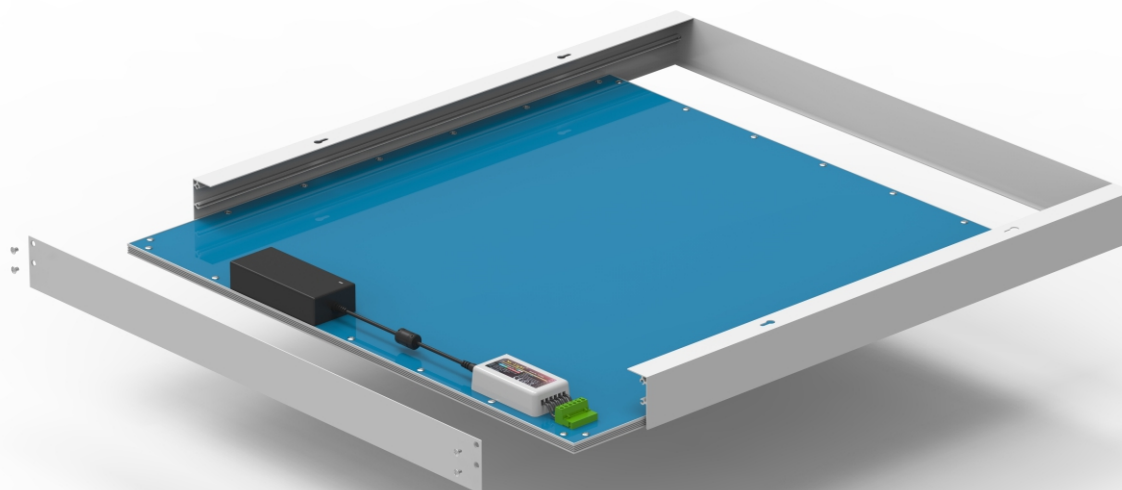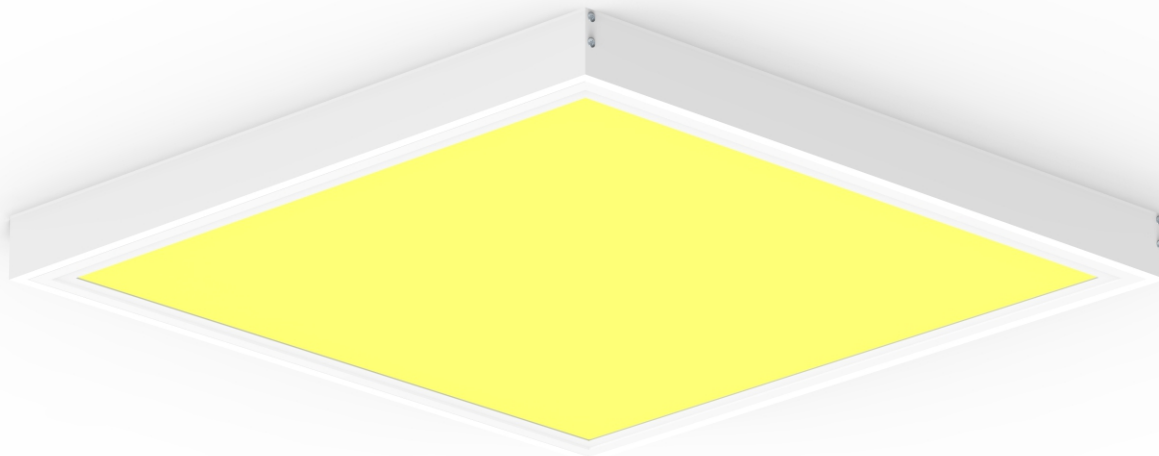

Product model	Accessories size
SPL30X30-18W	298x298xH42.5mm
SPL30X60-24W	623x623xH42.5mm
SPL60X60-36W	598x598xH42.5mm
SPL62X62-48W	623x623xH42.5mm
SPL30X120-48W	298x1198x42.5mm
SPL60X120-48W	598x1198x42.5mm

Remarks:



1: Please refer to the installation of the required size .

2: This accessory is sold separately to make a purchase, if you need, please inform our sales staff. 1 set for 4PCS.






MLX PLATHEN LED PANELEK

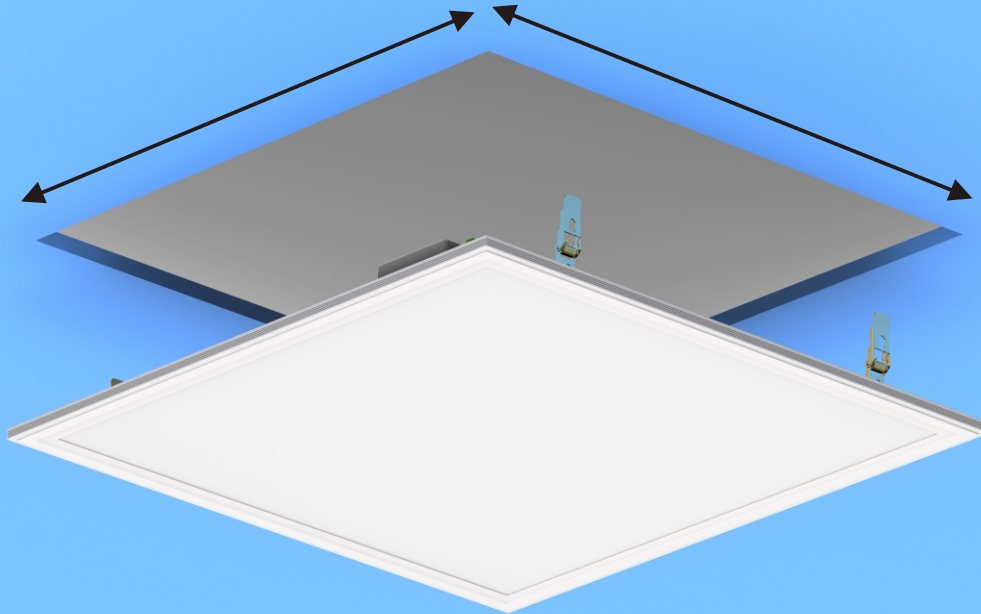

Product model	Hole Size
SPL60X60-36W	270x270mm
SPL62X62-48W	270x570mm
SPL60X60-36W	570x570mm
SPL62X62-48W	595x595mm
SPL30X120-48W	270x1170mm
SPL60X120-48W	570x1170mm

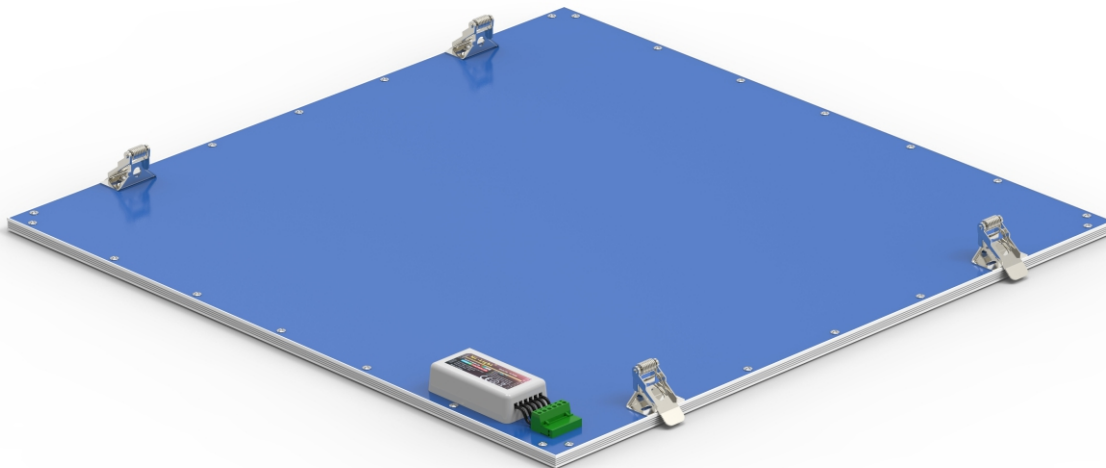


Remarks:



1: Please refer to the installation of the required size .

2: This accessory is sold separately to make a purchase, if you need, please inform our sales staff. 1 set for 4PCS.





MLX PLATHEN LED PANELEK

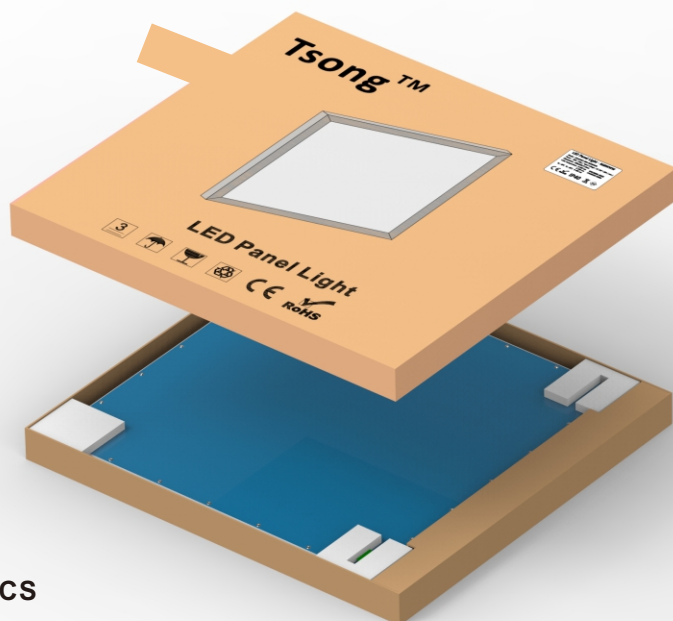

2PCS



Product model	PCS/CTN	N.W./PCS (kg)	G.W./PCS(kg)	Carton size
SPL30X30-18W	10 pcs	1.1kg	12.8kg	445x300x370MM
SPL62X62-48W	10 pcs	1.9kg	21.6kg	715x245x370MM
SPL60X60-36W	4 pcs	3.1kg	16.4kg	715x130x685MM
SPL62X62-48W	4 pcs	3.3kg	17.3kg	740x130x710MM
SPL30X120-48W	4 pcs	3.3kg	16.9kg	1315x130x390MM
SPL60X120-48W	4 pcs	6.5kg	30.1kg	1315x130x685MM

A távirányító nem tartozék, külön rendelhető.
Cikkszám: HL0019852

