




MLX PL LUNA LED PANELEK




HL0019865
HL0019836
HL0019839
HL0019837
HL0019835
HL0019001
HL0020053
HL0020052
HL0020079
HL0020051

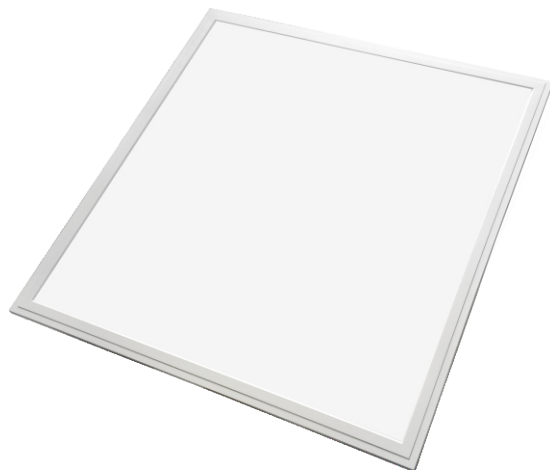

UGR19 Panel Diffuser

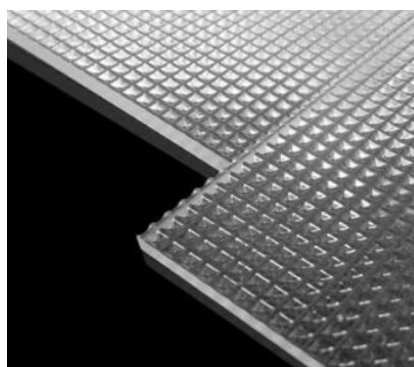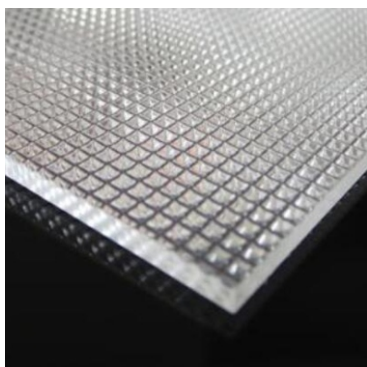



MLX PL LUNA LED PANELEK



Technikai paraméterek


30X30-18W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.07A	DC36V	0.45A	18W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	2070LM±10%	2160LM±10%	2160LM±10%
SMD4014	96PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	295*295*9MM	0.6Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L345*W55*H385mm	0.72Kg	
Outer carton package	5*2=10PCS/carton,K=K corrugated paper, L365*W295*H405mm,GW:8.7KG					
Optional dimming type	1-10V dimming / Thyristor dimming/DALI dimming					

30X60-24W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.07A	DC36V	0.60A	24W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	2640LM±10%	2880LM±10%	2880LM±10%
SMD4014	192PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	595*295*9MM	1.1Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L685*W55*H345mm	1.3Kg	
Outer carton package	5*2=10PCS/carton,K=K corrugated paper, L705*W295*H360mm,GW:14.9KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX PL LUNA LED PANELEK



Technikai paraméterek


60X60-36WH

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.23A	DC40V	0.80A	36W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	3960LM±10%	4320LM±10%	4320LM±10%
SMD4014	210PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	595*595*9MM	2.1Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W55*H685mm	2.4Kg	
Outer carton package	3*2=6PCS/carton,K=K corrugated paper, L665*W180*H705mm,GW:16.6KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

62X62-40WH

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.23A	DC40V	0.90A	40W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	4400LM±10%	4800LM±10%	4800LM±10%
SMD4014	224PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	620*620*11.3MM	2.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L670*W55*H710mm	2.8Kg	
Outer carton package	3*2=6PCS/carton,K=K corrugated paper, L690*W180*H730mm,GW:18.75KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX PL LUNA LED PANELEK



Technikai paraméterek


30X120-36WH

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.23A	DC40V	0.80A	36W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	3960LM±10%	4320LM±10%	4320LM±10%
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	1195*295*11.3MM	2.6Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1285*W55*H345mm	2.9Kg	
Outer carton package	3*2=6PCS/carton,K=K corrugated paper, L1305*W180*H365mm,GW:19.8KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					

30X150-40WH

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.23A	DC40V	0.9A	40W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
			Luminous flux	4400LM±10%	4800LM±10%	4800LM±10%
SMD4014	252PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	1495*295*11.3MM	4.2Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1585*W55*H345mm	4.5Kg	
Outer carton package	2*2=4PCS/carton,K=K corrugated paper, L1605*W130*H380mm,GW:19.8KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX PL LUNA LED PANELEK




Technikai paraméterek








60X120-60WH

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.36A	DC40V	1.35A	60W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	110LM/W	120LM/W	120LM/W
SMD4014	420PCS	≥80Ra	Luminous flux	6600LM	7200LM	7200LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	TUV-GS CE,RoHS	IP41	Class II	1195*595*11.3MM	4.2Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1285*W55*H645mm	4.5Kg	
Outer carton package	2*2=4PCS/carton,K=K corrugated paper, L1305*W130*H665mm,GW:19.7KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX PL LUNA LED PANELEK

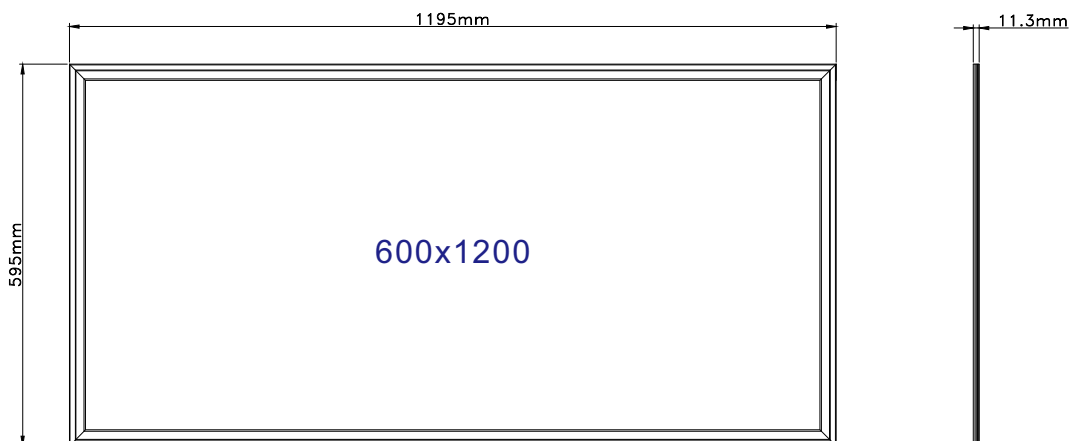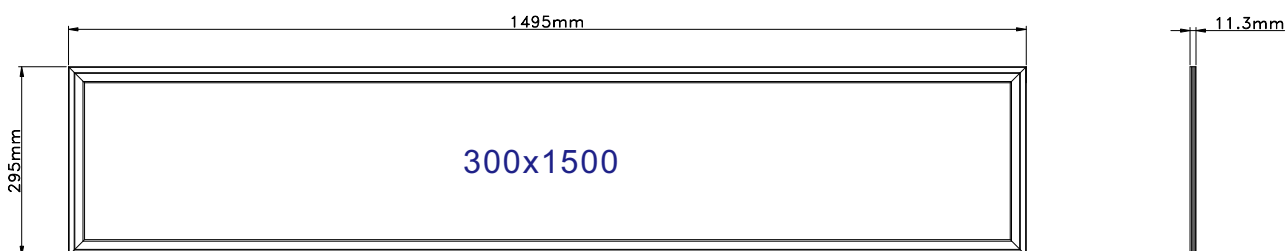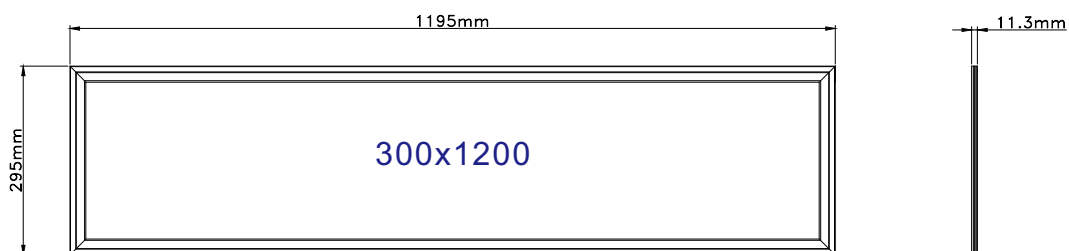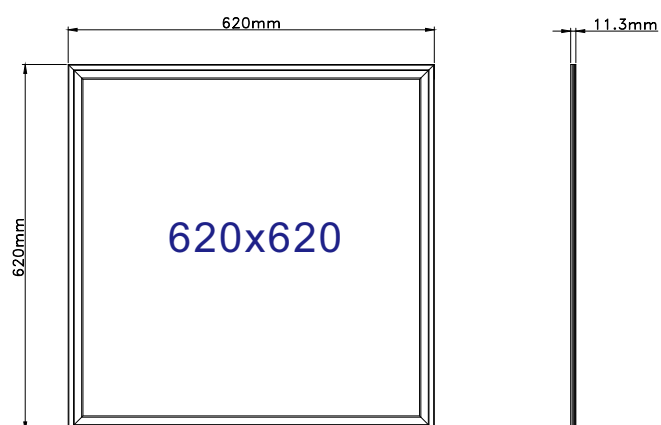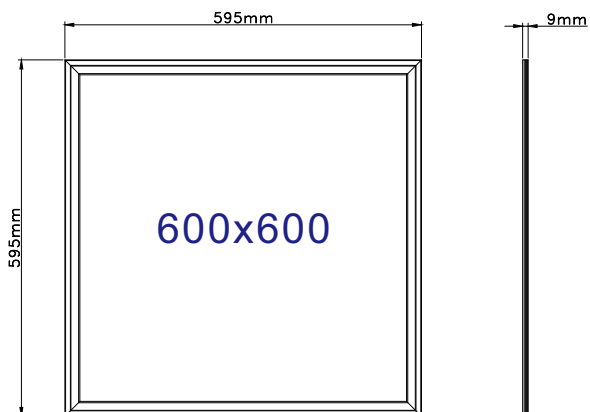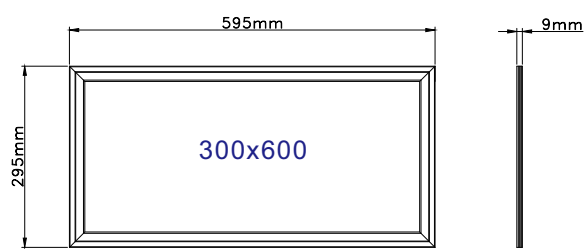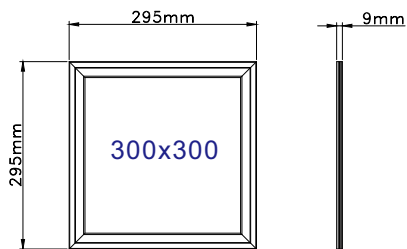




MLX PL LUNA LED PANELEK




Szerelési útmutató


1.beépített

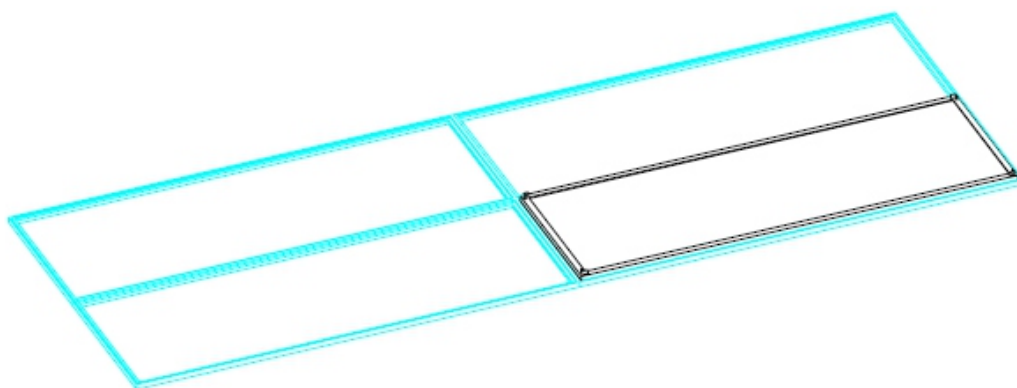


2.Felszerelés

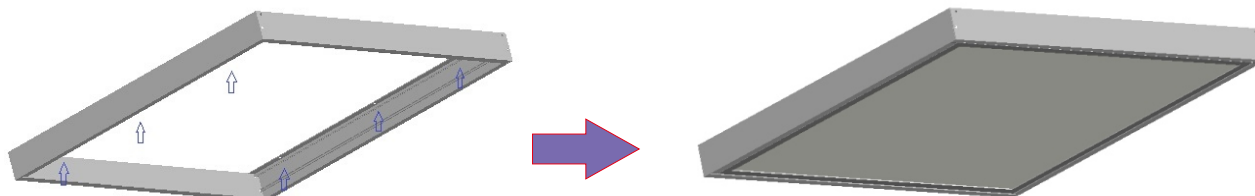

3.Függesztés

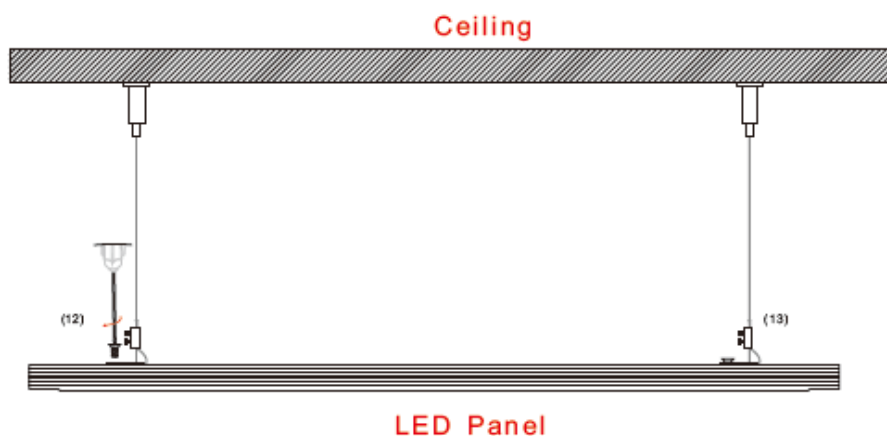



MLX PL LUNA LED PANELEK




Telepítés:

1. Ezt a terméket képzett villanszerelőnek kell telepítenie.
2. A csomagolás felbontása után ellenőrizze a termékek épségét.
3. A lámpa és a gyúlékony anyagok közötti távolság nem lehet kevesebb, mint 0,2 m. A beépített lámpa felső része és a mennyezet közötti távolság nem lehet kevesebb, mint 2 cm. A lámpát tilos hőszigetelő anyagot tartalmazó mennyezetbe vagy falba szerelni. A főkábelt nem szabad kisfeszültségű kábelhez vagy a falra szerelt lámpákhoz csatlakoztatni.
4. Vezesse át a lámpák csatlakozókábeleit a kifúrt lyukon, és rögzítse a falra szerelt lámpákat az előre felszerelt bilincsekkel. Győződjön meg arról, hogy ezek biztonságosan csatlakoznak az alaphoz.
5. A kábelek fektetésekor ügyeljen arra, hogy a kábelek és a csatlakozódugók ne legyenek kitéve húzó- vagy csavaróerőnek. Szerelje fel a kábelfeszítő-mentesítő mechanizmusokat a falra szerelt lámpák csatlakozási pontjaira.
Ne törje meg a kábeleket. A kimeneti kábeleket külön és a többi kábeltől távol kell fektetni.
6. A telepítés után csatlakoztassa a transzformátort a hálózati áramforráshoz.
7. Folytassa a kábelek csatlakoztatásával a lámpatestekhez. Általában a barna vezeték az élő vezeték, csatlakoztassa az „L” jelölésű csatlakozóhoz. A kék vezeték a „Naughty” vezeték, csatlakoztassa az „N” jelölésű csatlakozóhoz.
8. Csak a mellékelt LED-meghajtót használja, és ne csatlakoztassa a felületre szerelt lámpákat más terhelésekhez.
9. Ne távolítsa el a tápegység és a lámpa meghajtójának adattábláját.

Karbantartás:

1. A lámpa tisztítása előtt győződjön meg arról, hogy le van választva a tápegységről.
2. A tisztításhoz használjon száraz vagy enyhén nedves ruhát.
3. Soha ne használjon vegyszereket vagy súrolószereket a tisztításhoz.





MLX PL LUNA LED PANELEK



Jellemzők

Kiváló minőségű, nagy fényerejű LED fényforrásként, nagy hatékonyságú és energiatakarékos, tükröződés- és villódzásmentes, (FLICKER FREE) átlagos világító felülettel rendelkezik.

Alumínium hűtőbordával ellátott, tükröződés mentes

Több mint 90%-os fényáteresztő képességű lámpaernyő anyagok, a lámpatest pedig nagy hővezető képességű alumíniumötvözet.

Bemeneti feszültség: AC200-240V.

Új, nagy hatékonyságú meghajtó.

Azonnali indítás, nincs villogás, nincs zúgás.

Speciális áramköri kialakítás, hatékonyabban és egyenletesebben világít.

Zöld környezetvédelem, ólommentes anyag, megfelel az ROHS-nek.

Nincs RF interferencia.

Alkalmazási terület:

Hotelek

Irodák

Üzletek, plázák

Iskolák, kollégiumok

Intézmények

Kórházak

Ipari létesítmények

