


MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



HL0019896
HL0019897
HL0019898
HL0019899
HL0019900
HL0019901
HL0019902
HL0019903




COB

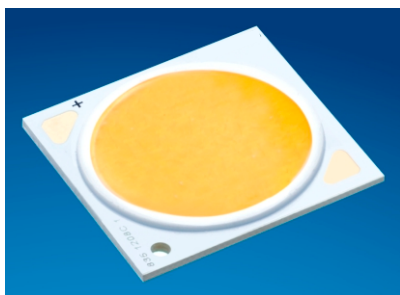

**beépített
meghajtós változat**





MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



Power

10W	20W	30W	40W
-----	-----	-----	-----

Size

Light cup(Φ60*120mm) Driver(151*32*46mm)	Light cup(Φ65*130mm) Driver(151*32*46mm)	Light cup(Φ78*160mm) Driver(151*32*46mm)	Light cup(Φ90*158mm) Driver(151*32*46mm)
---	---	---	---

LED Type

COB 1 pcs	COB 1 pcs	COB 1 pcs	COB 1 pcs
-----------	-----------	-----------	-----------

CRI / brightness

CRI>90Ra	CRI>90Ra	CRI>90Ra	CRI>90Ra
1050LM±10%	2100LM±10%	3150LM±10%	4200LM±10%

N.W.


0.33KG	0.35KG	0.53KG	0.9KG
--------	--------	--------	-------

G.W.


0.39KG	0.42KG	0.6KG	0.97KG
--------	--------	-------	--------

Input Voltage	AC200-240V	LED	COB
Base Type	4-wire track head	LED Driver	Flicker Free Driver
Rendering Index	>90Ra	View Angle	36°
LED'S Operating Life	49, 999Hours	Material	Aluminium+PC
Operating Temperature	-20°C – +45°C	Storage Temperature	-30°C – +65°C
Certificates	CE ROHS	Color Temperature	2900-3100K 4000-4500K 5500-6000K








MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ

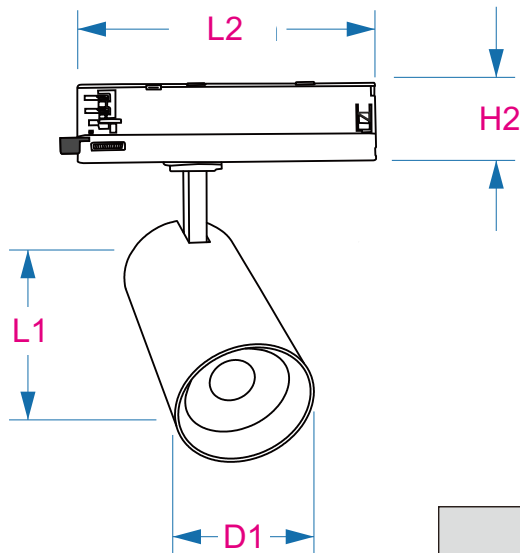


	Power	Light Cup Size(D1*L1)	Driver Size(L2*H2)
	10W	Φ 60*120mm	L 151*H46mm
	20W	Φ 65*130mm	L 151*H46mm
	30W	Φ 78*160mm	L 151*H46mm
	40W	Φ 90*158mm	L 151*H46mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


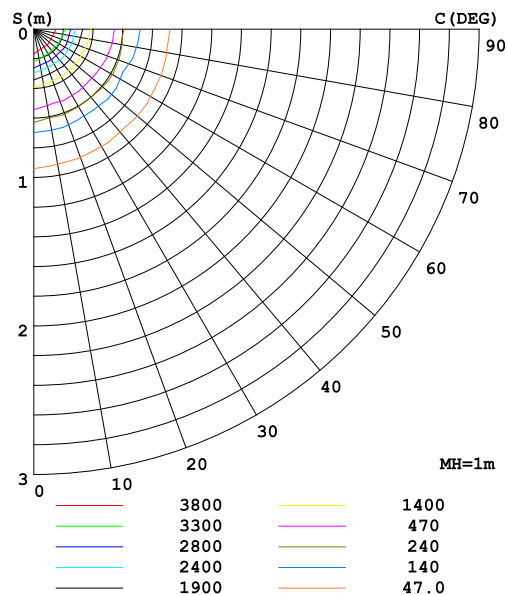
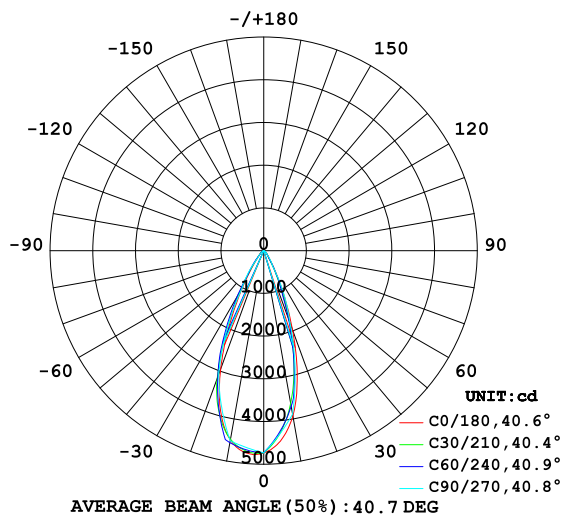




MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ




Suitable for
4-wire track

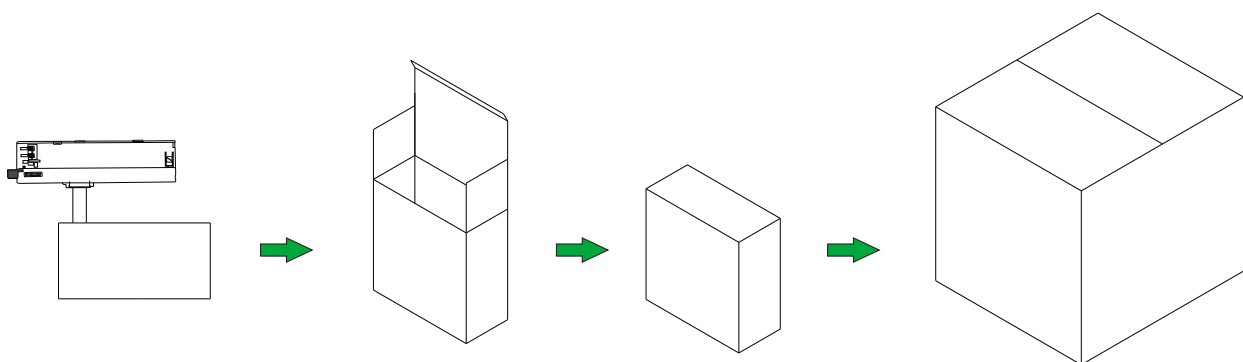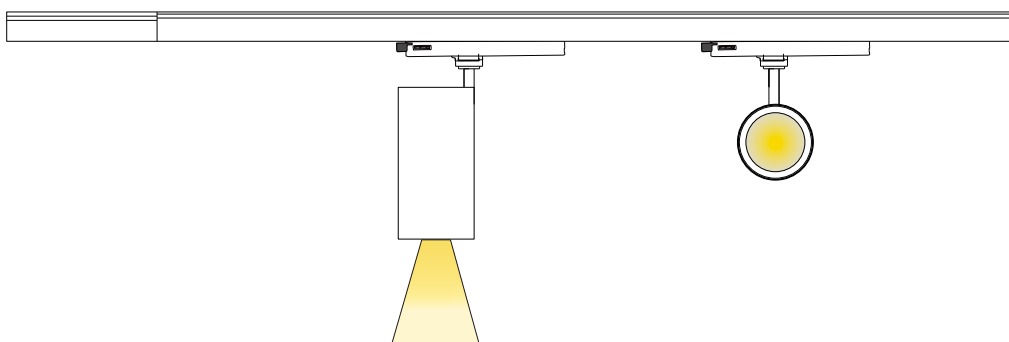
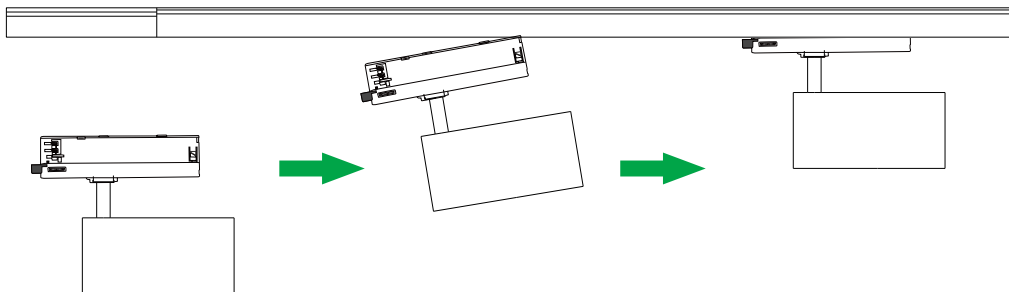


	Power	Outer Carton Size	G.W	QTY
	10W	L360*W345*H335mm	7.9 KG/karton	20 db/karton
	20W	L380*W370*H350mm	8.5 KG/karton	20 db/karton
	30W	L445*W440*H375mm	12 KG/karton	20 db/karton
	40W	L495*W445*H385mm	19.5 KG/karton	20 db/karton





MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



Jellemzők

Nagy fényerejű COB sínlámpa

60%-os energiamegtakarítás a hagyományos halogénlámpákhoz képest.

49999 órás élettartam, alumínium PC konstrukció, szállítás közben nem törik.

Optikai PC diffúzor, kellemes világítás.

Meleg/természetes/hideg fehér színekben kapható magas CRI értékkel.

Gyors kapcsolási idő, FLICKER FREE.

Használható üzletekben, kiállítótermekben, múzeumokban, kabinetekben, irodákban, recepciókon, tárgyalókban, otthoni dekorációs világításhoz és egyéb területeken.

