


# MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



HL0019896  
HL0019897  
HL0019898  
HL0019899  
HL0019900  
HL0019901  
HL0019902  
HL0019903




**COB**

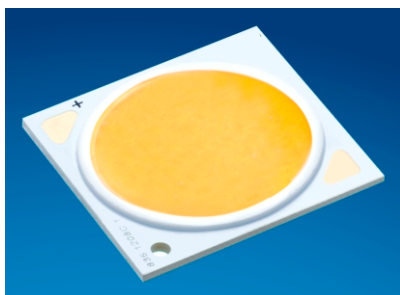

**beépített  
meghajtós változat**





# MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



## Power

| 10W | 20W | 30W | 40W |
|-----|-----|-----|-----|
|-----|-----|-----|-----|

## Size

|                                             |                                             |                                             |                                             |
|---------------------------------------------|---------------------------------------------|---------------------------------------------|---------------------------------------------|
| Light cup(Φ60*120mm)<br>Driver(151*32*46mm) | Light cup(Φ65*130mm)<br>Driver(151*32*46mm) | Light cup(Φ78*160mm)<br>Driver(151*32*46mm) | Light cup(Φ90*158mm)<br>Driver(151*32*46mm) |
|---------------------------------------------|---------------------------------------------|---------------------------------------------|---------------------------------------------|

## LED Type

|           |           |           |           |
|-----------|-----------|-----------|-----------|
| COB 1 pcs | COB 1 pcs | COB 1 pcs | COB 1 pcs |
|-----------|-----------|-----------|-----------|

## CRI / brightness

|            |            |            |            |
|------------|------------|------------|------------|
| CRI>90Ra   | CRI>90Ra   | CRI>90Ra   | CRI>90Ra   |
| 1050LM±10% | 2100LM±10% | 3150LM±10% | 4200LM±10% |

## N.W.


|        |        |        |       |
|--------|--------|--------|-------|
| 0.33KG | 0.35KG | 0.53KG | 0.9KG |
|--------|--------|--------|-------|

## G.W.


|        |        |       |        |
|--------|--------|-------|--------|
| 0.39KG | 0.42KG | 0.6KG | 0.97KG |
|--------|--------|-------|--------|

|                       |                   |                     |                                        |
|-----------------------|-------------------|---------------------|----------------------------------------|
| Input Voltage         | AC200-240V        | LED                 | COB                                    |
| Base Type             | 4-wire track head | LED Driver          | Flicker Free Driver                    |
| Rendering Index       | >90Ra             | View Angle          | 36°                                    |
| LED'S Operating Life  | 49, 999Hours      | Material            | Aluminium+PC                           |
| Operating Temperature | -20°C – +45°C     | Storage Temperature | -30°C – +65°C                          |
| Certificates          | CE ROHS           | Color Temperature   | 2900-3100K<br>4000-4500K<br>5500-6000K |








# MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ

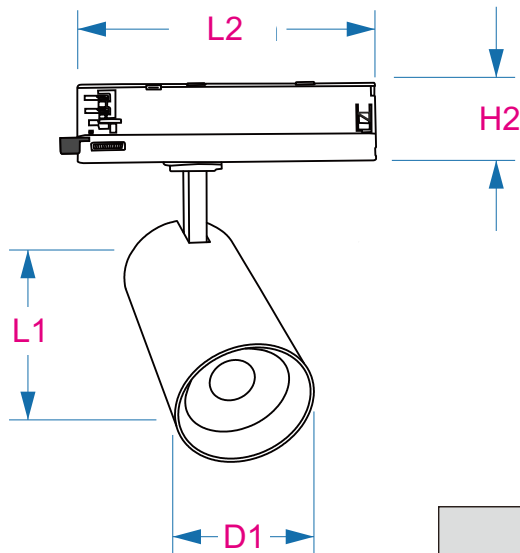





|  | Power | Light Cup Size(D1*L1) | Driver Size(L2*H2) |
|--|-------|-----------------------|--------------------|
|  | 10W   | Φ 60*120mm            | L 151*H46mm        |
|  | 20W   | Φ 65*130mm            | L 151*H46mm        |
|  | 30W   | Φ 78*160mm            | L 151*H46mm        |
|  | 40W   | Φ 90*158mm            | L 151*H46mm        |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


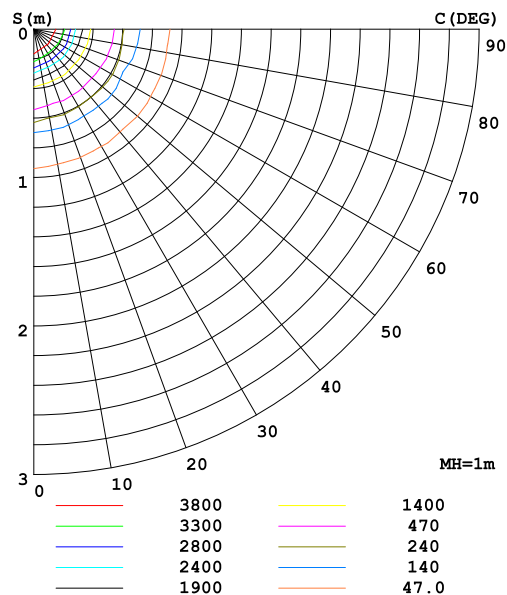
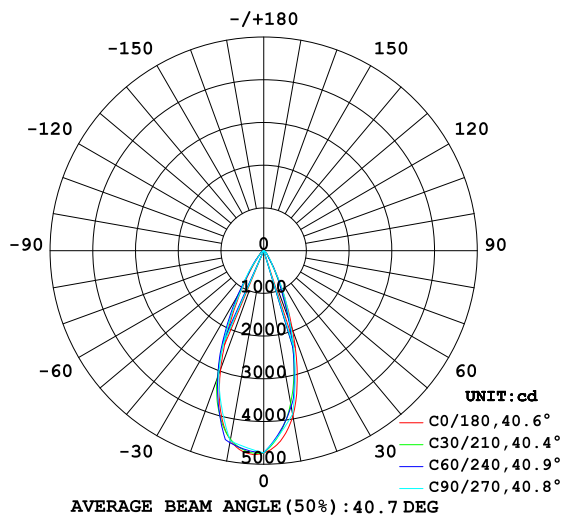




# MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ




Suitable for  
4-wire track

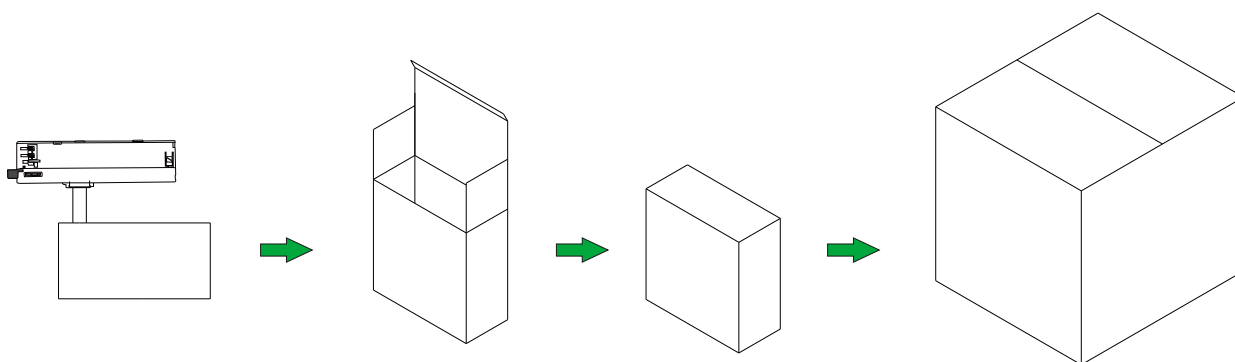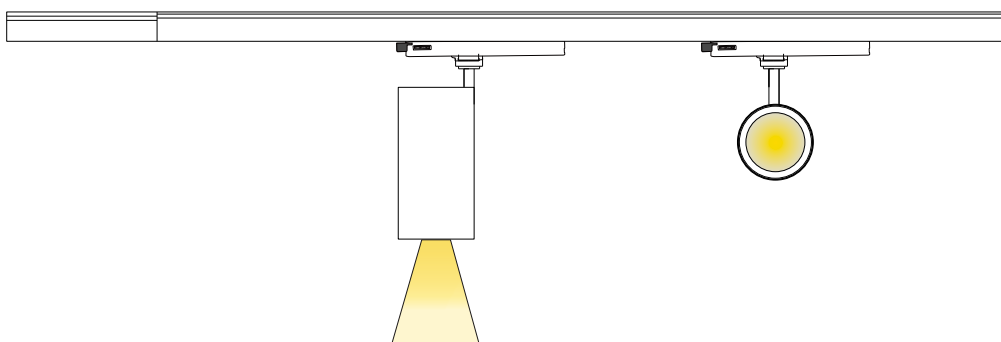
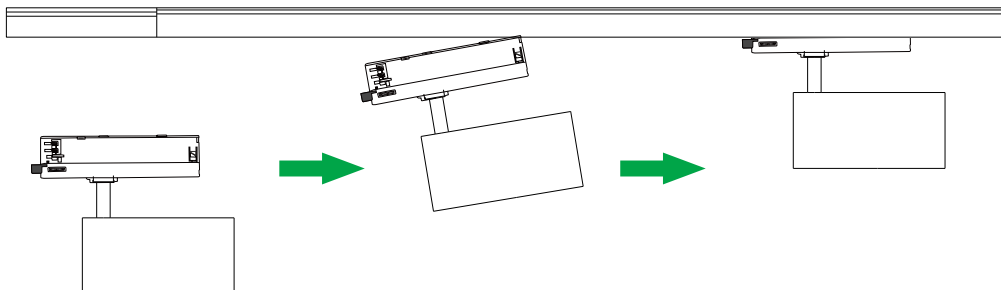


|  | Power | Outer Carton Size | G.W            | QTY          |
|--|-------|-------------------|----------------|--------------|
|  | 10W   | L360*W345*H335mm  | 7.9 KG/karton  | 20 db/karton |
|  | 20W   | L380*W370*H350mm  | 8.5 KG/karton  | 20 db/karton |
|  | 30W   | L445*W440*H375mm  | 12 KG/karton   | 20 db/karton |
|  | 40W   | L495*W445*H385mm  | 19.5 KG/karton | 20 db/karton |





# MLX PLNARROLED SÍNES LÁMPATESTEK 3 FÁZISÚ SÍNHEZ



## Jellemzők

Nagy fényerejű COB sínlámpa

60%-os energiamegtakarítás a hagyományos halogénlámpákhoz képest.

49999 órás élettartam, alumínium PC konstrukció, szállítás közben nem törik.

Optikai PC diffúzor, kellemes világítás.

Meleg/természetes/hideg fehér színekben kapható magas CRI értékkel.

Gyors kapcsolási idő, FLICKER FREE.

Használható üzletekben, kiállítótermekben, múzeumokban, kabinetekben, irodákban, recepciókon, tárgyalókban, otthoni dekorációs világításhoz és egyéb területeken.

