MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

FÖLDELÉS | 24V BEMENETI FESZÜLTSÉG | IP 68 | 3 ÉV GARANCIA | 30 000 h | -20 +50 °C | 30° |

HL0019904
HL0019905
HL0019906
HL0019907
HL0019908
HL0019909
HL0019910
HL0019911
HL0019914
HL0019915
HL0019996
HL0019917
HL0019918
HL0019919

HUNILUX Kft. 1117 Budapest, Hunyadi János út 16. Tel: +36 1 218 2285 hunilux@hunilux.hu hunilux.hu

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

180°-os szögben
forgatható fel-le irányban

360°-os szögben
forgatható oldal irányban

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

	Power	Product Size(D1*H)	Surface Size(D2)
	3W	Φ82*H140mm	Φ49mm
	6W	Φ120*H140mm	Φ76mm
	9W	Φ145*H180mm	Φ100mm
	12W	Φ160*H185mm	Φ113mm
	18W	Φ190*H220mm	Φ146mm
	24W	Φ210*H230mm	Φ165mm
	36W	Φ230*H240mm	Φ180mm

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

3W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	0.125A	DC18V	0.15A	3W ±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green / Blue
SMD2835	3 PCS	⩾80Ra	Luminous flux	255LM±10%	270LM±10%	270LM±10%	620-625nm	517-522nm / 456-460nm
			Beam Angle	30° 【5° / 120° Optional】				

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ82*140mm	0.37Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L105*W105*H100mm	0.39Kg
Outer carton package	50*1layer=50PCS/carton,K=K corrugated paper, L540*W225*H525mm,GW:18.7KG				

6W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	0.25A	DC18V	0.3A	6W ±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green / Blue
SMD2835	6 PCS	⩾80Ra	Luminous flux	510LM±10%	540LM±10%	540LM±10%	620-625nm	517-522nm / 456-460nm
			Beam Angle	30° 【5° / 120° Optional】				

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ120*140mm	0.62Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L155*W90*H130mm	0.65Kg
Outer carton package	30*1layer=30PCS/carton,K=K corrugated paper, L470*W330*H410mm,GW:17.2KG				

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

9W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	0.375A	DC18V	0.45A	9W ±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	9 PCS	⩾80Ra	Luminous flux	765LM±10%	810LM±10%	810LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ145*180mm	0.8Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L160*W100*H185mm	0.85Kg

Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L500*W335*H395mm,GW:15.5KG

12W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	0.5A	DC18V	0.6A	12W±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	12 PCS	⩾80Ra	Luminous flux	1020LM±10%	1080LM±10%	1080LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ160*185mm	0.98Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L170*W170*H150mm	1.04Kg

Outer carton package	18*1layer=18PCS/carton,K=K corrugated paper, L530*W360*H470mm,GW:17.1KG

HUNILUX Kft. 1117 Budapest, Hunyadi János út 16. Tel: +36 1 218 2285 hunilux@hunilux.hu hunilux.hu

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

18W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	0.75A	DC18V	0.9A	18W±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	18 PCS	⩾80Ra	Luminous flux	1530LM±10%	1620LM±10%	1620LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ190*220mm	1.36Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L210*W135*H255mm	1.42Kg

Outer carton package	12*1layer=12PCS/carton,K=K corrugated paper, L520*W420*H440mm,GW:16.5KG

24W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	1.0A	DC18V	1.2A	24W±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	24 PCS	⩾80Ra	Luminous flux	2040LM±10%	2160LM±10%	2160LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ210*230mm	1.81Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L250*W175*H285mm	1.9Kg

Outer carton package	8*1layer=8PCS/carton,K=K corrugated paper, L530*W370*H590mm,GW:14.6KG

HUNILUX Kft. 1117 Budapest, Hunyadi János út 16. Tel: +36 1 218 2285 hunilux@hunilux.hu hunilux.hu

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

FÖLDELÉS | 24V BEMENETI FESZÜLTSÉG | IP 68 | 3 ÉV GARANCIA | 30 000 h | -20 +50 °C | 30° | IP68

36W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power	Factor
AC/DC24V	1.5A	DC18V	0.9A*2	36W±10%	≥0.5

LED Type	LED Q'ty	CRI						
			CCT	2900-3100K	4000-4500K	5500-6000K	Wave length	
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	36 PCS	⩾80Ra	Luminous flux	3060LM±10%	3240LM±10%	3240LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					

Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
30.000Hours	CE,RoHS	IP68	ClassIII	Φ230*240mm	2.06Kg

Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel	L250*W175*H285mm	2.2Kg

Outer carton package	8*1layer=8PCS/carton,K=K corrugated paper, L530*W370*H590mm,GW:17.5KG

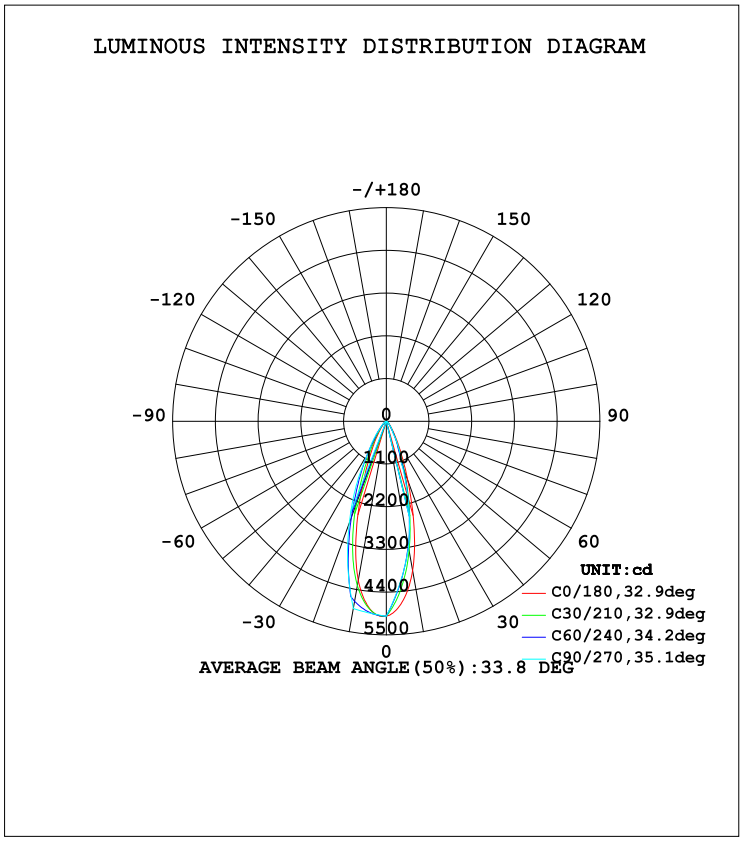

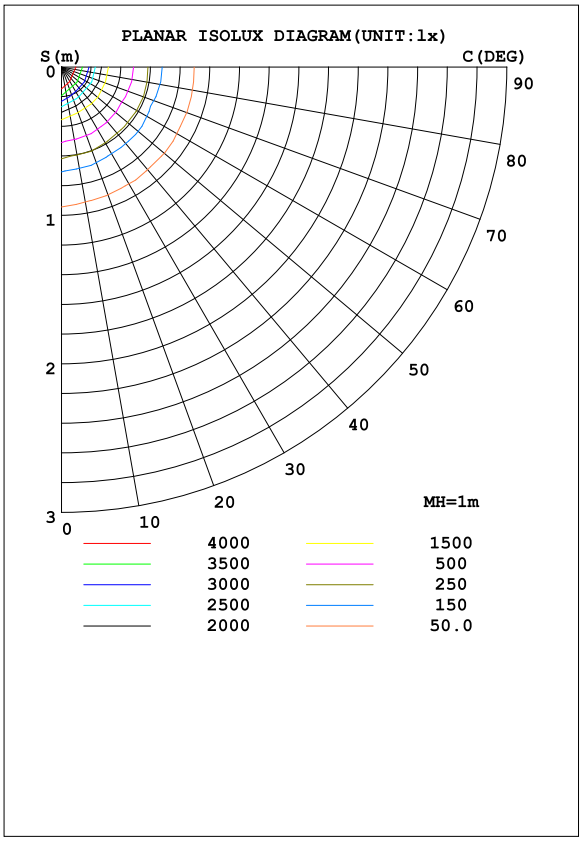

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

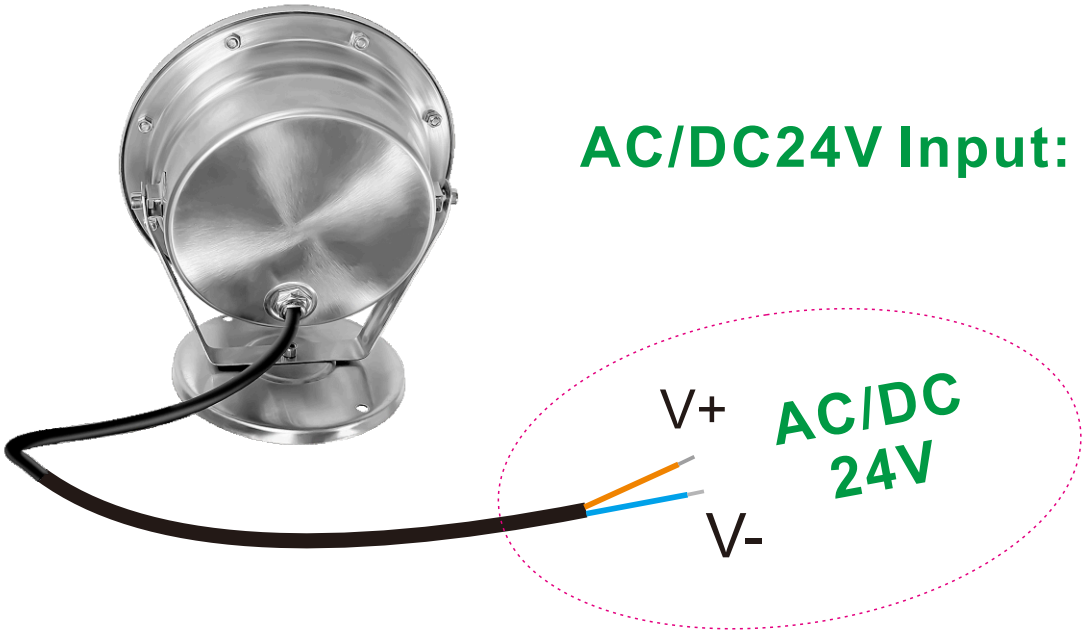

AC/DC24V Input: **V+** -Brown
V- -Blue

Ne csatlakoztasson 230 V-os vagy 24 V-nál magasabb AC feszültséget, különben a lámpa károsodhat!

HUNILUX Kft. 1117 Budapest, Hunyadi János út 16. Tel: +36 1 218 2285 hunilux@hunilux.hu hunilux.hu

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK

Jellemzők

Jó vízállóság: Az alacsony feszültségű víz alatti lámpák speciális anyagokból készülnek, és kiváló vízállósággal rendelkeznek, így hosszú ideig képesek víz alatt működni.

Nagy fényerő: Az alacsony feszültségű víz alatti lámpák nagy fényerejű LED fényforrásokat használnak, amelyek erős fényhatásokat biztosítanak, és tisztábban láthatóvá teszik a víz alatti környezetet.

Energiatakarékos és környezetbarát: Az alacsony feszültségű víz alatti lámpák LED fényforrásokat használnak, amelyek energiát takarítanak meg és csökkentik az energiafogyasztást, így környezetbarátak.

Hosszú élettartam: Az alacsony feszültségű víz alatti lámpák kiváló minőségű anyagokból készülnek, amelyek ellenállnak a víz alatti környezet korróziójának és nyomásának, így hosszú élettartamot biztosítanak.
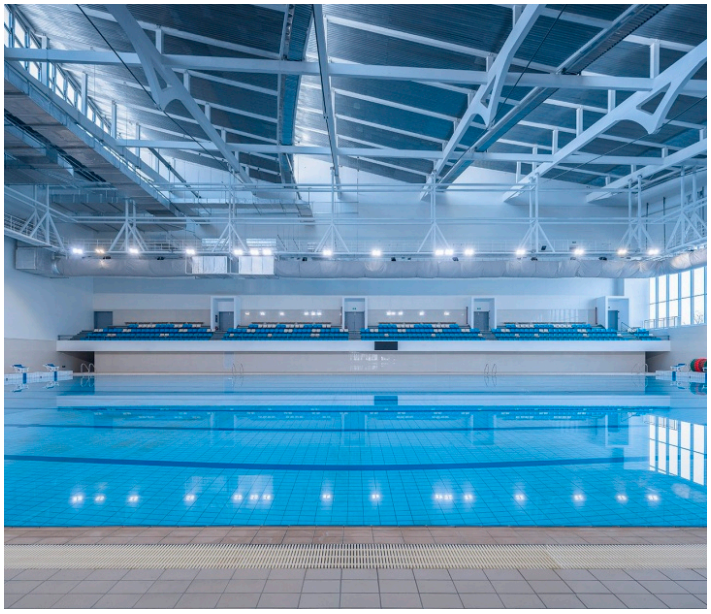
Könnyű telepítés: Az alacsony feszültségű víz alatti lámpák kis méretűek és könnyen telepíthetők például hajókra, dokkokba és kikötőkbe.
Alkalmas nagy úszómedencékbe, akváriumokba, parkokba, sziklakertekbe, magas színvonalú villák medencéibe, melegvízű forrásokba, szökőkutakba, kiállításokra, fényjátékokra és egyéb helyekre.