

MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK



HL0019904
HL0019905
HL0019906
HL0019907
HL0019908
HL0019909
HL0019910
HL0019911
HL0019914
HL0019915
HL0019996
HL0019917
HL0019918
HL0019919



OUTDOOR IP68 UNDERWATER LIGHT

Suitable for squares, parks, pedestrian streets, swimming pools, fish ponds, rocky landscape, music performance spring and other occasions.



36W



24W



18W



12W



9W




6W



3W





MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




180°-os szögben
forgatható fel-le irányban




360°-os szögben
forgatható oldal irányban






MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




	Power	Product Size(D1*H)	Surface Size(D2)
	3W	Φ82*H140mm	Φ49mm
	6W	Φ120*H140mm	Φ76mm
	9W	Φ145*H180mm	Φ100mm
	12W	Φ160*H185mm	Φ113mm
	18W	Φ190*H220mm	Φ146mm
	24W	Φ210*H230mm	Φ165mm
	36W	Φ230*H240mm	Φ180mm





MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




3W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.125A	DC18V	0.15A		3W ±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
			Luminous flux	255LM±10%	270LM±10%	270LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP68	ClassIII		Φ82*140mm		0.37Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L105*W105*H100mm		0.39Kg		
Outer carton package	50*1layer=50PCS/carton,K=K corrugated paper, L540*W225*H525mm,GW:18.7KG								


6W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.25A	DC18V	0.3A		6W ±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	6 PCS	≥80Ra	Luminous flux	510LM±10%	540LM±10%	540LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP68	ClassIII		Φ120*140mm		0.62Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L155*W90*H130mm		0.65Kg		
Outer carton package	30*1layer=30PCS/carton,K=K corrugated paper, L470*W330*H410mm,GW:17.2KG								





MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK



9W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.375A	DC18V	0.45A		9W ±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
			Luminous flux	765LM±10%	810LM±10%	810LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP68	ClassIII		Φ145*180mm		0.8Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L160*W100*H185mm		0.85Kg		
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L500*W335*H395mm,GW:15.5KG								

12W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.5A	DC18V	0.6A		12W ± 10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	12 PCS	≥80Ra	Luminous flux	1020LM±10%	1080LM±10%	1080LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP68	ClassIII		Φ160*185mm		0.98Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L170*W170*H150mm		1.04Kg		
Outer carton package	18*1layer=18PCS/carton,K=K corrugated paper, L530*W360*H470mm,GW:17.1KG								





MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




18W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	0.75A	DC18V	0.9A		18W±10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue	
SMD2835	18 PCS	≥80Ra	Luminous flux	1530LM±10%	1620LM±10%	1620LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	30° 【5° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP68	ClassIII		Φ190*220mm		1.36Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L210*W135*H255mm		1.42Kg			
Outer carton package	12*1layer=12PCS/carton,K=K corrugated paper, L520*W420*H440mm,GW:16.5KG									

24W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	1.0A	DC18V	1.2A		24W ±10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue	
SMD2835	24 PCS	≥80Ra	Luminous flux	2040LM±10%	2160LM±10%	2160LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	30° 【5° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP68	ClassIII		Φ210*230mm		1.81Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L250*W175*H285mm		1.9Kg			
Outer carton package	8*1layer=8PCS/carton,K=K corrugated paper, L530*W370*H590mm,GW:14.6KG									






MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




36W


Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	1.5A	DC18V	0.9A*2		36W±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	85LM/W	90LM/W	90LM/W	Red	Green	Blue
SMD2835	36 PCS	≥80Ra	Luminous flux	3060LM±10%	3240LM±10%	3240LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	30° 【5° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP68	ClassIII		Φ230*240mm		2.06Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L250*W175*H285mm		2.2Kg		
Outer carton package	8*1layer=8PCS/carton,K=K corrugated paper, L530*W370*H590mm,GW:17.5KG								

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

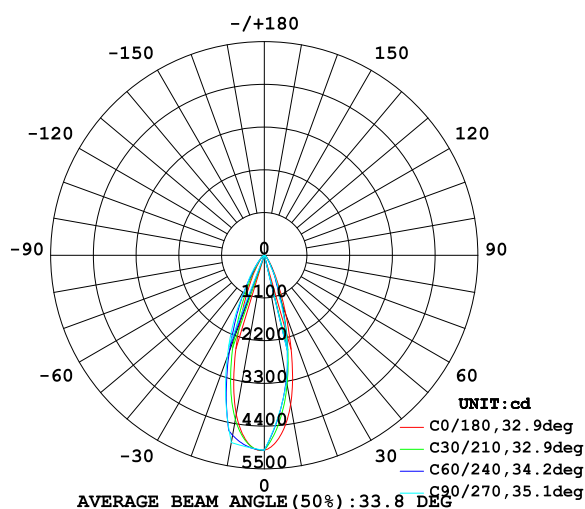


PLANAR ISOLUX DIAGRAM(UNIT:lx)

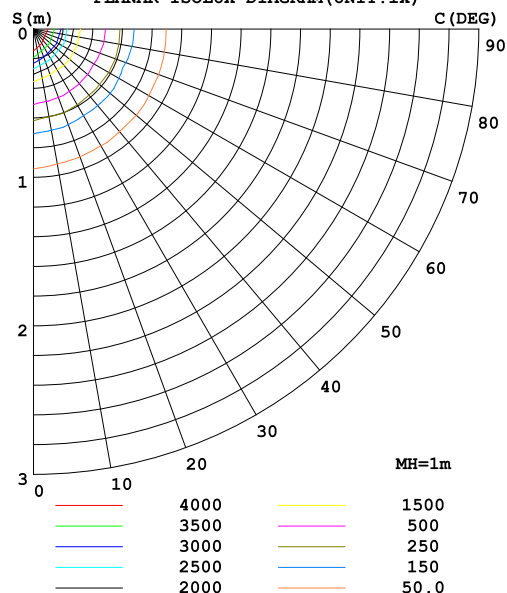




MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK




AC/DC24V Input: V+ -Brown
V- -Blue

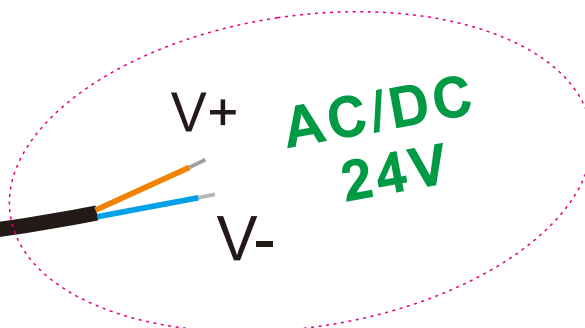

Ne csatlakoztasson 230 V-os vagy 24 V-nál
magasabb AC feszültséget, különben a lámpa
károsodhat!





MLX UW POOLY LED BILLENTHETŐ MEDENCE LÁMPATESTEK



Jellemzők

Jó vízállóság: Az alacsony feszültségű víz alatti lámpák speciális anyagokból készülnek, és kiváló vízállósággal rendelkeznek, így hosszú ideig képesek víz alatt működni.

Nagy fényerő: Az alacsony feszültségű víz alatti lámpák nagy fényerejű LED fényforrásokat használnak, amelyek erős fényhatásokat biztosítanak, és tisztábban láthatóvá teszik a víz alatti környezetet.

Energiatakarékos és környezetbarát: Az alacsony feszültségű víz alatti lámpák LED fényforrásokat használnak, amelyek energiát takarítanak meg és csökkentik az energiafogyasztást, így környezetbarátak.

Hosszú élettartam: Az alacsony feszültségű víz alatti lámpák kiváló minőségű anyagokból készülnek, amelyek ellenállnak a víz alatti környezet korróziójának és nyomásának, így hosszú élettartamot biztosítanak.

Könnyű telepítés: Az alacsony feszültségű víz alatti lámpák kis méretűek és könnyen telepíthetők például hajókra, dokkokba és kikötőkbe.

Alkalmas nagy úszómedencékbe, akváriumokba, parkokba, sziklakertekbe, magas színvonalú villák medencéibe, melegvízű forrásokba, szökőkutakba, kiállításokra, fényjátékokra és egyéb helyekre.

