


MLX UG WALKY LED TAPOSÓ LÁMPA 24 V



HL0019921	HL0019943
HL0019936	HL0019944
HL0019937	HL0019824
HL0019938	HL0019920
HL0019939	HL0019945
HL0019940	HL0019946
HL0019941	HL0019947
HL0019942	HL0019948



36W



24W



18W



12W



9W




6W



3W






MLX UG WALKY LED TAPOSÓ LÁMPA 24 V



Aluminum radiator

PC embedded parts

LED driver inside

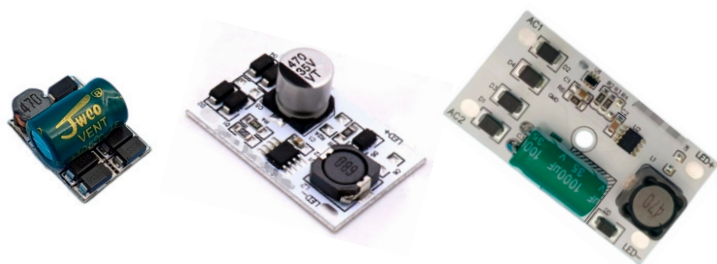

304 stainless steel face ring



Potting waterproofing



Color temperature



White(6000K/4000K/3000K)




Yellow



Red



Blue




Green




RGB






MLX UG WALKY LED TAPOSÓ LÁMPA 24 V

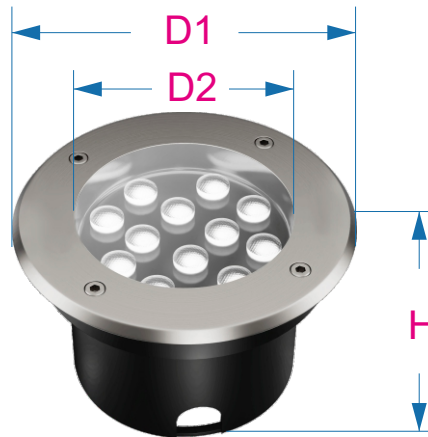


	Power	Product Size(D1*H)	Surface Size(D2)	Hole Size
	3W	Φ100*H90mm	Φ58mm	Φ95mm
	6W	Φ120*H90mm	Φ80mm	Φ115mm
	9W	Φ160*H95mm	Φ100mm	Φ145mm
	12W	Φ180*H90mm	Φ115mm	Φ155mm
	18W	Φ200*H90mm	Φ146mm	Φ185mm
	24W	Φ220*H90mm	Φ165mm	Φ205mm
	36W	Φ250*H90mm	Φ190mm	Φ240mm
	48W	Φ300*H94mm	Φ240mm	Φ285mm





MLX UG WALKY LED TAPOSÓ LÁMPA 24 V




3W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.125A	DC18V	0.15A		3W ± 10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue
SMD2835	3 PCS	≥80Ra	Luminous flux	225LM±10%	240LM±10%	240LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP67	ClassIII		Φ100*90mm		0.39Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L105*W105*H100mm		0.41Kg		
Outer carton package	50*1layer=50PCS/carton,K=K corrugated paper, L540*W225*H525mm,GW:22.4KG								


6W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.25A	DC18V	0.3A		6W ±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue
SMD2835	6 PCS	≥80Ra	Luminous flux	450LM±10%	480LM±10%	480LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP67	ClassIII		Φ120*90mm		0.64Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L125*W100*H125mm		0.67Kg		
Outer carton package	30*1layer=30PCS/carton,K=K corrugated paper, L520*W265*H395mm,GW:18.8KG								





MLX UG WALKY LED TAPOSÓ LÁMPA 24 V




9W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	0.375A	DC18V	0.45A		9W ± 10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue	
			Luminous flux	675LM±10%	720LM±10%	720LM±10%	620-625nm	517-522nm	456-460nm	
SMD2835	9 PCS	≥80Ra	Beam Angle	45° 【30° / 60° / 90° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension			N.W		
30.000Hours	CE,RoHS	IP67	ClassIII		Φ160*95mm			1.01Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension			G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L160*W95*H185mm			1.06Kg		
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L500*W335*H395mm,GW:18.8KG									

12W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	0.5A	DC18V	0.6A		12W ± 10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue	
SMD2835	12 PCS	≥80Ra	Luminous flux	900LM±10%	960LM±10%	960LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP67	ClassIII		Φ180*90mm		1.19Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L190*W100*H185mm		1.25Kg			
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L520*W390*H390mm,GW:23.2KG									





MLX UG WALKY LED TAPOSÓ LÁMPA 24 V




18W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power		Factor		
AC/DC24V	0.75A	DC18V	0.9A		18W±10%		≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length		
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue
SMD2835	18 PCS	≥80Ra	Luminous flux	1350LM±10%	1440LM±10%	1440LM±10%	620-625nm	517-522nm	456-460nm
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W		
30.000Hours	CE,RoHS	IP67	ClassIII		Φ200*90mm		1.53Kg		
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W		
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L195*W115*H220mm		1.61Kg		
Outer carton package	12*1layer=12PCS/carton,K=K corrugated paper, L600*W250*H460mm,GW:17.4KG								


24W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	1.0A	DC18V	1.2A		24W ± 10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue	
SMD2835	24 PCS	≥80Ra	Luminous flux	1800LM±10%	1920LM±10%	1920LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP67	ClassIII		Φ220*90mm		1.84Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L225*W100*H225mm		1.92Kg			
Outer carton package	10*1layer=10PCS/carton,K=K corrugated paper, L520*W240*H470mm,GW:17.6KG									





MLX UG WALKY LED TAPOSÓ LÁMPA 24 V




36W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	1.5A	DC18V	0.9A*2		36W±10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue	
			Luminous flux	2700LM±10%	2880LM±10%	2880LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】						
SMD2835	36 PCS	≥80Ra								
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP67	ClassIII		Φ250*90mm		2.42Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L305*W100*H305mm		2.55Kg			
Outer carton package	8*1layer=8PCS/carton,K=K corrugated paper, L420*W270*H530mm,GW:18.65KG									

48W

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power			Factor		
AC/DC24V	2.0A	DC18V	1.2A*2		48W ±10%			≥0.5		
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	Wave length			
			Luminous efficiency	75LM/W	80LM/W	80LM/W	Red	Green	Blue	
SMD2835	48 PCS	≥80Ra	Luminous flux	3600LM±10%	3840LM±10%	3840LM±10%	620-625nm	517-522nm	456-460nm	
			Beam Angle	45° 【30° / 60° / 90° / 120° Optional】						
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W			
30.000Hours	CE,RoHS	IP67	ClassIII		Φ300*90mm		3.8Kg			
Operating Temperature	Storage Temperature	Lamp Body Material	Lamp Shade Material		Packing dimension		G.W			
-20℃to+50℃	-30℃to+60℃	304 Stainless Steel	304 Stainless Steel		L355*W100*H355mm		4.0Kg			
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L420*W370*H370mm,GW:17KG									







MLX UG WALKY LED TAPOSÓ LÁMPA 24 V




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

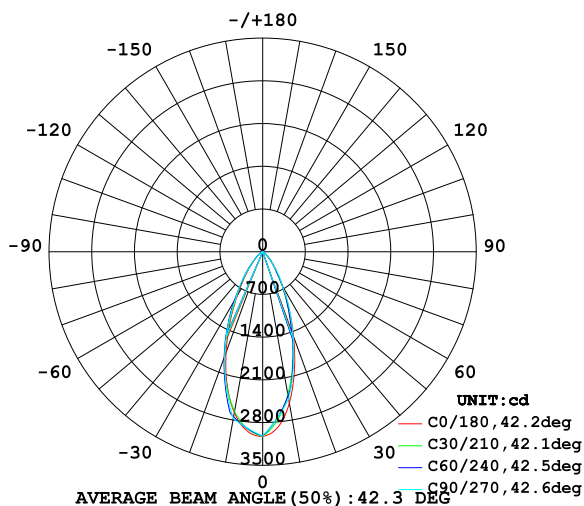

PLANAR ISOLUX DIAGRAM (UNIT: lx)

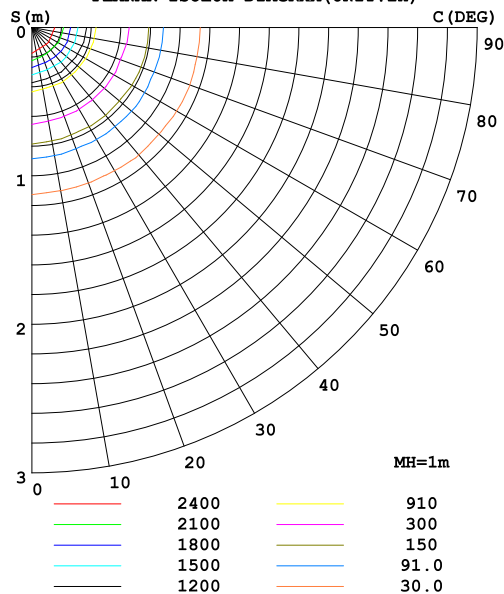


AC/DC24V Input: V+ -Brown
V- -Blue

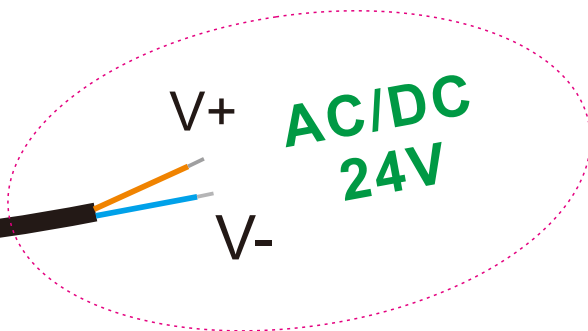


Ne csatlakoztasson 230 V-os vagy 24 V-nál magasabb AC feszültséget, különben a lámpa károsodhat.





MLX UG WALKY LED TAPOSÓ LÁMPA 24 V



Esztétikus:

A taposólámpák talajszint alá telepíthetők, nem foglalnak el helyet és nem zavarják a táj szépségét.

Energiatakarékos:

LED fényforrásokat használnak, amelyek hatékonyak és energiatakarékosak, csökkentve az energiafogyasztást.

Tartós:

Kiváló minőségű rozsdamentes acélból vagy alumíniumötvözetből készülnek, vízálló, korrózióálló tulajdonságokkal rendelkeznek, így hosszú élettartamot biztosítanak.

Biztonságos:

Alacsony feszültségű egyenáramú tápegységet használnak, amely nem bocsát ki elektromágneses impulzusokat és hőszugárzást, így biztonságosak és megbízhatóak.

Széleskörű felhasználási módok:

A taposólámpák a szín és a fényerő, valamint más paraméterek, szerint állíthatók be, és számos alkalmazási forgatókönyvhöz igazíthatók, például kertvilágításhoz, tájvilágításhoz, térvilágításhoz és épület világításhoz.

A taposólámpákat széles körben használják köztereken, éttermekben, magánvillákban, kertekben, konferenciatermekben, kiállítótermekben, közösségi tereprendezésben, színpadi bárokban, bevásárlóközpontokban, parkolósobrokban, turisztikai látványosságokban és más helyeken, például fénydekorációkban.

