

MLX FL VEGA LED FÉNYVETŐK



HL0019950

HL0019951

HL0019952



100W



150W




200W



SOSEN LED Driver

SMD2835 Leds









MLX FL VEGA LED FÉNYVETŐK





100W

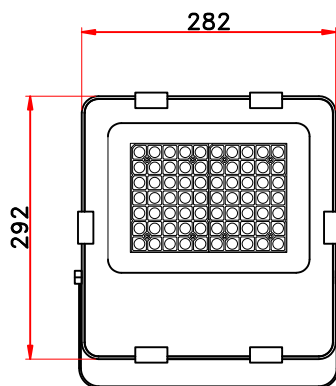


150W

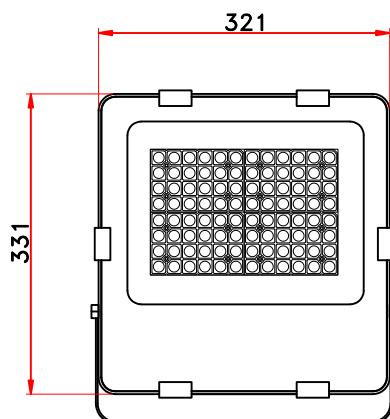

200W

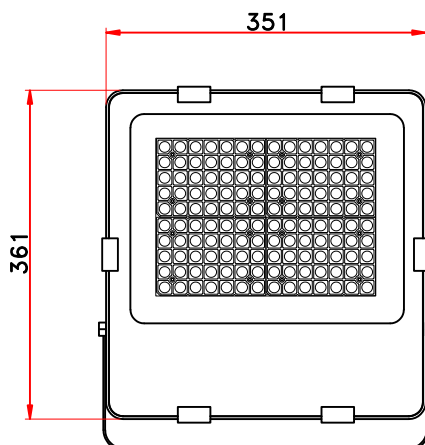



MLX FL VEGA LED FÉNYVETŐK




100W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.5A	DC210V	0.42A	100W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD2835	140PCS	≥80Ra	Luminous flux	14000LM	15000LM	15000LM
			Beam Angle	90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L282*W55*H292mm	2.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+55℃	-30℃to+55℃	10-80%RH	10-90%RH	L328*W70*H363mm	2.7Kg	
Outer carton package	5*1layer=5PCS/carton,K=K corrugated paper, L370*W345*H380mm,GW:15.3KG					


150W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power Consumption		Power Factor	
AC200-240V	0.75A	DC228V	0.6A		150W		≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K		4000-4500K		5500-6000K
			Luminous efficiency	140LM/W		150LM/W		150LM/W
SMD2835	192PCS	≥80Ra	Luminous flux	21000LM		22500LM		22500LM
			Beam Angle	90°				
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W	
50.000Hours	CE,RoHS	IP66	Class I		L321*W65*H331mm		3.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage		Packing dimension		G.W	
-20℃to+55℃	-30℃to+55℃	10-80%RH	10-90%RH		L368*W80*H410mm		3.7Kg	
Outer carton package	5*1layer=5PCS/carton,K=K corrugated paper, L420*W385*H425mm,GW:20.4KG							





MLX FL VEGA LED FÉNYVETŐK




200W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.0A	DC210V	0.85A	200W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD2835	280PCS	≥80Ra	Luminous flux	28000LM	30000LM	30000LM
			Beam Angle	90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP66	Class I	L351*W68*H361mm	4.0Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+55℃	-30℃to+55℃	10-80%RH	10-90%RH	L398*W83*H435mm	4.2Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L415*W350*H450mm,GW:19.1KG					










MLX FL VEGA LED FÉNYVETŐK



150W

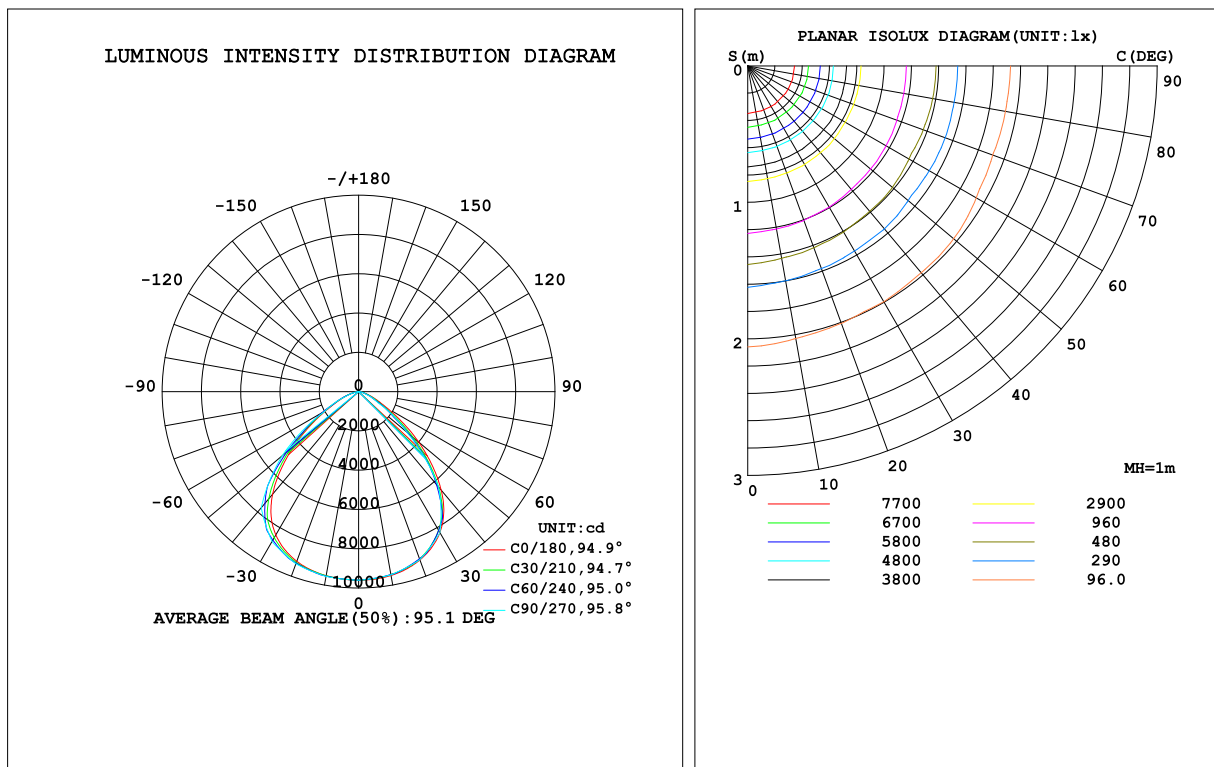

1 db/karton

Power	Quantity
100W	5 db/karton
150W	5 db/karton
200W	4 db/karton

